
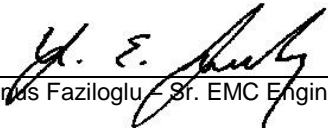




Test Report

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	ER2499-11
Client	Harman International Industries, Inc. Mark Bowman
Address	30001 Cabot Drive Novi, MI 48377
Phone	248-254-7751
Items tested FCC ID IC FRN	G31 HIGH 2AHPN-BE2834 6434C-BE2834 0026894154
Equipment Type Equipment Code	Digital Transmission System DTS
FCC/IC Rule Parts	CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2
Test Dates	September 22 - October 17, 2017
Results	As detailed within this report
Prepared by	 Zachary Johnson – Test Engineer
Authorized by	 Yurdas Faziloglu – Sr. EMC Engineer
Issue Date	10/28/2017
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 17 of this report.

Contents

Contents2

Summary3

Test Methodology4

Product Tested - Configuration Documentation5

Statement of Conformity6

Test Results7

 Radiated Spurious Emissions7

AC Line Conducted Emissions15

Measurement Uncertainty16

Conditions Of Testing17

Appendix A:19

Report REV Sep-08-2017 - YF



Summary

This test report supports an application for certification of a transmitter operating pursuant to:
CFR Title 47 FCC Part 15.247, ISED Canada RSS-247 Issue 2

The product is the G31 HIGH. It is a direct sequence spread spectrum transmitter that operates in the 2412 – 2462MHz frequency range. This report covers the 2.4GHz Wifi portion of the device.

Antenna Type: Switching PCB trace antenna

Gain: 1.18dBi maximum in 2.4GHz – 2.5GHz range

We found that the product met the above requirements without modification.

Test samples were received in good condition.



Test Methodology

All testing was performed according to the following rules/procedures/documents;
CFR 47 Part 15.247, RSS-247 Issue 2, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS
Measurement Guidance v04 and ANSI C63.10-2013.

Radiated emissions were maximized by measuring the device in normal operating position,
as well as varying the test antenna's height and polarity.

EUT operating voltage is 11-16V DC

The following bandwidths were used during radiated spurious and AC line conducted emissions
testing.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

Product Tested - Configuration Documentation

EUT Configuration											
Work Order:	R2499										
Company:	Harman International Industries, Incorporated										
Company Address:	30001 Cabot Drive										
	Novi, MI, 48377										
Contact:	Mark Bowman										
	MN			PN			SN				
EUT:	G31 HIGH			--			--				
EUT Description:	Car Stereo System										
EUT Components	MN			SN							
Back up camera	--			--							
FM/AM antenna	--			--							
Support Equipment	MN			SN							
CS Supplied Laptop.	--			--							
USB to Ethernet Converter	--			--							
13.5Vdc Power Supply	--			--							
Port Label	Port Type	# ports	# populated	cable type	shielded	ferrites	length (m)	in/out	under test	comment	
DC main	Power DC	2	2	Power DC	No	No	1.2	in	yes		
Audio		1	1	-	Yes	No	3	in	yes		
USB	USB	3	1	USB	Yes	No	1	in	yes		
xm/Dab connector		1	1	Coaxial	Yes	No	1.2	in	yes		
FM/AM antenna	-	1	1		Yes	No	0.4	in	yes		
Back up camera		1	1		Yes	No	0.3	in	yes		
Next Gen port	-	1	0	-				in	no		
Software Operating Mode Description:											
EUT will be operating in a test mode for Immunity tests, RX for non intentional REMI, and Constant TX internal mode for Spurious.											
Performance Criteria:											
EUT will connect to CMW and perform less than 10% PER during test.BT- EUT will connect to tablet or CMW over bluetooth and stay connected at appropriate distance.											

Statement of Conformity

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	EUT employs single switching PCB trace antenna with maximum 1.18dBi gain.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	N/A. Unit is powered by a vehicle battery only.

Refer to Appendix A of this report for antenna port conducted measurements.

Test Results

Radiated Spurious Emissions

LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

[15.247(d)]

Device was measured in normal operating position.

MEASUREMENTS / RESULTS

Curtis Straus - a Bureau Veritas Company				Work Order - R2499					
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC					
30-1000MHz Vertical Data				Test Site - CH 2					
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar					
2.4GHz 802.11b ch6									
Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Limit Req 1	Margin Req 1	Test Results Req 1	Antenna Height	EUT Azimuth	Worst Margin Req 1
MHz	(dBµV)	(dB/m)	(dBµV/m)	(dBµV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)
31.077	39.5	-15.4	24.2	40	-15.8	PASS	202	25	
479.558	44.8	-15.9	28.9	46	-17.1	PASS	155	141	
479.979	48	-15.8	32.2	46	-13.8	PASS	125	160	
480.967	46.5	-15.8	30.7	46	-15.4	PASS	141	146	
720.024	48.6	-12.2	36.5	46	-9.6	PASS	139	328	-9.6
960.041	44.6	-9.2	35.4	54	-18.6	PASS	138	37	

Curtis Straus - a Bureau Veritas Company					Work Order - R2499				
Radiated Emissions Electric Field 3m Distance					EUT Power Input - 13.8V DC				
30-1000MHz Horizontal Data					Test Site - CH 2				
Operator: CCH					Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar				
2.4GHz 802.11b ch6									
Frequency	Raw QP Reading	Correction Factor	Adjusted QP Amplitude	Limit Req 1	Margin Req 1	Test Results Req 1	Antenna Height	EUT Azimuth	Worst Margin Req 1
MHz	(dBµV)	(dB/m)	(dBµV/m)	(dbµV/m)	(dB)	(Pass/Fail	(cm)	(degrees)	(dB)
30.414	38.6	-14.7	23.9	40	-16.1	PASS	107	55	
720.03	52.3	-12.2	40.2	46	-5.8	PASS	125	104	
956.047	28.9	-9.3	19.6	46	-26.4	PASS	125	11	
958.023	42.2	-9.2	33	46	-13	PASS	155	328	
959.524	38.8	-9.2	29.6	46	-16.4	PASS	135	315	
959.996	51.8	-9.2	42.6	46	-3.4	PASS	152	344	-3.4

Rev. 8/21/2017

Spectrum Analyzers / Receivers / Preselectors
Rental MXE EMI Receiver(1170725)

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	12/22/2017	12/22/2016

Radiated Emissions Sites
EMI Chamber 1
EMI Chamber 1

FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
719150	2762A-6	A-0015	30-1000MHz	1685	I	12/21/2018	12/21/2016
719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018	12/21/2016

Preamplifiers / Couplers Attenuators / Filters
2311 PA

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-1000MHz	PAM-103	COM-POWER	441175	2311	II	2/4/2018	2/4/2017

Antennas
Red-Black Bilog

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
30-2000MHz	JB1	Sunol	A091604-2	1106	I	2/28/2019	2/28/2017

Meteorological Meters
Weather Clock (Pressure Only)
TH A#2084

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016
HTC-1	HDE		2084	II	3/23/2018	3/23/2017

Cables
Asset #1522
Asset #2051
Asset #2054

Range	Mfr	Cat	Calibration Due	Calibrated on
9kHz - 18GHz	Florida RF	II	2/11/2018	2/11/2017
9kHz - 18GHz	Florida RF	II	3/5/2018	3/5/2017
9kHz - 18GHz	Florida RF	II	10/30/2017	10/30/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

30-1000MHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Curtis Straus - a Bureau Veritas Company					Work Order - R2499												
Radiated Emissions Electric Field 3m Distance					EUT Power Input - 13.8V DC												
1-6GHz Vertical Data					Test Site - CH 2												
Operator: CCH					Temp; Humid; Pres - 23.2°C; 52%RH; 1012mBar												
2.4GHz 802.11b ch1																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Avg Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1064.8	45.7	43.3	-6.4	39.3	36.9	74	-34.6	PASS	54	-17.1	PASS	275	51				
1087.5	40.6	32.9	-6	34.6	26.9	74	-39.4	PASS	54	-27.1	PASS	290	29				
1328.9	43.8	33	-3.9	40	29.2	74	-34	PASS	54	-24.8	PASS	102	201				
4874.1	46	40.7	3.2	49.2	43.9	74	-24.7	PASS	54	-10.1	PASS	102	165	-24.7	-10.1		

Curtis Straus - a Bureau Veritas Company					Work Order - R2499												
Radiated Emissions Electric Field 3m Distance					EUT Power Input - 13.8V DC												
1-6GHz Horizontal Data					Test Site - CH 2												
Operator: CCH					Temp; Humid; Pres - 23.2°C; 52%RH; 1012mBar												
2.4GHz 802.11b ch1																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Average Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1064.5	47	38.9	-6.4	40.6	32.5	74	-33.4	PASS	54	-21.5	PASS	275	124				
5706.5	39.1	30.6	5.6	44.7	36.2	74	-29.3	PASS	54	-17.8	PASS	127	47	-29.3	-17.8		

1-6GHz Low Channel

Curtis Straus - a Bureau Veritas Company					Work Order - R2499												
Radiated Emissions Electric Field 3m Distance					EUT Power Input - 13.8V DC												
1-6GHz Vertical Data					Test Site - CH 2												
Operator: CCH					Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar												
2.4GHz 802.11b ch6																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Avg Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1037.9	42.4	33.6	-6.8	35.6	26.8	74	-38.4	PASS	54	-27.1	PASS	188	28				
1064.9	55	41.4	-6.4	48.6	35	74	-25.3	PASS	54	-19	PASS	285	2	-25.3			
1176.8	41.4	33.2	-5.5	35.9	27.7	74	-38	PASS	54	-26.3	PASS	100	185				
1329.8	42.7	33.3	-3.9	38.8	29.4	74	-35.2	PASS	54	-24.6	PASS	125	193				
4874.3	44.7	41.2	3.2	47.9	44.4	74	-26.1	PASS	54	-9.6	PASS	125	160			-9.6	

Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC													
1-6GHz Horizontal Data				Test Site - CH 2													
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar													
2.4GHz 802.11b ch6																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Average Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1063.9	46.9	33.6	-6.4	40.5	27.2	74	-33.4	PASS	54	-26.7	PASS	204	146				
1331.4	42	32.4	-3.9	38.1	28.6	74	-35.9	PASS	54	-25.4	PASS	100	5				
5759.6	39.5	30.5	5.6	45.1	36	74	-28.9	PASS	54	-17.9	PASS	102	0	-28.9	-17.9		

1-6GHz Mid Channel

Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC													
1-6GHz Vertical Data				Test Site - CH 2													
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 1012mBar													
2.4GHz 802.11b ch11																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Average Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1042	42.9	33.3	-6.8	36.2	26.6	74	-37.8	PASS	54	-27.4	PASS	175	69				
1062.7	49.2	42.5	-6.4	42.8	36.1	74	-31.2	PASS	54	-17.9	PASS	287	0				
1177.7	40.5	33.5	-5.5	35	28	74	-39	PASS	54	-25.9	PASS	110	149				
1332.1	41.1	32.7	-3.9	37.2	28.8	74	-36.7	PASS	54	-25.2	PASS	125	172				
4874.1	46.7	42.3	3.2	49.9	45.5	74	-24.1	PASS	54	-8.5	PASS	100	176	-24.1	-8.5		

Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 3m Distance				EUT Power Input - 13.8V DC													
1-6GHz Horizontal Data				Test Site - CH 2													
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 1012mBar													
2.4GHz 802.11b ch11																	
Frequency	Raw Peak Reading	Raw Avg Reading	Correction Factor	Adjusted Peak Amplitude	Adjusted Avg Amplitude	Peak Limit	Peak Margin	Peak Results	Avg Limit	Avg Margin	Avg Results	Antenna Height	EUT Azimuth	Worst Peak Margin	Worst Average Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
1063.9	46.9	33.6	-6.4	40.5	27.2	74	-33.4	PASS	54	-26.7	PASS	204	146				
1331.4	42	32.4	-3.9	38.1	28.6	74	-35.9	PASS	54	-25.4	PASS	100	5				
5759.6	39.5	30.5	5.6	45.1	36	74	-28.9	PASS	54	-17.9	PASS	102	0	-28.9	-17.9		

1-6GHz High Channel



Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 13.8V DC													
6-18GHz Vertical Data				Test Site - CH 2													
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar													
2.4GHz 802.11b ch6																	
				Adjusted	Adjusted												
				Peak	Avg												
Frequency	Raw Peak	Raw Avg	Correction	Amplitude	Amplitude	Peak	Peak	Peak		Avg	Avg	Antenna	EUT	Worst	Worst		
	Reading	Reading	Factor	(dBμV/m)	(dBμV/m)	Limit	Margin	Results	Avg Limit	Margin	Results	Height	Azimuth	Peak	Avg		
														Margin	Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
10534.4	39.5	28.8	11.1	50.7	39.9	83.5	-32.8	PASS	63.5	-23.6	PASS	200	340				
14480	39.1	30.7	14	53.1	44.7	83.5	-30.4	PASS	63.5	-18.8	PASS	132	109				
17045.4	36.9	27.5	18.8	55.8	46.4	83.5	-27.7	PASS	63.5	-17.1	PASS	200	253				
17925.8	35.7	26.6	20.9	56.6	47.5	83.5	-26.9	PASS	63.5	-16	PASS	200	237	-26.9	-16		

Curtis Straus - a Bureau Veritas Company				Work Order - R2499													
Radiated Emissions Electric Field 1m Distance				EUT Power Input - 13.8V DC													
6-18GHz Horizontal Data				Test Site - CH 2													
Operator: CCH				Temp; Humid; Pres - 23.2°C; 48%RH; 10012mBar													
2.4GHz 802.11b ch6																	
				Adjusted	Adjusted												
				Peak	Avg												
Frequency	Raw Peak	Raw Avg	Correction	Amplitude	Amplitude	Peak	Peak	Peak Test		Avg	Avg Test	Antenna	EUT	Worst	Worst		
	Reading	Reading	Factor	(dBμV/m)	(dBμV/m)	Limit	Margin	Results	Avg Limit	Margin	Results	Height	Azimuth	Peak	Avg		
														Margin	Margin		
MHz	(dBμV)	(dBμV)	(dB/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)	(Pass/Fail)	(dBμV/m)	(dB)	(Pass/Fail)	(cm)	(degrees)	(dB)	(dB)		
10534	36.6	28.7	11.1	47.7	39.8	83.5	-35.8	PASS	63.5	-23.7	PASS	150	129				
12500.6	38.8	30.3	14.1	52.9	44.4	83.5	-30.6	PASS	63.5	-19.1	PASS	166	81				
15574	38.4	29.7	15.5	53.9	45.2	83.5	-29.6	PASS	63.5	-18.3	PASS	162	156				
16810.3	38.6	29.1	17.7	56.2	46.8	83.5	-27.3	PASS	63.5	-16.7	PASS	139	229				
17957.7	35.9	26.7	20.9	56.8	47.6	83.5	-26.7	PASS	63.5	-15.9	PASS	175	241	-26.7	-15.9		

Rev. 8/21/2017

Spectrum Analyzers / Receivers/Preselectors

Rental MXE EMI Receiver(1170725)

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	12/22/2017	12/22/2016

Radiated Emissions Sites

EMI Chamber 1
EMI Chamber 1

FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
719150	2762A-6	A-0015	30-1000MHz	1685	I	12/21/2018	12/21/2016
719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018	12/21/2016

Preamps /Couplers Attenuators / Filters

2111 HF Preamp

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
0.5-18GHz	PAM-118A	COM-POWER	551063	2111	II	11/5/2017	11/5/2016

Antennas

Blue Horn

Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1-18GHz	3117	ETS	157647	1861	I	2/14/2019	2/14/2017

Meteorological Meters

Weather Clock (Pressure Only)
TH A#2084

MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016
HTC-1	HDE		2084	II	3/23/2018	3/23/2017

Cables

Asset #1522
Asset #2051
Asset #2054

Range	Mfr	Cat	Calibration Due	Calibrated on
9kHz - 18GHz	Florida RF	II	2/11/2018	2/11/2017
9kHz - 18GHz	Florida RF	II	3/5/2018	3/5/2017
9kHz - 18GHz	Florida RF	II	10/30/2017	10/30/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

6-18GHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Emissions Table														
Date: 17-Oct-17				Company: Harman International Industries, Inc.						Work Order: R2499				
Engineer: Chris Hamel				EUT Desc: G31 HIGH						EUT Operating Voltage/Frequency: 13.8V DC				
Temp: 24.2°C				Humidity: 42%						Pressure: 1010mbar				
Frequency Range: 18-26.5GHz								Measurement Distance: 0.1 m						
Notes: No emissions Found								EUT Max Freq:						
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
									No Emissions Found					
Table Result:				Pass by N/A dB				Worst Freq:				N/A MHz		
Test Site: EMI Chamber 2				Cable 1: Asset #2324				Cable 2: ---				Cable 3: ---		
Analyzer: Gold				Preamp: 18-26.5GHz				Antenna: 18-26.5GHz Horn				Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.188														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														
Copyright Curtis-Straus LLC 2000														

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Gold		100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 2		719150	2762A-7	A-0015	30-1000MHz	1686	I	12/21/2018	12/21/2016
EMI Chamber 2		719150	2762A-7	A-0015	1-18GHz	1686	I	12/21/2018	12/21/2016
Preamps / Couplers Attenuators / Filters		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF (Yellow)		18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	10/16/2017	9/16/2016
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
HF (White) Horn		18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test
Meteorological Meters			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016
TH A#2084			HTC-1	HDE		2084	II	3/23/2018	3/23/2017
Cables		Range		Mfr			Cat	Calibration Due	Calibrated on
Asset 2324		1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

18-26.5GHz Mid Channel

Radiated Emissions Table																
Date: 17-Oct-17			Company: Harman International Industries, Inc.							Work Order: R2499						
Engineer: Chris Hamel			EUT Desc: G31 HIGH							EUT Operating Voltage/Frequency: 13.8V DC						
Temp: 24.2°C			Humidity: 42%							Pressure: 1010mbar						
Frequency Range: 26.5-40GHz										Measurement Distance: 0.1 m						
Notes: No emissions Found										EUT Max Freq:						
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average				
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)		
									---	---	---	---	---	---		
No Emissions Found																
Table Result:				Pass				by		N/A dB		Worst Freq:			N/A MHz	
Test Site: EMI Chamber 1				Cable 1: Asset #2323				Cable 2: Asset #2324				Cable 3: ---				
Analyzer: Gold				Preamp: 40GHz Mixer				Antenna: 40GHz Mixer				Preselector: ---				
CSsoft Radiated Emissions Calculator v 1.017.195																
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor																
Copyright Curtis-Straus LLC 2000																

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Gold		100Hz-26.5 GHz	E4407B	Agilent	MY45113816	1284	I	2/28/2018	2/28/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due	Calibrated on
EMI Chamber 1		719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018	12/21/2016
Mixers/Duplexers		Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Mixer / Horn		26.5-40 GHz	11970A	Agilent	3003A10230	2154	I	3/12/2019	3/12/2016
Meteorological Meters/Chambers			MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	4/28/2018	4/28/2016
TH A#2084			HTC-1	HDE		2084	II	3/23/2018	3/23/2017
Cables		Range		Mfr			Cat	Calibration Due	Calibrated on
Asset 2323		1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 002	2323	II	8/19/2018	8/19/2017
Asset 2324		1-26.5GHz	TM26-S1S1-120	MEGAPHASE	17139101 001	2324	II	8/19/2018	8/19/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

26.5-40GHz Mid Channel



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Radiated Band Edge**Radiated Emissions Table**

Date: 11-Oct-17		Company: Harman International Industries, Inc.							Work Order: R2499							
Engineer: Chris Hamel		EUT Desc: G31 HIGH							EUT Operating Voltage/Frequency: 13.8V DC							
Temp: 24.1°C		Humidity: 40%							Pressure: 1011mBar							
Frequency Range:									Measurement Distance: 3 m							
Notes: 2.4 802.11b 11Mbps									EUT Max Freq:							
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average				
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)		
Low				---	---	---	---	---	---	---	---	---	---	---		
V Max	2412.0	79.0		0.0	28.1	3.2	---	---	74.0	---	---	54.0	---	---		
H Max	2411.8	77.8		0.0	28.1	3.2	---	---	74.0	---	---	54.0	---	---		
V	2390.0	24.5	17.7	0.0	28.0	3.2	55.7	48.9	74.0	-18.3	Pass	54.0	-5.1	Pass		
V	2386.2	29.1	18.5	0.0	28.0	3.2	60.3	49.7	74.0	-13.7	Pass	54.0	-4.3	Pass		
				---	---	---	---	---	---	---	---	---	---	---		
High				---	---	---	---	---	---	---	---	---	---	---		
V Max	2462.1	72.7		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---		
H Max	2461.1	68.8		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---		
V	2483.5	24.0	16.7	0.0	28.2	3.2	55.4	48.1	74.0	-18.6	Pass	54.0	-5.9	Marginal		
V	2488.5	27.9	16.5	0.0	28.3	3.2	59.4	48.0	74.0	-14.6	Pass	54.0	-6.0	Marginal		
Table Result:		Pass by -4.3 dB							Worst Freq: 2386.2 MHz							
Test Site: EMI Chamber 1		Cable 1: Asset #2051							Cable 2: Asset #2054				Cable 3: ---			
Analyzer: Rental SA#3		Preamp: None							Antenna: Orange Horn				Preselector: ---			
CSsoft Radiated Emissions Calculator v 1.017.192																
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor																
Copyright Curtis-Straus LLC 2000																

Radiated Emissions Table

Date: 11-Oct-17		Company: Harman International Industries, Inc.							Work Order: R2499					
Engineer: Chris Hamel		EUT Desc: G31 HIGH							EUT Operating Voltage/Frequency: 13.8V DC					
Temp: 24.1°C		Humidity: 40%							Pressure: 1011mBar					
Frequency Range:									Measurement Distance: 3 m					
Notes: 2.4 802.11g 6Mbps Power Reduced to 27.									EUT Max Freq:					
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBμV)	Average Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBμV/m)	Adjusted Avg Reading (dBμV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBμV/m)	Margin (dB)	Result (Pass/Fail)
Low				---	---	---	---	---	---	---	---	---	---	---
H Max	2411.4	66.8		0.0	28.1	3.2	---	---	74.0	---	---	54.0	---	---
V Max	2410.2	72.1		0.0	28.1	3.2	---	---	74.0	---	---	54.0	---	---
V	2390.0	24.8	14.7	0.0	28.0	3.2	56.0	45.9	74.0	-18.0	Pass	54.0	-8.1	Pass
V	2389.4	28.2	13.7	0.0	28.0	3.2	59.4	44.9	74.0	-14.6	Pass	54.0	-9.1	Pass
				---	---	---	---	---	---	---	---	---	---	---
High				---	---	---	---	---	---	---	---	---	---	---
H Max	2469.0	69.8		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V Max	2469.4	71.0		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V	2483.5	32.9	20.4	0.0	28.2	3.2	64.3	51.8	74.0	-9.7	Pass	54.0	-2.2	Pass
V	2487.8	31.5	17.6	0.0	28.3	3.2	63.0	49.1	74.0	-11.0	Pass	54.0	-4.9	Pass
V	2493.8	28.2	16.1	0.0	28.3	3.2	59.7	47.6	74.0	-14.3	Pass	54.0	-6.4	Pass
Table Result:		Pass by -2.2 dB							Worst Freq: 2483.5 MHz					
Test Site: EMI Chamber 1		Cable 1: Asset #2051							Cable 2: Asset #2054			Cable 3: ---		
Analyzer: Rental SA#3		Preamp: None							Antenna: Orange Horn			Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.192														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														
Copyright Curtis-Straus LLC 2000														

BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



page 13 of 65

Radiated Emissions Table

Date: 11-Oct-17		Company: Harman International Industries, Inc.						Work Order: R2499						
Engineer: Chris Hamel		EUT Desc: G31 HIGH						EUT Operating Voltage/Frequency: 13.8V DC						
Temp: 24.1°C		Humidity: 40%						Pressure: 1011mBar						
Frequency Range:								Measurement Distance: 3 m						
Notes: 2.4 802.11n 20MHz MCS 3								EUT Max Freq:						
Antenna Polarization (H / V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Low				---	---	---	---	---	---	---	---	---	---	---
H Max	2406.2	66.5		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V Max	2405.8	72.0		0.0	28.0	3.2	---	---	74.0	---	---	54.0	---	---
V	2390.0	27.3	19.7	0.0	28.0	3.2	58.5	50.9	74.0	-15.5	Pass	54.0	-3.1	Pass
V	2389.6	33.8	19.4	0.0	28.0	3.2	65.0	50.6	74.0	-9.0	Pass	54.0	-3.4	Pass
				---	---	---	---	---	---	---	---	---	---	---
High				---	---	---	---	---	---	---	---	---	---	---
H Max	2466.4	65.1		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V Max	2462.7	68.77		0.0	28.2	3.2	---	---	74.0	---	---	54.0	---	---
V	2483.5	34.0	22.1	0.0	28.2	3.2	65.4	53.5	74.0	-8.6	Pass	54.0	-0.5	Pass
V	2483.8	36.6	21.9	0.0	28.2	3.2	68.0	53.3	74.0	-6.0	Pass	54.0	-0.7	Pass
V	2484.3	36.0	21.5	0.0	28.2	3.2	67.4	52.9	74.0	-6.6	Pass	54.0	-1.1	Pass
V	2486.8	34.8	19.4	0.0	28.3	3.2	66.3	50.9	74.0	-7.7	Pass	54.0	-3.1	Pass
V	2494.4	30.0	16.8	0.0	28.3	3.2	61.5	48.3	74.0	-12.5	Pass	54.0	-5.7	Pass
Table Result:		Pass		by		-0.5 dB		Worst Freq:		2483.5 MHz				
Test Site: EMI Chamber 1		Cable 1: Asset #2051		Cable 2: Asset #2054		Cable 3: ---								
Analyzer: Rental SA#3		Preamp: None		Antenna: Orange Horn		Preselector: ---								
CSsoft Radiated Emissions Calculator v 1.017.192														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														
Copyright Chris-Straus LLC 2000														

Spectrum Analyzers / Receivers / Preselectors		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Rental MXE EMI Receiver(1170725)		20Hz-26.5GHz	N9038A	Agilent	MY51210151	1170725	I	12/22/2017
Radiated Emissions Sites		FCC Code	IC Code	VCCI Code	Range	Asset	Cat	Calibration Due
EMI Chamber 1		719150	2762A-6	A-0015	1-18GHz	1685	I	12/21/2018
Antennas		Range	MN	Mfr	SN	Asset	Cat	Calibration Due
Orange Horn		1-18GHz	3115	EMCO	0004-6123	390	I	10/13/2018
Meteorological Meters/Chambers			MN	Mfr	SN	Asset	Cat	Calibration Due
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	4/28/2018
TH A#2084			HTC-1	HDE		2084	II	3/23/2018
Cables		Range		Mfr			Cat	Calibration Due
Asset #2051		9kHz - 18GHz		Florida RF			II	3/5/2018
Asset #2054		9kHz - 18GHz		Florida RF			II	10/30/2017

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



AC Line Conducted Emissions

LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBμV)	Average limit (dBμV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

MEASUREMENTS / RESULTS

**EUT is powered by a vehicle battery only.

Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisp)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisp)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	3.23×10^{-8}	1×10^{-7}
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.

2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.

3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.

4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.

5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "BUREAU VERITAS," "BUREAU VERITAS CONSUMER PRODUCTS SERVICES," "BVCPS," "MTL," "ACTS," "MTL-ACTS" and CURTIS-STRAUS (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.

6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.

7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.

8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.

9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.

10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.

11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only where such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.

12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.

13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.

14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.
Rev.160009121(2)_#684340 v14CS



Appendix A:

ER2499-11 Appendix A

CFR Title 47 FCC Part §15.247 and ISCED Canada RSS-247 Issue 2

DUT Information

Model: G31 High
 Manufacturer: Harman International Industries, Inc.
 Serial Number: 067

Mode	Channel	Frequency
802.11b/g/n(HT20)	1	2412 MHz
802.11b/g/n(HT20)	2	2417 MHz
802.11b/g/n(HT20)	3	2422 MHz
802.11b/g/n(HT20)	4	2427 MHz
802.11b/g/n(HT20)	5	2432 MHz
802.11b/g/n(HT20)	6	2437 MHz
802.11b/g/n(HT20)	7	2442 MHz
802.11b/g/n(HT20)	8	2447 MHz
802.11b/g/n(HT20)	9	2452 MHz
802.11b/g/n(HT20)	10	2457 MHz
802.11b/g/n(HT20)	11	2462 MHz

Antenna Gain:

Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-4.35	36.70	0.94
2410	-4.40	36.33	0.93
2420	-4.43	36.06	0.92
2430	-4.46	35.78	1.18
2440	-4.44	35.94	0.95
2450	-4.50	35.47	0.87
2460	-4.61	34.60	0.88
2470	-4.80	33.13	0.71
2480	-4.90	32.38	0.93
2490	-5.06	31.18	0.85
2500	-5.33	29.32	0.24

Number of transmission chains 1
 Equipment Type Digital Transmission System (DTS)

Test Equipment Used: R&S TS8997 Test System



Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
FSV40 Signal Generator	10Hz-40GHz	FSV40	ROHDE & SCHWARZ	101551	2200	I	6/30/2018	6/30/2017
Signal Generators	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
SMBV100A Vector Signal Generator	9KHz-6GHz	SMBV100A	ROHDE & SCHWARZ	261919	2201	I	6/26/2018	6/26/2017
SMB100A Signal Generator	100kHz-40GHz	SMB100A	ROHDE & SCHWARZ	179846	2434	I	5/30/2018	5/30/2017
R&S@OSP120 with R&S@OSP-B157	30MHz-18GHz	OSP120	ROHDE & SCHWARZ	101674		I	6/1/2018	6/1/2017
Cables	Range		Mfr			Cat	Calibration Due	Calibrated on
Asset #2052	9kHz - 18GHz		Florida RF			II	3/5/2018	3/5/2017
DUT1	30MHz-26GHz		Micro-Coax			II	6/21/2018	6/21/2017
Attenuators	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
10dB Attenuator-01 Brown	30MHz-26GHz		Mini Circuits			II	7/13/2018	7/14/2017
10dB Attenuator-02 Yellow	30MHz-26GHz		Mini Circuits			II	7/13/2018	7/14/2017
Wideband Radio Communication Tester	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
(Rental)CMW500	DC to 6GHz	CMW500	ROHDE & SCHWARZ	155905		I	6/2/2018	6/2/2017



BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Test Results Summary

Test	Frequency (MHz)	802.11b	802.11g	802.11n (HT20)
Average Output Power	2412.000	PASS	PASS	PASS
Peak Power Spectral Density	2412.000	PASS	PASS	PASS
DTS Bandwidth (6dB)	2412.000	PASS	PASS	PASS
Conducted Band Edges	2412.000	PASS	PASS	PASS
Conducted Spurious Emissions	2412.000	PASS	PASS	PASS
Average Output Power	2437.000	PASS	PASS	PASS
Peak Power Spectral Density	2437.000	PASS	PASS	PASS
DTS Bandwidth (6dB)	2437.000	PASS	PASS	PASS
Conducted Band Edges	2437.000	PASS	PASS	PASS
Conducted Spurious Emissions	2437.000	PASS	PASS	PASS
Average Output Power	2462.000	PASS	PASS	PASS
Peak Power Spectral Density	2462.000	PASS	PASS	PASS
DTS Bandwidth (6dB)	2462.000	PASS	PASS	PASS
Conducted Band Edges	2462.000	PASS	PASS	PASS
Conducted Spurious Emissions	2462.000	PASS	PASS	PASS

Average Output Power (Gated)

Test according to FCC KDB 558074 DTS Measurement Guidance v04 Section 9.2.3.2.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

802.11b (Power Setting: Default)

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)
1 Mbps	17.4	16.8	16.1	30	97.972
2 Mbps	17.8	17	16.3	30	97.007
5.5 Mbps	17.7	17	16.2	30	93.432
11 Mbps	17.9	17.1	16.3	30	89.030

802.11g (Power Setting: 27)

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)
6 Mbps	11.08	10.84	11.375	30	92.273
9 Mbps	11.092	10.845	11.314	30	89.340
12 Mbps	11.146	10.85	11.325	30	86.625
18 Mbps	11.148	10.848	11.306	30	81.865
24 Mbps	11.447	11.11	11.669	30	77.586
36 Mbps	11.431	11.165	11.687	30	70.698
48 Mbps	11.591	11.297	11.891	30	64.927
54 Mbps	11.578	11.297	11.835	30	63.060

802.11n(HT20) (Power Setting: Default)

Data Rate	Gated RMS (dBm) 2412 MHz	Gated RMS (dBm) 2437 MHz	Gated RMS (dBm) 2462 MHz	Limit (dBm)	Duty Cycle (%)
MCS0	13.924	13.563	12.838	30	91.842
MCS1	14.01	13.615	12.885	30	86.030
MCS2	13.824	13.492	12.925	30	81.260
MCS3	14.24	13.838	13.239	30	77.176
MCS4	12.932	12.508	12.087	30	70.681
MCS5	13.065	12.431	12.072	30	65.518
MCS6	13.041	12.458	11.864	30	63.704
MCS7	13.049	12.496	11.882	30	61.530



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Peak Power Spectral Density


Test according to FCC KDB 558074 DTS Measurement Guidance v04 Section 10.2

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.3 dB

802.11b (Power Setting: Default)

Data Rate	Peak PSD (dBm) 2412 MHz	Peak PSD (dBm) 2437 MHz	Peak PSD (dBm) 2462 MHz	Limit (dBm)
1 Mbps	-5.091	-3.800	-6.184	8
2 Mbps	-3.898	-5.731	-6.118	8
5.5 Mbps	-4.898	-5.399	-5.399	8
11 Mbps	-5.309	-6.649	-6.805	8

802.11b 1 Mbps 2437MHz

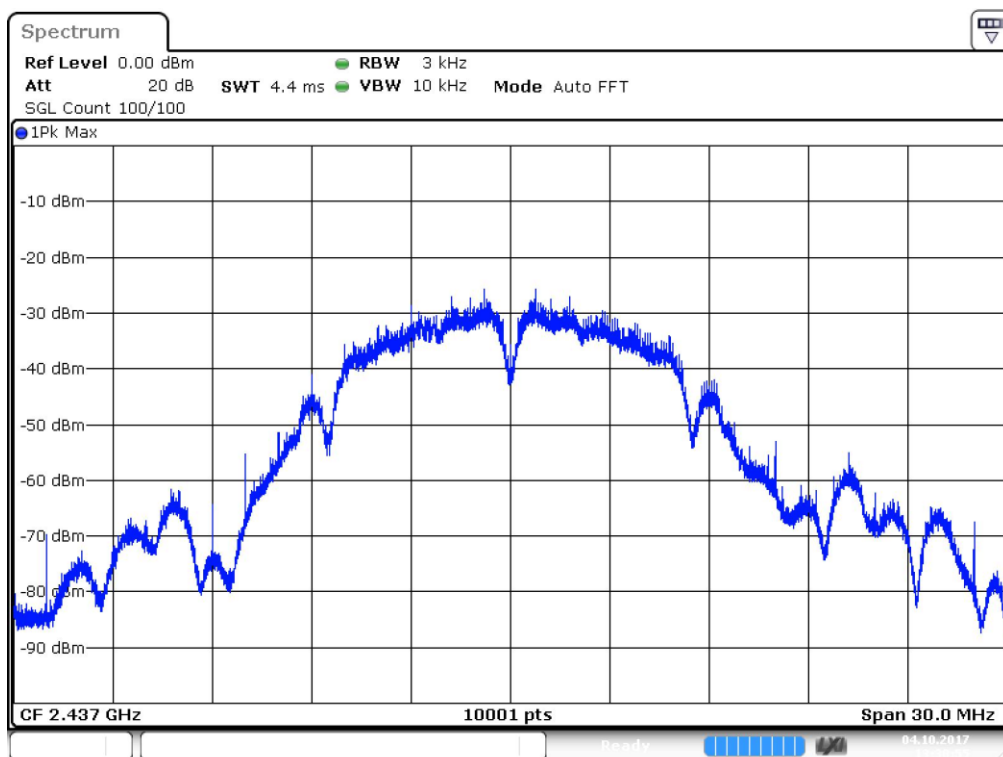


Date: 4.OCT.2017 13:30:56

802.11g (Power Setting: 27)

Data Rate	Peak PSD (dBm) 2412 MHz	Peak PSD (dBm) 2437 MHz	Peak PSD (dBm) 2462 MHz	Limit (dBm)
6 Mbps	-13.909	-14.240	-13.860	8
9 Mbps	-15.231	-15.435	-14.829	8
12 Mbps	-14.075	-14.398	-14.050	8
18 Mbps	-15.273	-15.616	-15.047	8
24 Mbps	-14.388	-14.690	-14.009	8
36 Mbps	-15.898	-16.163	-16.163	8
48 Mbps	-16.278	-16.507	-15.593	8
54 Mbps	-16.415	-16.611	-16.177	8


802.11g 6 Mbps 2462MHz

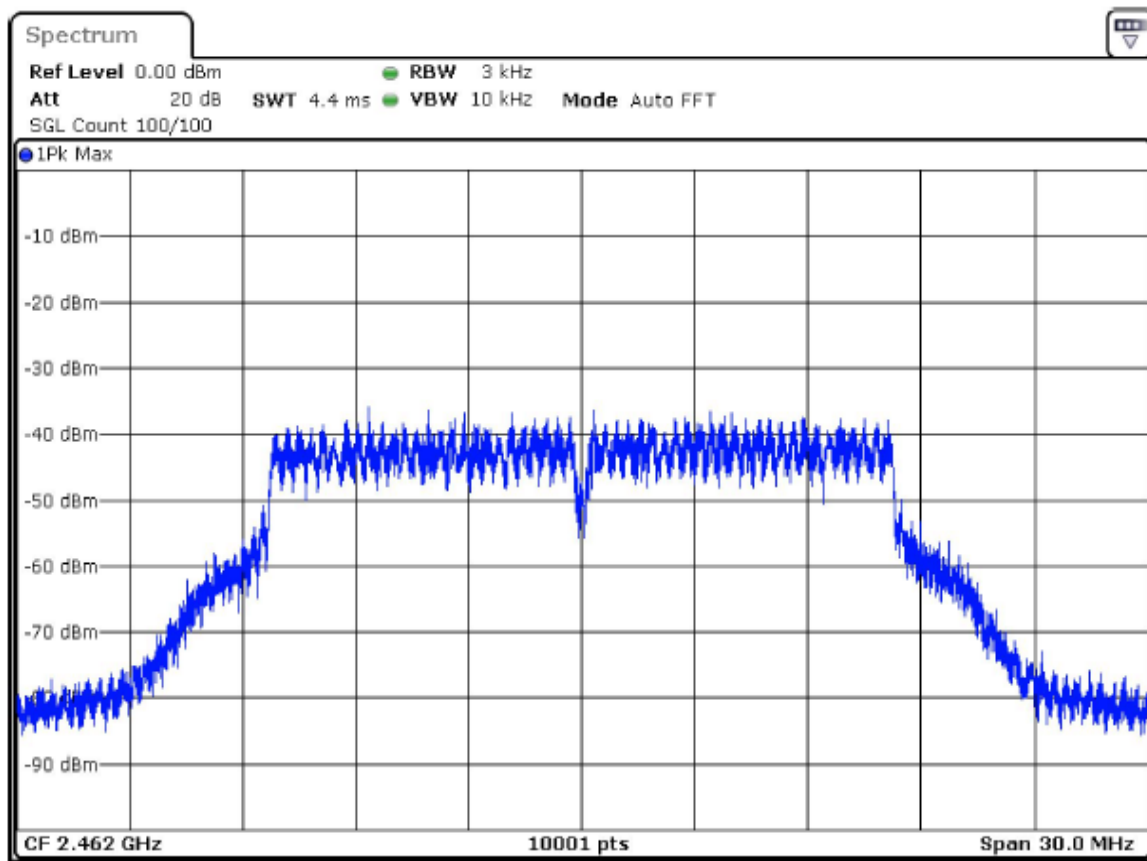

802.11n(HT20) (Power Setting: Default)

Data Rate	Peak PSD (dBm) 2412 MHz	Peak PSD (dBm) 2437 MHz	Peak PSD (dBm) 2462 MHz	Limit (dBm)
MCS0	-11.164	-12.811	-13.345	8
MCS1	-12.176	-12.007	-12.991	8
MCS2	-12.898	-12.697	-12.745	8
MCS3	-12.074	-12.462	-13.280	8
MCS4	-13.575	-14.338	-13.607	8
MCS5	-14.105	-14.560	-14.873	8
MCS6	-13.795	-13.920	-14.388	8
MCS7	-14.013	-13.738	-14.134	8

802.11n(HT20) MCS0 2412MHz

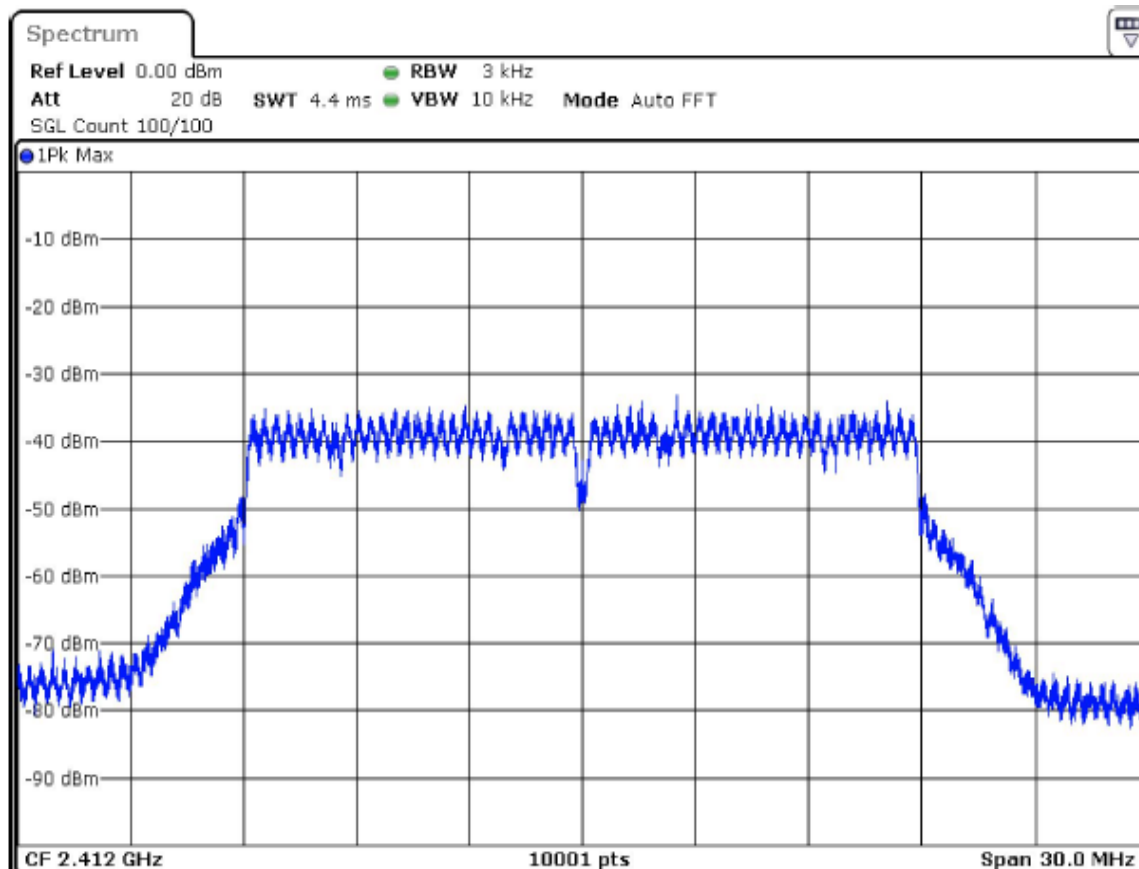



DTS Bandwidth (6dB)

Test according to FCC KDB 558074 DTS Measurement Guidance v04 Section 8.1


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 2%

Data Rate	DUT Frequency (MHz)	Bandwidth (MHz)	Minimum Limit (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
802.11b 11 Mbps	2412.000	7.780549	0.5	2407.910224	2415.690773
802.11g 48 Mbps	2412.000	16.658354	0.5	2403.620948	2420.279302
802.11n(HT20) MCS3	2412.000	17.855361	0.5	2403.022444	2420.877805
802.11b 11 Mbps	2437.000	7.980050	0.5	2432.910224	2440.890274
802.11g 48 Mbps	2437.000	16.658354	0.5	2428.620948	2445.279302
802.11n(HT20) MCS3	2437.000	17.855361	0.5	2428.022444	2445.877805
802.11b 11 Mbps	2462.000	8.478803	0.5	2457.910224	2466.389027
802.11g 48 Mbps	2462.000	16.658354	0.5	2453.620948	2470.279302
802.11n(HT20) MCS3	2462.000	17.855361	0.5	2453.022444	2470.877805

802.11b 11Mbps 2412MHz

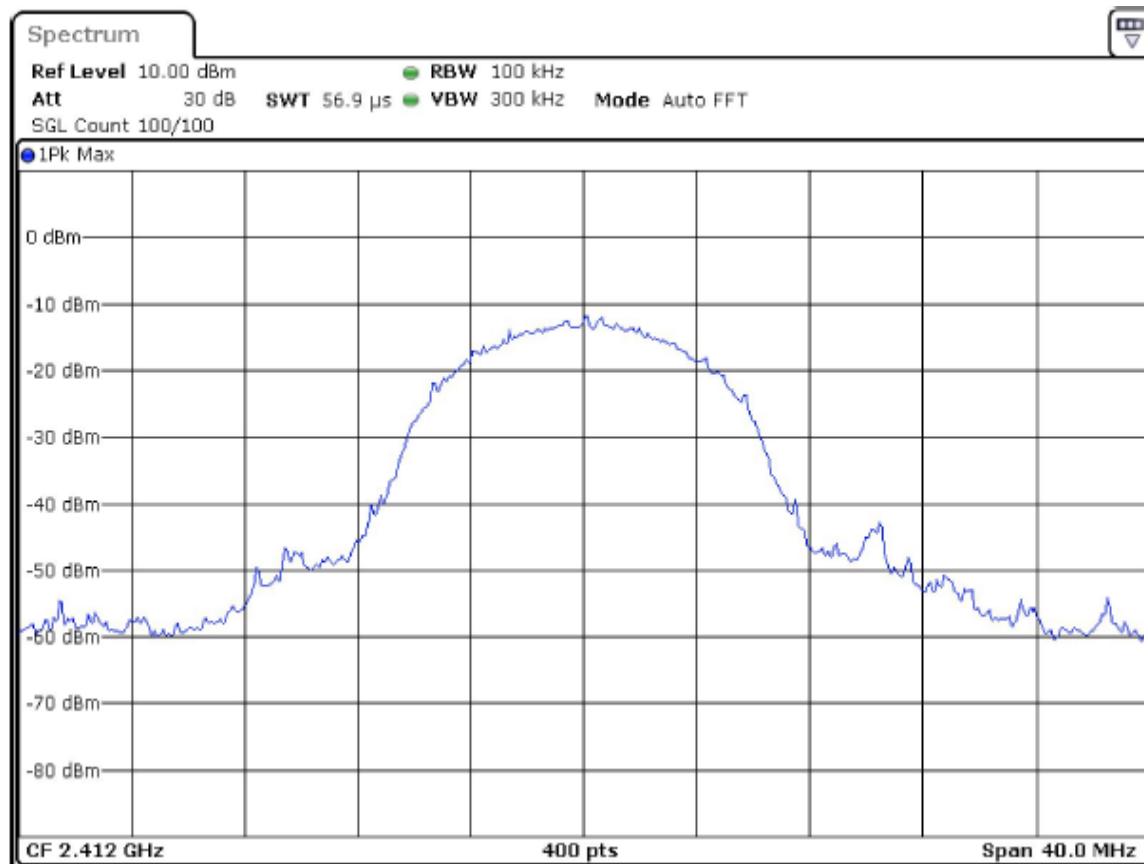
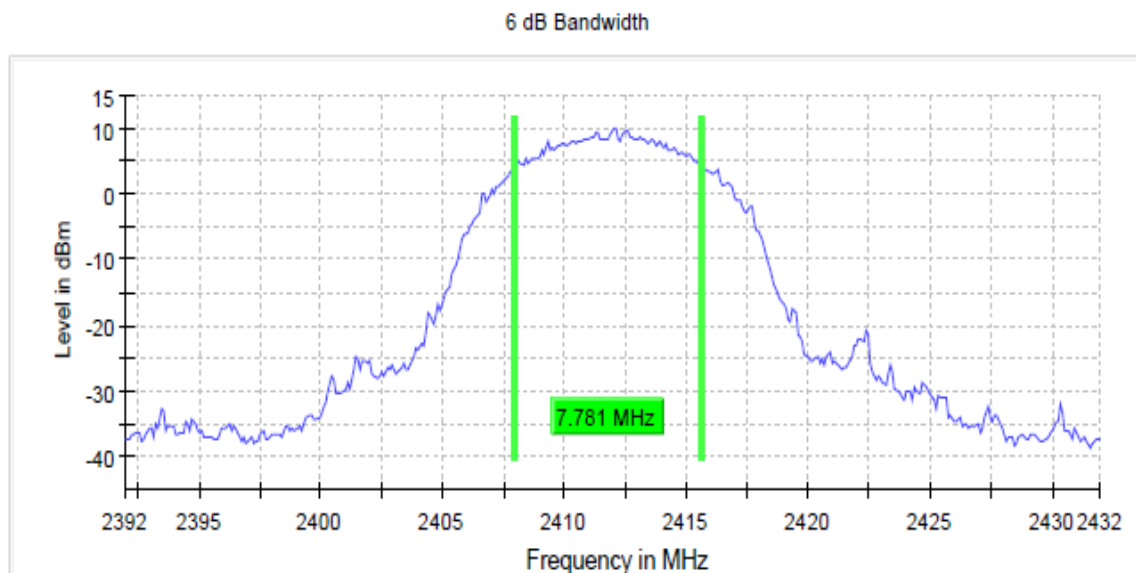


802.11g 48 Mbps 2462MHz

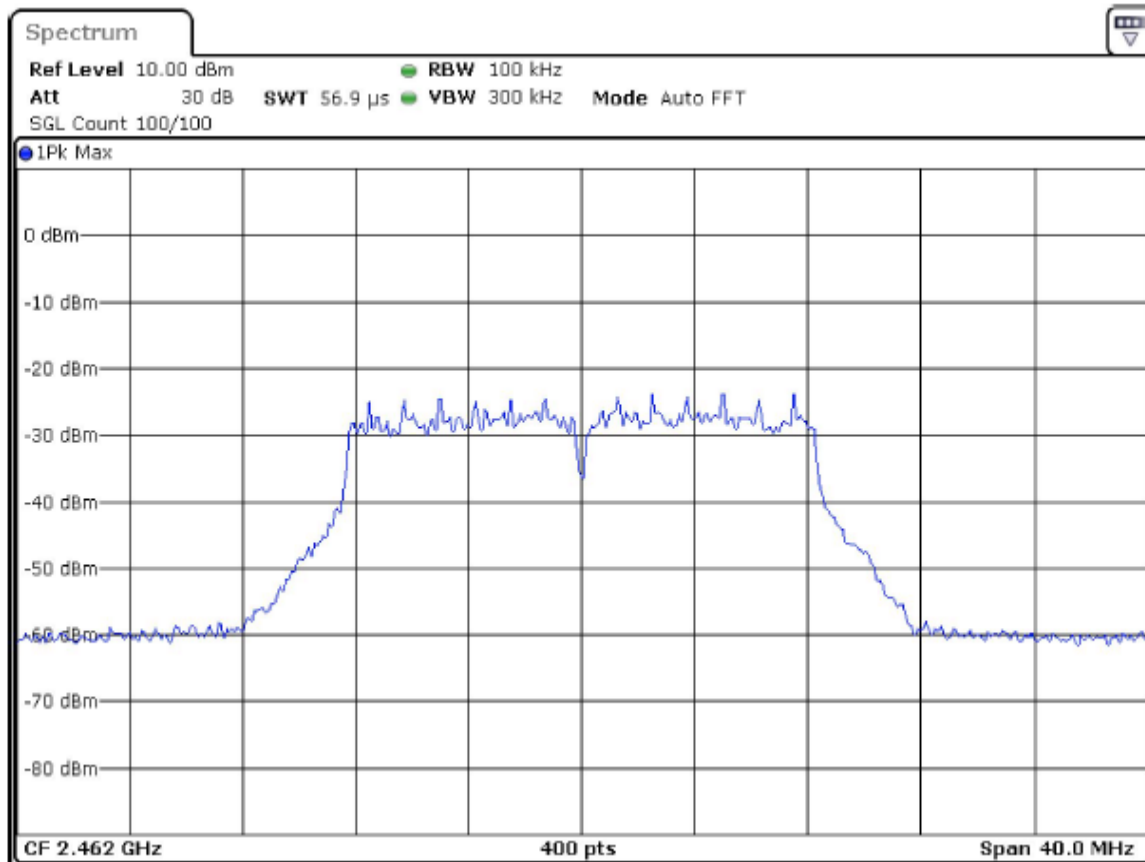

802.11n(HT20) MCS3 2437MHz

6 dB Bandwidth

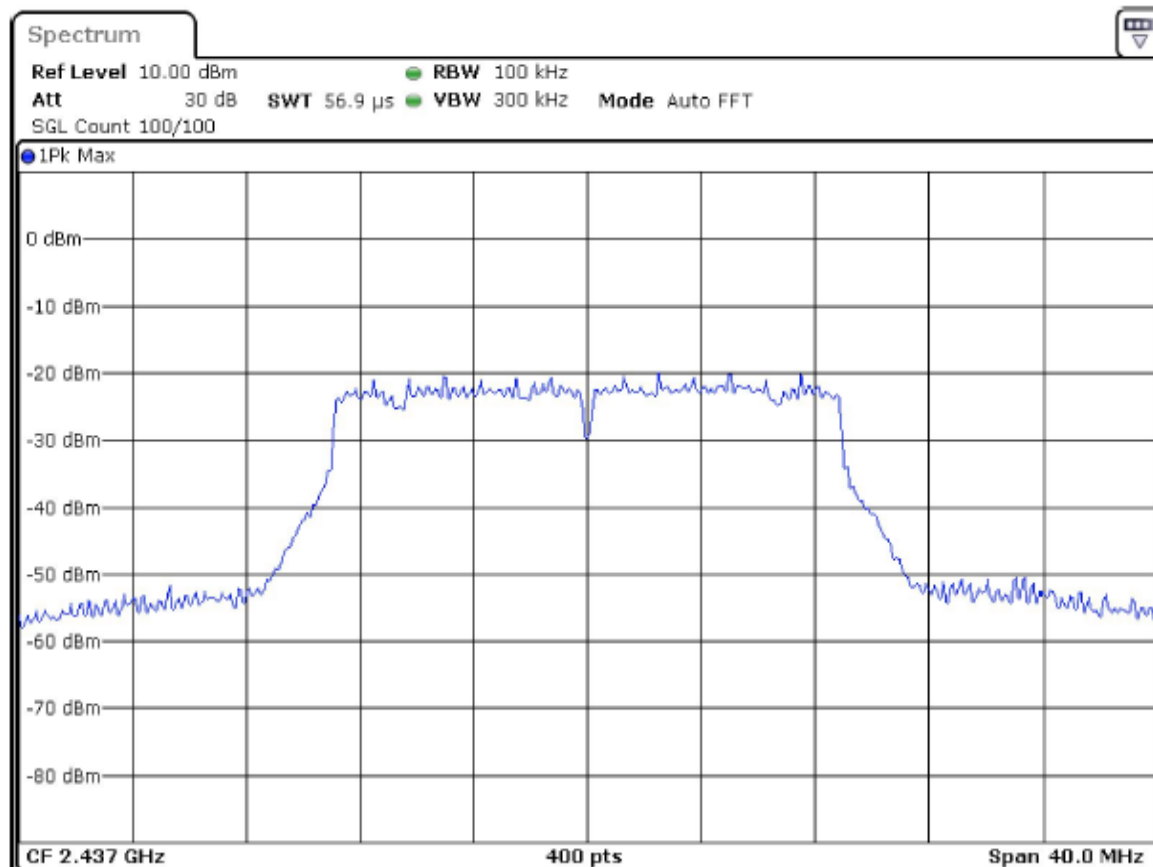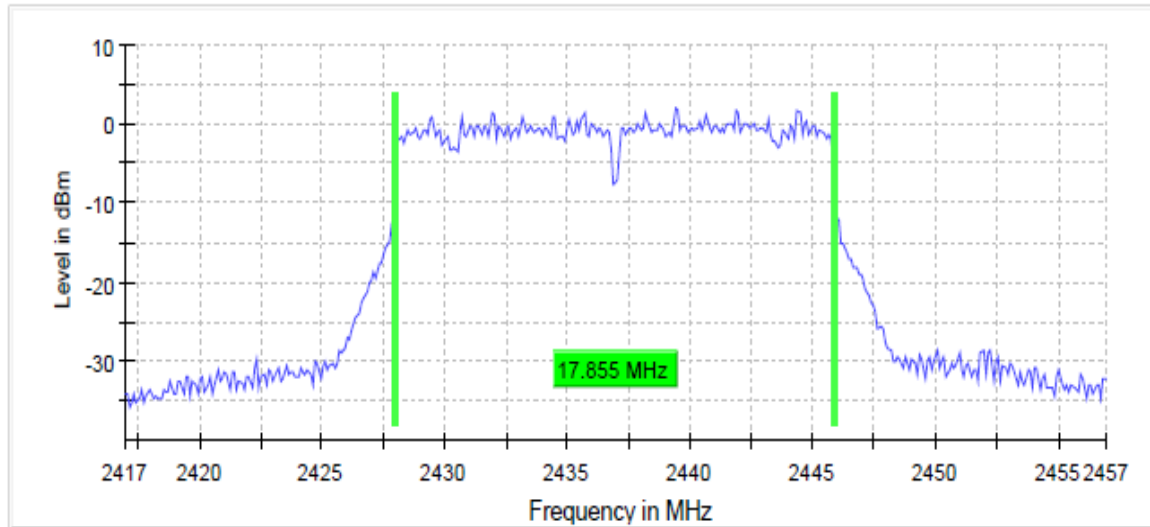

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



Conducted Band Edge

Test according to FCC KDB 558074 DTS Measurement Guidance v04 Section 11.

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 0.8 dB

802.11b 11Mbps 2412MHz

Band Edge Low


Inband Peak


Frequency (MHz)	Level (dBm)
2412.117744	10


Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.725153	-34.3	14.3	-20.0	PASS
2399.775125	-34.5	14.5	-20.0	PASS
2393.428651	-34.5	14.5	-20.0	PASS
2393.378679	-35.0	15.0	-20.0	PASS
2399.925042	-35.1	15.1	-20.0	PASS
2399.875069	-35.2	15.2	-20.0	PASS
2393.178790	-35.3	15.3	-20.0	PASS
2393.128817	-35.4	15.4	-20.0	PASS
2393.478623	-35.4	15.5	-20.0	PASS
2399.825097	-35.6	15.6	-20.0	PASS
2399.525264	-35.6	15.6	-20.0	PASS
2386.232649	-35.9	15.9	-20.0	PASS
2399.675180	-35.9	15.9	-20.0	PASS
2399.475292	-36.1	16.1	-20.0	PASS
2398.875625	-36.1	16.1	-20.0	PASS

Band Edge

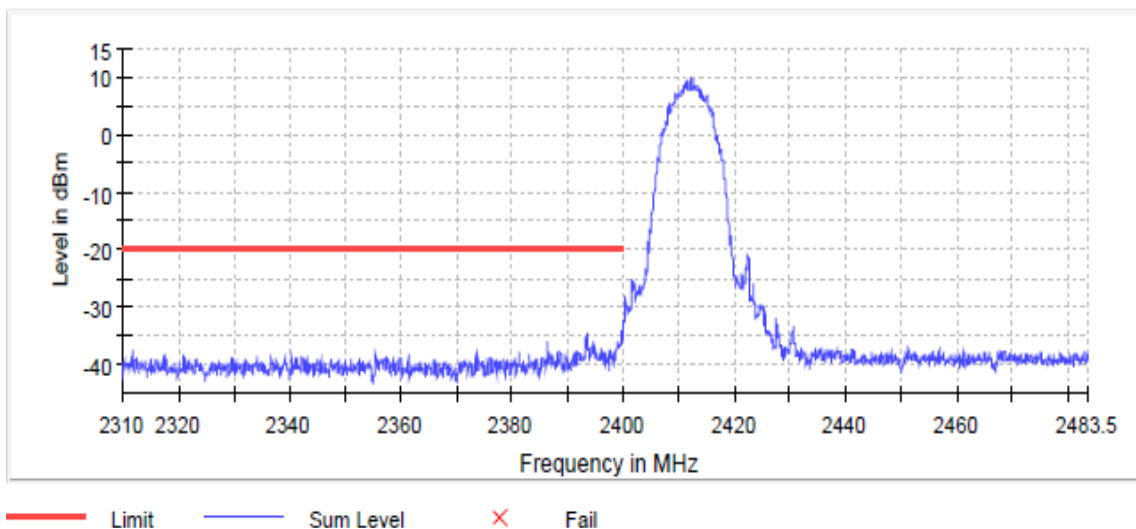

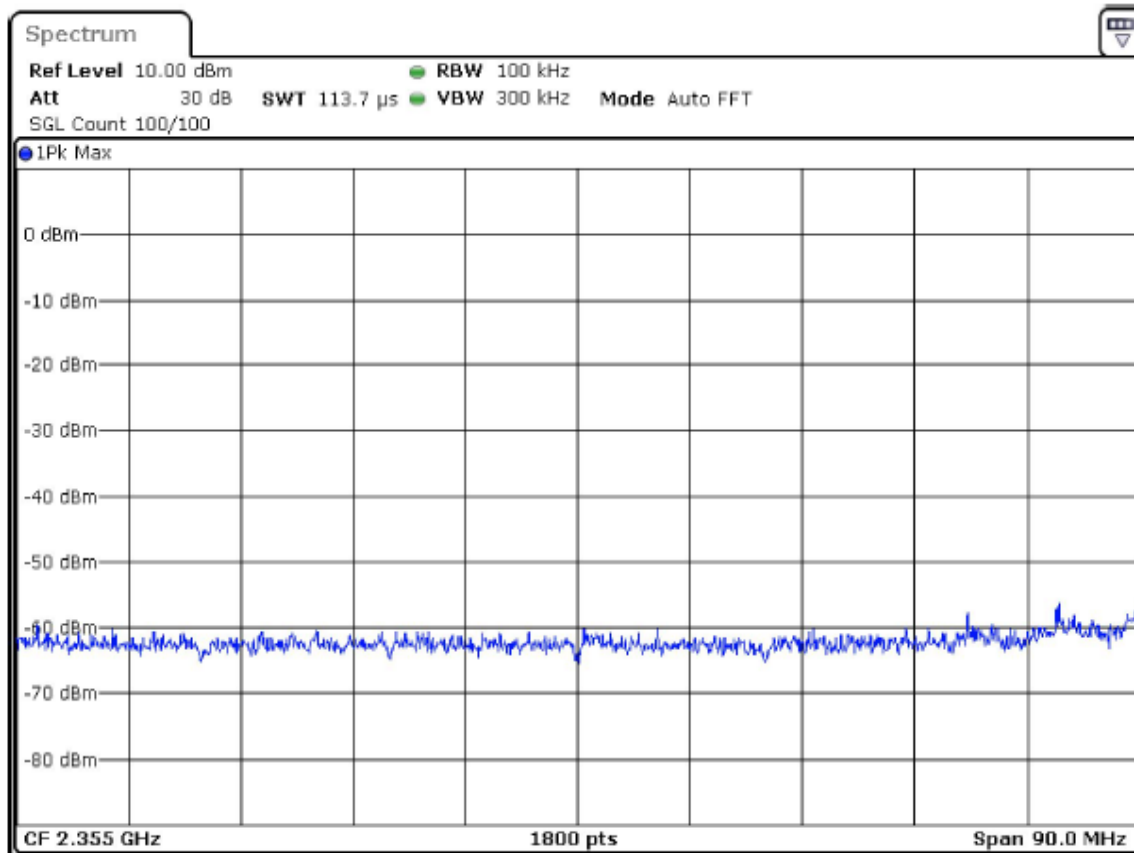

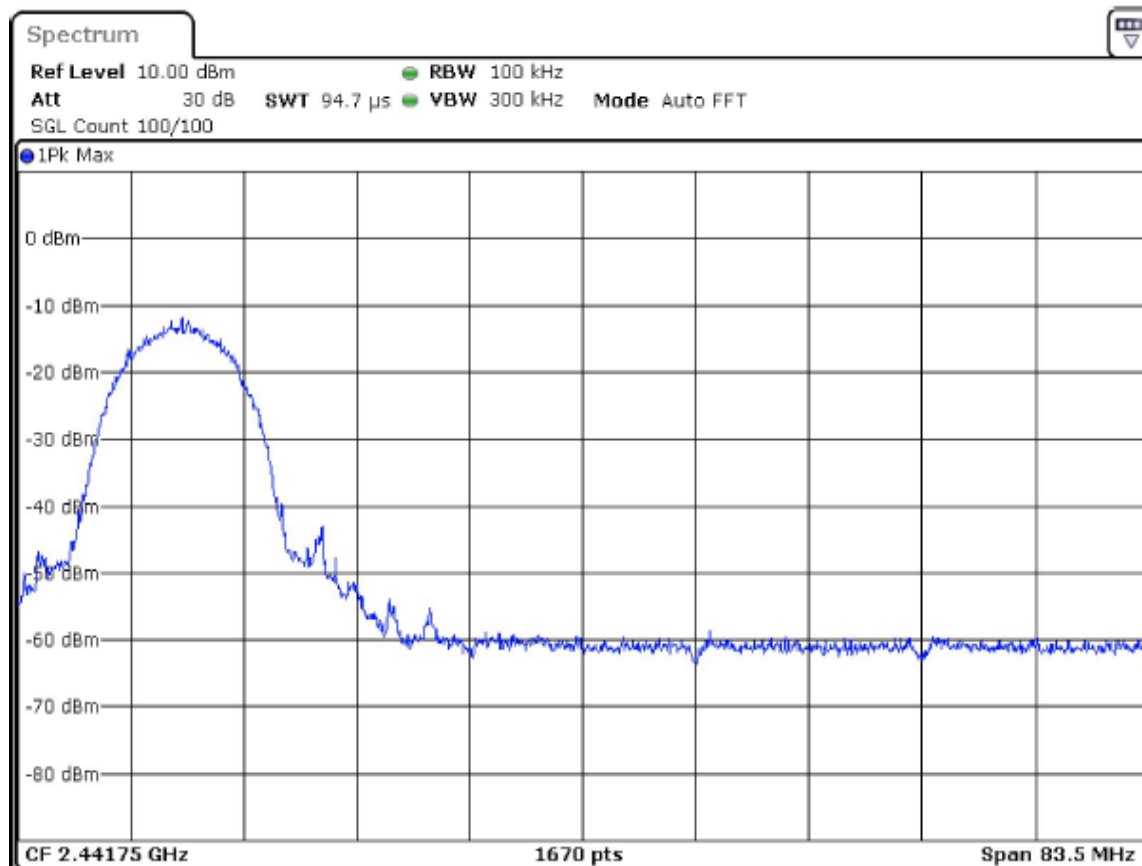

802.11b 11Mbps 2462MHz

Band Edge High


Inband Peak

Frequency (MHz)	Level (dBm)
2461.338270	7.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2484.472054	-38.0	15.6	-22.4	PASS
2484.521903	-38.1	15.7	-22.4	PASS
2486.515861	-38.1	15.7	-22.4	PASS
2488.659366	-38.2	15.8	-22.4	PASS
2488.709215	-38.3	15.9	-22.4	PASS
2488.459970	-38.5	16.1	-22.4	PASS
2493.893505	-38.5	16.1	-22.4	PASS
2486.565710	-38.5	16.1	-22.4	PASS
2485.867825	-38.6	16.1	-22.4	PASS
2493.843656	-38.6	16.2	-22.4	PASS
2485.817976	-38.6	16.2	-22.4	PASS
2488.111027	-38.7	16.3	-22.4	PASS
2495.438822	-38.7	16.3	-22.4	PASS
2487.861782	-38.7	16.3	-22.4	PASS
2491.201662	-38.8	16.4	-22.4	PASS

Band Edge

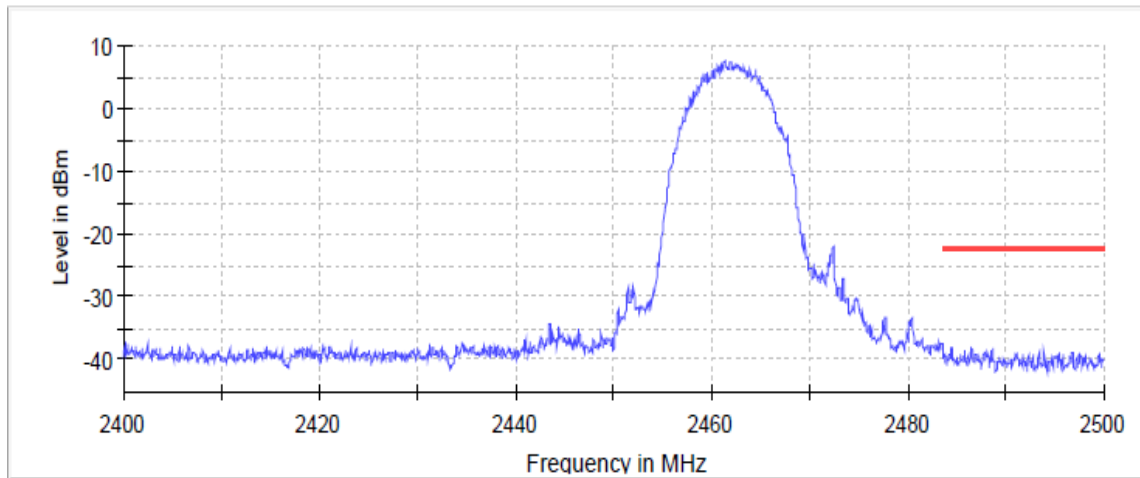


— Limit — Sum Level × Fail




BUREAU
VERITAS

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



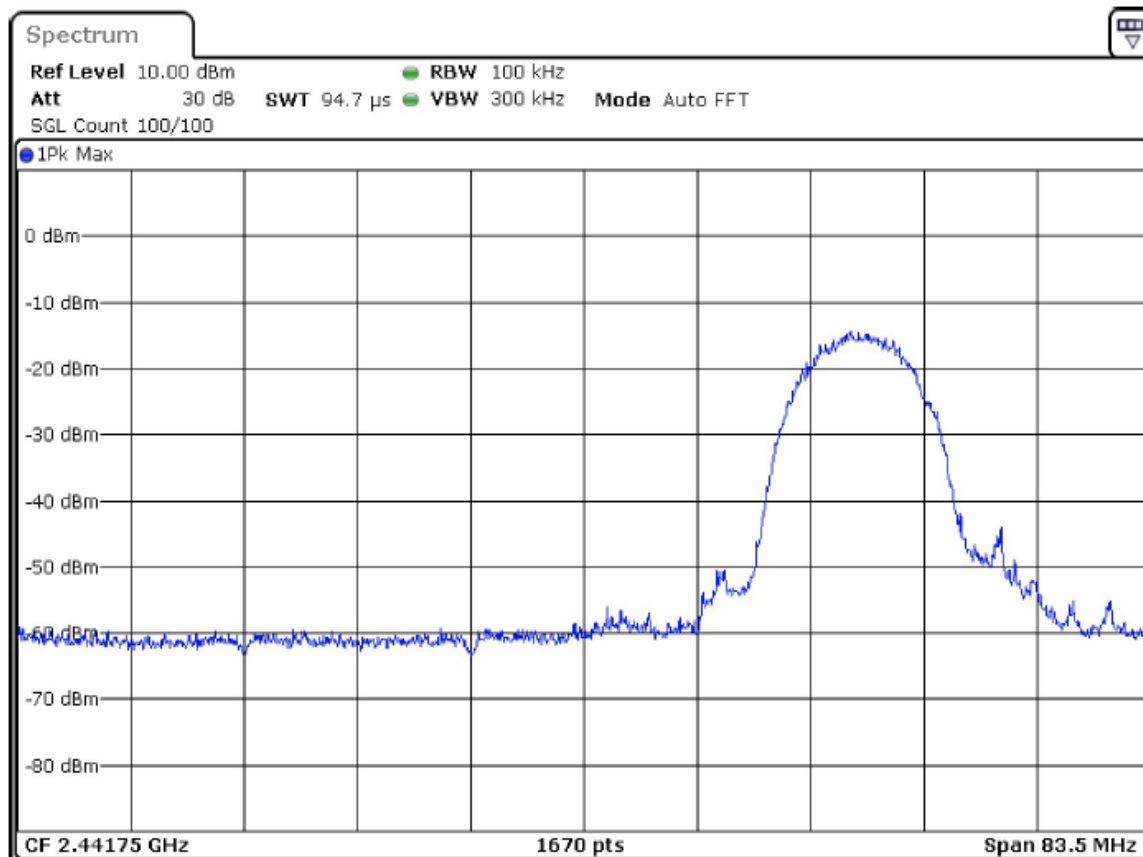

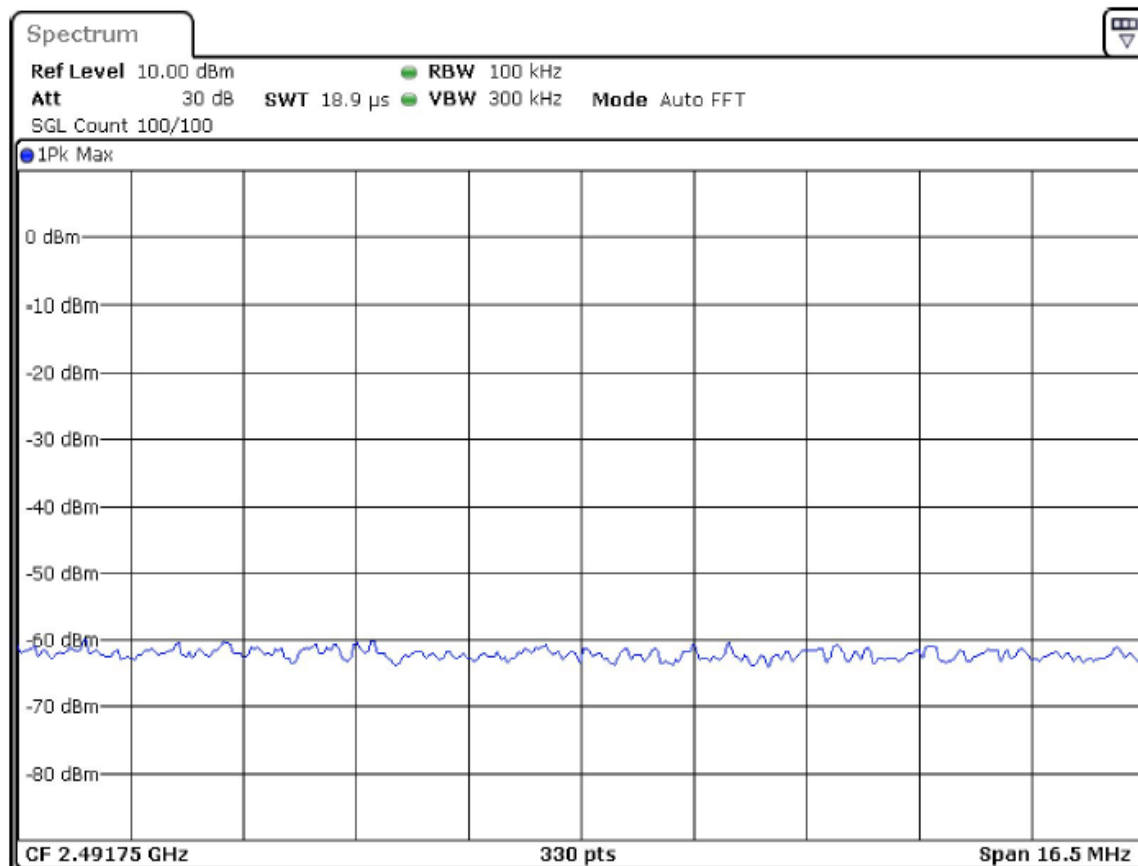

802.11g 48 Mbps 2412MHz

Band Edge Low


Inband Peak

Frequency (MHz)	Level (dBm)
2414.466338	-1.0


Measurements


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.225986	-36.3	5.3	-31.0	PASS
2398.875625	-36.8	5.8	-31.0	PASS
2398.925597	-36.9	5.8	-31.0	PASS
2398.275958	-36.9	5.8	-31.0	PASS
2397.776235	-36.9	5.9	-31.0	PASS
2397.826208	-37.0	6.0	-31.0	PASS
2398.825652	-37.1	6.1	-31.0	PASS
2395.777346	-37.2	6.1	-31.0	PASS
2396.526929	-37.4	6.3	-31.0	PASS
2361.196557	-37.4	6.4	-31.0	PASS
2398.775680	-37.4	6.4	-31.0	PASS
2361.246530	-37.4	6.4	-31.0	PASS
2395.727374	-37.5	6.4	-31.0	PASS
2398.176013	-37.5	6.4	-31.0	PASS
2399.725153	-37.7	6.7	-31.0	PASS

Band Edge

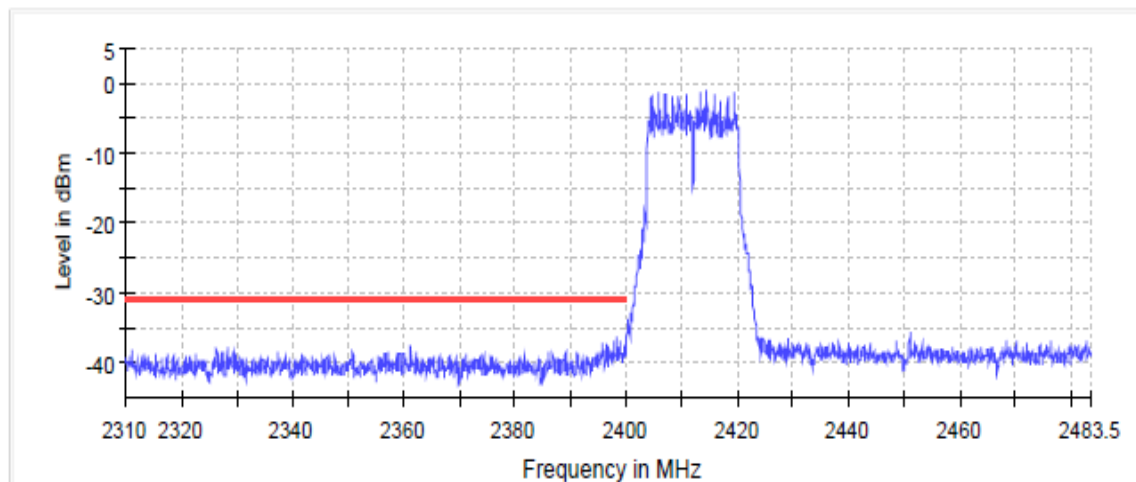

— Limit — Sum Level × Fail

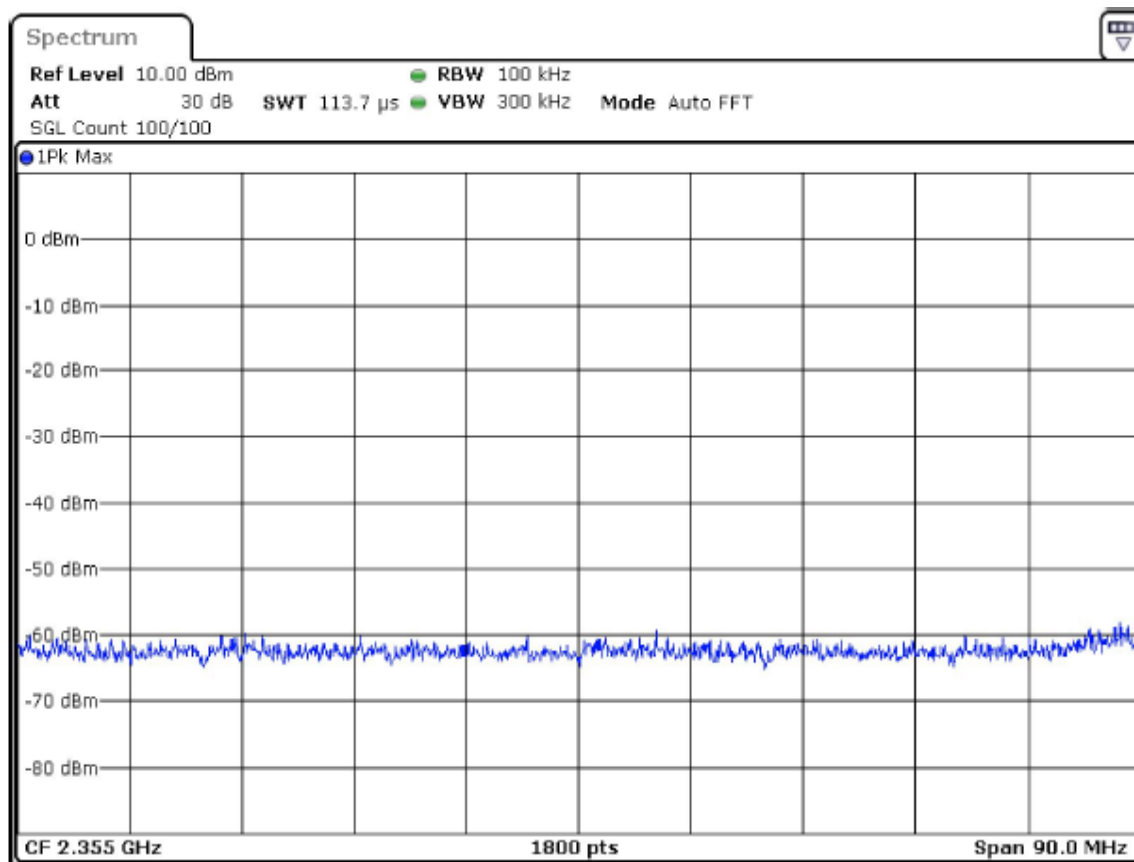

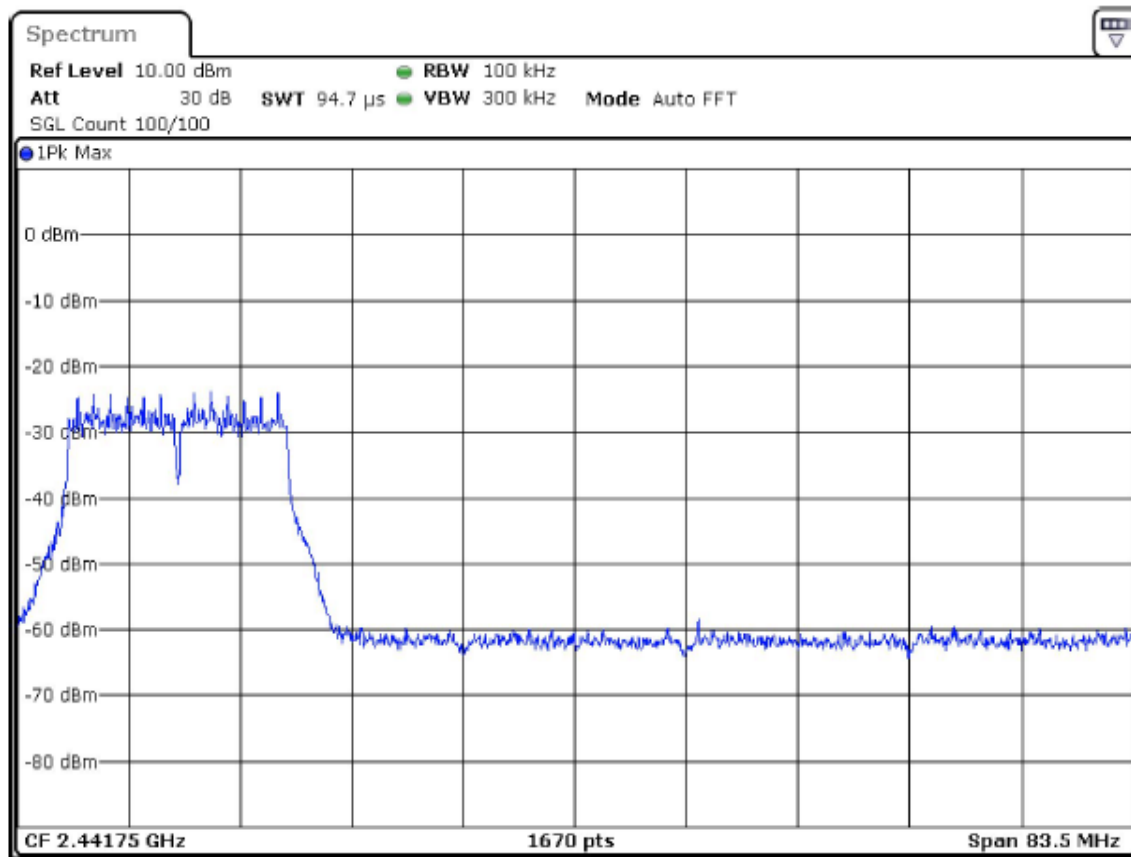

802.11g 48 Mbps 2462MHz

Band Edge High


Inband Peak

Frequency (MHz)	Level (dBm)
2464.436415	-1.1


Measurements


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2488.310423	-37.5	6.5	-31.1	PASS
2488.260574	-37.8	6.8	-31.1	PASS
2488.360272	-38.3	7.3	-31.1	PASS
2485.219789	-38.4	7.3	-31.1	PASS
2484.023414	-38.4	7.4	-31.1	PASS
2485.169940	-38.6	7.5	-31.1	PASS
2483.973565	-38.6	7.5	-31.1	PASS
2492.348187	-38.7	7.7	-31.1	PASS
2492.298338	-38.7	7.7	-31.1	PASS
2494.192598	-38.7	7.7	-31.1	PASS
2485.469033	-38.8	7.8	-31.1	PASS
2492.248489	-38.9	7.8	-31.1	PASS
2494.242447	-38.9	7.8	-31.1	PASS
2500.000000	-38.9	7.9	-31.1	PASS
2499.925227	-38.9	7.9	-31.1	PASS

Band Edge

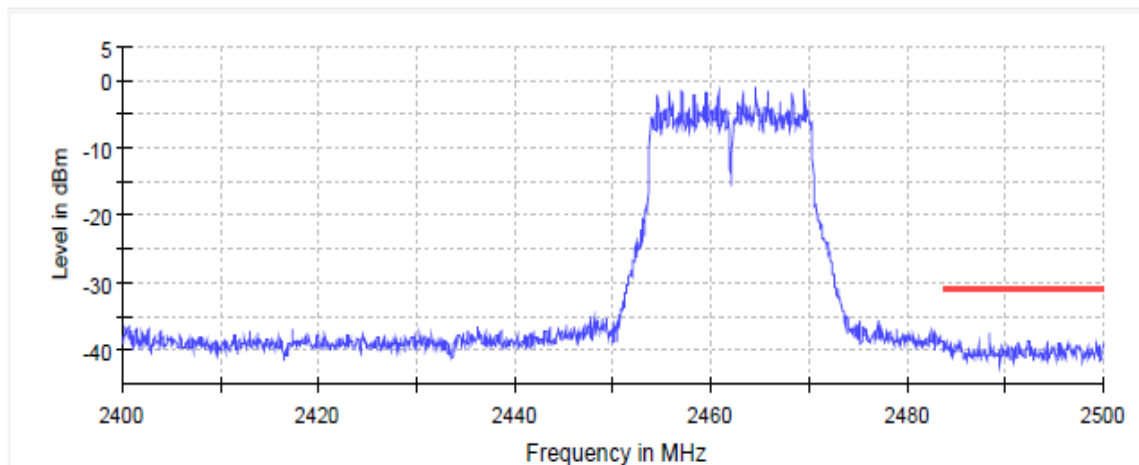

— Limit — Sum Level × Fail

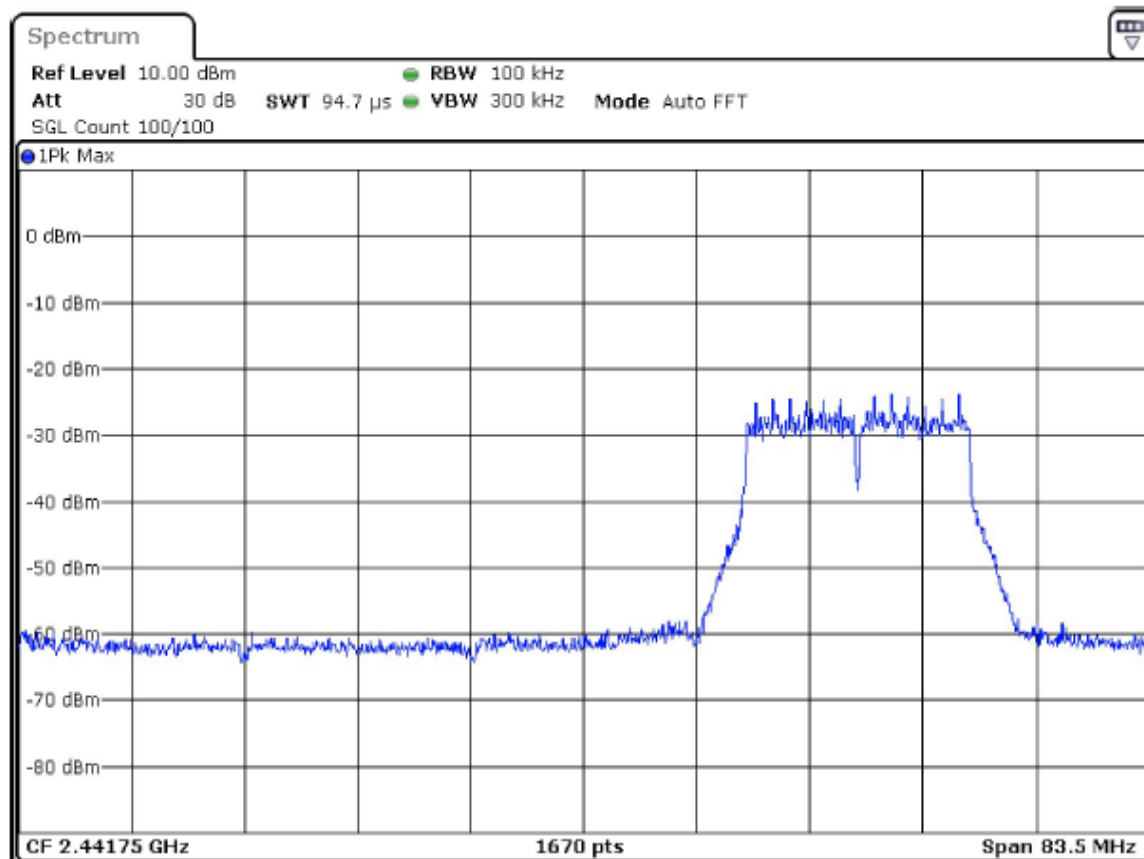

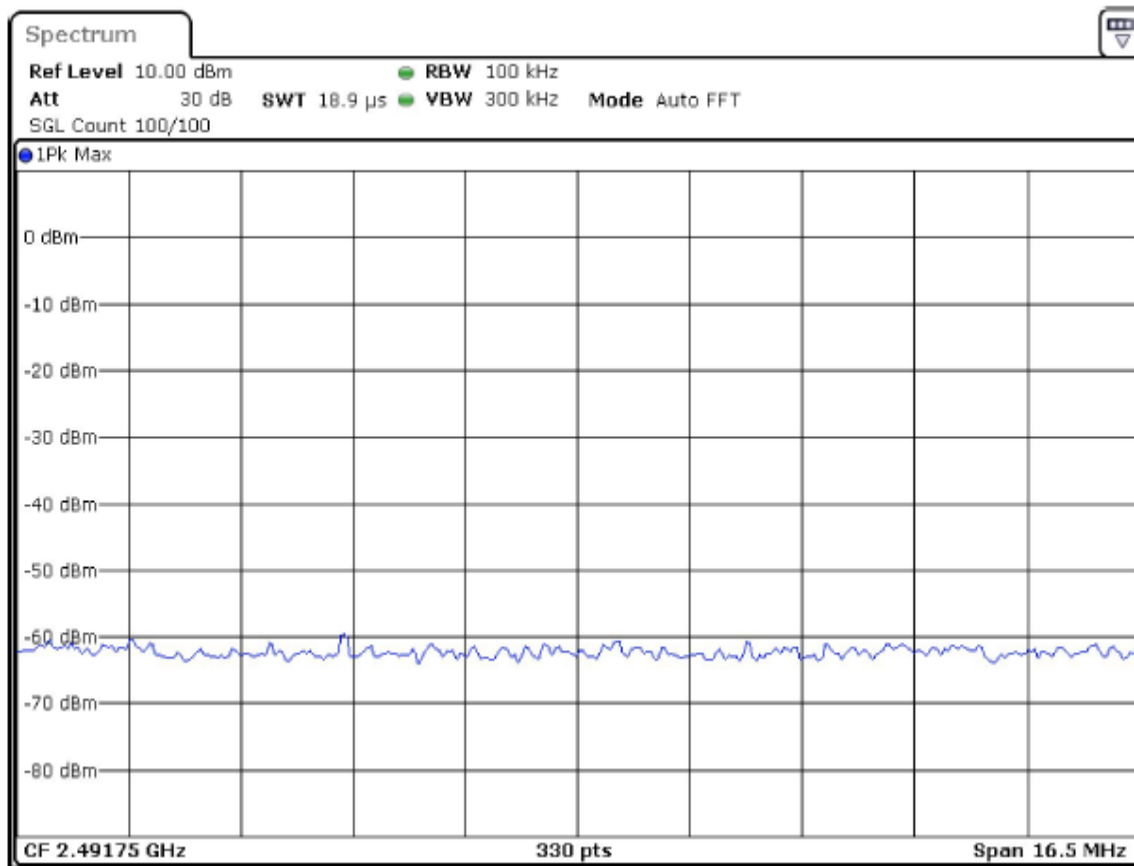

802.11n(HT20) MCS3 2412MHz

Band Edge Low


Inband Peak


Frequency (MHz)	Level (dBm)
2414.466338	2.1


Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.825652	-30.5	2.6	-27.9	PASS
2398.875625	-30.8	3.0	-27.9	PASS
2397.576346	-31.3	3.5	-27.9	PASS
2396.077179	-31.5	3.6	-27.9	PASS
2396.027207	-31.5	3.6	-27.9	PASS
2397.626319	-31.7	3.8	-27.9	PASS
2396.576902	-31.8	3.9	-27.9	PASS
2398.225986	-31.9	4.1	-27.9	PASS
2398.775680	-31.9	4.1	-27.9	PASS
2398.275958	-32.0	4.1	-27.9	PASS
2397.926152	-32.0	4.1	-27.9	PASS
2399.475292	-32.0	4.2	-27.9	PASS
2397.976124	-32.0	4.2	-27.9	PASS
2396.626874	-32.1	4.2	-27.9	PASS
2397.526374	-32.1	4.2	-27.9	PASS

Band Edge

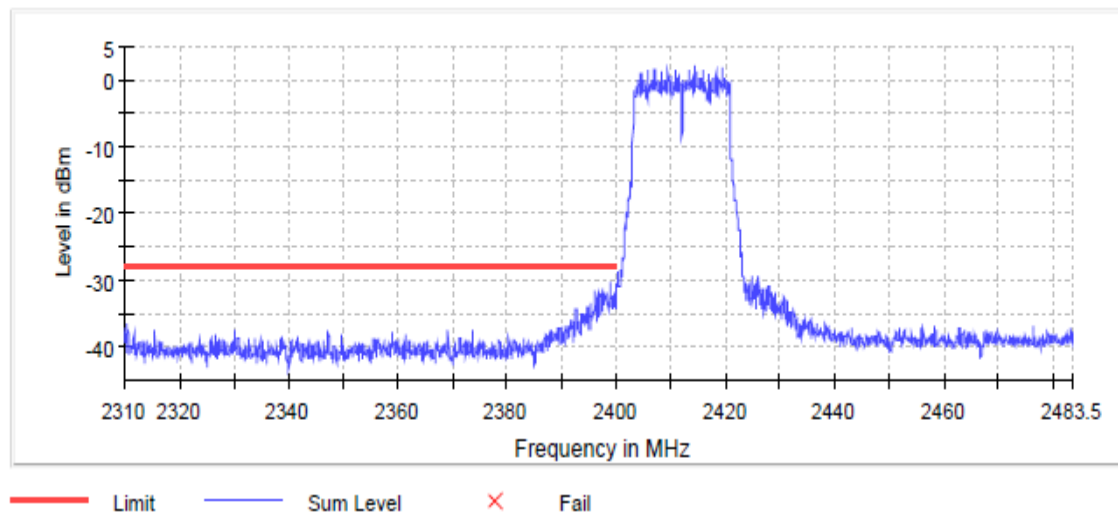

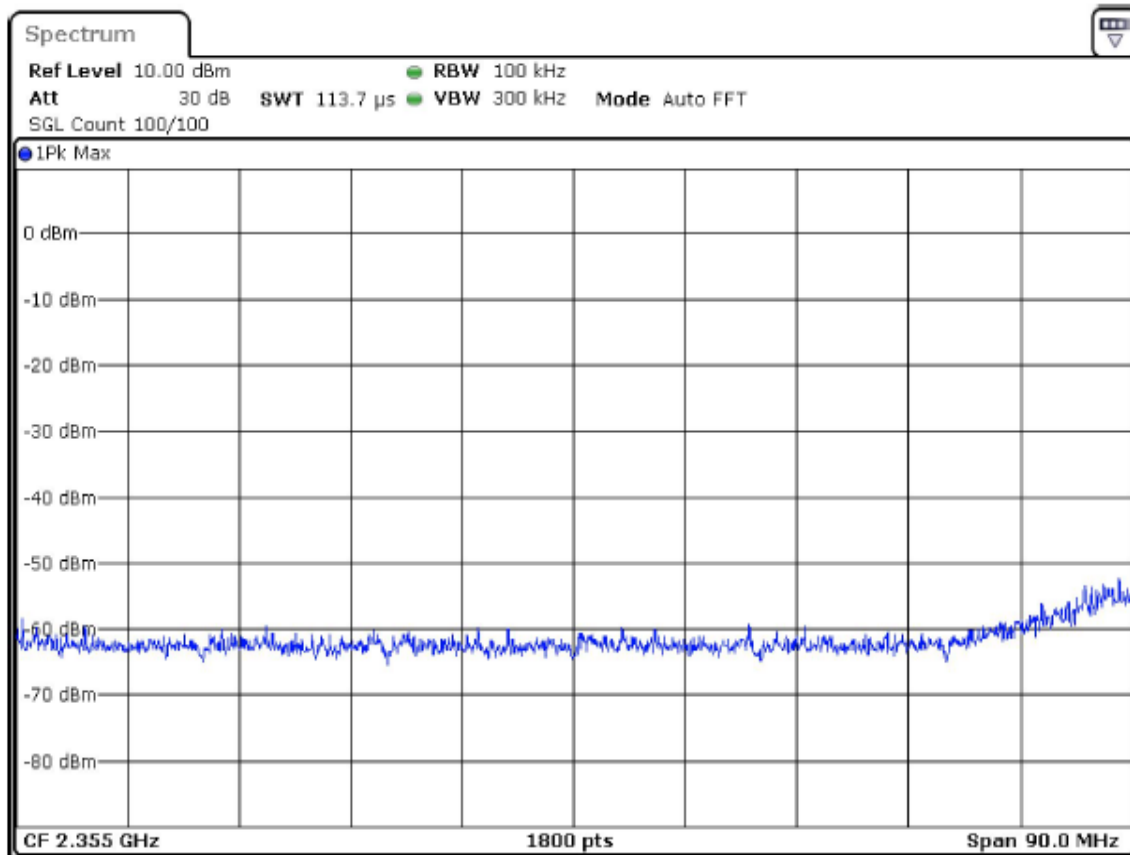

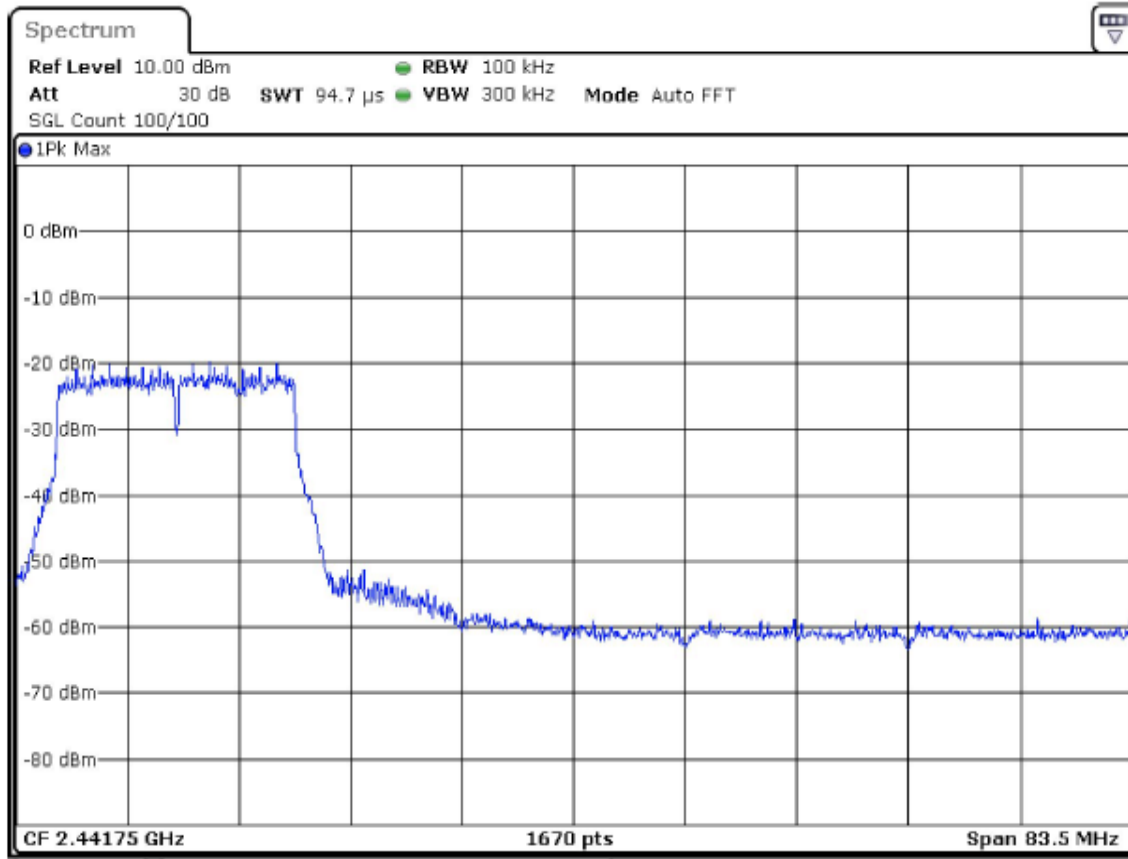

802.11n(HT20) MCS3 2462MHz

Band Edge High



Inband Peak


Frequency (MHz)	Level (dBm)
2464.436415	1.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2483.524924	-34.4	5.6	-28.8	PASS
2483.923716	-34.6	5.8	-28.8	PASS
2483.873867	-35.0	6.2	-28.8	PASS
2483.973565	-35.8	7.0	-28.8	PASS
2483.774169	-36.4	7.6	-28.8	PASS
2483.824018	-36.5	7.7	-28.8	PASS
2484.820997	-36.5	7.7	-28.8	PASS
2484.372356	-36.6	7.8	-28.8	PASS
2484.771148	-36.7	7.9	-28.8	PASS
2484.172961	-36.7	7.9	-28.8	PASS
2484.322508	-36.7	7.9	-28.8	PASS
2485.718278	-36.7	7.9	-28.8	PASS
2484.222810	-36.8	8.0	-28.8	PASS
2483.574773	-36.8	8.0	-28.8	PASS
2484.422205	-37.0	8.2	-28.8	PASS



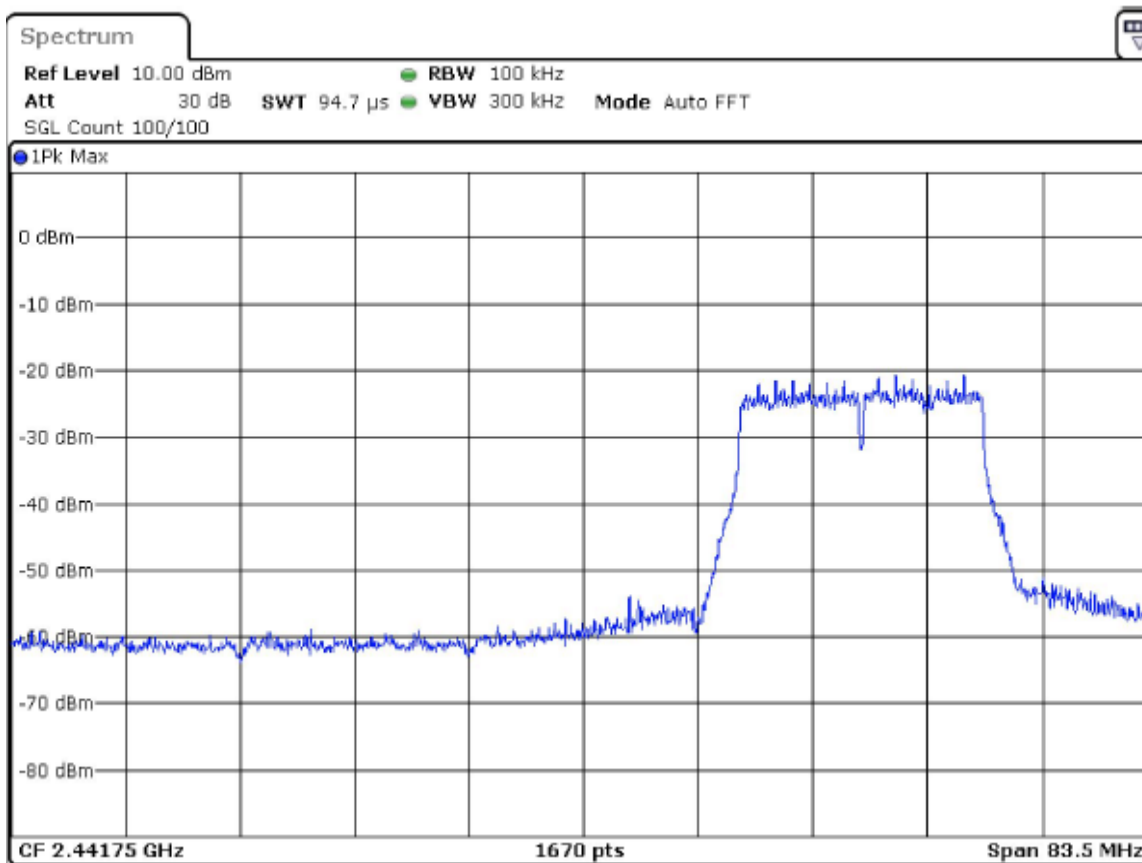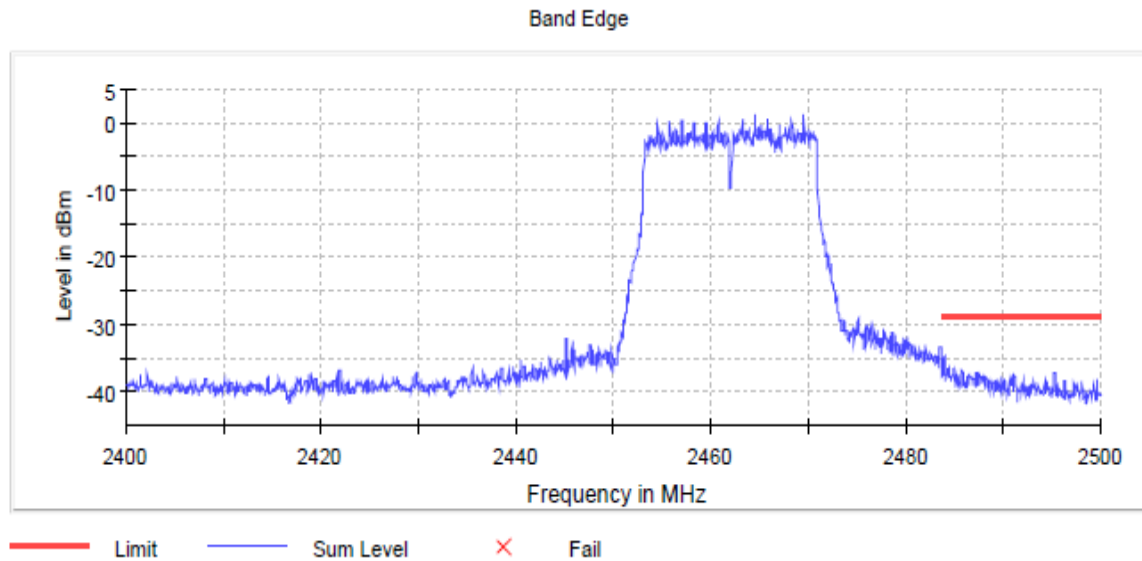

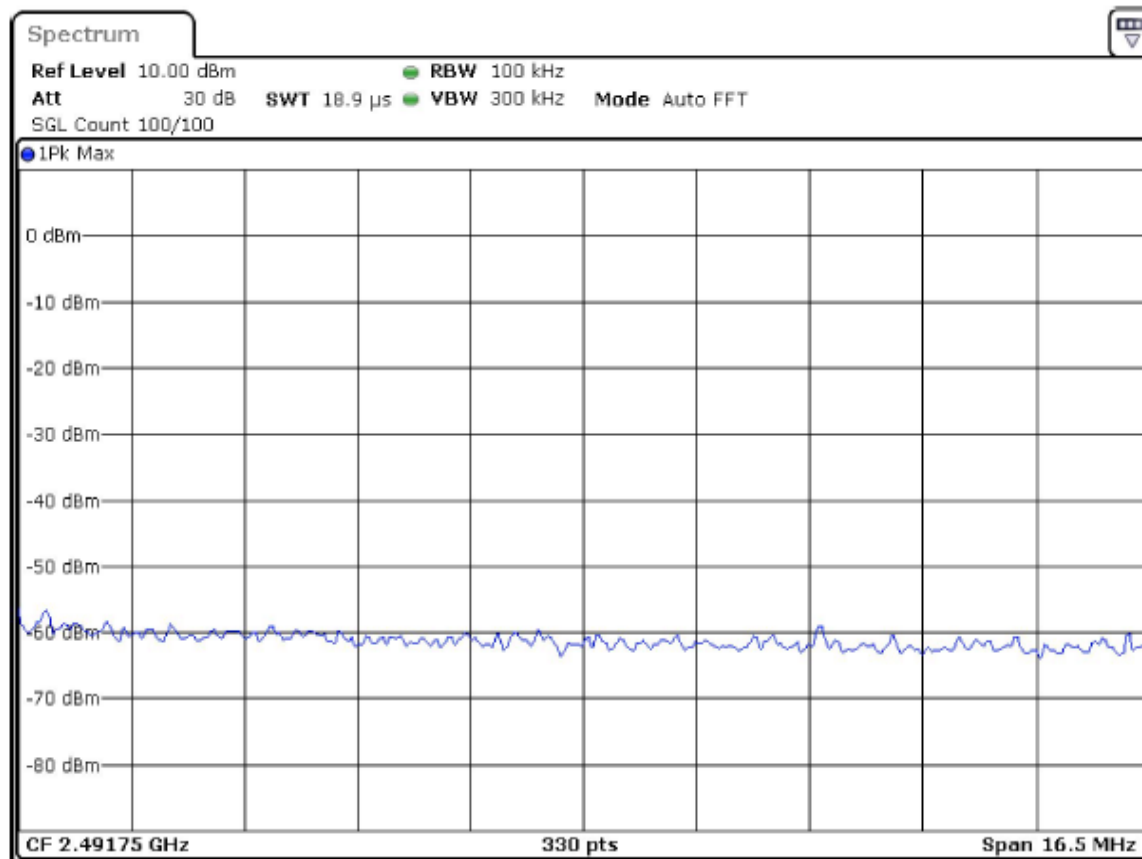

Conducted Spurious Emissions


Test according to FCC KDB 558074 DTS Measurement Guidance v04 Section 11.


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1. Expanded Uncertainty (K=2) < 1.8 dB

802.11b 11 Mbps 2412MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2396.149772	-30.0	9.7	-20.4
2398.490563	-32.2	11.8	-20.4
2396.930036	-34.6	14.2	-20.4
2397.710299	-35.0	14.6	-20.4
2394.589244	-35.0	14.6	-20.4
2399.270827	-35.4	15.1	-20.4
2393.028717	-36.1	15.7	-20.4
2395.369508	-36.8	16.5	-20.4
2393.808981	-38.5	18.1	-20.4
19768.721799	-39.0	18.6	-20.4
19783.546810	-39.5	19.1	-20.4
19767.941535	-39.5	19.2	-20.4
19769.502062	-39.6	19.2	-20.4
19807.734985	-39.6	19.3	-20.4
19950.523249	-39.7	19.3	-20.4

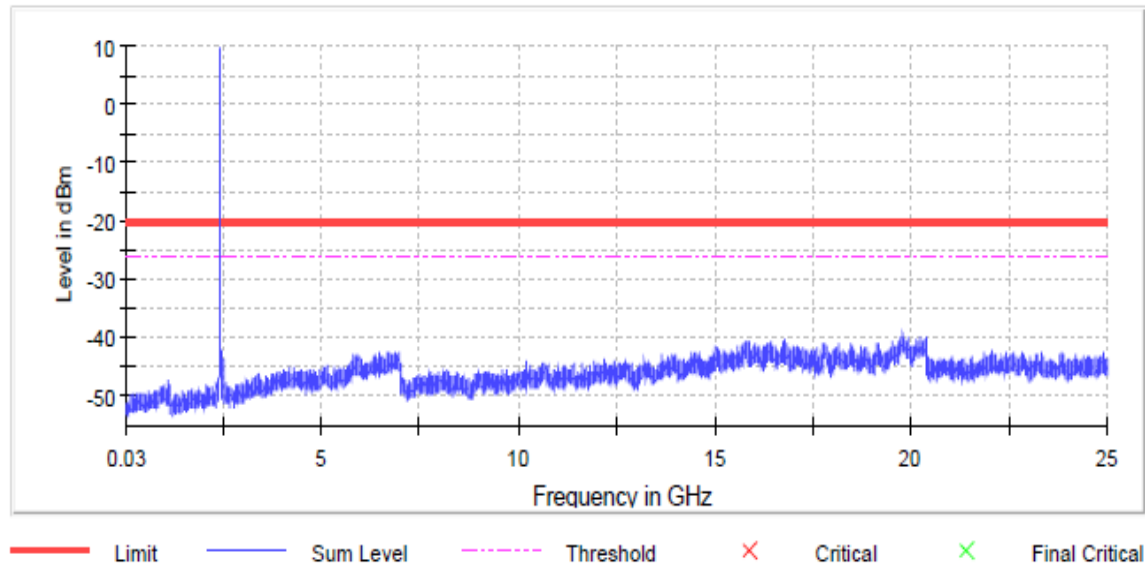


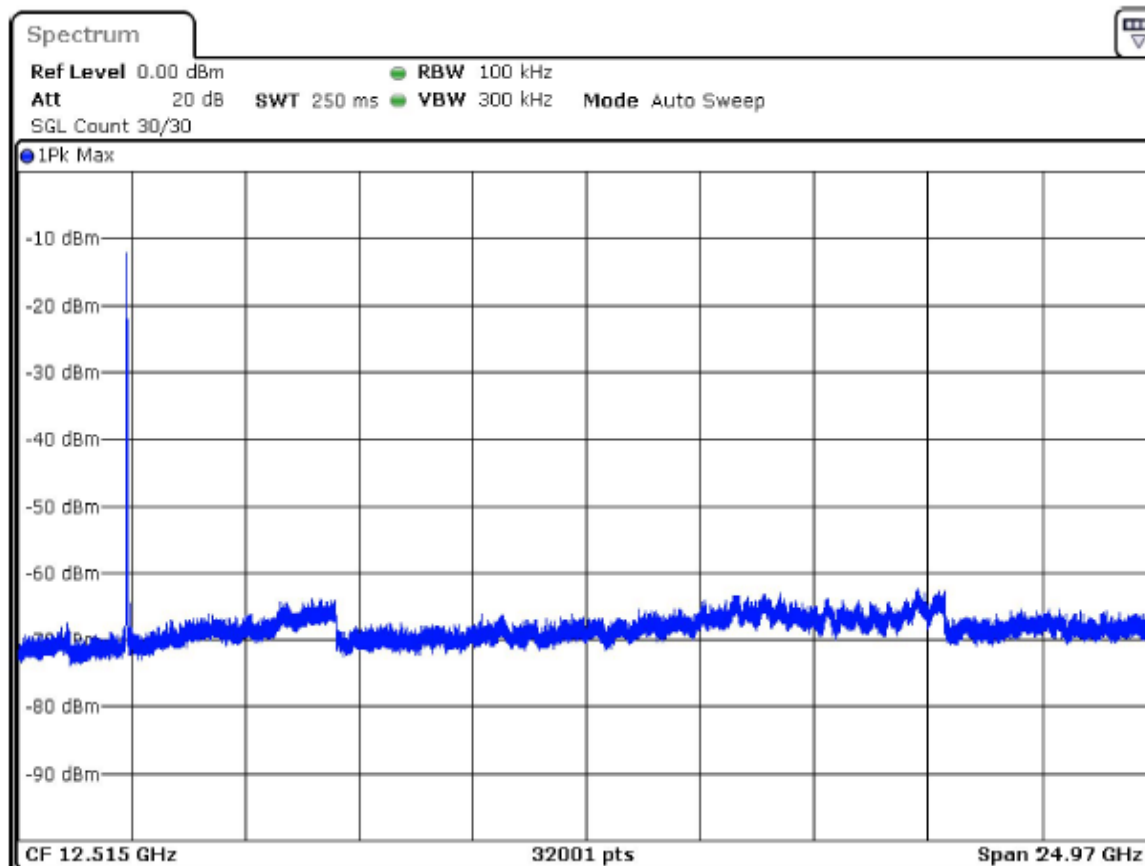


802.11b 11Mbps 2437MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
19789.008656	-39.3	18.4	-20.8
19743.753359	-39.3	18.5	-20.8
19733.609931	-39.5	18.6	-20.8
19732.049403	-39.6	18.7	-20.8
16780.311699	-39.6	18.7	-20.8
19792.909974	-39.6	18.7	-20.8
19785.887601	-39.6	18.8	-20.8
16400.323261	-39.6	18.8	-20.8
19735.170458	-39.7	18.9	-20.8
19748.434942	-39.8	18.9	-20.8
19732.829667	-39.8	19.0	-20.8
17806.358509	-39.8	19.0	-20.8
18143.432442	-39.9	19.1	-20.8
19764.040216	-39.9	19.1	-20.8
20296.960346	-40.0	19.1	-20.8

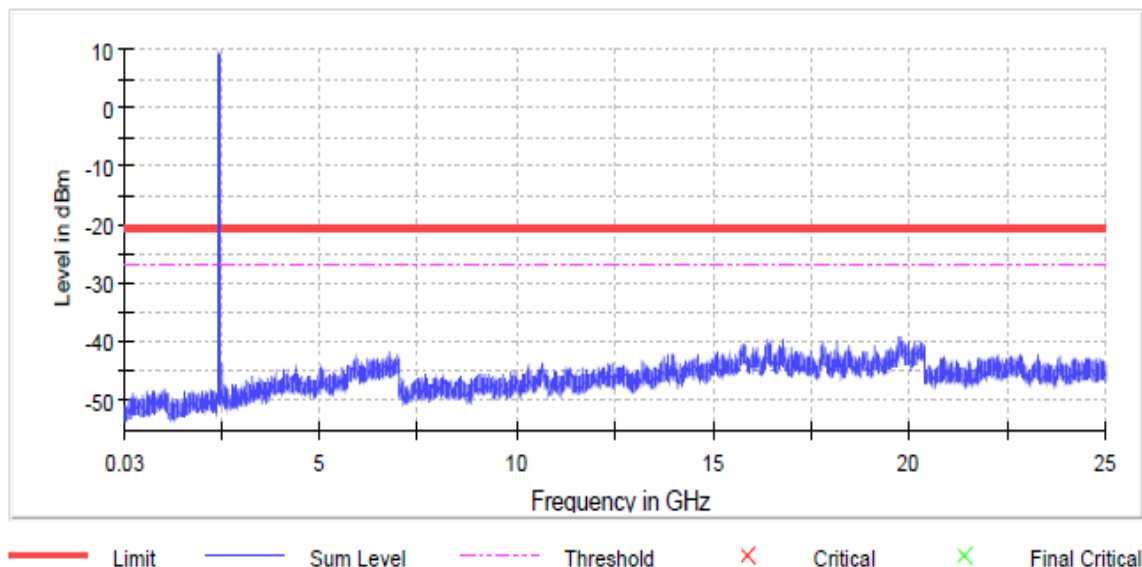


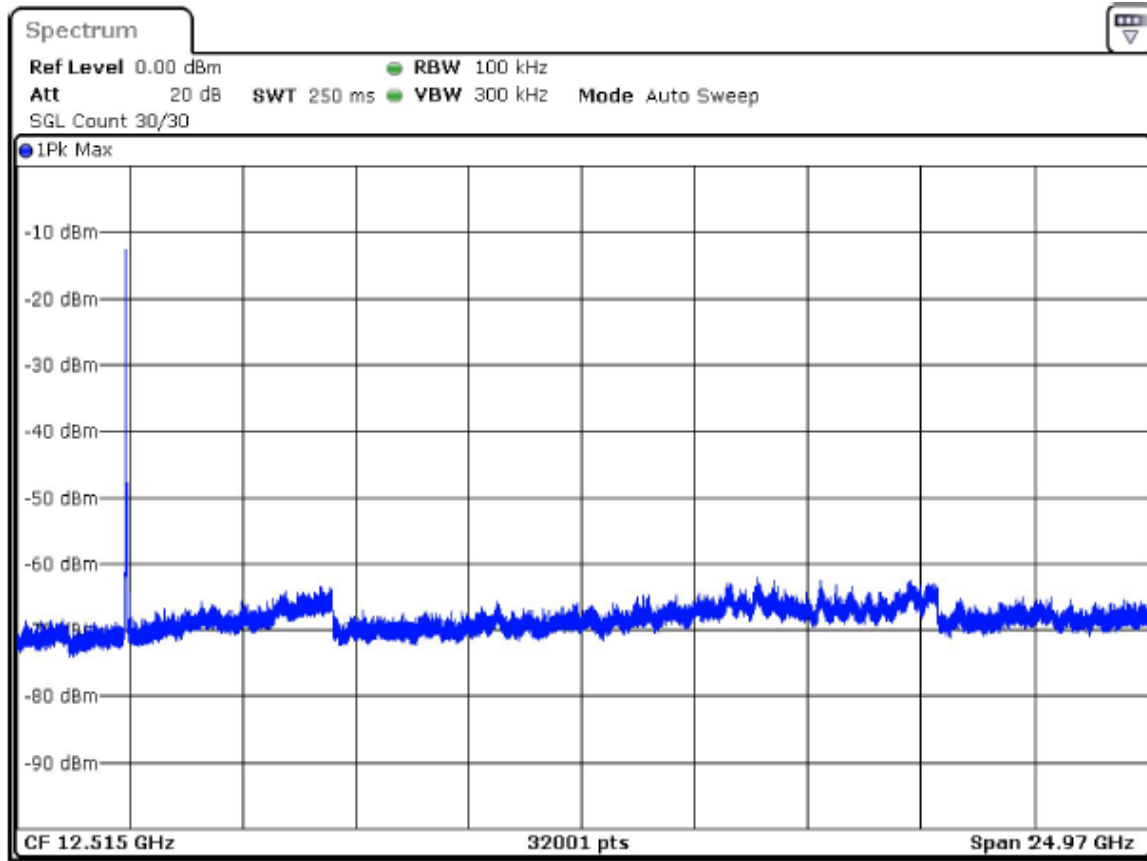


802.11b 11Mbps 2462MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2483.539310	-36.9	16.7	-20.3
19856.111337	-38.8	18.6	-20.3
19732.829667	-38.9	18.6	-20.3
19753.896788	-39.3	19.1	-20.3
19639.978283	-39.4	19.1	-20.3
20250.144522	-39.6	19.3	-20.3
16512.681239	-39.6	19.4	-20.3
19787.448128	-39.7	19.4	-20.3
19832.703425	-39.7	19.5	-20.3
2485.099838	-39.7	19.5	-20.3
19732.049403	-39.8	19.5	-20.3
19780.425755	-39.8	19.5	-20.3
19774.963909	-39.8	19.6	-20.3
19700.838854	-39.8	19.6	-20.3
19790.569183	-39.8	19.6	-20.3

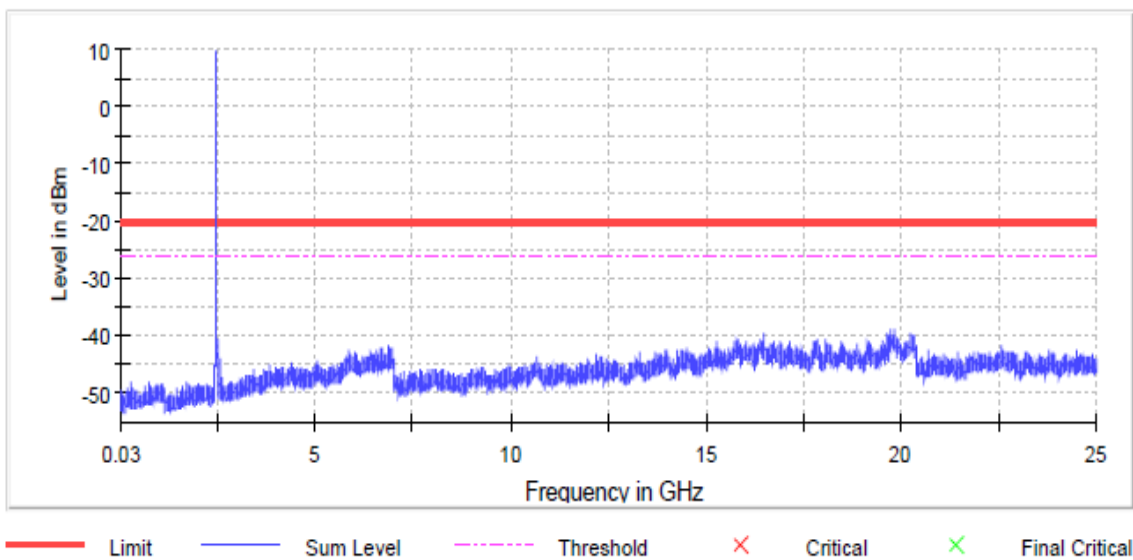

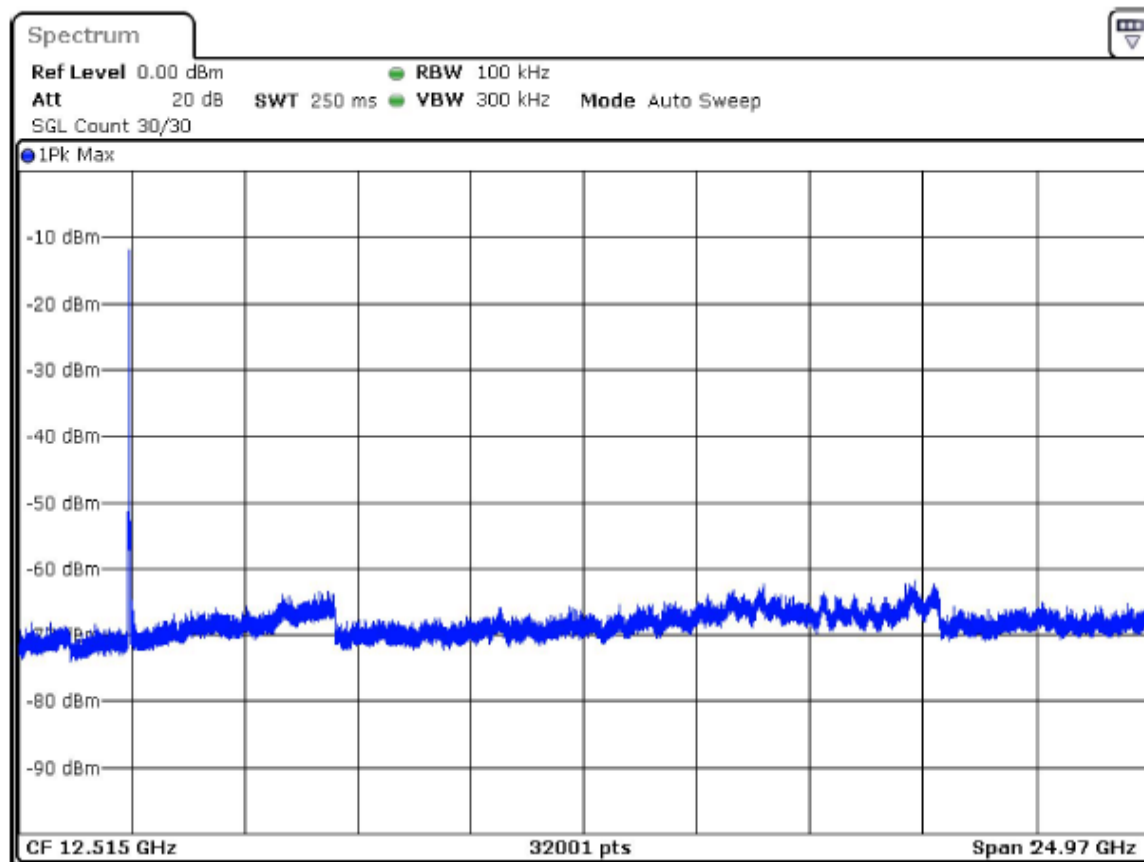



802.11g 48 Mbps 2412MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
19777.304700	-39.1	8.1	-31.0
19757.798106	-39.2	8.1	-31.0
19765.600744	-39.3	8.2	-31.0
19788.228392	-39.4	8.4	-31.0
19823.340260	-39.6	8.6	-31.0
19772.623117	-39.7	8.7	-31.0
19753.116524	-39.7	8.7	-31.0
19773.403381	-39.7	8.7	-31.0
2399.270827	-39.8	8.7	-31.0
16422.170646	-39.8	8.8	-31.0
19805.394194	-39.8	8.8	-31.0
18425.107650	-39.9	8.9	-31.0
19768.721799	-39.9	8.9	-31.0
19827.241579	-40.0	8.9	-31.0
19771.842854	-40.0	8.9	-31.0

Spurious

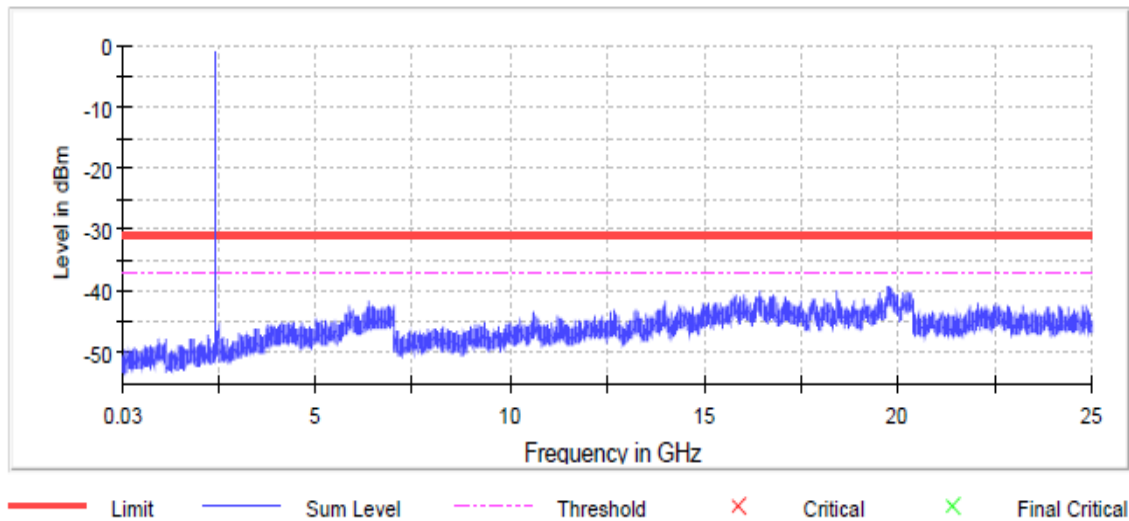

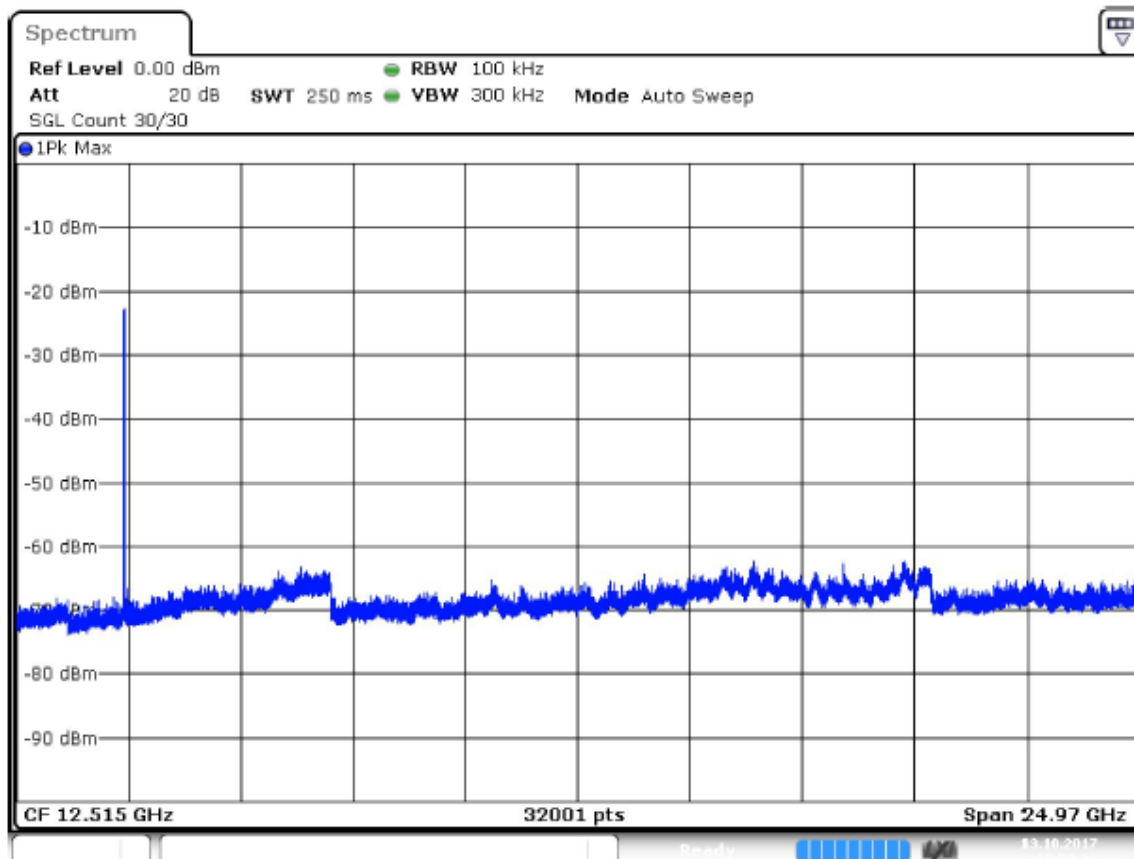



802.11g 48 Mbps 2437MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
19778.084963	-39.0	7.8	-31.2
19760.138898	-39.4	8.2	-31.2
19737.511249	-39.5	8.3	-31.2
19775.744172	-39.5	8.3	-31.2
19774.963909	-39.6	8.5	-31.2
19779.645491	-39.7	8.6	-31.2
19831.923161	-39.8	8.6	-31.2
19828.021842	-39.8	8.6	-31.2
20321.148522	-39.8	8.6	-31.2
19753.896788	-39.9	8.7	-31.2
19774.183645	-40.0	8.8	-31.2
19755.457315	-40.0	8.8	-31.2
19700.838854	-40.0	8.8	-31.2
19739.852040	-40.0	8.9	-31.2
19835.824480	-40.1	8.9	-31.2

Spurious

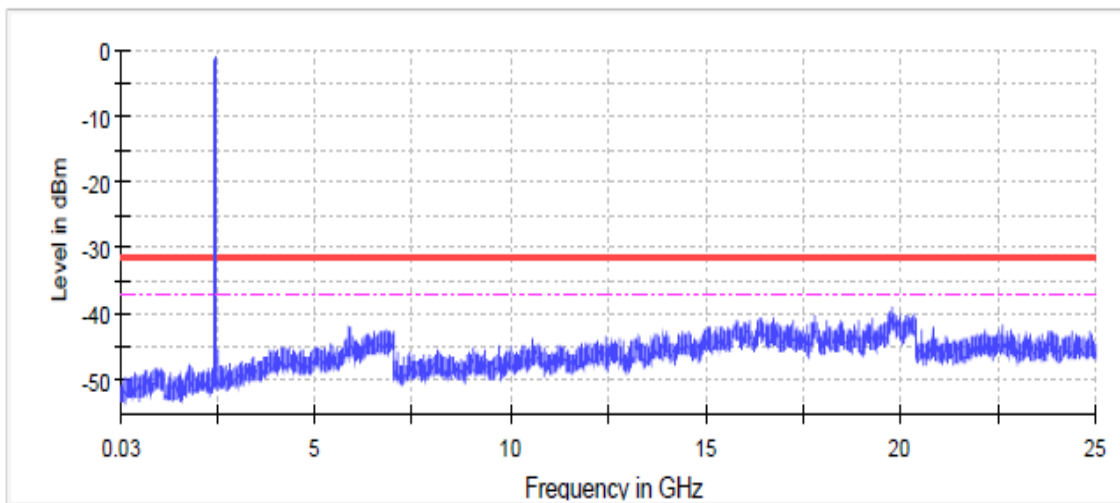

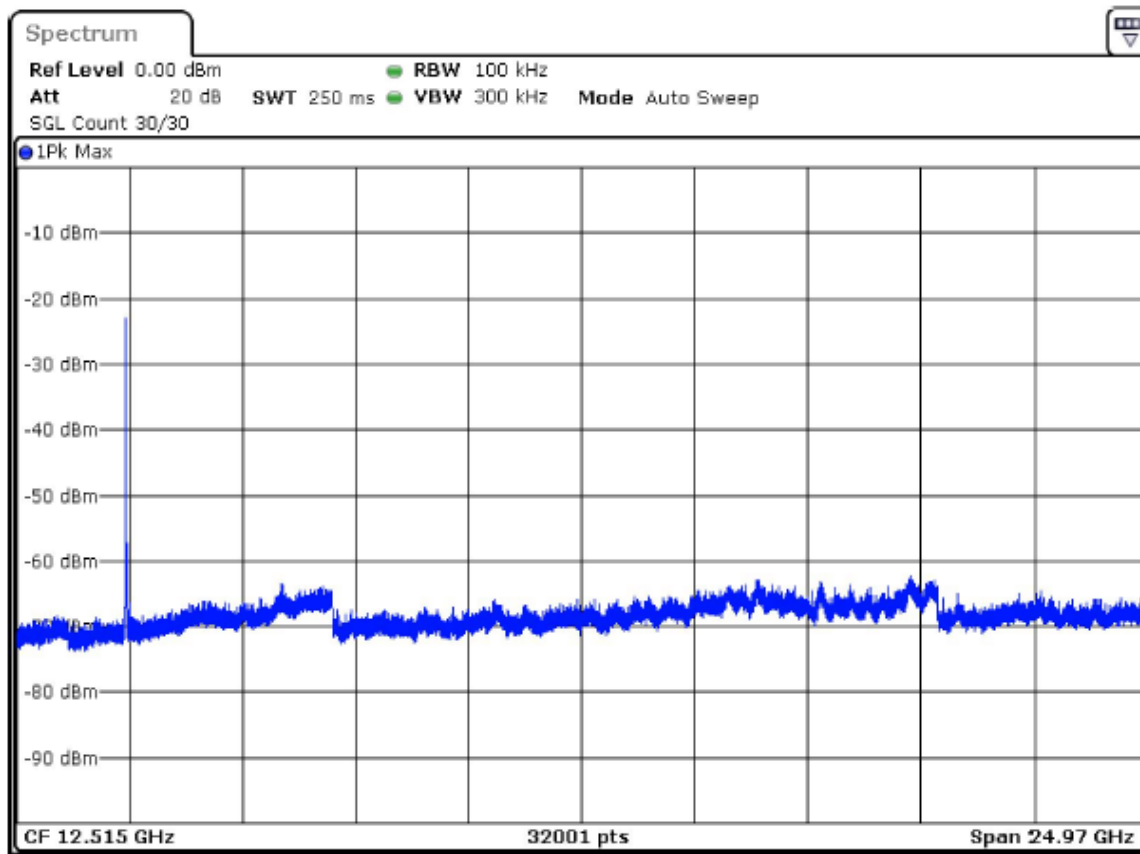



802.11g 48 Mbps 2462MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
19781.986282	-39.4	8.6	-30.8
19820.999469	-39.4	8.6	-30.8
19745.313887	-39.7	8.9	-30.8
19757.017843	-39.7	8.9	-30.8
20258.727423	-39.7	8.9	-30.8
19740.632304	-39.8	9.0	-30.8
19783.546810	-39.8	9.0	-30.8
19781.206018	-39.8	9.0	-30.8
19718.784920	-39.9	9.1	-30.8
17808.699300	-39.9	9.1	-30.8
20145.589182	-39.9	9.1	-30.8
19912.290326	-40.0	9.2	-30.8
17788.412443	-40.0	9.2	-30.8
19789.788919	-40.0	9.2	-30.8
20230.637929	-40.1	9.2	-30.8

Spurious

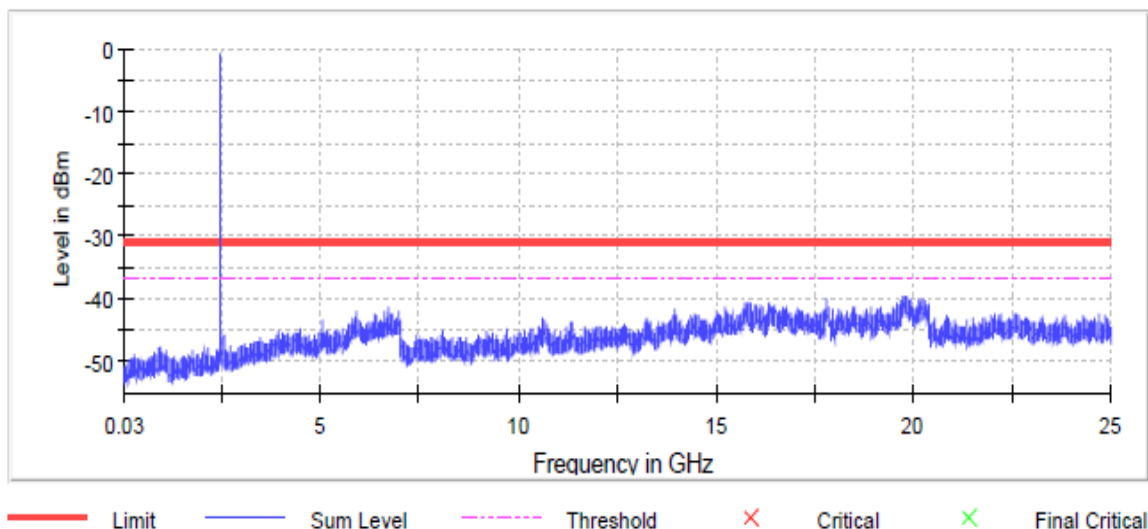

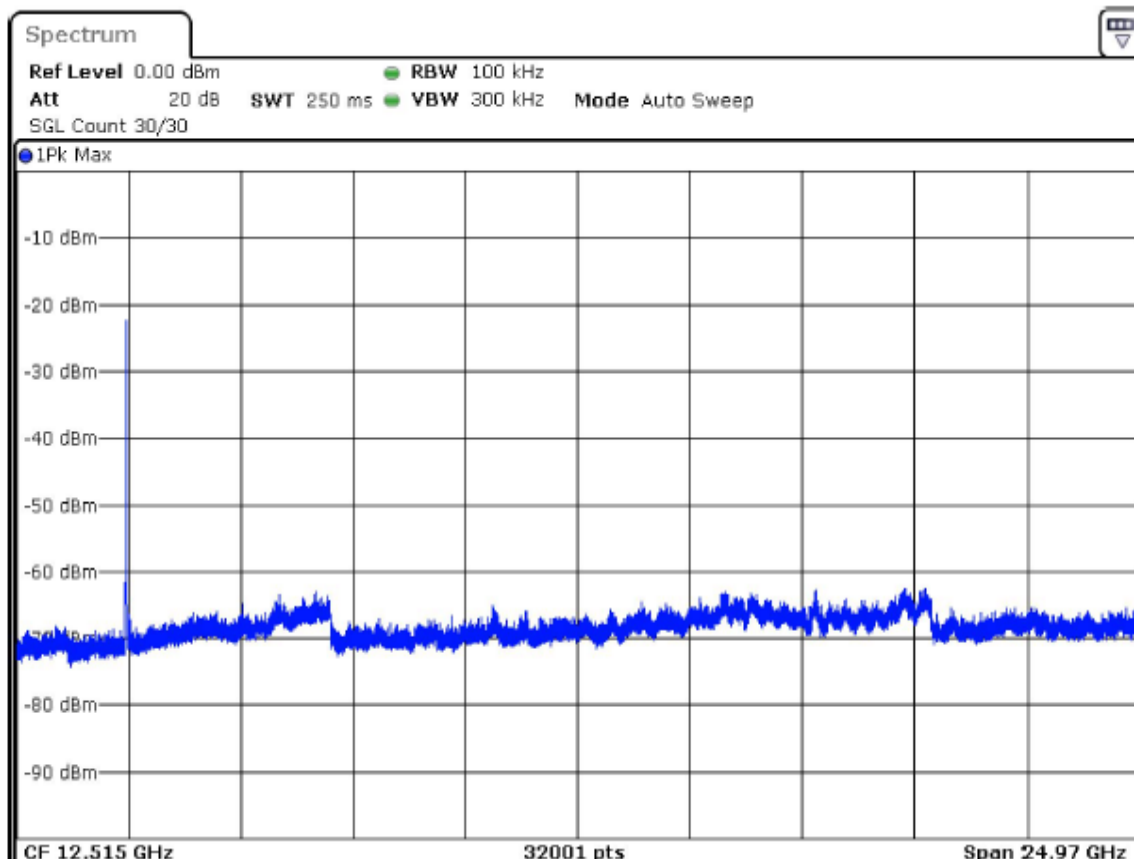



802.11n(HT20) MCS3 2412MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2398.490563	-31.2	3.9	-27.3
2397.710299	-32.6	5.4	-27.3
2396.930036	-33.2	6.0	-27.3
2399.270827	-33.4	6.1	-27.3
2395.369508	-33.9	6.6	-27.3
2396.149772	-34.2	6.9	-27.3
2394.589244	-34.3	7.0	-27.3
2393.808981	-34.4	7.1	-27.3
2393.028717	-35.2	7.9	-27.3
2391.468189	-36.6	9.3	-27.3
2390.687926	-37.2	10.0	-27.3
2392.248453	-37.2	10.0	-27.3
19796.811293	-38.7	11.5	-27.3
2389.907662	-38.8	11.6	-27.3
19815.537623	-39.0	11.7	-27.3

Spurious

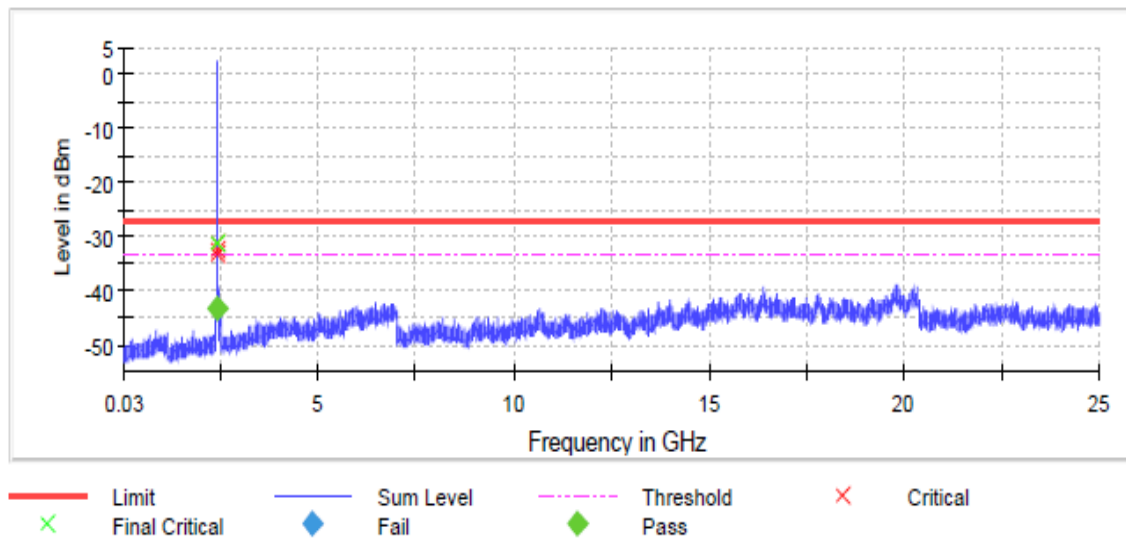

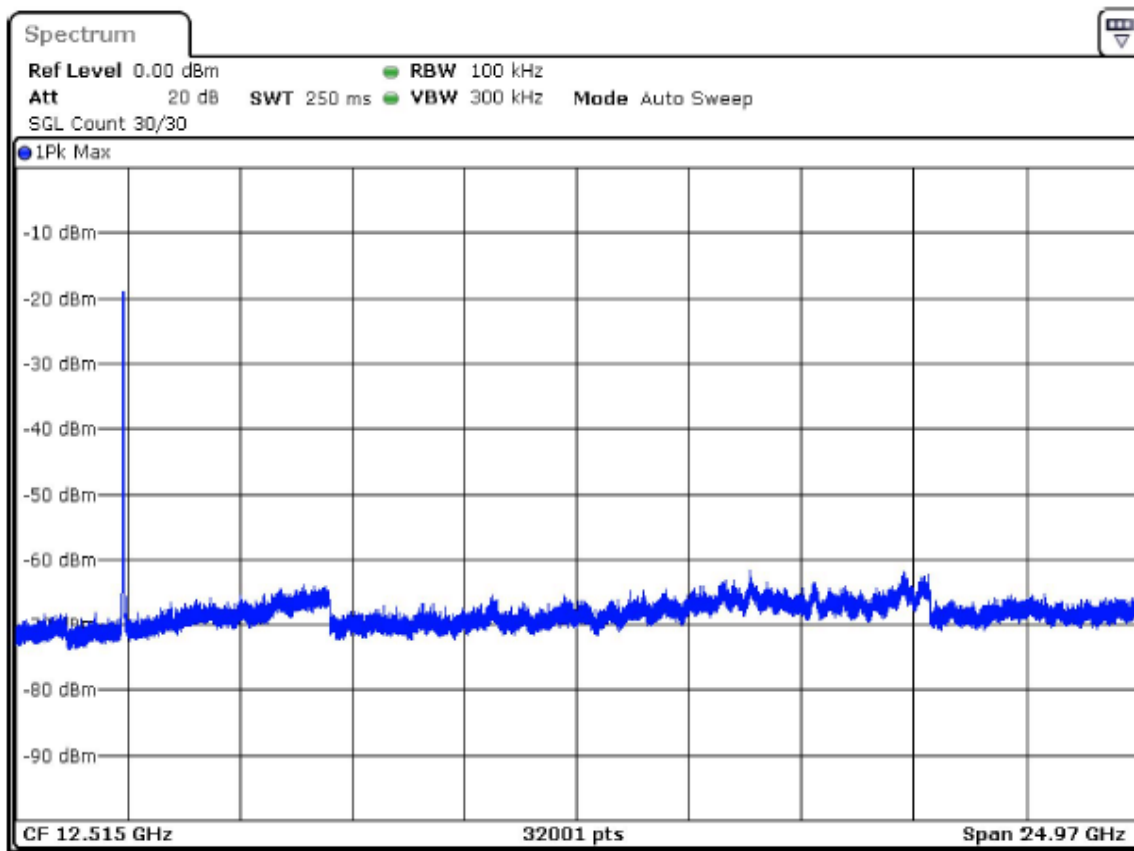



802.11n(HT20) MCS3 2437MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
19759.358634	-38.3	11.2	-27.1
19776.524436	-39.2	12.1	-27.1
19779.645491	-39.2	12.1	-27.1
19742.192832	-39.2	12.1	-27.1
19771.842854	-39.3	12.2	-27.1
19780.425755	-39.3	12.2	-27.1
19823.340260	-39.4	12.3	-27.1
20188.503687	-39.4	12.4	-27.1
19847.528436	-39.6	12.5	-27.1
19753.116524	-39.7	12.6	-27.1
19777.304700	-39.7	12.6	-27.1
19819.438941	-39.9	12.8	-27.1
19729.708612	-39.9	12.8	-27.1
19781.206018	-39.9	12.9	-27.1
20283.695863	-40.0	12.9	-27.1

Spurious

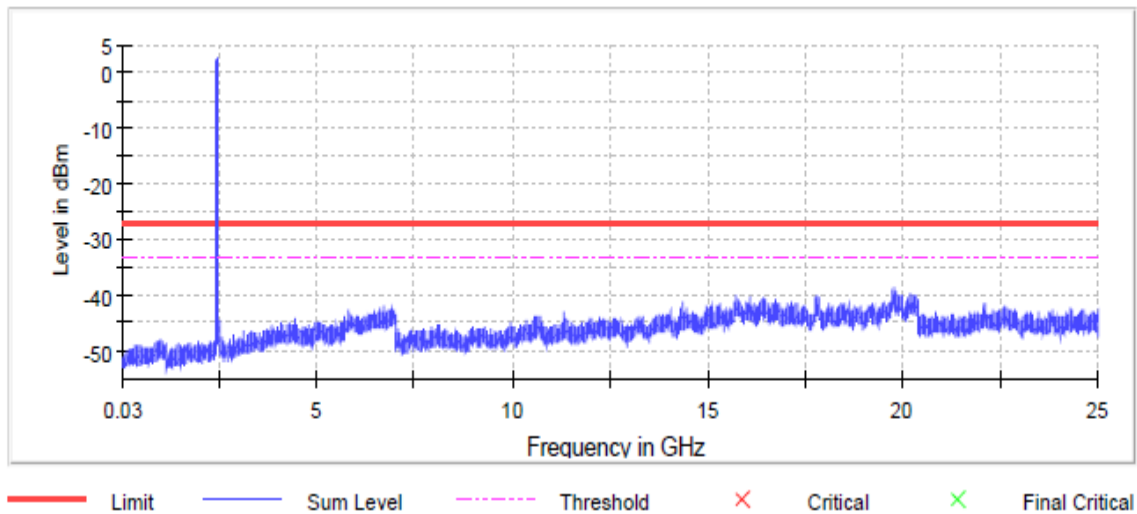

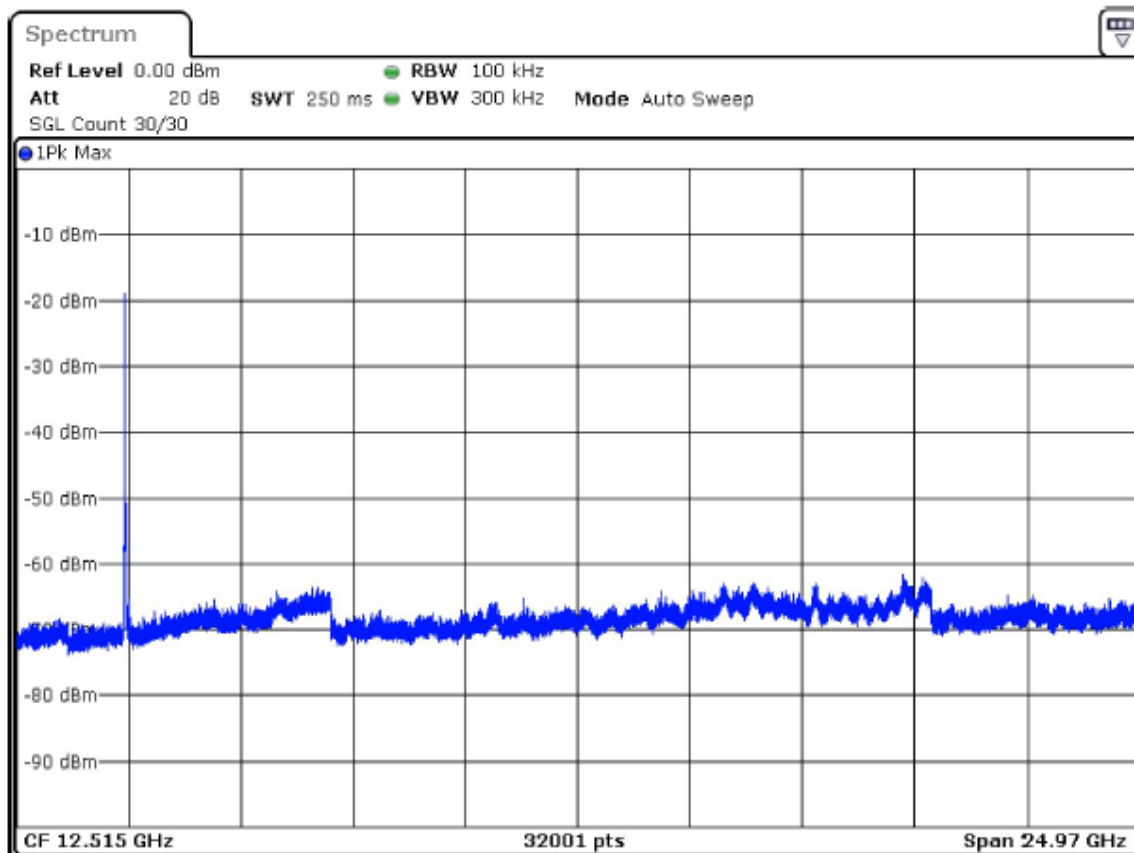

802.11n(HT20) MCS3 2462MHz

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2484.319574	-35.4	7.5	-28.0
2483.539310	-37.3	9.3	-28.0
2485.880101	-38.8	10.8	-28.0
2485.099838	-39.1	11.1	-28.0
2486.660365	-39.3	11.4	-28.0
19798.371821	-39.4	11.5	-28.0
19739.852040	-39.5	11.5	-28.0
19760.138898	-39.6	11.6	-28.0
20171.337885	-39.6	11.7	-28.0
19828.802106	-39.7	11.8	-28.0
20200.207643	-39.7	11.8	-28.0
19810.856040	-39.7	11.8	-28.0
19750.775733	-39.8	11.9	-28.0
20208.010281	-39.9	11.9	-28.0
19768.721799	-39.9	11.9	-28.0

Spurious

