




AirGPS QUICK CHART

SETUP

STEP 1

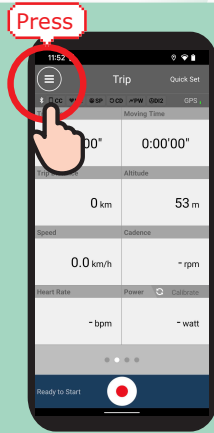

Download Cateye Cycling app.
Open the app and then
press .




Cateye Cycling






STEP 2

Long press

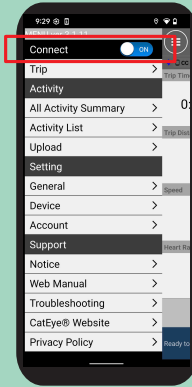

Power on AirGPS.
Turn [Connect] on on Cycling
app.


STEP 3



Press [Device]
and then [Pair
to Device].

After AirGPS is
detected, press
[Pair to Device].


STEP 4

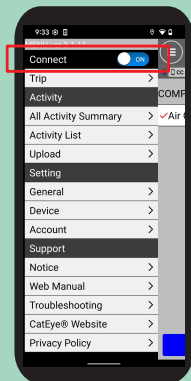

After completion of pairing,
turn [Connect] off.

RECORD YOUR RIDE

STEP
1



Power on.

⏻ Long press

STEP
2



Get GPS signal.



Wait
outside
for about
1-2 min.





STEP
3



Start recording.

Press POWER or MODE button.




Press MODE:
Changes bottom
row data.



Long press MODE:
Pauses/resumes
recording.

STEP
4




Power off to end recording.

⏻ Long press


Ride data will be automatically saved.

IMPORT RIDE DATA


STEP 1



Power on.


 Long press


STEP 2

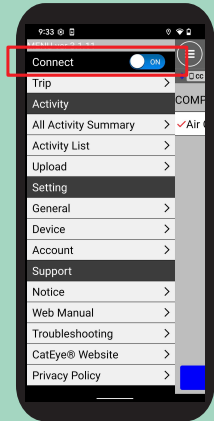


Open Cateye Cycling app and turn [Connect] on.

STEP 3

**Press [Device] > [AirGPS] >  .
Select activity you want to import and then press [Select to Import ].**

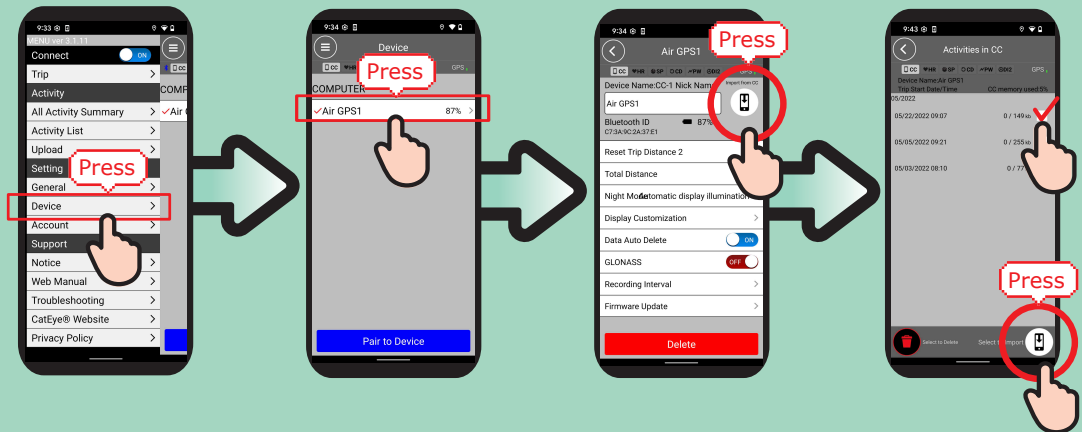




STEP 4

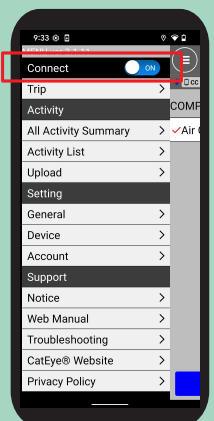

After completion of import, turn [Connect] off.

VIEW RIDE DATA

Select activity.

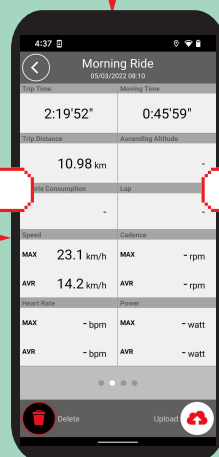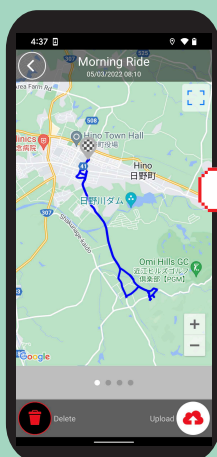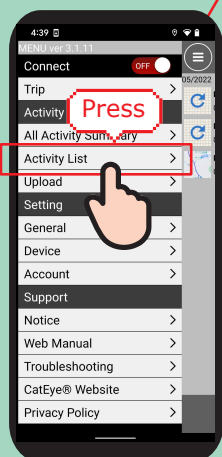

Map



Summary

Graph

UPLOAD TO WEBSITES



Press Upload. Select activity you want to upload and then press Upload button.

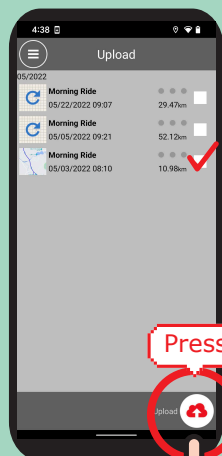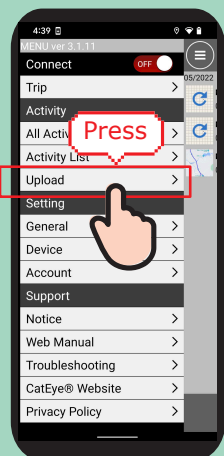

share your adventure.
CAT EYE Atlas™

STRAVA™

TRAINING PEAKS™




CHANGE SETTINGS



1) Open Cateye Cycling™ app.

2) Press Device > AirGPS

Changes will be applied when your AirGPS connects to app.

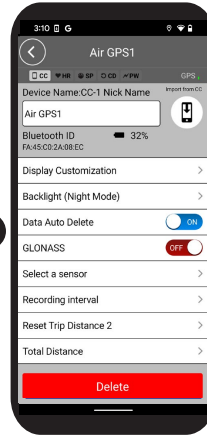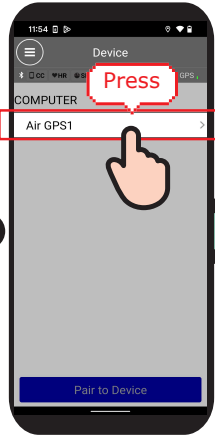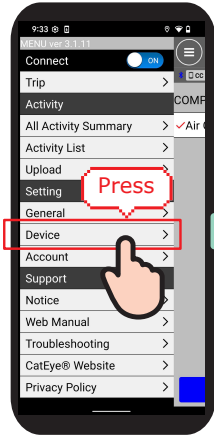

Settable items

- Display customization
- Backlit (Night mode)
- Data auto delete
- GLONASS
- Sensor selection
- Recording interval
- Distance 2 reset
- Total distance
- Firmware

USE WITH SENSORS



Pair sensors with your AirGPS through app.

Through Cateye Cycling™ app, CATEYE brand sensors can be paired with your AirGPS and tire circumference can be set.



ISC-12



SPD-30



CDC-30



HR-12



OHR-31

Please read the instruction manual for more details.

<https://cateye.com/intl/support/manual/CC-GPS100.html>