

Halco®

LIGHTING TECHNOLOGIES

LED PRODUCT GUIDE



LED Retrofit Downlights



LED Direct Fit Slim Downlights



Next Generation A19, BR, PAR Lamps



LED SekTor Area Lights



LED Volumetric Panels

LED Backlit Panels

LED Edgelit Panels



LED Commercial Downlights



LED SekTor Flood Lights



2', 3', 4', 8' LED T8s



LED HID Retrofits



LED Wallpacks



LED Round Highbays



LED Linear Highbays

Fall – Winter 2022

Look for This Icon to See Our New Products!



Table of Contents

OUTDOOR FIXTURES

- ProLED Vaportight Series 4
- ProLED Select WPFS Wallpack Series 4
- ProLED Select WPS Wallpack Series 4
- ProLED Select SekurPak Wallpack Series 5
- ProLED Select Adjustable Wallpack 5
- ProLED Select Floodlight Series 5
- LED High Lumen Floodlight 6
- ProLED Select SekTor Floodlight Series 6
- Patrol Security Floodlight 7
- Mini Bullet Flood Light 7
- ProLED Select Slim Canopy 7
- ProLED SekTor Area Lights 8

INDOOR FIXTURES

- Evade Exit Series 10
- Combination Exit & Emergency Fixtures 10
- Emergency Light 10
- Emergency Wallpack 10
- ProLED Select Linear Strip Fixture 11
- ProLED Linear Strip 11
- ProLED Linear Wrap 11
- ProLED Lamp Ready Fixture Strip 12
- ProLED Lamp Ready Fixture Wrap 12
- ProLED Select Linear Vaportight 12
- ProLED HLVT Linear Vaportight 12
- ProLED Select HoverBay Round Highbay Series 13
- ProLED Premium Linear High Bay Series 14
- ProLED Select Linear High Bay Series 14
- ProLED Select Edgelit Flat Panel: Field Selectable
Light Output & CCT 15
- ProLED Edgelit Flat Panel 15
- Surface Mount Kit 15
- ProLED Select Backlit Panel 16
- ProLED Select Volumetric Panel Series 16
- ProLED Select Commercial Downlight 17
- ProLED Commercial Downlight Retrofit 17
- ProLED Downlight Retrofit 17
- ProLED Select Retrofit Downlight Series 18
- ProLED Select Gimbal Downlight Series 19
- ProLED Select Surface Downlight Retrofit 19
- ProLED Surface Downlight Retrofit 19
- ProLED Select Slim Downlight Series 19
- ProLED Select Slim Downlight Series 4 Pack 20
- ProLED Select Direct Fit Slim Downlights 20
- ProLED Square Downlights 21
- ProLED Select Flushmount Fixtures 21

LED LAMPS

- ProLED HID Highbay Replacement Lamp 23
- ProLED HID Highbay Retrofit Series 23
- ProLED HID Wallpack Retrofit Series 23
- ProLED HID Omni Retrofit Series 23
- ProLED Select HID Retrofit Series 24
- ProLED Temporary Work Light 24
- ProLED Linear T8 (Type A) 24
- ProLED T8 8Ft Linear Double Ended Bypass Series 25
- ProLED T8 Linear Double Ended Bypass Series (Type B) 25

- ProLED T8 Linear Double, Single Ended Bypass Series (Type B) 25
- Emergency T8 (Type B) 25
- ProLED Linear T8 Hybrid (Type A/B) 26
- ProLED Select T8 Linear Hybrid 26
- ProLED T8 U-Bend Hybrid (Type A/B) 26
- ProLED T5 Direct Fit Replacement Series (Type A) 26
- ProLED T5 Single End Bypass Series 26
- ProLED A19 ECO Series 27
- ProLED A19 Contractor Series 6-Pack 27
- ProLED A19 Omnidirectional A-Shape Series (GU24 Base) 27
- ProLED A19 Omnidirectional A-Shape Series 28
- ProLED Performance A-Shape Lamp (Title 20) 28
- ProLED Performance A-Shape Lamp Title 24/JA 8 & Title 20 29
- ProLED Performance Reflector Lamps 29
- ProLED BR40 29
- ProLED BR30 29
- ProLED BR30 Contractor Series 6-Pack 30
- ProLED R20 30
- ProLED Prime PAR Series 30
- ProLED ECO PAR Series 31
- ProLED Performance PAR Lamps 32
- ProLED MR11 33
- ProLED Outdoor PAR36 33
- ProLED Outdoor PAR36 RGB-W Series 33
- ProLED PAR36/AR111 Indoor 33
- Linear LED Plug-In series 33
- ProLED PL Bypass Series 34
- ProLED PL Direct Series 34
- ProLED PL Hybrid Series 34
- ProLED B11 Chandelier 34
- ProLED Decorative Chandelier 35
- ProLED G25 Series Globe 35
- ProLED Filament LED Series 35
- ProLED Sign Lamp Series 37
- ProLED Elevator Lamp 37
- ProLED MR16 GU10 37
- ProLED MR16 38
- ProLED Commercial MR16/MR11 39
- ProLED MR16 Black 39
- ProLED IP Rated LED JC Series 40
- ProLED Omnidirectional IP65 JC Lamps 40
- ProLED Traditional JC Series 41
- ProLED Traditional LED Series 41

SOLLOS LANDSCAPE PRODUCTS

- Up and Accent Lights 44
- Path Lights 44
- Well Lights 44
- Transformers 44
- Lamps & Fixture 44

● = New Product

About Halco Lighting Technologies

Established in 1974, Halco Lighting Technologies is a leader in lamp, luminaire and ballast solutions. We are dedicated to providing you with the latest in energy efficient technologies, illustrated by our ProLED luminaires and full offering of ProLED lamps. Halco's luminaire offering features indoor recessed solutions such as ProLED Panel, Volumetric Panel and Downlight Retrofit luminaires. Our broad selection of long life, energy efficient ProLED lamps is available in popular shapes with an array of color temperatures and beam spreads. Halco is your single source for LED lamps for replacement and retrofit applications.

Service

We measure our success by one standard - your satisfaction. Halco carries deep inventory of a broad SKU offering to assure we have what you need when you need it. With strategically located warehouses in Atlanta, Chicago, Cleveland, Houston, Los Angeles and Phoenix, orders placed by 2:00 PM local warehouse time ship the same day. Will-call and courier service is also available for your convenience.



How to Read Ordering Information

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®] / DLC Qualified ³
81074	PAR36WFL4/827/IP67/LED	Wide Flood	4.5W	MP Term	10-15V	2700K	82	300	700	40,000	Yes	1/6	32°	2.40"	20W	No
81075	PAR36WFL6/827/IP67/LED	Wide Flood	6.5W	MP Term	10-15V	2700K	82	450	1100	40,000	Yes	1/6	32°	2.40"	35W	No
81076	PAR36WFL12/827/IP67/LED	Wide Flood	12.5W	MP Term	10-15V	2700K	82	800	2000	40,000	Yes	1/6	32°	2.40"	50W	No

<p>Product Number Use this product number when placing an order</p>	<p>Description Light Distribution or other important information</p>	<p>Base Indicates base type</p>	<p>Color Temp. A term used to describe the color of a light source and is expressed in degrees Kelvin (K)</p>	<p>Lumens Represents average light output</p>	<p>Useful Life Rated at L70</p>	<p>MOL Indicates maximum overall length in inches</p>	<p>Package Quantity Indicates minimum sell quantity and smallest shipping carton</p>	<p>ENERGY STAR[®] / DLC Qualified Designates a qualified product</p>
<p>Spec Sheet Available Here. Link to corresponding product spec sheet.</p>	<p>Product Code Abbreviated product description can also be used for ordering</p>	<p>Wattage Indicates the power consumed by the lamp during operation</p>	<p>CRI Lamps ability to render an object's color</p>	<p>CBCP Luminous intensity at the center of the beam</p>	<p>Dimmable Designates if product can be dimmed</p>	<p>Eq. Wattage Typical wattage of Incandescent or Halogen lamp of comparable light output</p>		
<p>NEW PRODUCT Indicates product has been added to inventory</p>		<p>Voltage Indicates the product's design voltage of operation</p>	<p>Beam Spread Indicates the beam angle or beam spread of a bulb, measured in degrees</p>					

Customer Support

Our customer support team is available to assist for project and volume pricing. Contact your local rep for more information 1-800-677-3334.

¹ Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.

² May not be compatible with all Dimming systems, Dimming performance may vary by system. Please check www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

³ To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

OUTDOOR FIXTURES



ProLED Select WPFS
Wallpack Series



ProLED High Lumen
Floodlight



ProLED Select
SekurPak Wallpack
Series



ProLED Select
Slim Canopy





[SPEC SHEET AVAILABLE HERE.](#)

ProLED Vaportight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Wet Location	Eq. Wattage	ENERGY STAR [®]
10455	VPT-20-4K-U	20W	120-277V	4000K	>80	1,915	50,000	Yes	100W PSMH	Yes
10456	VPT-20-5K-U	20W	120-277V	5000K	>80	2,198	50,000	Yes	100W PSMH	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select WPFS Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Equivalent Wattage	DLC Qualified
20352	WPFS1-WS-CS-U	30W-40W-50W-60W	120-347V	3000K, 4000K, 5000K	80	4,110-7,866	100,000	100W - 250W MH	Yes
20353	WPFS2-WS-CS-U	70W-80W-90W-100W	120-347V	3000K, 4000K, 5000K	80	9,656-13,344	100,000	250W - 400W MH	Yes
20354	WPFS3-WS-CS-U	100W-120W-140W	120-347V	3000K, 4000K, 5000K	80	12,500-17,500	100,000	400W - 550W MH	Yes

Available Accessories

Product #	Product Code	Product Description
10141	PC/120277	Button Photocell, 120-277V

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select WPS Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
10390	WPS-28-4K-U	28W	120-277V	4000K	80	3,514	50,000	No	Yes
10391	WPS-28-5K-U	28W	120-277V	5000K	80	3,609	50,000	No	Yes
10392	WPS-40-4K-U	40W	120-277V	4000K	80	4,885	50,000	No	Yes
10393	WPS-40-5K-U	40W	120-277V	5000K	80	4,948	50,000	No	Yes
10394	WPS-80-4K-U	80W	120-277V	4000K	80	9,797	50,000	No	Yes
10395	WPS-80-5K-U	80W	120-277V	5000K	80	9,865	50,000	No	Yes
10396	WPS-120-4K-U	120W	120-277V	4000K	80	14,228	50,000	No	Yes
10397	WPS-120-5K-U	120W	120-277V	5000K	80	14,465	50,000	No	Yes

Available Accessories

Product #	Product Code	Description
10141	PC/120-277V	Button Photocell, 120-277VAC



SPEC SHEET AVAILABLE HERE.

ProLED Select SekurPak Wallpack Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10450	SKWP-15-FS-U	15W	120-277V	3000K,4000K, 5000K	80	1,941, 2,061, 2,024	50,000	0-10V	100W MH	Yes
10451	SKWP-20-FS-U	20W	120-277V	3000K, 4000K, 5000K	80	2,456, 2,651, 2,551	50,000	0-10V	150W PSMH	Yes
10452	SKWP-26-FS-U	26W	120-277V	3000K, 4000K, 5000K	80	3,239, 3,484, 3,263	50,000	0-10V	175W MH	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Adjustable Wallpack



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
39874	AWP-1-15-CS-U-PC	15W	120-277V	3000K, 4000K, 5000K	80	1,761-1,904	>100,000	Yes	50W MH	Premium
39875	AWP-2-WS-CS-U-PC	15W-20W-30W	120-277V	3000K, 4000K, 5000K	80	2,138-3,902	>100,000	Yes	50W-100W MH	Premium
39876	AWP-3-WS-CS-U-PC	30W-40W-50W	120-277V	3000K, 4000K, 5000K	80	3,877-7,016	>100,000	Yes	100W-175W MH	Premium
39877	AWP-4-WS-CS-U-PC	60W-70W-80W	120-277V	3000K, 4000K, 5000K	80	8,032-11,144	>100,000	Yes	175W-250W MH	Premium
39878	AWP-5-WS-CS-U-PC	100W-110W-120W	120-277V	3000K, 4000K, 5000K	80	13,110-16,738	>100,000	Yes	250W-400W MH	Premium

SPEC SHEET AVAILABLE HERE.

ProLED Select Flood Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10339	FLFS12/3CCTU/KN	12W	120-277V	3000K, 4000K, 5000K	70	1,560	50,000	No	50W MH	Yes
10340	FLFS12/3CCTU/YK	12W	120-277V	3000K, 4000K, 5000K	70	1,560	50,000	No	50W MH	Yes
10341	FLFS30/3CCTU/KN	30W	120-277V	3000K, 4000K, 5000K	70	3,900	50,000	No	100W MH	Yes
10342	FLFS30/3CCTU/YK	30W	120-277V	3000K, 4000K, 5000K	70	3,900	50,000	No	100W MH	Yes
10343	FLFS50/3CCTU/KN	50W	120-277V	3000K, 4000K, 5000K	70	6,500	50,000	No	150W MH	Yes
10344	FLFS50/3CCTU/YK	50W	120-277V	3000K, 4000K, 5000K	70	6,500	50,000	No	150W MH	Yes
10345	FLFS70/3CCTU/SF	70W	120-277V	3000K, 4000K, 5000K	70	9,100	50,000	0-10V	175W MH	Yes
10346	FLFS70/3CCTU/YK	70W	120-277V	3000K, 4000K, 5000K	70	9,100	50,000	0-10V	175W MH	Yes
10347	FLFS100/3CCTU/SF	100W	120-277V	3000K, 4000K, 5000K	>70	13,000	50,000	0-10V	250W PSMH	Yes
10348	FLFS100/3CCTU/YK	100W	120-277V	3000K, 4000K, 5000K	>70	13,000	50,000	0-10V	250W PSMH	Yes



SPEC SHEET AVAILABLE HERE.

ProLED High Lumen Floodlight



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10349	FL150/U50/SF	150W	120-277V	5000K	>70	19,500	>100,000	0-10V	400W MH	Yes
10350	FL150/U50/YK	150W	120-277V	5000K	>70	19,500	>100,000	0-10V	400W MH	Yes

Available Accessories

Product #	Product Code	Description
10141	PC/120277	Button Photocell, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED Select SekTor Floodlights Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
24900	SFL-150-CS-U-TR	150W	120-277V	3000K, 4000K, 5000K	70	18, 236-20, 552	50,000	Yes	Yes
24901	SFL-150-CS-U-KN	150W	120-277V	3000K, 4000K, 5000K	70	18, 236-20, 552	50,000	Yes	Yes
24902	SFL-200-CS-U-TR	200W	120-277V	3000K, 4000K, 5000K	70	25, 162-28, 382	50,000	Yes	Yes
24903	SFL-200-CS-U-KN	200W	120-277V	3000K, 4000K, 5000K	70	25, 162-28, 382	50,000	Yes	Yes
24904	SFL-300-40-U-TR	300W	120-277V	4000K	70	42,761	50,000	Yes	Yes
24905	SFL-300-40-U-KN	300W	120-277V	5000K	70	42,761	50,000	Yes	Yes
24906	SFL-300-50-U-TR	300W	120-277V	4000K	70	43,184	50,000	Yes	Yes
24907	SFL-300-50-U-KN	300W	120-277V	5000K	70	43,184	50,000	Yes	Yes

ProLED Select Flood Series Fixture Options

Product #	Product Code	Description
24910	SEK-SPD	Sektor 10 kVA Surge Protection Device
24911	SFL-3PR	Sektor Flood 3 Pin Photocell Extension & Shorting Cap

Product #	Product Code	Description
24915	SFL-VSR-M	Sektor Visor 150W & 200W Fixture
24916	SFL-VSR-L	Sektor Visor 300W Fixture
24917	SFL-WGD-M	Sektor Wireguard 150W & 200W Fixture
24918	SFL-WGD-L	Sektor Wireguard 300W Fixture
10231	PC/JL205C	Photocell Twist Lock 120 277VAC JI 205c

SPEC SHEET AVAILABLE HERE.

Patrol Security Floodlight



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage
24954	PFL-20-30-U-BZ	20W	120-277V	3000K	80	2,800	30,000	No	100W MH
24955	PFL-20-30-U-WH	20W	120-277V	3000K	80	2,800	30,000	No	100W MH
24956	PFL-20-50-U-BZ	20W	120-277V	5000K	80	2,800	30,000	No	100W MH
24957	PFL-20-50-U-WH	20W	120-277V	5000K	80	2,800	30,000	No	100W MH

SPEC SHEET AVAILABLE HERE.

Mini Bullet Floodlight



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage
24950	MBUL-10-30-U-BZ	10W	120-277V	3000K	80	1,200	30,000	No	50W MH
24951	MBUL-10-30-U-BL	10W	120-277V	3000K	80	1,200	30,000	No	50W MH
24952	MBUL-10-50-U-BZ	10W	120-277V	5000K	80	1,200	30,000	No	50W MH
24953	MBUL-10-50-U-BL	10W	120-277V	5000K	80	1,200	30,000	No	50W MH

SPEC SHEET AVAILABLE HERE.

ProLED Select Slim Canopy



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
Parking Garage Distribution										
39900	CSP-28-CS-U-BZ	28W	120-347V	3000K, 4000K, 5000K	70	3,500-3,780	>100,000	0-10V	150W MH	Premium
39901	CSP-40-CS-U-BZ	40W	120-347V	3000K, 4000K, 5000K	70	5,000-5,400	>100,000	0-10V	175W MH	Premium
39902	CSP-60-CS-U-BZ	60W	120-347V	3000K, 4000K, 5000K	70	7,500-8,100	>100,000	0-10V	250W MH	Premium
39904	CSP-28-CS-U-WH	28W	120-347V	3000K, 4000K, 5000K	70	3,500-3,780	>100,000	0-10V	150W MH	Premium
39905	CSP-40-CS-U-WH	40W	120-347V	3000K, 4000K, 5000K	70	5,000-5,400	>100,000	0-10V	175W MH	Premium
39906	CSP-60-CS-U-WH	60W	120-347V	3000K, 4000K, 5000K	70	7,500-8,100	>100,000	0-10V	250W MH	Premium

Available Accessories

Product #	Product Code	Description
10296	CSC/LENS	Slim Canopy; Lens Canopy Distribution
10297	CSBBU/KIT	Slim Canopy; Emergency Battery Backup Kit, 8W, 120-277V
10141	PC/120277	Button Photocell, 120-277V



SPEC SHEET AVAILABLE HERE.

ProLED **SekTor** Area Lights

Ordering Logic

EX: SAL-200-T3-40-U-7PR



Series	Wattage	Distribution	CCT	Voltage	Options
SAL = SekTor Area Light	100 = 100 Watts 150 = 150 Watts 200 = 200 Watts 240 = 240 Watts 300 = 300 Watts	T2 = Type II* T3 = Type III T4 = Type IV* T5 = Type V	40 = 4000K 50 = 5000K	U = 120 277 VAC H = 347-480 VAC*	7PR = 7 Pin Receptacle w/Photocell* SPD = 10kVA Surge Suppression*


* For Options and Non-Stock Items - Lead Times Apply ** Mounting Ordered Separately

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified
24850	SAL-100-T3-40-U	100W	100-277V	4000K	70	14,556-14,851	100,000	0-10V	250W	Yes
24851	SAL-100-T5-40-U	100W	100-277V	4000K	70	14,556-14,851	100,000	0-10V	250W	Yes
24852	SAL-100-T3-50-U	100W	100-277V	5000K	70	14,556-14,851	100,000	0-10V	250W	Yes
24853	SAL-100-T5-50-U	100W	100-277V	5000K	70	14,556-14,851	100,000	0-10V	250W	Yes
24854	SAL-150-T3-40-U	150W	100-277V	4000K	70	21,641-21,935	100,000	0-10V	400W	Yes
24855	SAL-150-T5-40-U	150W	100-277V	4000K	70	21,641-21,935	100,000	0-10V	400W	Yes
24856	SAL-150-T3-50-U	150W	100-277V	5000K	70	21,641-21,935	100,000	0-10V	400W	Yes
24857	SAL-150-T5-50-U	150W	100-277V	5000K	70	21,641-21,935	100,000	0-10V	400W	Yes
24858	SAL-200-T3-40-U	200W	100-277V	4000K	70	29,112-29,886	100,000	0-10V	400W	Yes
24859	SAL-200-T5-40-U	200W	100-277V	4000K	70	29,112-29,886	100,000	0-10V	400W	Yes
24860	SAL-200-T3-50-U	200W	100-277V	5000K	70	29,112-29,886	100,000	0-10V	400W	Yes
24861	SAL-200-T5-50-U	200W	100-277V	5000K	70	29,112-29,886	100,000	0-10V	400W	Yes
24862	SAL-240-T3-40-U	240W	100-277V	4000K	70	34,601-35,076	100,000	0-10V	750W	Yes
24863	SAL-240-T5-40-U	240W	100-277V	4000K	70	34,601-35,076	100,000	0-10V	750W	Yes
24864	SAL-240-T3-50-U	240W	100-277V	5000K	70	34,601-35,076	100,000	0-10V	750W	Yes
24865	SAL-240-T5-50-U	240W	100-277V	5000K	70	34,601-35,076	100,000	0-10V	750W	Yes
24866	SAL-300-T3-40-U	300W	100-277V	4000K	70	43,734-43,884	100,000	0-10V	1000W	Yes
24867	SAL-300-T5-40-U	300W	100-277V	4000K	70	43,734-43,884	100,000	0-10V	1000W	Yes
24868	SAL-300-T3-50-U	300W	100-277V	5000K	70	43,734-43,884	100,000	0-10V	1000W	Yes
24869	SAL-300-T5-50-U	300W	100-277V	5000K	70	43,734-43,884	100,000	0-10V	1000W	Yes

Available Accessories

Product #	Product Code	Description
Fixture Accessories*		
24875	DCMS	Dc Motion Bi-Level Motion Sensor
24876	DCMS-REM	Dc Motion Bi-Level Motion Sensor Remote
24878	SAL-BLS-SM	Sektor Backlight Shield (100W-150W)
24879	SAL-BLS-L	Sektor Backlight Shield (200W-300W)
24880	SAL-SS-SM	Sektor Side Shield (100W-150W)
24881	SAL-SS-L	Sektor Side Shield (200W-300W)
Mounting Arms		
24870	SEK-SF	Sektor Slipfit Knuckle Mount
24871	SEK-QM	Sektor Straight Arm Quick Mount
24872	SEK-TR	Sektor Trunnion Mount
24908	SEK-PM	Sektor Adjustable Pole Mount


INDOOR FIXTURES

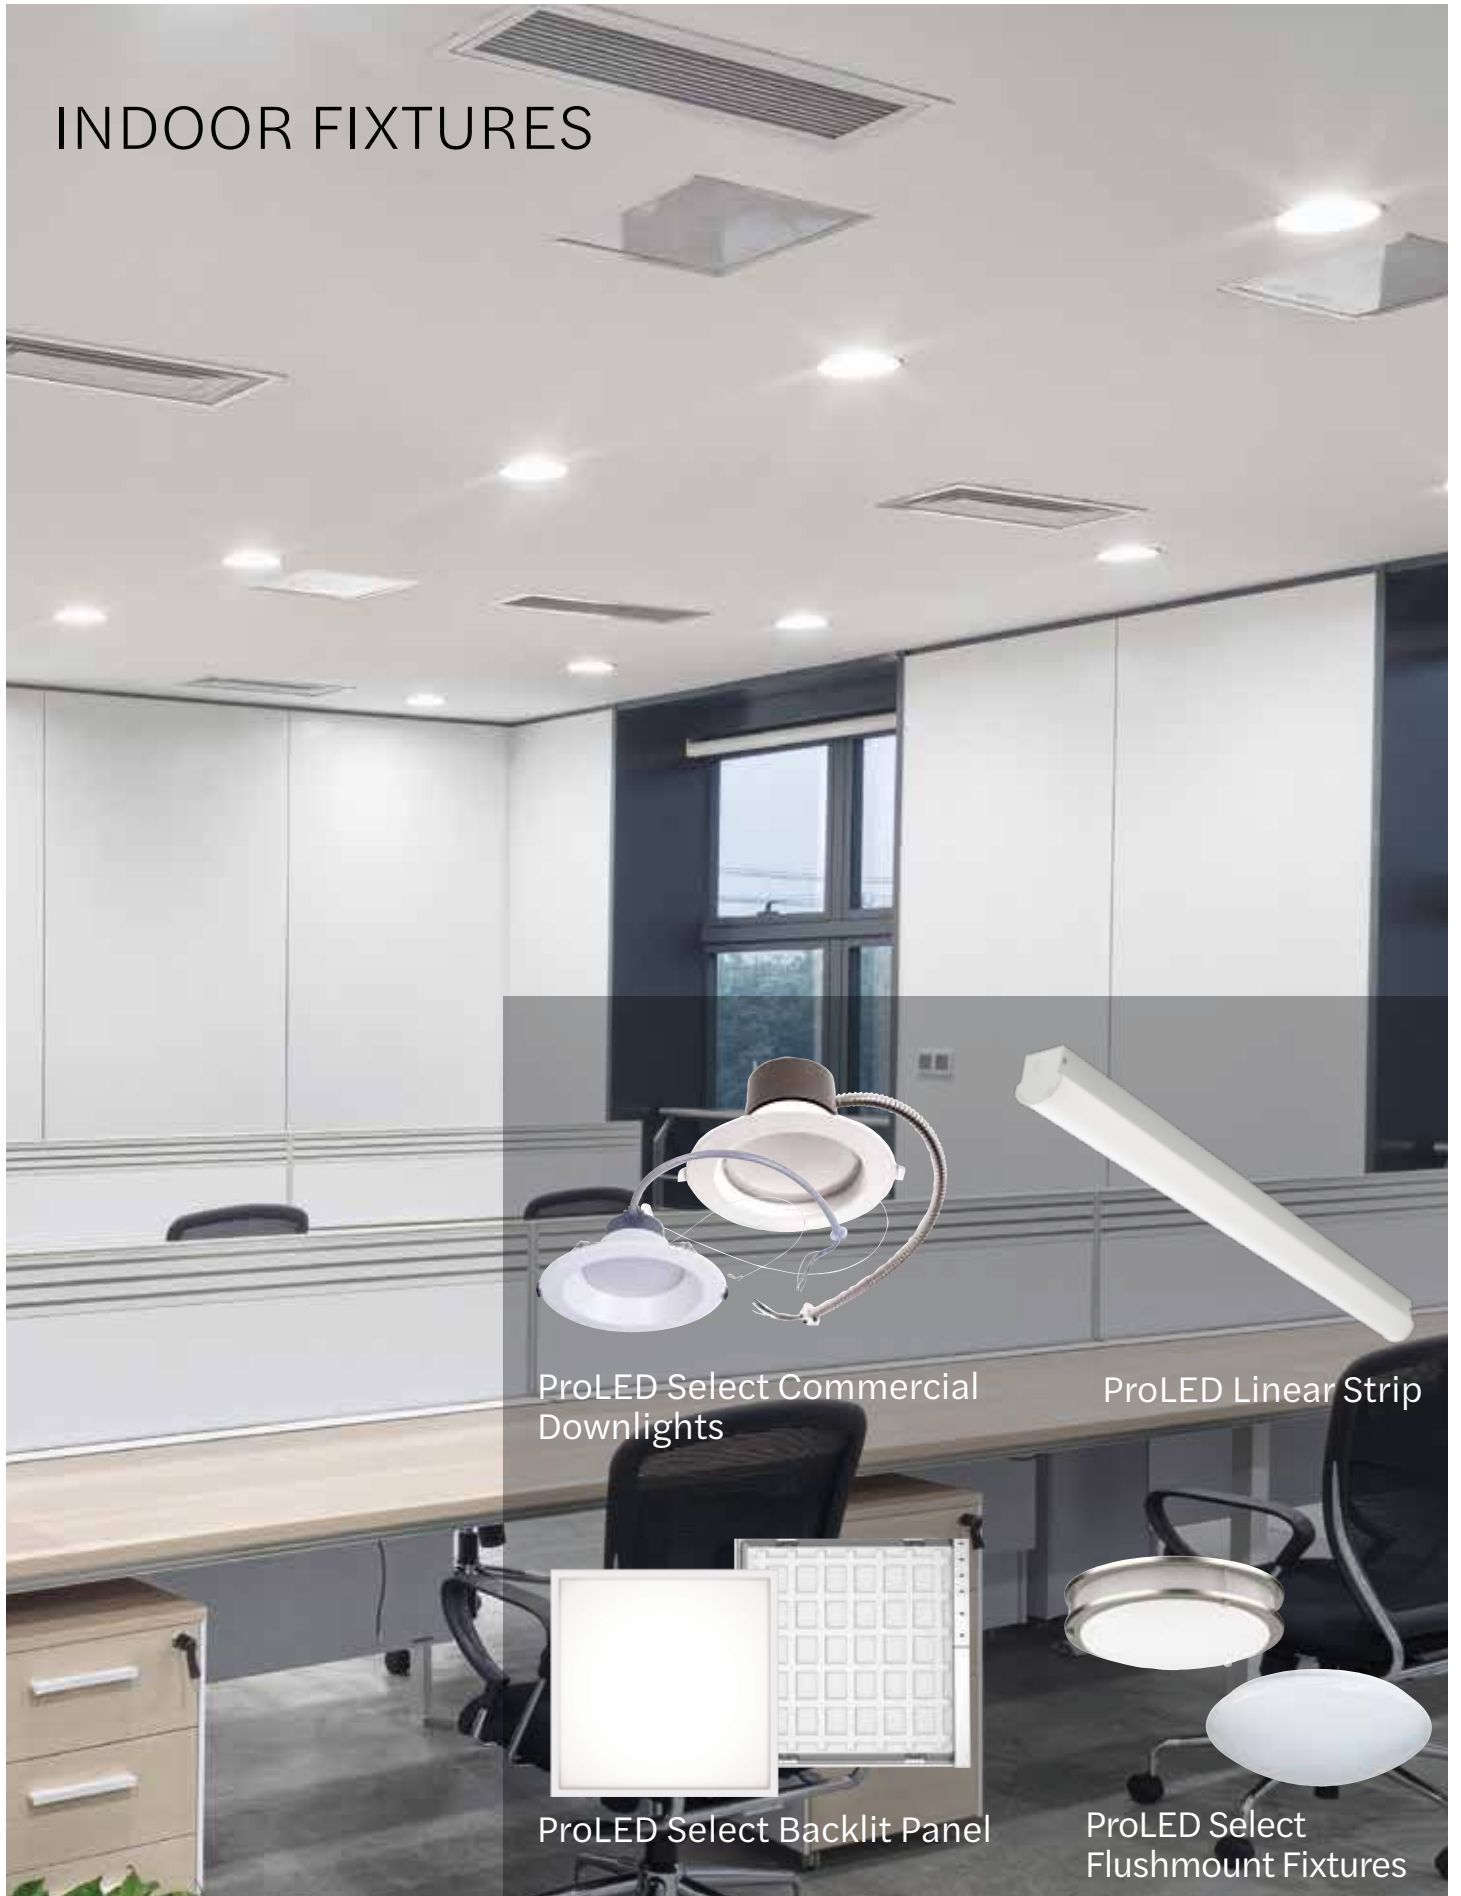

ProLED Select Commercial Downlights



ProLED Linear Strip

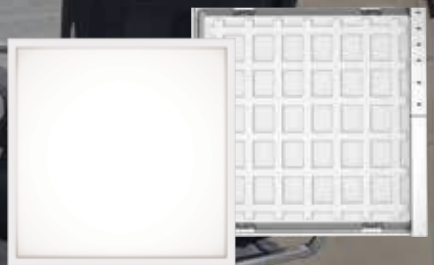

ProLED Select Backlit Panel



ProLED Select Flushmount Fixtures



[SPEC SHEET AVAILABLE HERE.](#)

Evade Exit Series



Product #	Product Code	Product Description
Exit Signs		
95000	EV-EXE-GR	Evade Exit Green Lettering
95001	EV-EXE-RD	Evade Exit Red Lettering
95002	EV-EXE-GR-RC	Evade Exit Green Lettering With Remote Capability
95003	EV-EXE-RD-RC	Evade Exit Red Lettering With Remote Capability
Remote Heads		
95015	EV-RHE-1-IND	Evade Exit Single Remote Indoor Head
95016	EV-RHE-2-IND	Evade Exit Double Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

[SPEC SHEET AVAILABLE HERE.](#)

Combination Exit & Emergency Fixtures



Product #	Product Code	Product Description
Exit Signs		
95004	EV-EXC-GR	Evade Exit & Em Combo Green Lettering
95005	EV-EXC-RD	Evade Exit & Em Combo Red Lettering
95006	EV-EXC-GR-RC	Evade Exit & Em Combo Green Lettering With Remote Capability
95007	EV-EXC-RD-RC	Evade Exit & Em Combo Red Lettering With Remote Capability
Remote Heads		
95010	EV-RHE-1-IND	Evade Single Remote Indoor Head
95011	EV-RHE-2-IND	Evade Dual Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

[SPEC SHEET AVAILABLE HERE.](#)

Emergency Light



Product #	Product Code	Product Description
Exit Signs		
95008	EV-EME-R	Evade Emergency Unit
95009	EV-EME-R-RC	Evade Emergency With Remote Capability
Remote Heads		
95010	EV-RHE-1-IND	Evade Single Remote Indoor Head
95011	EV-RHE-2-IND	Evade Dual Remote Indoor Head
95012	EV-RH-1-OUT	Evade Single Remote Outdoor Head
95013	EV-RH-2-OUT	Evade Double Remote Outdoor Head

[SPEC SHEET AVAILABLE HERE.](#)

Emergency Wallpack



Product #	Product Code	Product Description
Exit Signs		
95014	EV-EME-R-RC	Evade Emergency With Remote Capability



SPEC SHEET AVAILABLE HERE.

ProLED Select Linear Strip Fixture



Product #	Product Code	Wattage	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	DLC Qualified
90241	LS4-WS-CS-U	30W, 40W, 50W	120-277VAC	3500K, 4000K, 5000K	80	4,532-6,997	50,000	0-10V	Yes
90242	LS8-WS-CS-U	50W, 60W, 70W	120-277VAC	3500K, 4000K, 5000K	80	7,504-9,712	50,000	0-10V	Yes

Available Accessories

Product #	Product Code	Description
90243	LS-SK-1	ProLED Select Linear Strip Suspension Kit Size 1 4ft
90244	LS-SK-2	ProLED Select Linear Strip Suspension Kit Size 2 8ft
90245	LS-SM-CK-1	ProLED Select Linear Strip Surface Mount Connector Kit Size 1 4ft
90246	LS-SM-CK-2	ProLED Select Linear Strip Surface Mount Connector Kit Size 2 8ft
90247	LS-SK-CK-1	ProLED Select Linear Strip Suspension Connector Kit Size 1 4ft
90248	LS-SK-CK-2	ProLED Select Linear Strip Suspension Connector Kit Size 2 8ft
80313	MWMS-BRI810	Microwave Motion Sensor Sharkward Bri810-M10
99986	LHB/MC/PIR	Motion Sensor Control Pir LSXR 610 HI
90313	BBU/EM9WU	Emergency Battery Back Up 9W 120-277V 90 Minute 0-10V Dimming

SPEC SHEET AVAILABLE HERE.

ProLED Linear Strip



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Equivalent Wattage	DLC Qualified ³
10240	LS4/36U40	36W	120-277V	4000K	80	4,903	100,000	0-10V	(2) 32W T8	Yes
10241	LS4/36U50	36W	120-277V	5000K	80	4,910	100,000	0-10V	(2) 32W T8	Yes
10243	LS8/72U40	72W	120-277V	4000K	80	9,806	100,000	0-10V	(2) 59W T8	Yes
10244	LS8/72U50	72W	120-277V	5000K	80	9,820	100,000	0-10V	(2) 59W T8	Yes

Available Accessories

Product #	Product Code	Description
10228	LS4/LENS	Linear Strip; 4ft Acrylic Lens
10229	LS8/LENS	Linear Strip; 8ft Acrylic Lens
10309	LS-LCK	Linear Strip; Linear Connection Kit
10310	BBU/EM8WU	Battery Backup; Emergency 8W, 120-277V, Lifep04 Battery, 90 Minute Backup
10311	ACC/12IN	Aircraft Cable; 12 Inches, 1 Set
10318	MWMS/IB/MC601V	Microwave Motion Sensor; Installation Bracket; Merrytek MC601V
10313	MWMS/MC601V	Microwave Motion Sensor; Merrytek MC601V

SPEC SHEET AVAILABLE HERE.

ProLED Linear Wrap



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Equivalent Wattage	DLC Qualified ³
Traditional Prismatic Lens										
10302	LWA-P20U2-40	20W	120-277V	4000K	80	2,442	50,000	0-10V	(2) 17W T8	Yes
10307	LWA-P20U2-50	20W	120-277V	5000K	80	2,466	50,000	0-10V	(2) 17W T8	Yes
10299	LWA-P40U4-40	40W	120-277V	4000K	80	4,944	50,000	0-10V	(2) 32W T8	Yes
10304	LWA-P40U4-50	40W	120-277V	5000K	80	5,008	50,000	0-10V	(2) 32W T8	Yes
Architectural Diffused Lens										
10300	LWA-D23U2-40	23W	120-277V	4000K	80	3,073	100,000	0-10V	(2) 17W T8	Yes
10305	LWA-D23U2-50	23W	120-277V	5000K	80	3,125	100,000	0-10V	(2) 17W T8	Yes
10301	LWA-D46U4-40	46W	120-277V	4000K	80	6,242	100,000	0-10V	(2) 32W T8	Yes
10306	LWA-D46U4-50	46W	120-277V	5000K	80	6,293	100,000	0-10V	(2) 32W T8	Yes



Available Accessories

Product #	Product Code	Description
10310	BBU/EM8WU	Battery Backup; Emergency 8W, 120-277V, LifpO4 Battery, 90 Minute Backup
10311	ACC/12IN	Aircraft Cable; 12", 1 Set
10312	LWA-D/JB	Linear Wrap; Architectural Diffused Lens; Joiner Bracket, 1 Pair (2pcs)
10313	MWMS/MC601V	Microwave Motion Sensor; Merrytek MC601V
10318	MWMS/IB/MC601V	Microwave Motion Sensor; Installation Bracket; Merrytek MC601V

SPEC SHEET AVAILABLE HERE.



ProLED Lamp Ready Fixture Strip Series

Product #	Product Code	Description
90510	LRS2-2L-T8DE	Lamp Ready Fixture Strip 2ft 2 Lamp Double End Bypass Lamp
90511	LRS4-2L-T8DE	Lamp Ready Fixture Strip 4ft 2 Lamp Double End Bypass Lamp
90515	LRS8-4L-T8DE	Lamp Ready Fixture Strip 8ft 4 Lamp Double End Bypass Lamp

Available Accessories

Product #	Product Code	Description
90514	LRS-JB	Lamp Ready Fixture Strip Joiner Bracket

SPEC SHEET AVAILABLE HERE.



ProLED Lamp Ready Fixture Wrap Series

Product #	Product Code	Description
90512	LRW2-2L-T8DE	Lamp Ready Fixture Wrap 2ft 2 Lamp Double End Bypass Lamp
90513	LRS4-2L-T8DE	Lamp Ready Fixture Wrap 4ft 2 Lamp Double End Bypass Lamp

SPEC SHEET AVAILABLE HERE.




ProLED Select Linear Vaportight Series

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Wet Location	DLC Qualified ³
28090	LVPT-2-WS-CS-U	20W, 25W, 30W	120-277V	3000K, 4000K, 5000K	80	2,780, 3,600, 4,140	75,000	0-10V	Yes	Yes
28091	LVPT-4-WS-CS-U	40W, 50W, 60W	120-277V	3000K, 4000K, 5000K	80	5,600, 7,300, 8,280	75,000	0-10V	Yes	Yes
28092	LVPT-8-WS-CS-U	60W, 75W, 80W	120-277V	3000K, 4000K, 5000K	80	8,340, 10,875, 12,450	75,000	0-10V	Yes	Yes

Available Accessories

Product #	Product Code	Description
28094	LVPT-MS-RC	LVPT Dc Microwave Motion Sensor Remote Control
28095	LVPT-ACC	LVPT Suspended Aircraft Cable Mounting Accessory, 9 Foot Length
28096	LVPT-RPL-LENS-2	LVPT Replacement Lens 2ft Length
28097	LVPT-RPL-LENS-4	LVPT Replacement Lens 4ft Length
28098	LVPT-RPL-LENS-8	LVPT Replacement Lens 8ft Length
28099	LVPT-MTG-HDWR	LVPT Spare Mounting Hardware

SPEC SHEET AVAILABLE HERE.



ProLED HLVT Linear Vaportight Series

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
10316	HLVT4/40U40	40W	120-277V	4000K	80	5,200	100,000	0-10V	3 x 32W T8	Yes
10317	HLVT4/40U50	40W	120-277V	5000K	80	5,200	100,000	0-10V	3 x 32W T8	Yes

Available Accessories

Product #	Product Code	Description
10311	ACC/12IN	Aircraft Cable; 12", 1 Set
40500	BBU/EM10W	BBU/EM10W 40500 Emergency 10W

Continue to next page for additional product information



SPEC SHEET AVAILABLE HERE.

ProLED Select HoverBay Round Highbay Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage	DLC Qualified
30250	HRHB-100-CS-U-WH	100W	120-277V	4000K, 5000K	80	14,703-14,280	100,000	0-10V	250W MH	Yes
30251	HRHB-100-CS-U-BL	100W	120-277V	4000K, 5000K	80	14,703-14,280	100,000	0-10V	250W MH	Yes
30252	HRHB-150-CS-U-WH	150W	120-277V	4000K, 5000K	80	20,831-20,940	100,000	0-10V	400W MH	Yes
30253	HRHB-150-CS-U-BL	150W	120-277V	4000K, 5000K	80	20,831-20,940	100,000	0-10V	400W MH	Yes
30254	HRHB-200-CS-U-WH	200W	120-277V	4000K, 5000K	80	28,942-29,179	100,000	0-10V	600W MH	Yes
30255	HRHB-200-CS-U-BL	200W	120-277V	4000K, 5000K	80	28,942-29,179	100,000	0-10V	600W MH	Yes
30256	HRHB-240-CS-U-WH	240W	120-277V	4000K, 5000K	80	33,212-33,282	100,000	0-10V	750W MH	Yes
30257	HRHB-240-CS-U-BL	240W	120-277V	4000K, 5000K	80	33,212-33,282	100,000	0-10V	750W MH	Yes

Available Accessories

Product #	Product Code	Description
24875*	DCMS	Dc Bi-Level Motion Sensor
24876	DCMS-REM	Dc Bi-Level Motion Sensor Remote
30258	HRHB-YB-SM-B	Hoverbay Round Highbay Yoke Mount Bracket - 100W & 150W Fixtures (Black)
30259	HRHB-YB-LG-B	Hoverbay Round Highbay Yoke Mount Bracket - 200W & 240W Fixtures (Black)
30274	HRHB-YB-SM-W	Hoverbay Round Highbay Yoke Mount Bracket - 100W & 150W Fixtures (White)
30275	HRHB-YB-LG-W	Hoverbay Round Highbay Yoke Mount Bracket - 200W & 240W Fixtures (White)
30260	HRHB-JBM	Hoverbay Round Highbay Junction Box Mount
30269	HRHB-PA	Hoverbay Round Highbay Pendant Adapter
30273*	HRHB-BBU-30	Hoverbay Round Highbay Em Pack 30 Watt
30261	HRHB-AR-SM	Hoverbay Round Highbay Aluminum Reflector - 100W & 150W Fixtures
30262	HRHB-AR-LG	Hoverbay Round Highbay Aluminum Reflector - 200W & 240W Fixtures
30263	HRHB-PC-SM	Hoverbay Round Highbay Polycarbonate Reflector - 100W & 150W Fixtures
30264	HRHB-PC-LG	Hoverbay Round Highbay Polycarbonate Reflector - 200W & 240W Fixtures
30265	HRHB-FL-SM	Hoverbay Round Highbay 110 Degree Frosted Lens - 100W & 150W Fixtures
30266	HRHB-FL-LG	Hoverbay Round Highbay 110 Degree Frosted Lens - 200W & 240W Fixtures
30278	HRHB-110-SM	Hoverbay Round Highbay 110 Degree Clear Lens - 100W & 150W Fixtures
30279	HRHB-110-LG	Hoverbay Round Highbay 110 Degree Clear Lens - 200W & 240W Fixtures
30267	HRHB-60-SM	Hoverbay Round Highbay 60 Degree Lens - 100W & 150W Fixtures
30268	HRHB-60-LG	Hoverbay Round Highbay 60 Degree Lens - 200W & 240W Fixtures
30276	HRHB-WG-SM	Hoverbay Round Highbay Wire Guard - 100W & 150W Fixtures
30277	HRHB-WG-LG	Hoverbay Round Highbay Wire Guard - 200W & 240W Fixtures

*When using HRHB-BBU-EM battery and DCMS Motion Sensor, DCMS sensor must be set to ∞ standby time on the motion sensor remote. This setting allows fixture to not turn off in EM mode.



[SPEC SHEET AVAILABLE HERE.](#)

ProLED Premium Linear Highbay Series Quick Ship Product



Product Code	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	DLC Qualified ³
10419	HLHB1/101U50	101W	120-277V	5000K	80	14,604	100,000	0-10V	Yes
10420	HLHB2/161U50	161W	120-277V	5000K	80	22,862	100,000	0-10V	Yes
10421	HLHB2/201U50	201W	120-277V	5000K	80	28,602	100,000	0-10V	Yes
10422	HLHB2/241U50	241W	120-277V	5000K	80	35,427	100,000	0-10V	Yes
10423	HLHB2/301U50	301W	120-277V	5000K	80	44,247	100,000	0-10V	Yes

Available Accessories

Product #	Product Code	Description
99986	LHB/MC	Motion Control Sensor LSXR 610 HL

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Select Linear Highbay Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life	Dimmable	Equivalent Wattage	DLC Qualified
30280	LHB-1-WS-40-U	70W-90W-110W	120-277V	4000K	80	9,700-14,500	>100,000 Hrs	0-10VDC	4-lamp (T8), 175W HID	Yes
30281	LHB-1-WS-50-U	70W-90W-110W	120-277V	5000K	80	9,700-14,500	>100,000 Hrs	0-10VDC	4-lamp (T8), 175W HID	Yes
30282	LHB-2-WS-40-U	110W-135W-160W	120-277V	4000K	80	16,300-22,000	>100,000 Hrs	0-10VDC	4-lamp (T5HO), 6-lamp (T8), 250W-400W HID	Yes
30283	LHB-2-WS-50-U	110W-135W-160W	120-277V	5000K	80	16,300-22,000	>100,000 Hrs	0-10VDC	4-lamp (T5HO), 6-lamp (T8), 250W-400W HID	Yes
30284	LHB-3-WS-40-U	180W-200W-220W	120-277V	4000K	80	25,500-30,100	>100,000 Hrs	0-10VDC	6-lamp (T5HO), 8-lamp (T8), 400W-750W HID	Yes
30285	LHB-3-WS-50-U	180W-200W-220W	120-277V	5000K	80	25,500-30,100	>100,000 Hrs	0-10VDC	6-lamp (T5HO), 8-lamp (T8), 400W-750W HID	Yes
30286	LHB-4-WS-40-U	240W-280W-320W	120-277V	4000K	80	35,300-45,000	>100,000 Hrs	0-10VDC	8-lamp (T5HO) 750W-1000W HID	Yes
30287	LHB-4-WS-50-U	240W-280W-320W	120-277V	5000K	80	35,300-45,000	>100,000 Hrs	0-10VDC	8-lamp (T5HO) 750W-1000W HID	Yes

Available Accessories

Product #	Product Code	Description
30288	LHB-PMA	LHB Pendant Mounting Assembly For Wattage Selectable Lhb
30289	LHB-SMK-1	LHBSurface Mount Kit Assembly For Wattage Selectable LHB1, LHB2, LHB4
30290	LHB-SMK-2	LHB Surface Mount Kit Assembly For Wattage Selectable LHB3
30291	LHB-MWMS	LHB Microwave Motion Control Sensor
30292	LHB-MS-RC	LHB Microwave Motion Control Sensor Remote
99986	LHB/MC	Motion Control Sensor LSXR 610 HI
99654	LHB1&2-WG	Linear Highbay Wire Guard For LHB1 & LHB2
99655	LHB3-WG	Linear Highbay Wire Guard For LHB3
99656	LHB4-WG	Linear Highbay Wire Guard For LHB4



SPEC SHEET AVAILABLE HERE.

ProLED Select Edgelit Flat Panel: Field Selectable Light Output & CCT



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
1' x 4'										
10330	14FSEPL/8DU	20W, 25W, 30W	120-277V	3000K, 4000K, 5000K	80	3,300-5,000	50,000	0-10V	(2) 32W T8	Yes
2' x 2'										
10331	22FSEPL8DU	40W, 50W, 60W	120-277V	3000K, 4000K, 5000K	80	3,300-5,000	50,000	0-10V	(2) 32W T8	Yes
2' x 4'										
10332	24FSEPL/8DU	60W, 75W, 80W	120-277V	3000K, 4000K, 5000K	80	3300-5,000	50,000	0-10V	(4) 32W T8	Yes

Available Accessories


Product #	Product Code	Description
81981	VPL/EM/LED3	Emergency Battery; 16W, 120-277V

SPEC SHEET AVAILABLE HERE.

ProLED Edgelit Flat Panel



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
1' x 4"										
81982	14EPL40/835/LED	40W	120-277V	3500K	82	4,000	50,000	0-10V	(2) 32W T8	Yes
81984	14EPL40/850/LED	40W	120-277V	5000K	82	4,000	50,000	0-10V	(2) 32W T8	Yes
2' x 2"										
81963	22EPL30/835/LED	30W	120-277V	3500K	82	3,000	50,000	0-10V	(2) 32W T8	Yes
81964	22EPL30/840/LED	30W	120-277V	4000K	82	3,050	50,000	0-10V	(2) 32W T8	Yes
81965	22EPL30/850/LED	30W	120-277V	5000K	82	3,150	50,000	0-10V	(2) 32W T8	Yes
2' x 4"										
81966	24EPL50/835/LED	50W	120-277V	3500K	82	5000	50,000	0-10V	(4) 32W T8	Yes
81967	24EPL50/840/LED	50W	120-277V	4000K	82	5100	50,000	0-10V	(4) 32W T8	Yes
81968	24EPL50/850/LED	50W	120-277V	5000K	82	5300	50,000	0-10V	(4) 32W T8	Yes

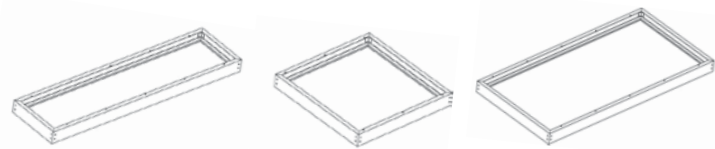

SPEC SHEET AVAILABLE HERE.

Surface Mount Kit

Product #	Product Code	Description
81985	14EPL/SMK	1' X 4' Surface Mount Kit For Led Panels, White (48.12" X 12.06" X 4.5")
81986	22EPL/SMK	2' X 2' Surface Mount Kit For Led Panels, White (24.06" X 24.06" X 4.5")
81987	24EPL/SMK	2' X 4' Surface Mount Kit For Led Panels, White (48.12" X 24.06" X 4.5")



SPEC SHEET AVAILABLE HERE.

ProLED Select Backlit Panel



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	DLC Qualified
90363	BPL-14-WS-CS-U	20W, 30W, 35W	120-277VAC	3500K, 4000K, 5000K	80	2,548-4,217	50,000	0-10V	Yes
90364	BPL-22-WS-CS-U	20W, 30W, 35W	120-277VAC	3500K, 4000K, 5000K	80	2,454-4,044	50,000	0-10V	Yes
90365	BPL-24-WS-CS-U	30W, 35W, 45W	120-277VAC	3500K, 4000K, 5000K	80	3,864-5,544	50,000	0-10V	Yes

Available Accessories

Product #	Product Code	Description
90366	BPL-14-SMK	ProLED Select Backlit Panel 1x4 Surface Mount Kit
90367	BPL-22-SMK	ProLED Select Backlit Panel 2x2 Surface Mount Kit
90368	BPL-24-SMK	ProLED Select Backlit Panel 2x4 Surface Mount Kit
90369	BPL-14-FMK	ProLED Select Backlit Panel 1x4 Flange Mount Kit
90370	BPL-22-FMK	ProLED Select Backlit Panel 2x2 Flange Mount Kit
90371	BPL-24-FMK	ProLED Select Backlit Panel 2x4 Flange Mount Kit
81981	VPL-EM-LED3	Led Panel Gen 3 Emergency Battery 16W
90372	BPL-EMMB1	ProLED Select Backlit Panel 1x4 Emergency Battery Back Up Mounting Bridge Size 1
90373	BPL-EMMB2	ProLED Select Backlit Panel 1x4 Emergency Battery Back Up Mounting Bridge Size 2

SPEC SHEET AVAILABLE HERE.

ProLED Select Volumetric Panel Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified ³
1' x 4'										
81779	14FSVPL/8DU	15W, 19W, 24W, 29W	120-277V	3500K, 4000K, 5000K	80	2,190-4,437	50,000	0-10V	(2) 32W T8	Yes
2' x 2'										
81780	22FSVPL/8DU	15W, 19W, 24W, 29W	120-277V	3500K, 4000K, 5000K	80	2,175-4,379	50,000	0-10V	(2) 32W T8	Yes
2' x 4'										
81781	24FSVPL/8DU	24W, 29W, 32W, 39W	120-277V	3500K, 4000K, 5000K	80	3,384-5,889	50,000	0-10V	(4) 32W T8	Yes

Available Accessories

Product #	Product Code	Description
81782	14VPL/SMK	1x4 Surface Mount Kit For Volumetric Panels
81783	22VPL/SMK	2x2 Surface Mount Kit For Volumetric Panels
81784	24VPL/SMK	2x4 Surface Mount Kit For Volumetric Panels
10310	BBU/EM8WU	Emergency Battery Backup 8W 120-277V



SPEC SHEET AVAILABLE HERE.

ProLED Select Commercial Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	EQ Wattage	Dimmable	ENERGY STAR [®]
88984	CDL4-WS-CS-U	7W, 10W, 13W	120-277VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	591-1,170	50,000	0-10V	Yes	Yes
88985	CDL6-WS-CS-U	10W, 15W, 22W	120-277VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	822-1853	50,000	0-10V	Yes	Yes
88986	CDL8-WS-CS-U	12W, 20W, 30W	120-277VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	1,084-2,640	50,000	0-10V	Yes	Yes
88987	CDL10-WS-CS-U	20W, 30W, 40W	120-277VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	1,743-3,157	50,000	0-10V	Yes	Yes

Available Accessories [SPEC SHEET AVAILABLE HERE.](#)

Product #	Product Code	Description
90313	BBU/EM9WU	Battery Backup Emergency 9W 120-277V 90 Minute 0-10V Dimming

SPEC SHEET AVAILABLE HERE.


ProLED Commercial Downlight Retrofit



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
4" Commercial Downlight Retrofit												
99610	CDL4FR10/927/RTJB/LED	10W	120-277V	2700K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99611	CDL4FR10/930/RTJB/LED	10W	120-277V	3000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99612	CDL4FR10/940/RTJB/LED	10W	120-277V	4000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
99613	CDL4FR10/950/RTJB/LED	10W	120-277V	5000K	90	700	50,000	120V Only	1/12	4"	65W	Yes
6" Commercial Downlight Retrofit												
99614	CDL6FR15/927/RTJB/LED	15W	120-277V	2700K	90	1,000	50,000	120V Only	1/12	6"	120W	Yes
99615	CDL6FR15/930/RTJB/LED	15W	120-277V	3000K	90	1,000	50,000	120V Only	1/12	6"	120W	Yes
99616	CDL6FR15/940/RTJB/LED	15W	120-277V	4000K	90	1,000	50,000	120V Only	1/12	6"	120W	Yes
99617	CDL6FR15/950/RTJB/LED	15W	120-277V	5000K	90	1,000	50,000	120V Only	1/12	6"	120W	Yes
8" Commercial Downlight Retrofit												
99618	CDL8FR30/927/RTJB/LED	30W	120-277V	2700K	90	2,000	50,000	120V Only	1/6	8"	200W	Yes
99619	CDL8FR30/930/RTJB/LED	30W	120-277V	3000K	90	2,000	50,000	120V Only	1/6	8"	200W	Yes
99620	CDL8FR30/940/RTJB/LED	30W	120-277V	4000K	90	2,000	50,000	120V Only	1/6	8"	200W	Yes
99621	CDL8FR30/950/RTJB/LED	30W	120-277V	5000K	90	2,000	50,000	120V Only	1/6	8"	200W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Downlight Retrofit Series

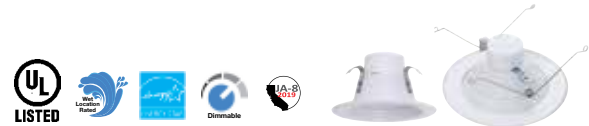

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Eq. Wattage	Dimmable	ENERGY STAR [®]
99733	DL4FR9/927/LED3	9W	120V	2700K	90	765	50,000	65W	Yes	Yes
99734	DL4FR9/930/LED3	9W	120V	3000K	90	765	50,000	65W	Yes	Yes
99735	DL4FR9/940/LED3	9W	120V	4000K	90	765	50,000	65W	Yes	Yes
99736	DL4FR9/950/LED3	9W	120V	5000K	90	765	50,000	65W	Yes	Yes
99741	DL6FR9/927/LED3	9W	120V	2700K	90	810	50,000	75W	Yes	Yes
99742	DL6FR9/930/LED3	9W	120V	3000K	90	810	50,000	75W	Yes	Yes

Continue to next page for additional product information



ProLED Downlight Retrofit Series

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Eq. Wattage	Dimmable	ENERGY STAR [®]
99743	DL6FR9/940/LED3	9W	120V	4000K	90	810	50,000	75W	Yes	Yes
99744	DL6FR9/950/LED3	9W	120V	5000K	90	810	50,000	75W	Yes	Yes
99745	DL6FR12/927/LED3	12.5W	120V	2700K	90	1100	50,000	100W	Yes	Yes
99746	DL6FR12/930/LED3	12.5W	120V	3000K	90	1100	50,000	100W	Yes	Yes
99747	DL6FR12/940/LED3	12.5W	120V	4000K	90	1100	50,000	100W	Yes	Yes
99748	DL6FR12/950/LED3	12.5W	120V	5000K	90	1100	50,000	100W	Yes	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Retrofit Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR [®]
87983	RDL4-8-CS-BT	8W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	707lm - 791lm	50,000	Yes	Yes
87984	RDL6-10.5-CS-BT	10.5W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	926lm - 1078lm	50,000	Yes	Yes
87985	RDL6-14-CS-BT	14W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	1219lm - 1318lm	50,000	Yes	Yes
87986	RDL4-8-CS-ST	8W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	757lm - 849lm	50,000	Yes	Yes
87987	RDL6-10.5-CS-ST	10.5W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	965lm - 1084lm	50,000	Yes	Yes
87988	RDL6-14-CS-ST	14W	120V	2700K, 3000K, 3500K, 4000K, 5000K	92+	1276lm - 1380lm	50,000	Yes	Yes

Available Accessories

Product #	Product Code	Description
87960	RDL4-RT-BT-BK	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Black
87961	RDL6-RT-BT-BK	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Black
87962	RDL4-RT-ST-BK	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Black
87963	RDL6-RT-ST-BK	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Black
87964	RDL4-RT-BT-BN	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Brushed Nickel
87965	RDL6-RT-BT-BN	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Brushed Nickel
87966	RDL4-RT-ST-BN	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Brushed Nickel
87967	RDL6-RT-ST-BN	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Brushed Nickel
87968	RDL4-RT-BT-BZ	ProLED Select Retrofit Downlight 4" Round Replaceable Baffle Trim Bronze
87969	RDL6-RT-BT-BZ	ProLED Select Retrofit Downlight 6" Round Replaceable Baffle Trim Bronze
87970	RDL4-RT-ST-BZ	ProLED Select Retrofit Downlight 4" Round Replaceable Smooth Trim Bronze
87971	RDL6-RT-ST-BZ	ProLED Select Retrofit Downlight 6" Round Replaceable Smooth Trim Bronze
87972	RDL6-RB	ProLED Select Retrofit Downlight 6" Friction Installation Band
87973	RDL4-GR	ProLED Select Retrofit Downlight 4" Goof Ring 4"-6"
87974	RDL6-GR	ProLED Select Retrofit Downlight 6" Goof Ring 6"-8"



SPEC SHEET AVAILABLE HERE.

ProLED Select Gimbal Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	ENERGY STAR [®]
83986	FSDLG4FR8/CCT/LED	8W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	741-815	50,000	Yes	60W	Yes
83987	FSDLG6FR10/CCT/LED	10W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	969-1,067	50,000	Yes	100W	Yes
83988	FSDLG6FR11/CCT/LED	11W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	1,126-1,184	50,000	Yes	120W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Surface Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	EQ Wattage	Dimmable	ENERGY STAR [®]
82993	SDL4-10-CS	10W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	650	50,000	85W	Yes	Yes
82994	SDL6-15-CS	15W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	1,050	50,000	85W	Yes	Yes
82995	SDL8-20-CS	20W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	1,500	50,000	85W	Yes	Yes
82996	SDL6-15-CS-MS	15W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	1,050	50,000	85W	Yes	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Surface Downlight Retrofit Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Pkg. Qty.	Fixture Size	EQ Wattage	Dimmable	ENERGY STAR [®]
82989	SDL6FR15/927/LED3	15W	120V	2700K	90	1,200	50,000	1/12	6"	85W	Yes	Yes
82990	SDL6FR15/930/LED3	15W	120V	3000K	90	1,200	50,000	1/12	6"	85W	Yes	Yes
82991	SDL6FR15/940/LED3	15W	120V	4000K	90	1,200	50,000	1/12	6"	85W	Yes	Yes
82992	SDL6FR15/950/LED3	15W	120V	5000K	90	1,200	50,000	1/12	6"	85W	Yes	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Slim Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR [®]
89152	FSDLS3FR8/CCT/LED	8W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	546-569	50,000	Yes	Yes
89093	FSDLS4FR10/CCT/LED	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	773 - 827	50,000	Yes	Yes
89153	FSDLS5FR12/CCT/LED	12W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	830-981	50,000	Yes	Yes
89094	FSDLS6FR12/CCT/LED	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	954 - 1,024	50,000	Yes	Yes
89095	FSDLS6FR15/CCT/LED	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,116 - 1,242	50,000	Yes	Yes

Continue to next page for additional product information



ProLED Select Slim Downlight Series

Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR®
89106	FSDLS8FR18/CCT/LED	18W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,506 - 1,607	50,000	Yes	Yes
89096	FSDLS4FR10/SQ/CCT/LED	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	686 - 740	50,000	Yes	Yes
89097	FSDLS6FR12/SQ/CCT/LED	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,036 - 1,107	50,000	Yes	Yes
89098	FSDLS6FR15/SQ/CCT/LED	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,130 - 1,235	50,000	Yes	Yes

Available Accessories

Product #	Product Code	Description
89120	DFDLS4-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Black
89121	DFDLS6-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Black
89122	DFDLS8-RT-RD-BK	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Black
89123	DFDLS4-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Satin Nickel
89124	DFDLS6-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Satin Nickel
89125	DFDLS8-RT-RD-SN	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Satin Nickel
89126	DFDLS4-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Trim Bronze
89127	DFDLS6-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Trim Bronze
89128	DFDLS8-RT-RD-BZ	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Trim Bronze
89099	FSDLS/EXT12	Select Slim Downlight Extension Cable 12"
89104	DLS/RP4RD	ProLED Direct Fit Slim Downlight Rough In Pan 4" Round
89088	DLS/FK4SQ	Slim Downlight New Construction Frame - 4" Square
89105	DLS/RP6RD	ProLED Direct Fit Slim Downlight Rough In Pan 6" Round
89090	DLS/FK6SQ	Slim Downlight New Construction Frame - 6" Square
89129	DFDLS-RP-468-RD	ProLED Select Direct Fit Slim Downlight Adjustable Rough In Pan 4" 6" 8" Round

SPEC SHEET AVAILABLE HERE.

ProLED Select Slim Downlight Series 4 Pack



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR®
89140	FSDLS4FR10/CCT/LED/4PK	10W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	773-827	50,000	Yes	Yes
89141	FSDLS6FR12/CCT/LED/4PK	12W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	954-1024	50,000	Yes	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Select Direct Fit Downlight Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	ENERGY STAR®
89150	DFDLS3-8-CS-BT	8W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	484-529	50,000	Yes	Yes
89107	DFDLS4-10-CS-BT	10W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	725 - 728	50,000	Yes	Yes
89151	DFDLS5-12-CS-BT	12W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	90	817-975	50,000	Yes	Yes
89108	DFDLS6-12-CS-BT	12W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	918 - 1,020	50,000	Yes	Yes
89109	DFDLS6-15-CS-BT	15W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,122 - 1,314	50,000	Yes	Yes
89110	DFDLS8-18-CS-BT	18W	120V	2700K, 3000K, 3500K, 4000K, 5000K	90+	1,619 - 1,741	50,000	Yes	Yes



Available Accessories

Product #	Product Code	Description
89111	DFDLS4-RT-RD-RC-BK	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Black
89112	DFDLS6-RT-RD-RC-BK	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Black
89113	DFDLS8-RT-RD-RCBK	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Black
89114	DFDLS4-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Satin Nickel
89115	DFDLS6-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Satin Nickel
89116	DFDLS8-RT-RD-RC-SN	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Satin Nickel
89117	DFDLS4-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Recessed Trim Bronze
89118	DFDLS6-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Recessed Trim Bronze
89119	DFDLS8-RT-RD-RC-BZ	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Recessed Trim Bronze
89130	DFDLS4-RT-RD-BT-BK	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Baffle Trim Black
89131	DFDLS6-RT-RD-BT-BK	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Baffle Trim Black
89132	DFDLS8-RT-RD-BT-BK	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Baffle Trim Black
89133	DFDLS4-RT-RD-BT-SN	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Baffle Trim Satin Nickel
89134	DFDLS4-RT-RD-BT-SN	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Baffle Trim Satin Nickel
89135	DFDLS4-RT-RD-BT-SN	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Baffle Trim Satin Nickel
89136	DFDLS4-RT-RD-BT-BZ	ProLED Select Direct Fit Slim Downlight 4" Round Replaceable Baffle Trim Bronze
89137	DFDLS4-RT-RD-BT-BZ	ProLED Select Direct Fit Slim Downlight 6" Round Replaceable Baffle Trim Bronze
89138	DFDLS4-RT-RD-BT-BZ	ProLED Select Direct Fit Slim Downlight 8" Round Replaceable Baffle Trim Bronze
89129	DFDLS-RP-468-RD	ProLED Select Direct Fit Slim Downlight Adjustable Rough In Pan 4", 6", 8"
89104	FSDLS/RP4RD	ProLED Select Direct Fit Slim Downlight Rough In Pan 4"
89105	FSDLS/RP6RD	ProLED Select Direct Fit Slim Downlight Rough In Pan 6"
89102	FSDLS/EXT12	ProLED Select Direct Fit Slim Downlight Extension Cable 12"

SPEC SHEET AVAILABLE HERE.

ProLED Square Downlights



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Fixture Size	Eq. Wattage	ENERGY STAR [®]
99952	QDL4FR10/927/LED	10W	120V	2700K	90	560	50,000	Yes	1/12	4"	50W	Yes
99953	QDL4FR10/930/LED	10W	120V	3000K	90	560	50,000	Yes	1/12	4"	50W	Yes
99954	QDL4FR10/940/LED	10W	120V	4000K	90	590	50,000	Yes	1/12	4"	50W	Yes
99957	QDL6FR15/930/LED	15W	120V	3000K	90	930	50,000	Yes	1/12	6"	65W	Yes


SPEC SHEET AVAILABLE HERE.

ProLED Select Flushmount Fixtures



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	ENERGY STAR [®]
90260	FM-DR12-16-CS	16W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	80	1,193 - 1,316	50,000	Yes	Yes
90261	FM-DR14-20-CS	20W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	80	1,498 - 1,741	50,000	Yes	Yes
90262	FM-DR16-24-CS	24W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	80	1,607 - 1,905	50,000	Yes	Yes
90263	FM-M11-16-CS	16W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	80	1,312 - 1,465	50,000	Yes	Yes
90264	FM-M14-24-CS	24W	120VAC	2700K, 3000K, 3500K, 4000K, 5000K	80	1,489 - 1,780	50,000	Yes	Yes

LED LAMPS

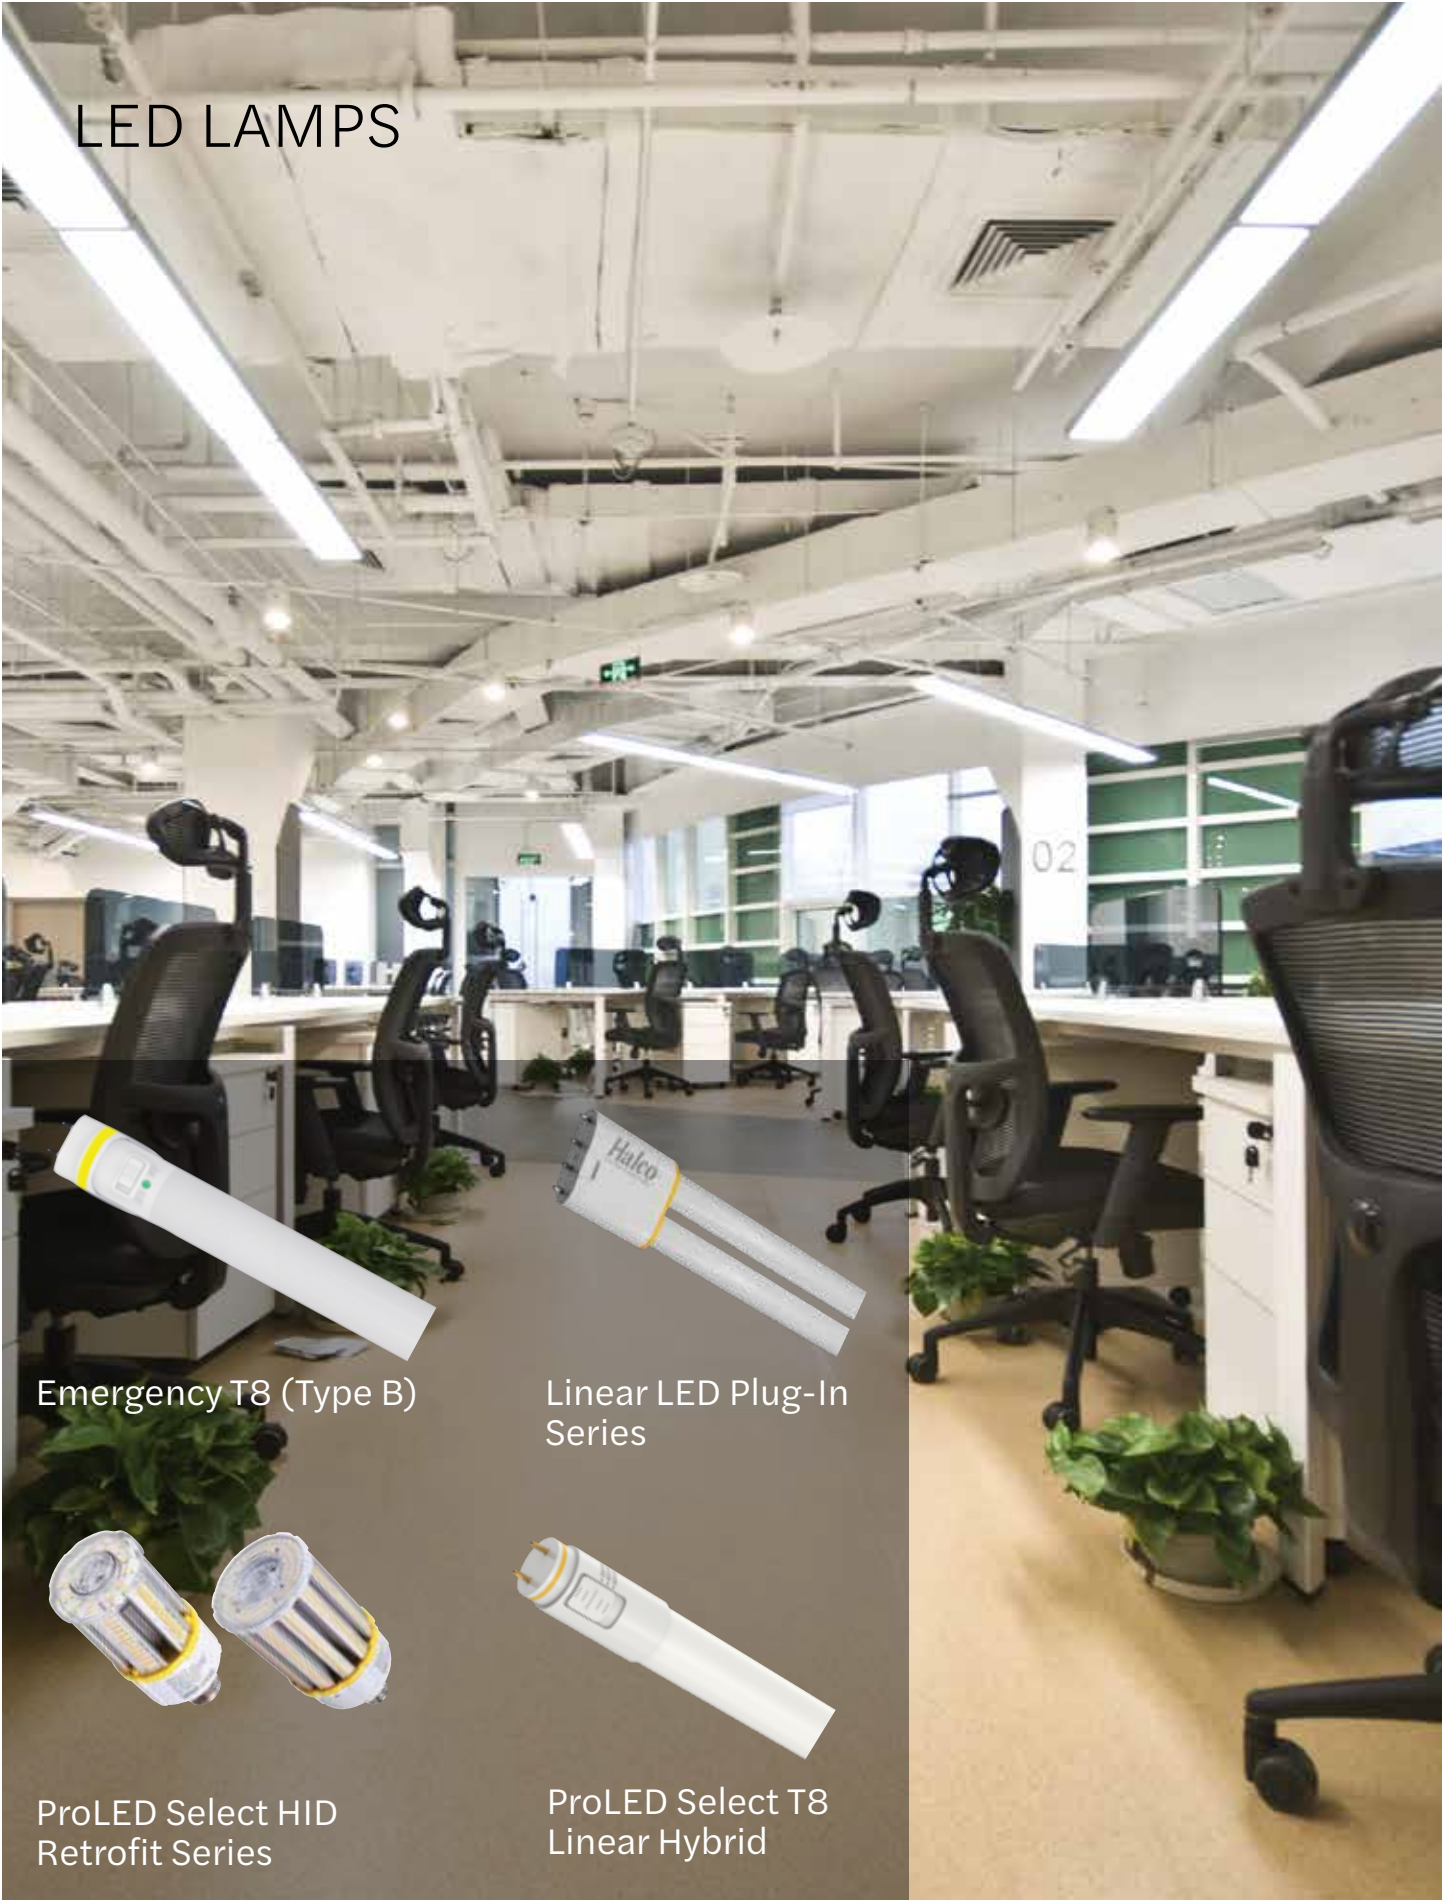

Emergency T8 (Type B)



Linear LED Plug-In Series



ProLED Select HID Retrofit Series



ProLED Select T8 Linear Hybrid

SPEC SHEET AVAILABLE HERE.

ProLED HID Highbay Replacement Lamp



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life	MOL	Eq. Wattage	DLC Qualified
89091	HRSL-1-WS-CS-U-EX39	70W-80W-90W	EX39	120-277VAC	3000K, 4000K, 5000K Selectable	>80	10,683 - 14,130	>50,000 Hrs	9.33"	400W	Premium
89092	HRSL-2-WS-CS-U-EX39	100W-120W-140W	EX39	120-277VAC	3000K, 4000K, 5000K Selectable	>80	14,800 - 22,120	>50,000 Hrs	10.35"	400W	Premium

SPEC SHEET AVAILABLE HERE.

ProLED HID Highbay Retrofit Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84113	HID90/840/EX39/LED	90W	EX39	120-277V	4000K	84	11,970	50,000	No	1/4	9.24"	400W MH/HPS	Standard
84114	HID90/850/EX39/LED	90W	EX39	120-277V	5000K	84	12,150	50,000	No	1/4	9.24"	400W MH/HPS	Standard
84115	HID120/840/EX39/LED	120W	EX39	120-277V	4000K	84	17,760	50,000	No	1/4	9.24"	600W MH/HPS	Standard
84116	HID120/850/EX39/LED	120W	EX39	120-277V	5000K	84	18,000	50,000	No	1/4	9.24"	600W MH/HPS	Standard

SPEC SHEET AVAILABLE HERE.

ProLED HID Wallpack Retrofit Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84027	HID40/840/MV/EX39/LED	40W	EX39	120-277V	4000K	82	6,000	50,000	No	1/8	8.46"	175W MH/HPS	Yes
84030	HID60/840/MV/LED	60W	E26	120-277V	4000K	82	9,000	50,000	No	1/8	9.96"	250W MH/HPS	No
84032	HID60/850/MV/LED	60W	E26	120-277V	5000K	82	9,000	50,000	No	1/8	9.96"	250W MH/HPS	No

SPEC SHEET AVAILABLE HERE.

ProLED HID Omni Retrofit Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
84318	HID20/OMNI/830/LED	20W	E26	120-277V	3000K	84	2,780	50,000	No	1/24	5.26"	80W MH/HPS	No
84319	HID20/OMNI/850/LED	20W	E26	120-277V	5000K	84	2,865	50,000	No	1/24	5.26"	80W MH/HPS	No
84320	HID25/OMNI/830/LED	25W	E26	120-277V	3000K	84	3,500	50,000	No	1/24	6.28"	100W MH/HPS	No
84321	HID25/OMNI/850/LED	25W	E26	120-277V	5000K	84	3,612	50,000	No	1/24	6.28"	100W MH/HPS	No
84322	HID25/OMNI/830/EX39/LED	25W	EX39	120-277V	3000K	84	3,500	50,000	No	1/24	6.28"	100W MH/HPS	Yes
84323	HID25/OMNI/850/EX39/LED	25W	EX39	120-277V	5000K	84	3,612	50,000	No	1/24	6.28"	100W MH/HPS	Yes
84324	HID35/OMNI/830/EX39/LED	35W	EX39	120-277V	3000K	84	4,620	50,000	No	1/12	7.25"	150W MH/HPS	Yes
84325	HID35/OMNI/850/EX39/LED	35W	EX39	120-277V	5000K	84	4,760	50,000	No	1/12	7.25"	150W MH/HPS	Yes



SPEC SHEET AVAILABLE HERE.

ProLED Select HID Retrofit Series



Product #	Product Code	Wattage	Voltage	Color Temp.	Lumens	Useful Life ¹	Dimmable ²	Eq. Wattage	DLC Qualified	ENERGY STAR [®]
82361	HID12-CS-E26-LED	12W	100-277V	3000, 4000, 5000K	1,680-1,800	50,000	No	50W	Yes	No
82362	HID18-CS-E26-LED	18W	100-277V	3000, 4000, 5000K	2,520-2,700	50,000	No	70W	Yes	No
82363	HID36-CS-E26-LED	36W	100-277V	3000, 4000, 5000K	2,520-5,652	50,000	No	150W	Yes	No
82364	HID36-CS-EX39-LED	36W	100-277V	3000, 4000, 5000K	2,520-5,652	50,000	No	150W	Yes	No
82365	HID45-CS-E26-LED	45W	100-277V	3000, 4000, 5000K	3,780-7,065	50,000	No	150W	Yes	No
82366	HID45-CS-EX39-LED	45W	100-277V	3000, 4000, 5000K	3,780-7,065	50,000	No	150W	Yes	No
82367	HID54-CS-E26-LED	54W	100-277V	3000, 4000, 5000K	5,040-8,478	50,000	No	175W	Yes	No
82368	HID54-CS-EX39-LED	54W	100-277V	3000, 4000, 5000K	5,040-8,478	50,000	No	175W	Yes	No
82369	HID80-CS-EX39-LED	80W	100-277V	3000, 4000, 5000K	7,560-12,560	50,000	No	250W	Yes	No
82370	HID100-CS-EX39-LED	100W	100-277V	3000, 4000, 5000K	8,820-15,700	50,000	No	250W	Yes	No
82371	HID120-CS-EX39-LED	120W	100-277V	3000, 4000, 5000K	11,200-18,840	50,000	No	400W	Yes	No

SPEC SHEET AVAILABLE HERE.

ProLED Temporary Work Light



Product #	Product Code	Wattage	Voltage	Color Temp	CRI	Lumens	Useful Life	Beam Angle
82378	WKL60-850-LED	60W	120-277V	5000K	80	7,200	50,000	360
82379	WKL100-850-LED	100W	120-277V	5000K	80	12,000	50,000	360
82380	WKL150-850-LED	150W	120-277V	5000K	80	18,000	50,000	360

Available Accessories

Product #	Product Code	Description
82381	WKL-Tripod	Led Temporary Work Light Tripod Stand Accessory

SPEC SHEET AVAILABLE HERE.

ProLED Linear T8 Series (Type A)



Product #	Product Code	Description	Watt	System Watt	Base	Voltage	CCT	CRI	Lumens	Useful Life	Pkg. Qty.	MOL	Eq. Wattage	End Cap	
2 Foot															
82355	T824FR8/835/DIR3/LED	QuickConnect Type A LED T8 Linear 24 3500K	8W	11W	G13	120-277V	3500K	82	1,325	50,000	1/25	24"	17W	Metal	
82356	T824FR8/840/DIR3/LED	QuickConnect Type A LED T8 Linear 24 4000K	8W	11W	G13	120-277V	4000K	82	1,350	50,000	1/25	24"	17W	Metal	
82357	T824FR8/850/DIR3/LED	QuickConnect Type A LED T8 Linear 24 5000K	8W	11W	G13	120-277V	5000K	82	1,350	50,000	1/25	24"	17W	Metal	
3 Foot															
82358	T836FR11/835/DIR3/LED	QuickConnect Type A LED T8 Linear 36 3500K	11W	14W	G13	120-277V	3500K	82	1,675	50,000	1/25	36"	25W	Metal	
82359	T836FR11/840/DIR3/LED	QuickConnect Type A LED T8 Linear 36 4000K	11W	14W	G13	120-277V	4000K	82	1,700	50,000	1/25	36"	25W	Metal	
82360	T836FR11/850/DIR3/LED	QuickConnect Type A LED T8 Linear 36 5000K	11W	14W	G13	120-277V	5000K	82	1,700	50,000	1/25	36"	25W	Metal	
4 Foot															
83880	T8FR12/835/DIR4/LED	LED T8 12W 3500K Ballast Compatible Direct Fit Dimmable 48 ProLED	12W	14W	G13	120-277V	3500K	82	1,800	50,000	1/25	48"	32W	Metal	
83881	T8FR12/840/DIR4/LED	LED T8 12W 4000K Ballast Compatible Direct Fit Dimmable 48 ProLED	12W	14W	G13	120-277V	4000K	82	1,900	50,000	1/25	48"	32W	Metal	
83882	T8FR12/850/DIR4/LED	LED T8 12W 5000K Ballast Compatible Direct Fit Dimmable 48 ProLED	12W	14W	G13	120-277V	5000K	82	2,000	50,000	1/25	48"	32W	Metal	

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Warning Halco ProLED® Linear Bypass T8 will not operate on a linear fluorescent ballast or with shunted lamp holders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lamp holders are installed in the luminaire before installing this product.

SPEC SHEET AVAILABLE HERE.

ProLED T8 8Ft Linear Double Ended Bypass Series



Product #	Product Code	Lamp Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
82875	T896FR42/840/BYP2/SP/LED	42W	Fa8	120-277V	4000K	82	5,500	50,000	No	10	270°	96"	<20%	86W	Yes
82876	T896FR42/850/BYP2/SP/LED	42W	Fa8	120-277V	5000K	82	5,500	50,000	No	10	270°	96"	<20%	86W	Yes
82877	T896FR42/840/BYP2/RDC/LED	42W	R17d	120-277V	4000K	82	5,500	50,000	No	10	270°	96"	<20%	86W	Yes
82878	T896FR42/850/BYP2/RDC/LED	42W	R17d	120-277V	5000K	82	5,500	50,000	No	10	270°	96"	<20%	86W	Yes
82879	T896FR42/865/BYP2/RDC/LED	42W	R17d	120-277V	6500K	82	5500	50,000	No	10	270°	96"	<20%	86W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED T8 Linear Double Ended Bypass Series (Type B)



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
83886	T8FR12/835/BYP3/DE/LED	12W	G13	120-277V	3500K	82	1,700	50,000	No	1/25	270°	48"	<20%	32W	Yes

Must be operated with an ambient luminaire temperature between 32°F (0°C) and 113°F (45°C). Warning Halco ProLED® Linear Bypass T8 will not operate on a linear fluorescent ballast or with shunted lamp holders. Please re-wire the luminaire as shown in the installation instructions included with the product and ensure non-shunted lamp holders are installed in the luminaire before installing this product.

SPEC SHEET AVAILABLE HERE.

ProLED T8 Linear Double, Single Ended Bypass Series (Type B)



Product #	Product Code	Wattage	Base	Voltage	CCT	CRI	Lumens	Useful Life	Beam Spread	Pkg. Qty.	MOL	Coated	Eq. Wattage
84886	T848FR12/835/BYP4/DSE/LED	12.5W	G13	120-277V	3500K	83	1,700	50,000	160°	25	48"	No	32W
84887	T848FR12/840/BYP4/DSE/LED	12.5W	G13	120-277V	4000K	83	1,800	50,000	160°	25	48"	No	32W
84888	T848FR12/850/BYP4/DSE/LED	12.5W	G13	120-277V	5000K	83	1,800	50,000	160°	25	48"	No	32W
84889	T848FR12/865/BYP4/DSE/LED	12.5W	G13	120-277V	6500K	83	1,700	50,000	160°	25	48"	No	32W
84875	T836FR12/835/BYP4/DSE/LED	12W	G13	120-277V	3500K	83	1,450	50,000	160°	25	36"	No	25W
84876	T836FR12/840/BYP4/DSE/LED	12W	G13	120-277V	4000K	83	1,500	50,000	160°	25	36"	No	25W
84877	T836FR12/850/BYP4/DSE/LED	12W	G13	120-277V	5000K	83	1,550	50,000	160°	25	36"	No	25W
84878	T836FR12/865/BYP4/DSE/LED	12W	G13	120-277V	6500K	83	1,450	50,000	160°	25	36"	No	25W
84871	T824FR7/835/BYP4/DSE/LED	7W	G13	120-277V	3500K	83	900	50,000	160°	25	24"	No	17W
84872	T824FR7/840/BYP4/DSE/LED	7W	G13	120-277V	4000K	83	950	50,000	160°	25	24"	No	17W
84873	T824FR7/850/BYP4/DSE/LED	7W	G13	120-277V	5000K	83	1,000	50,000	160°	25	24"	No	17W
84874	T824FR7/865/BYP4/DSE/LED	7W	G13	120-277V	6500K	83	900	50,000	160°	25	24"	No	17W
87206	48T8-14-835-DSE-BYP-LED-CG	14W	G13	120-277V	3500K	82	1700	50000	240°	25	48"	Yes	32W
87207	48T8-14-840-DSE-BYP-LED-CG	14W	G13	120-277V	4000K	82	1800	50000	240°	25	48"	Yes	32W
87208	48T8-14-850-DSE-BYP-LED-CG	14W	G13	120-277V	5000K	82	1800	50000	240°	25	48"	Yes	32W
87209	48T8-14-865-DSE-BYP-LED-CG	14W	G13	120-277V	6500K	82	1800	50000	240°	25	48"	Yes	32W

SPEC SHEET AVAILABLE HERE.

Emergency T8 (Type B)



Product #	Product Code	Watts	Base Type	Voltage	Color Temp.	CRI	Lumens	Emergency Power Lumen Output	Useful Life	Dimmable	Pkg Qty	Beam Spread	MOL
82373	T8EM-48FR17-40BYP-LED-2PK	17W	G13	120-277	4000K	80+	2,100	400	50000	Yes @ 120V	2/12	160°	48"
82374	T8EM-48FR17-50BYP-LED-2PK	17W	G13	120-277	5000K	80+	2,100	400	50000	Yes @ 120V	2/12	160°	48"

LED LAMPS



SPEC SHEET AVAILABLE HERE.

ProLED Linear T8 Hybrid (Type A/B)



Product #	Product Code	Type A Watt.	Type B Watt.	Base Type	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty	Beam Spread	MOL	THD	Eq. Watt.	DLC Qualified ³
85001	T8FR12/840/HYB/LED	Based on ballast	13W	G13	120-277V	4000K	80	1,900	50,000	No	1/25	270°	48"	<20	32W	No
85002	T8FR12/850/HYB/LED	Based on ballast	13W	G13	120-277V	5000K	80	1,900	50,000	No	1/25	270°	48"	<20	32W	No
87000	48T8-12-835-HYB-D-LED2	Based on ballast	12W	G13	120-277V	3500K	83	1,700	50,000	Yes*	1/25	320°	48"	<20	32W	Yes
87001	48T8-12-840-HYB-D-LED2	Based on ballast	12W	G13	120-277V	4000K	83	1,800	50,000	Yes*	1/25	320°	48"	<20	32W	Yes
87002	48T8-12-850-HYB-D-LED2	Based on ballast	12W	G13	120-277V	5000K	83	1,800	50,000	Yes*	1/25	320°	48"	<20	32W	Yes

*Dimming is dependent on the ballast in Type A applications, and a separate (not included) dimming module in Type B applications.

SPEC SHEET AVAILABLE HERE.

ProLED Select T8 Linear Hybrid



Product #	Product Code	Type A Watt.	Type B Watt.	Base Type	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty	Beam Spread	MOL	THD	Eq. Watt.	DLC Qualified ³
87100	24T8-8-8CS-HYB-D-LED	Based on ballast	8W	G13	120-277V	3500K, 4000K, 5000K	83	960	50,000	Yes*	1/25	320°	24"	<20	32W	Yes
87101	36T8-12-8CS-HYB-D-LED	Based on ballast	12W	G13	120-277V	3500K, 4000K, 5000K	83	1,500	50,000	Yes*	1/25	320°	36"	<20	32W	Yes
87102	48T8-12-8CS-HYB-D-LED	Based on ballast	12.5W	G13	120-277V	3500K, 4000K, 5000K	83	1,600	50,000	Yes*	1/25	320°	48"	<20	32W	Yes

*Dimming is dependent on the ballast in Type A applications, and a separate (not included) dimming module in Type B applications.

SPEC SHEET AVAILABLE HERE.

ProLED T8 U-Bend Hybrid (Type A/B)



Product #	Product Code	Nominal Wattage	Base Type	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ¹	Pkg Qty	Beam Angle	MOL	Eq. Watt.	DLC Qualified ³
82375	T8U6-FR13-835-HYB-LED	13W	2G13	120-277V	3500K	83	1,900	50,000	Yes	12	160°	24"	32W	Yes
82376	T8U6-FR13-840-HYB-LED	13W	2G13	120-277V	4000K	83	2,000	50,000	Yes	12	260°	24"	32W	Yes
82377	T8U6-FR13-850-HYB-LED	13W	2G13	120-277V	5000K	83	2,000	50,000	Yes	12	160°	24"	32W	Yes

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

SPEC SHEET AVAILABLE HERE.

ProLED T5 Direct Fit Replacement Series (Type A)



Product #	Product Code	Wattage	System Wattage ¹	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ²	Dimmable ³	Pkg. Qty.	Beam Spread	MOL	THD	Eq. Wattage	DLC Qualified ⁴
84080	T5FR25/840/DIR2/HO/LED	25W	28W	G5	120-277V	4000K	82	3,500	50,000	No	1/25	270°	45.2"	<20%	54W	Yes
84081	T5FR25/850/DIR2/HO/LED	25W	28W	G5	120-277V	5000K	82	3,500	50,000	No	1/25	270°	45.2"	<20%	54W	Yes

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

SPEC SHEET AVAILABLE HERE.

ProLED T5 Single End Bypass Series



Product #	Product Code	Wattage	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty	Beam Spread	MOL	THD	Equivalent Wattage	DLC Qualified ³
82987	T5FR25/840/BYP/HO/LED	25W	120-277V	4000K	80	3,300	50,000	No	1/25	270°	45.2"	<20	54W	Yes
82988	T5FR25/850/BYP/HO/LED	25W	120-277V	5000K	80	3,400	50,000	No	1/26	271°	45.2"	<20	54W	Yes

Must be operated with an ambient luminaire temperature between 32°F(0°C) and 113°F(45°C). Specifications are based on use with normal ballast factor ballasts (0.88). For LBF and HBF ballast performance, see the ProLED® Linear Direct T5 Specifications Sheet.

SPEC SHEET AVAILABLE HERE.

ProLED A19 ECO Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
88000	A19FR6-827-ECO-LED4	5.5W	E26	120V	2700K	80	450	15,000	No	1/48	4.13"	40W	Yes
88001	A19FR6-830-ECO-LED4	5.5W	E26	120V	3000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88002	A19FR6-840-ECO-LED4	5.5W	E26	120V	4000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88003	A19FR6-850-ECO-LED4	5.5W	E26	120V	5000K	80	450	15,000	No	1/48	4.13"	40W	Yes
88004	A19FR9-827-ECO-LED4	9W	E26	120V	2700K	80	800	15,000	No	1/48	4.13"	60W	Yes
88005	A19FR9-830-ECO-LED4	9W	E26	120V	3000K	80	800	15,000	No	1/48	4.13"	60W	Yes
88006	A19FR9-840-ECO-LED4	9W	E26	120V	4000K	80	800	15,000	No	1/48	4.13"	60W	Yes
88007	A19FR9-850-ECO-LED4	9W	E26	120V	5000K	80	800	15,000	No	1/48	4.13"	60W	Yes
88054	A19FR15-850-ECO-LED4	15W	E26	120V	5000K	80	1,600	15,000	No	1/48	4.64"	100W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

SPEC SHEET AVAILABLE HERE.

ProLED A19 Contractor Series 6-Pack



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
Non-Dimmable													
88036	A19FR9-827-ECO-LED4-6pk	9W	E26	120V	2700K	80	800	15,000	No	6/48	4.13"	60W	Yes
88037	A19FR9-830-ECO-LED4-6pk	9W	E26	120V	3000K	80	800	15,000	No	6/48	4.13"	60W	Yes
88038	A19FR9-840-ECO-LED4-6pk	9W	E26	120V	4000K	80	800	15,000	No	6/48	4.13"	60W	Yes
88039	A19FR9-850-ECO-LED4-6pk	9W	E26	120V	5000K	80	800	15,000	No	6/48	4.13"	60W	Yes
Dimmable													
88040	A19FR9-827-DIM-LED4-6pk	9W	E26	120V	2700K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88041	A19FR9-830-DIM-LED4-6pk	9W	E26	120V	3000K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88042	A19FR9-840-DIM-LED4-6pk	9W	E26	120V	4000K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
88043	A19FR9-850-DIM-LED4-6pk	9W	E26	120V	5000K	80	800	15,000	Yes	6/48	4.13"	60W	Yes
Dimmable-Title 20													
88044	A19FR9-927-DIM-LED4-T20-6pk	9W	E26	120V	2700K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88045	A19FR9-930-DIM-LED4-T20-6pk	9W	E26	120V	3000K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88046	A19FR9-940-DIM-LED4-T20-6pk	9W	E26	120V	4000K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes
88047	A19FR9-950-DIM-LED4-T20-6pk	9W	E26	120	5000K	90+	800	15,000	Yes	6/48	4.33"	60W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

SPEC SHEET AVAILABLE HERE.

ProLED A19 Omnidirectional A-Shape Series (GU24 Base)



Product #	Product Code	Wattage	Base	Voltage	Color Temp	CRI	Lumens	Useful Life	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
88055	A19FR9-827-GU24-LED	9W	GU24	120V	2700K	80	800	15,000	No	1/48	4.17"	60W	Yes
88056	A19FR9-830-GU24-LED	9W	GU24	120V	3000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88057	A19FR9-840-GU24-LED	9W	GU24	120V	4000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88058	A19FR9-850-GU24-LED	9W	GU24	120V	5000K	80	800	15,000	No	1/48	4.17"	60W	Yes
88059	A19FR11-827-GU24-LED	11W	GU24	121V	2700K	80	1,100	15,000	No	1/48	4.17"	75W	Yes
88060	A19FR15-840-GU24-LED	15W	GU24	122V	4000K	80	1,600	15,000	No	1/48	4.64"	100W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.



SPEC SHEET AVAILABLE HERE.

ProLED A19 Omnidirectional A-Shape Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
A15													
88008	A15FR5-827-DIM-LED4	5.5W	E26	120V	2700K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88009	A15FR5-830-DIM-LED4	5.5W	E26	120V	3000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88010	A15FR5-840-DIM-LED4	5.5W	E26	120V	4000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
88011	A15FR5-850-DIM-LED4	5.5W	E26	120V	5000K	80	450	25,000	Yes	1/48	3.26"	40W	Yes
A19													
88012	A19FR6-827-DIM-LED4	5.5W	E26	120V	2700K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88013	A19FR6-830-DIM-LED4	5.5W	E26	120V	3000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88014	A19FR6-840-DIM-LED4	5.5W	E26	120V	4000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88015	A19FR6-850-DIM-LED4	5.5W	E26	120V	5000K	80	450	15,000	Yes	1/48	4.33"	40W	Yes
88016	A19FR9-827-DIM-LED4	9W	E26	120V	2700K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88017	A19FR9-830-DIM-LED4	9W	E26	120V	3000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88018	A19FR9-840-DIM-LED4	9W	E26	120V	4000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88019	A19FR9-850-DIM-LED4	9W	E26	120V	5000K	80	800	15,000	Yes	1/48	4.33"	60W	Yes
88020	A19FR11-827-DIM-LED4	11W	E26	120V	2700K	80	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88021	A19FR11-830-DIM-LED4	11W	E26	120V	3000K	80	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88022	A19FR11-840-DIM-LED4	11W	E26	120V	4000K	80	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88023	A19FR11-850-DIM-LED4	11W	E26	120V	5000K	80	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88061	A19FR15-827-DIM-LED	15W	E26	120V	2700K	80	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88062	A19FR15-830-DIM-LED	15W	E26	120V	3000K	80	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88063	A19FR15-840-DIM-LED	15W	E26	120V	4000K	80	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88064	A19FR15-850-DIM-LED	15W	E26	120V	5000K	80	1,600	25,000	Yes	1/48	4.65"	100W	Yes
A21													
88048	A21FR17-827-DIM-LED4	17W	E26	120V	2700K	80	2,000	15,000	Yes	1/30	4.92"	125W	Yes
88049	A21FR17-830-DIM-LED4	17W	E26	120V	3000K	80	2,000	15,000	Yes	1/30	4.92"	125W	Yes
88050	A21FR17-840-DIM-LED4	17W	E26	120V	4000K	80	2,000	15,000	Yes	1/30	4.92"	125W	Yes
88051	A21FR17-850-DIM-LED4	17W	E26	120V	5000K	80	2,000	15,000	Yes	1/30	4.92"	125W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Performance A-Shape Lamp (Title 20)



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
88024	A19FR6-927-DIM-LED4-T20	6W	E26	120V	2700K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88025	A19FR6-930-DIM-LED4-T20	6W	E26	120V	3000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88026	A19FR6-940-DIM-LED4-T20	6W	E26	120V	4000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88027	A19FR6-950-DIM-LED4-T20	6W	E26	120V	5000K	90+	450	15,000	Yes	1/48	4.33"	40W	Yes
88028	A19FR9-927-DIM-LED4-T20	9W	E26	120V	2700K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88029	A19FR9-930-DIM-LED4-T20	9W	E26	120V	3000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88030	A19FR9-940-DIM-LED4-T20	9W	E26	120V	4000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88031	A19FR9-950-DIM-LED4-T20	9W	E26	120V	5000K	90+	800	15,000	Yes	1/48	4.33"	60W	Yes
88032	A19FR12-927-DIM-LED4-T20	11W	E26	120V	2700K	90+	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88033	A19FR12-930-DIM-LED4-T20	11W	E26	120V	3000K	90+	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88034	A19FR12-940-DIM-LED4-T20	11W	E26	120V	4000K	90+	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88035	A19FR12-950-DIM-LED4-T20	11W	E26	120V	5000K	90+	1,100	15,000	Yes	1/48	4.56"	75W	Yes
88068	A19FR15-950-DIM-LED-T20	15W	E26	120V	5000K	90+	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88052	A21-FR21-930-DIM-LED-T20	21W	E26	120V	5000K	90+	2,600	15,000	Yes	1/30	4.92"	150W	Yes
88053	A21-FR21-950-DIM-LED-T20	21W	E26	120V	5000K	90+	2,600	15,000	Yes	1/30	4.92"	150W	Yes

• Indicates new products added

SPEC SHEET AVAILABLE HERE.

ProLED Performance A-Shape Lamp Title24/JA & Title 24



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
88065	A19FR15-927-DIM-LED-T20JA82019	15W	E26	120V	2700K	90+	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88066	A19FR15-930-DIM-LED-T20JA82019	15W	E26	120V	3000K	90+	1,600	25,000	Yes	1/48	4.65"	100W	Yes
88067	A19FR15-940-DIM-LED-T20JA82019	15W	E26	120V	4000K	90+	1,600	25,000	Yes	1/48	4.65"	100W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Performance Reflector Lamps



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
84985	BR30FL8/927/T20/LED	8W	E26	120V	2700K	90	720	25,000	Yes	1/48	3.11"	65W	Yes
84986	BR30FL8/930/T20/LED	8W	E26	120V	3000K	90	720	25,000	Yes	1/48	3.11"	65W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED BR40



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
80981	BR40FL11/827/LED	11.5W	E26	120V	2700K	82	940	25,000	Yes	1/6	6.46"	75W	Yes
80980	BR40FL11/830/LED	11.5W	E26	120V	3000K	82	940	25,000	Yes	1/6	6.46"	75W	Yes
80983	BR40FL16/827/LED	16.5W	E26	120V	2700K	82	1,200	25,000	Yes	1/6	6.46"	85W	Yes
80982	BR40FL16/830/LED	16.5W	E26	120V	3000K	82	1,200	25,000	Yes	1/6	6.46"	85W	Yes
80984	BR40FL16/840/LED	16.5W	E26	120V	4000K	82	1,200	25,000	Yes	1/6	6.46"	85W	Yes
80985	BR40FL16/850/LED	16.5W	E26	120V	5000K	82	1,200	25,000	Yes	1/6	6.46"	85W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED BR30



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
80990	BR30FL8/827ECO/LED	8W	E26	120V	2700K	82	650	25,000	Yes	1/6	5.12"	65W	Yes
80991	BR30FL8/830/ECOLED	8W	E26	120V	3000K	82	650	25,000	Yes	1/6	5.12"	65W	Yes
80988	BR30FL8/PNK/LED	8W	E26	120V	Pink	82	-	40,000	Yes	1/6	5.12"	65W	No
80976	BR30FL10/827/LED	9.5W	E26	120V	2700K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80977	BR30FL10/830/LED	9.5W	E26	120V	3000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80978	BR30FL10/840/LED	9.5W	E26	120V	4000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes
80979	BR30FL10/850/LED	9.5W	E26	120V	5000K	82	750	25,000	Yes	1/6	5.12"	65W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.



[SPEC SHEET AVAILABLE HERE.](#)

ProLED BR30 Contractor Series 6-Pack



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
82172	BR30FL8/827/ECO/LED/6	8W	E26	120V	2700K	82	650	15,000	Yes	6/24	5.20"	65W	Yes
82170	BR30FL8/830/ECO/LED/6	8W	E26	120V	3000K	82	650	15,000	Yes	6/24	5.20"	65W	Yes

15,000 hour useful life rating is based on a maximum ambient temperature of 45°C. Exceeding this ambient temperature rating may result in reduced life.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED R20



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
80989	R20FL6/827/LED	6.5W	E26	120V	2700K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
80986	R20FL6/830/LED	6.5W	E26	120V	3000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
81164	R20FL6/840/LED	6.5W	E26	120V	4000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes
80987	R20FL6/850/LED	6.5W	E26	120V	5000K	82	525	25,000	Yes	1/6	3.94"	50W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Prime PAR Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
PAR20																
83142	PAR20NFL7/927/WH/LED2	Narrow Flood, White	7W	E26	120V	2700K	90	550	2500	50,000	Yes	6/24	25°	3.14"	50W	Yes
83143	PAR20NFL7/930/WH/LED2	Narrow Flood, White	7W	E26	120V	3000K	90	550	2500	50,000	Yes	6/24	25°	3.14"	50W	Yes
83144	PAR20NFL7/930/BH/LED2	Narrow Flood, Black	7W	E26	120V	3000K	90	550	2500	50,000	Yes	6/24	25°	3.14"	50W	Yes
83145	PAR20NFL7/940/WH/LED2	Narrow Flood, White	7W	E26	120V	4000K	90	550	2500	50,000	Yes	6/24	25°	3.14"	50W	Yes
83146	PAR20NFL7/950/WH/LED2	Narrow Flood, White	7W	E26	120V	2700K	90	550	2500	50,000	Yes	6/24	25°	3.14"	50W	Yes
83147	PAR20FL7/927/WH/LED2	Flood, White	7W	E26	120V	2700K	90	550	1000	50,000	Yes	6/24	40°	3.14"	50W	Yes
83148	PAR20FL7/927/BH/LED2	Flood, Black	7W	E26	120V	2700K	90	550	1000	50,000	Yes	6/24	40°	3.14"	50W	Yes
83149	PAR20FL7/930/WH/LED2	Flood, White	7W	E26	120V	3000K	90	550	1000	50,000	Yes	6/24	40°	3.14"	50W	Yes
83150	PAR20FL7/930/BH/LED2	Flood, Black	7W	E26	120V	3000K	90	550	1000	50,000	Yes	6/24	40°	3.14"	50W	Yes
83151	PAR20FL7/940/WH/LED2	Flood, White	7W	E26	120V	4000K	90	500	865	50,000	Yes	6/24	40°	3.39"	50W	Yes
83152	PAR20FL7/940/BH/LED2	Flood, Black	7W	E26	120V	4000K	90	500	865	50,000	Yes	6/24	40°	3.39"	50W	Yes
83153	PAR20FL7/950/WH/LED2	Flood, White	7W	E26	120V	5000K	90	550	1000	50,000	Yes	6/24	40°	3.14"	50W	Yes
PAR30 Long Neck																
83200	PAR30FL12L/927/WH/LED2	Flood, White	12W	E26	120V	2700K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83202	PAR30FL12L/930/WH/LED2	Flood, White	12W	E26	120V	3000K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83203	PAR30FL12L/930/BH/LED2	Flood, Black	12W	E26	120V	3000K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83204	PAR30FL12L/940/WH/LED2	Flood, White	12W	E26	120V	4000K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83205	PAR30FL12L/940/BH/LED2	Flood, Black	12W	E26	120V	4000K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83206	PAR30FL12L/950/WH/LED2	Flood, White	12W	E26	120V	5000K	90	1,050	2300	50,000	Yes	6/24	40°	4.37"	75W	Yes
83207	PAR30NFL12L/927/WH/LED2	Narrow Flood, White	12W	E26	120V	2700K	90	1,050	4815	50,000	Yes	6/24	25°	4.37"	75W	Yes
83209	PAR30NFL12L/930/WH/LED2	Narrow Flood, White	12W	E26	120V	3000K	90	1,050	4675	50,000	Yes	6/24	25°	4.37"	75W	Yes
83210	PAR30NFL12L/950/WH/LED2	Narrow Flood, White	12W	E26	120V	5000K	90	1,050	4675	50,000	Yes	6/24	25°	4.37"	75W	Yes

ProLED Prime PAR Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
PAR30 Short Neck																
83111	PAR30FL12S/927/WH/LED2	Flood, White	12W	E26	120V	2700K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83112	PAR30FL12S/927/BH/LED2	Flood, Black	12W	E26	120V	2700K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83113	PAR30FL12S/930/WH/LED2	Flood, White	12W	E26	120V	3000K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83114	PAR30FL12S/930/BH/LED2	Flood, Black	12W	E26	120V	3000K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83115	PAR30FL12S/940/WH/LED	Flood, White	12W	E26	120V	4000K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83116	PAR30FL12S/940/BH/LED2	Flood, Black	12W	E26	120V	4000K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83118	PAR30FL12S/950/WH/LED2	Flood, White	12W	E26	120V	5000K	90	1,050	2300	50,000	Yes	6/24	40°	3.26"	75W	Yes
83208	PAR30NFL12S/927/WH/LED2	Narrow Flood, White	12W	E26	120V	2700K	90	1,050	4800	50,000	Yes	6/24	25°	3.26"	75W	Yes
83120	PAR30NFL12S/930/WH/LED2	Narrow Flood, White	12W	E26	120V	3000K	90	1,050	4800	50,000	Yes	6/24	25°	3.26"	75W	Yes
83121	PAR30NFL12S/930/BH/LED2	Narrow Flood, Black	12W	E26	120V	3000K	90	1,050	4800	50,000	Yes	6/24	25°	3.26"	75W	Yes
83122	PAR30NFL12S/940/WH/LED2	Narrow Flood, White	12W	E26	120V	4000K	90	1,050	4800	50,000	Yes	6/24	25°	3.26"	75W	Yes
PAR38																
83123	PAR38FL17/927/WH/LED2	Flood, White	17W	E26	120V	2700K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83124	PAR38FL17/927/BH/LED2	Flood, Black	17W	E26	120V	2700K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83125	PAR38FL17/930/WH/LED2	Flood, White	17W	E26	120V	3000K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83126	PAR38FL17/930/BH/LED2	Flood, Black	17W	E26	120V	3000K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83127	PAR38FL17/940/WH/LED2	Flood, White	17W	E26	120V	4000K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83129	PAR38FL17/950/WH/LED2	Flood, White	17W	E26	120V	5000K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83130	PAR38NFL17/927/WH/LED2	Narrow Flood, White	17W	E26	120V	2700K	90	1,370	2800	50,000	Yes	6/24	40°	5.11"	120W	Yes
83131	PAR38NFL17/927/BH/LED2	Narrow Flood, Black	17W	E26	120V	2700K	90	1,370	7400	50,000	Yes	6/24	25°	5.11"	120W	Yes
83132	PAR38NFL17/930/WH/LED2	Narrow Flood, White	17W	E26	120V	3000K	90	1,370	7400	50,000	Yes	6/24	25°	5.11"	120W	Yes
83134	PAR38NFL17/940/WH/LED2	Narrow Flood, White	17W	E26	120V	4000K	90	1,370	7400	50,000	Yes	6/24	25°	5.11"	120W	Yes
83135	PAR38NFL17/950/WH/LED2	Narrow Flood, White	17W	E26	120V	5000K	90	1370	7400	50,000	Yes	6/24	25°	5.11"	120W	Yes

For details on ProLED PAR16, see ProLED Commercial MR16/PAR16 Series Sell Sheet. Not for use in enclosed fixtures.

SPEC SHEET AVAILABLE HERE.

ProLED ECO PAR Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
PAR20																
82963	PAR20FL7/827/ECO2/LED	Flood	7W	E26	120V	2700K	82	500	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82964	PAR20FL7/830/ECO2/LED	Flood	7W	E26	120V	3000K	82	530	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82965	PAR20FL7/840/ECO2/LED	Flood	7W	E26	120V	4000K	82	550	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
82966	PAR20FL7/850/ECO2/LED	Flood	7W	E26	120V	5000K	82	570	600	25,000	Yes	1/20	40°	3.39"	50W	Yes
PAR30L																
82958	PAR30FL10L/827/ECO2/LED	Flood	10W	E26	120V	2700K	82	760	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82959	PAR30FL10L/830/ECO2/LED	Flood	10W	E26	120V	3000K	82	800	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82960	PAR30FL10L/840/ECO2/LED	Flood	10W	E26	120V	4000K	82	840	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82967	PAR30FL10L/850/ECO2/LED	Flood	10W	E26	120V	5000K	82	880	1120	25,000	Yes	1/15	40°	4.61"	60W	Yes
82968	PAR30NFL10L/830/ECO2/LED	Narrow Flood	10W	E26	120V	3000K	82	800	1120	25,000	Yes	1/15	25°	4.61"	60W	Yes

Continue to next page for additional product information



ProLED ECO PAR Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
PAR30S																
81961	PAR30FL10S/827/ECO2/LED	Flood	10W	E26	120V	2700K	82	760	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
81962	PAR30FL10S/830/ECO2/LED	Flood	10W	E26	120V	3000K	82	800	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
82969	PAR30FL10S/840/ECO2/LED	Flood	10W	E26	120V	4000K	82	840	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
82970	PAR30FL10S/850/ECO2/LED	Flood	10W	E26	120V	5000K	82	880	960	25,000	Yes	1/15	40°	3.35"	75W	Yes
82971	PAR30NFL10S/830/ECO2/LED	Narrow Flood	10W	E26	120V	3000K	82	800	960	25,000	Yes	1/15	25°	3.35"	75W	Yes
PAR38																
81953	PAR38FL15/827/ECO2/LED	Flood	15W	E26	120V	2700K	82	1,150	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81954	PAR38FL15/830/ECO2/LED	Flood	15W	E26	120V	3000K	82	1,200	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81955	PAR38FL15/840/ECO2/LED	Flood	15W	E26	120V	4000K	82	1,250	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81956	PAR38FL15/850/ECO2/LED	Flood	15W	E26	120V	5000K	82	1,200	1800	25,000	Yes	1/15	40°	5.08"	90W	Yes
81957	PAR38NFL15/830/ECO2/LED	Narrow Flood	15W	E26	120V	3000K	82	1,200	3600	25,000	Yes	1/15	25°	5.08"	90W	Yes
82972	PAR38NFL15/850/ECO2/LED	Narrow Flood	15W	E26	120V	3000K	82	1,200	3600	25,000	Yes	1/15	25°	5.08"	90W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Performance PAR Lamps



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
84987	PAR30FL12S/927/T20/LED	12W	E26	120V	2700K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84988	PAR30FL12S/930/T20/LED	12W	E26	120V	3000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84989	PAR30FL12S/940/T20/LED	12W	E26	120V	4000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84990	PAR30FL12S/950/T20/LED	12W	E26	120V	5000K	94	975	25,000	Yes	1/48	3.74"	75W	Yes
84991	PAR30FL12L/927/T20/LED	12W	E26	120V	2700K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84992	PAR30FL12L/930/T20/LED	12W	E26	120V	3000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84993	PAR30FL12L/940/T20/LED	12W	E26	120V	4000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84994	PAR30FL12L/950/T20/LED	12W	E26	120V	5000K	94	975	25,000	Yes	1/48	4.41"	75W	Yes
84995	PAR38FL15/927/T20/LED	15W	E26	120V	2700K	94	1,250	25,000	Yes	1/30	4.88"	90W	Yes
84996	PAR38FL15/930/T20/LED	15W	E26	120V	3000K	94	1,250	25,000	Yes	1/30	4.88"	90W	Yes
84997	PAR38FL15/940/T20/LED	15W	E26	120V	4000K	94	1,250	25,000	Yes	1/30	4.88"	90W	Yes
84998	PAR38FL15/950/T20/LED	15W	E26	120V	5000K	94	1,250	25,000	Yes	1/30	4.88"	90W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED MR11



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81093	MR11FTD/827/LED	Flood	3W	GU4	10-18V	2700K	82	230	420	40,000	Yes	1/10	30°	1.42"	20W	No
81094	MR11FTD/827/BA15D/LED	Flood	3W	BA15d	10-15V	2700K	82	230	420	40,000	Yes	1/10	30°	1.42"	20W	No
81095	MR11FTD/850/LED	Flood	3W	GU4	10-18V	2700K	82	250	500	40,000	Yes	1/10	30°	1.42"	20W	No
81096	MR11FTC/827/LED	Narrow Flood	4.5W	GU4	10-18V	2700K	82	230	600	40,000	Yes	1/10	22°	1.42"	20W	No

Use on incompatible systems may shorten lamp life. Acceptable for use in sealed metal landscape luminaires when protected from the elements. May not be compatible with all electronic transformers. Magnetic transformers are recommended for Dimmable applications. Not for use in enclosed luminaires. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.

SPEC SHEET AVAILABLE HERE.

ProLED Outdoor PAR36



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81074	PAR36WFL4/827/IP67/1LED	Wide Flood	4.5W	MP Term	10-15V	2700K	82	300	700	40,000	Yes	1/6	32°	2.40"	20W	No
81075	PAR36WFL6/827/IP67/LED	Wide Flood	6.5W	MP Term	10-15V	2700K	82	450	1100	40,000	Yes	1/6	32°	2.40"	35W	No
81076	PAR36WFL12/827/IP67/LED	Wide Flood	12.5W	MP Term	10-15V	2700K	82	800	2000	40,000	Yes	1/6	32°	2.40"	50W	No

Not for use in enclosed luminaires. May not be compatible with all electronic transformers. Rated for outdoor use only.

SPEC SHEET AVAILABLE HERE.

ProLED Outdoor PAR36 RGB-W Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
82142	PAR36WFL10/RGBW/IP165/LED	Wide Flood	10W	MP Term	10-15V	RGB-W + 2700K	80	800 (max)	40,000	Yes	1/6	32°	2.40"	50W	No

May not be compatible with electronic transformers. Suitable for use in sealed metal landscape luminaires. IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. This lamp is not for submersible use. Warranty – Commercial / Industrial: This product is warranted for 5 years from the date of purchase. Not for use on dimmers, timing devices, photo sensors or occupancy sensors

SPEC SHEET AVAILABLE HERE.

ProLED PAR36/AR111 Indoor



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81097	PAR36FL11/827/LED	Flood	11.5W	MP Term	12V	2700K	82	870	2000	40,000	Yes	1/6	32°	1.97"	50W	No
80863	PAR36FL17/827/LED	Flood	17W	MP Term	12V	2700K	82	1,000	2300	40,000	Yes	1/6	32°	1.97"	75W	No

Not for use in enclosed luminaires. May not be compatible with all electronic transformers. Rated for indoor use only

SPEC SHEET AVAILABLE HERE.

Linear LED Plug-In Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
82352	PLL13-830-DIR-LED	13W	2G11	120-277V	3000K	>80	2,050	50,000	No	25	21.8"	40W	Yes
82353	PLL13-835-DIR-LED	13W	2G11	120-277V	3500K	>80	2,050	50,000	No	25	21.8"	40W	Yes
82354	PLL13-840-DIR-LED	13W	2G11	120-277V	4000K	82	2,100	50,000	No	25	21.8"	40W	Yes
82349	PLL17-830-BYP-LED	17W	2G11	120-277V	3000K	>80	2,050	50,000	No	25	21.8"	40W	Yes
82350	PLL17-835-BYP-LED	17W	2G11	120-277V	3500K	82	2,150	50,000	No	25	21.8"	40W	Yes
82351	PLL17-840-BYP-LED	17W	2G11	120-277V	4000K	>80	2,200	50,000	No	25	21.8"	40W	Yes



[SPEC SHEET AVAILABLE HERE.](#)

ProLED PL Bypass Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
Vertical													
81141	PL10V/835/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	3500K	82	1,000	50,000	No	1/10	4.60"	26W	No
81142	PL10V/841/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	4100K	82	1,000	50,000	No	1/10	4.60"	26W	No
81143	PL10V/850/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	5000K	82	1,000	50,000	No	1/10	4.60"	26W	No
Horizontal													
81144	PL10H/835/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	3500K	82	1,000	50,000	No	1/10	5.20"	26W	No
81145	PL10H/841/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	4100K	82	1,000	50,000	No	1/10	5.20"	26W	No
81146	PL10H/850/BYP/LED	10W	G24q/GX24q/G24d/GX24d	120-277V	5000K	82	1,000	50,000	No	1/10	5.20"	26W	No

Must be operated with an ambient luminaire temperature between -4°F(-20°C) and 122°F(50°C). Specifications are based on use with normal ballast factor ballasts (0.88).

[SPEC SHEET AVAILABLE HERE.](#)

ProLED PL Direct Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
Vertical													
82112	PL12V/835/DIR/LED2	12W	G24q/GX24q	120-277V	3500K	82	1,200	50,000	No	1/10	4.60"	26W	Yes
82113	PL12V/840/DIR/LED2	12W	G24q/GX24q	120-277V	4000K	82	1,200	50,000	No	1/10	4.60"	26W	Yes
82114	PL12V/850/DIR/LED2	12W	G24q/GX24q	120-277V	5000K	82	1,200	50,000	No	1/10	4.60"	26W	Yes
Horizontal													
82117	PL12H/835/DIR/LED2	12W	G24q/GX24q	120-277V	3500K	82	1,200	50,000	No	1/10	5.20"	26W	Yes
82118	PL12H/840/DIR/LED2	12W	G24q/GX24q	120-277V	4000K	82	1,200	50,000	No	1/10	5.20"	26W	Yes
82119	PL12H/850/DIR/LED2	12W	G24q/GX24q	120-277V	5000K	82	1,200	50,000	No	1/10	5.20"	26W	Yes

[SPEC SHEET AVAILABLE HERE.](#)

ProLED PL Hybrid Series



Product #	Product Code	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	DLC Qualified ³
81159	PL6H/827/HYB/LED	6W	GX23	120-277V	2700K	82	520	50,000	No	1/10	5.50"	13W	No
81160	PL6H/830/HYB/LED	6W	GX23	120-277V	3000K	82	520	50,000	No	1/10	5.50"	13W	No
81161	PL6H/835/HYB/LED	6W	GX23	120-277V	3500K	82	520	50,000	No	1/10	5.50"	13W	No
81162	PL6H/840/HYB/LED	6W	GX23	120-277V	4000K	82	520	50,000	No	1/10	5.50"	13W	No
81163	PL6H/850/HYB/LED	6W	GX23	120-277V	5000K	82	520	50,000	No	1/10	5.50"	13W	No

* Can be mounted vertical / works with or without ballast / ICAT Rated

[SPEC SHEET AVAILABLE HERE.](#)


ProLED B11 Chandelier



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
80094	B11CL3/827/LED	Cream Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80789	B11CL3/827/BR/LED	Brass Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80790	B11CL3/827/CHR/LED	Chrome Finish	3W	E12	120V	2700K	82	180	25,000	Yes	1/10	3.78"	25W	No
80185	B11CL3/830/LED	Cream Finish	3W	E12	120V	3000K	82	180	25,000	Yes	1/10	3.78"	25W	No
80820	B11CL5/827/LED	Cream Finish	4.5W	E12	120V	2700K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80168	B11CL5/827/E26/LED	Cream Finish	4.5W	E26	120V	2700K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80183	B11CL5/830/E26/LED	Cream Finish	4.5W	E26	120V	3000K	82	300	25,000	Yes	1/10	3.78"	40W	Yes
80184	B11CL5/830/LED	Cream Finish	4.5W	E12	120V	3000K	82	300	25,000	Yes	1/10	3.78"	40W	Yes

SPEC SHEET AVAILABLE HERE.

ProLED Decorative Chandelier

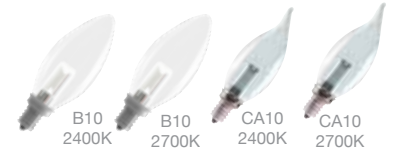

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
B10														
80172	B10CL1/827/LED	Clear Torpedo	1W	E12	120V	2700K	82	25	25,000	Yes	1/25	3.77"	7.5W	No
CA10														
80174	CA10CL1/827/LED	Clear Flame Tip	1W	E12	120V	2700K	82	25	25,000	Yes	1/25	4.01"	7.5W	No

Not for use in enclosed luminaires.

SPEC SHEET AVAILABLE HERE.

ProLED G25 Series Globe



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
80180	G25FR6/830/LED	Globe	6W	E26	120V	3000K	82	470	25,000	Yes	1/6	4.25"	40W	Yes

Use on incompatible systems may shorten lamp life

SPEC SHEET AVAILABLE HERE.

SPEC SHEET AVAILABLE HERE.

ProLED Filament LED Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
B11														
85051	B11CL2/ANT/827/LED2	Clear Filament	2.5W	E12	120V	2700K	82	180	15,000	Yes	1/10	3.78"	25W	Yes
85053	B11CL4/ANT/830/LED2	Clear Filament	4.5W	E12	120V	3000K	82	350	15,000	Yes	1/10	3.78"	40W	Yes
85054	B11CL4/ANT/827/LED2	Clear Filament	3.8W	E12	120V	2700K	82	300	15,000	Yes	1/10	3.72"	40W	Yes
85055	B11CL4ANT/827/E26/LED2	Clear Filament	3.8W	E26	120V	2700K	82	300	15,000	Yes	1/10	3.78"	40W	Yes
85058	B11CL5ANT/827/LED2	Clear Filament	5.5W	E12	120V	2700K	82	500	15,000	Yes	1/10	3.72"	60W	No
85059	B11AMB5ANT/822/LED2	Amber Filament	5.5W	E12	120V	2200K	82	400	15,000	Yes	1/10	3.78"	60W	Yes
85060	B11CL5/ANT/830/LED2	Clear Filament	5.5W	E12	120V	3000K	82	500	15,000	Yes	1/10	3.72"	60W	Yes
85157	B11CL5ANT/827/E26/LED2	Clear Filament	5W	E26	120V	2700K	82	500	15,000	Yes	10/100	3.72"	40W	No
CA10														
85061	CA10CL2ANT/827/LED2	Clear Filament	2.5W	E12	120V	2700K	82	180	15,000	Yes	1/10	4.09"	25W	Yes
85065	CA10CL4ANT/827/LED2	Clear Filament	3.8W	E12	120V	2700K	82	300	15,000	Yes	1/10	3.72"	40W	Yes
85066	CA10CL4ANT/830/LED2	Clear Filament	4.5W	E12	120V	3000K	82	350	15,000	Yes	1/10	3.78"	40W	Yes
85082	CA10FR4ANT/827/LED2	Frosted Filament	3.8W	E12	120V	2700K	82	300	15,000	Yes	1/10	3.78"	40W	Yes
A15														
85032	A15CL5ANT/827/LED2	Clear Filament	5W	E26	120V	2700K	82	450	15,000	Yes	1/10	4.13"	40W	Yes
A19														
85037	A19CL5ANT/827/LED2	Clear Filament	5.5W	E26	120V	2700K	82	450	15,000	Yes	1/10	4.13"	40W	Yes
85038	A19AMB5ANT/820/LED2	Frosted Filament	5.5W	E26	120V	2000K	82	450	15,000	Yes	1/10	4.13"	40W	Yes
85039	A19CL9ANT/827/LED2	Clear Filament	9W	E26	120V	2700K	82	800	15,000	Yes	1/10	4.13"	60W	Yes
85040	A19FR9ANT/827/LED2	Frosted Filament	9W	E26	120V	2700K	82	800	15,000	Yes	1/10	4.13"	60W	Yes
85144	9A19-CL-FLED3-930-D	Clear Filament	9W	E26	120	3000K	90	800	15,000	Yes	1/60	4.13	60W	Yes
85148	9A19-CL-FLED3-927-D	Clear Filament	9W	E26	120	2700K	90	800	15,000	Yes	1/60	4.13	60W	Yes

● Indicates new products added

** Wet location listed. ENERGY STAR[®] mandates that lamps may only be listed at 25,000 hour life with 3,000 hour actual life test data, 6,000 hour LM80 data and in-situ temperature measurements. Upon completion of full lifetime testing, ProLED ENERGY STAR[®] listed lamps will be listed at their full lifetime.

Continue to next page for additional product information



ProLED Filament LED Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
S14														
81139**	S14CL2ANT/827/LED	Clear Filament	2W	E26	120V	2700K	82	200	15,000	No	25/100	3.46"	25W	Yes
81140**	S14AMB2ANT/822/LED	Amber Filament	2W	E26	120V	2200K	82	160	15,000	No	25/100	3.46"	25W	Yes
82139**	S14CL2ANT/827/LED2	Clear Filament	2W	E26	120V	2700K	82	200	15,000	Yes	25/100	3.46"	25W	No
82140**	S14AMB2ANT/822/LED2	Amber Filament	2W	E26	120V	2200K	82	160	15,000	Yes	25/100	3.46"	25W	No
G16.5														
85071	G16.5CL4ANT/827/LED2	Clear Filament	4.5W	E12	120V	2700K	82	350	15,000	Yes	1/10	4.13"	40W	Yes
G25														
85047	G25CL5ANT/827/LED2	Clear Filament	5.5W	E26	120V	2700K	82	500	15,000	Yes	1/10	4.60"	60W	Yes
85048	G25FR5ANT/827/LED2	Frosted Filament	5.5W	E26	120V	2700K	82	500	15,000	Yes	1/10	4.60"	60W	Yes
85049	G25CL5ANT/830/LED2	Clear Filament	5.5W	E26	120V	3000K	82	500	15,000	Yes	1/10	4.60"	60W	Yes
85172	G25CL8ANT/827/LED2	Clear Filament	8W	E26	120V	2700K	82	800	15,000	Yes	10/60	4.52"	60W	Yes
ST19														
85043	ST19CL5ANT/827/LED2	Clear Filament	5.5W	E26	120V	2700K	82	500	15,000	Yes	1/10	5.79"	60W	Yes
85044	ST19AMB5ANT/822/LED2	Amber Filament	5.5W	E26	120V	2200K	82	400	15,000	Yes	1/10	5.79"	40W	Yes
85146	ST19AMB8ANT/822/LED2	Amber Filament	8W	E26	120V	2200K	82	650	15,000	Yes	10/60	5.79"	40W	Yes
85143	9ST19-CL-FLED3-930-D	Clear Filament	9W	E26	120V	3000K	90	800	15,000	Yes	1 / 60	5.79"	60W	Yes
85147	9ST19-CL-FLED3-927-D	Clear Filament	9W	E26	120V	2700K	90	800	15,000	Yes	1 / 60	5.79"	60W	Yes
T10														
85074	T10CL4ANT/827/LED2	Clear Filament	4.5W	E26	120V	2700K	82	350	15,000	Yes	1/10	7.44"	40W	No
T14														
85073	T14CL4ANT/827/LED2	Clear Filament	4.5W	E26	120V	2700K	82	450	15,000	Yes	1/10	3.46"	25W	Yes

● Indicates new products added

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Sign Lamp Series



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
S11														
80525	S11CL1C/827/INT/LED	Clear, IP65 Rated	1.2W	E17	120V	2700K	82	35	40,000	Yes	1/25	2.24"	11W	No
80524	S11CL1C/827/LED	Clear, IP65 Rated	1.2W	E26	120V	2700K	82	35	40,000	Yes	1/25	2.24"	11W	No
80526	S11WH1C/LED	White, IP65 Rated	1.2W	E26	120V	White	-	-	40,000	Yes	1/25	2.24"	11W	No
S14														
80522	S14CL1C/827/LED	Clear, IP65 Rated	1.4W	E26	120V	2700K	82	35	40,000	Yes	1/25	3.35"	11W	No
80517	S14RED1C/LED	Red, IP65 Rated	1.4W	E26	120V	Red	-	-	40,000	Yes	1/25	3.35"	11W	No
80518	S14BLU1C/LED	Blue, IP65 Rated	1.4W	E26	120V	Blue	-	-	40,000	Yes	1/25	3.35"	11W	No
80519	S14GRN1C/LED	Green, IP65 Rated	1.4W	E26	120V	Green	-	-	40,000	Yes	1/25	3.35"	11W	No
80520	S14YEL1C/LED	Yellow, IP65 Rated	1.4W	E26	120V	Yellow	-	-	40,000	Yes	1/25	3.35"	11W	No
80521	S14WH1C/LED	White, IP65 Rated	1.4W	E26	120V	White	-	-	40,000	Yes	1/25	3.35"	11W	No
80523	S14ORG1C/LED	Orange, IP65 Rated	1.4W	E26	120V	Orange	-	-	40,000	Yes	1/25	3.35"	11W	No

Not for use in enclosed luminaires.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Elevator Lamp

5 YR WARRANTY



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
80756	GBF/3WW/LED	Flood	2.6W	BA15d	10-18V	2700K	82	410	145	40,000	No	1/10	31°	2.52"	20W	No
80701	1383/3WW/LED	Flood	2.6W	BA15s	10-18V	2700K	82	410	145	40,000	No	1/10	31°	2.52"	20W	No

[SPEC SHEET AVAILABLE HERE.](#)

ProLED MR16 GU10

5 YR WARRANTY



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
80529	MR16FL4/827/GU10/LED	Flood	4.5W	GU10	120V	2700K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80887	MR16FL4/830/GU10/LED	Flood	4.5W	GU10	120V	3000K	82	370	525	25,000	Yes	1/10	40°	2.17"	35W	Yes
80531	MR16FL4/840/GU10/LED	Flood	4.5W	GU10	120V	4000K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80533	MR16FL4/850/GU10/LED	Flood	4.5W	GU10	120V	5000K	82	360	525	25,000	Yes	1/10	40°	2.70"	35W	No
80528	MR16FL6/827/GU10/LED	Flood	6.5W	GU10	120V	2700K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	No
80888	MR16FL6/830/GU10/LED	Flood	6.5W	GU10	120V	3000K	82	520	730	25,000	Yes	1/10	40°	2.17"	50W	Yes
80530	MR16FL6/840/GU10/LED	Flood	6.5W	GU10	120V	4000K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	No
80532	MR16FL6/850/GU10/LED	Flood	6.5W	GU10	120V	5000K	82	500	730	25,000	Yes	1/10	40°	2.17"	50W	Yes



SPEC SHEET AVAILABLE HERE.

ProLED MR16



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR®
81055	MR16NFL10/827/LED	Narrow Flood	2.5W	GU5.3	10-18V	2700K	82	200	800	40,000	Yes	1/10	20°	1.97"	10W	No
81079	MR16NFL10/830/LED	Narrow Flood	2.5W	GU5.3	10-18V	3000K	82	210	830	40,000	Yes	1/10	20°	1.97"	10W	No
81056	MR16FL10/827/LED	Flood	2.5W	GU5.3	10-18V	2700K	82	200	300	40,000	Yes	1/10	40°	1.97"	10W	No
81057	MR16WFL10/827/LED	Wide Flood	2.5W	GU5.3	10-18V	2700K	82	200	200	40,000	Yes	1/10	60°	1.97"	10W	No
81080	MR16WFL10/830/LED	Wide Flood	2.5W	GU5.3	10-18V	3000K	82	210	220	40,000	Yes	1/10	60°	1.97"	10W	No
81059	MR16BBF/827/LED	Narrow Flood	4W	GU5.3	10-18V	2700K	82	270	900	40,000	Yes	1/10	20°	1.97"	20W	Yes
81081	MR16BBF/830/LED	Narrow Flood	4W	GU5.3	10-18V	3000K	82	280	1100	40,000	Yes	1/10	20°	1.97"	20W	Yes
81060	MR16BAB/827/LED	Flood	4W	GU5.3	10-18V	2700K	82	270	440	40,000	Yes	1/10	40°	1.97"	20W	Yes
81062	MR16BAB/830/LED	Flood	4W	GU5.3	10-18V	3000K	82	280	500	40,000	Yes	1/10	40°	1.97"	20W	Yes
81063	MR16BAB/850/LED	Flood	4W	GU5.3	10-18V	5000K	82	310	530	40,000	Yes	1/10	40°	1.97"	20W	Yes
81061	MR16WFL20/827/LED	Wide Flood	4W	GU5.3	10-18V	2700K	82	270	210	40,000	Yes	1/10	60°	1.97"	20W	No
81082	MR16WFL20/830/LED	Wide Flood	4W	GU5.3	10-18V	3000K	82	280	230	40,000	Yes	1/10	60°	1.97"	20W	No
81064	MR16FRA/827/LED	Narrow Flood	4.5W	GU5.3	10-18V	2700K	82	380	1700	40,000	Yes	1/10	20°	1.97"	35W	Yes
81083	MR16FRA/830/LED	Narrow Flood	4.5W	GU5.3	10-18V	3000K	82	390	1800	40,000	Yes	1/10	20°	1.97"	35W	Yes
81065	MR16FMW/827/LED	Flood	4.5W	GU5.3	10-18V	2700K	82	380	600	40,000	Yes	1/10	40°	1.97"	35W	Yes
81067	MR16FMW/830/LED	Flood	4.5W	GU5.3	10-18V	3000K	82	390	650	40,000	Yes	1/10	40°	1.97"	35W	Yes
81068	MR16FMW/850/LED	Flood	4.5W	GU5.3	10-18V	5000K	82	430	700	40,000	Yes	1/10	40°	1.97"	35W	Yes
81066	MR16WFL35/827/LED	Wide Flood	4.5W	GU5.3	10-18V	2700K	82	380	300	40,000	Yes	1/10	60°	1.97"	35W	No
81084	MR16WFL35/830/LED	Wide Flood	4.5W	GU5.3	10-18V	3000K	82	390	320	40,000	Yes	1/10	60°	1.97"	35W	No
81069	MR16EXZ/827/LED	Narrow Flood	8W	GU5.3	10-18V	2700K	82	590	2700	40,000	Yes	1/10	20°	1.97"	50W	No
81085	MR16EXZ/830/LED	Narrow Flood	8W	GU5.3	10-18V	3000K	82	600	2800	40,000	Yes	1/10	20°	1.97"	50W	No
81070	MR16EXN/827/LED	Flood	8W	GU5.3	10-18V	2700K	82	590	1100	40,000	Yes	1/10	40°	1.97"	50W	No
81072	MR16EXN/830/LED	Flood	8W	GU5.3	10-18V	3000K	82	600	1200	40,000	Yes	1/10	40°	1.97"	50W	No
81073	MR16EXN/850/LED	Flood	8W	GU5.3	10-18V	5000K	82	660	1400	40,000	Yes	1/10	40°	1.97"	50W	No
81071	MR16FNV/827/LED	Wide Flood	8W	GU5.3	10-18V	2700K	82	590	500	40,000	Yes	1/10	60°	1.97"	50W	No
81086	MR16FNV/830/LED	Wide Flood	8W	GU5.3	10-18V	3000K	82	600	520	40,000	Yes	1/10	60°	1.97"	50W	No

Acceptable for use in sealed metal landscape luminaires when protected from the elements.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED Commercial MR16/MR11



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	CBCP	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
MR11																
80996	MR11NFL3/827/LED	Narrow Flood	3W	GU4	12V	2700K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80997	MR11NFL3/830/LED	Narrow Flood	3W	GU4	12V	3000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80998	MR11NFL3/840/LED	Narrow Flood	3W	GU4	12V	4000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
80999	MR11NFL3/850/LED	Narrow Flood	3W	GU4	12V	5000K	82	210	700	25,000	No	1/10	20°	1.48"	20W	No
MR16																
80534	MR16FL4/827/LED2	Flood	4.5W	GU5.3	12V	2700K	82	360	730	25,000	Yes	1/10	40°	1.77"	35W	No
80535	MR16FL4/830/LED2	Flood	4.5W	GU5.3	12V	3000K	82	370	750	25,000	Yes	1/10	40°	1.77"	35W	No
80536	MR16FL4/850/LED2	Flood	4.5W	GU5.3	12V	5000K	82	400	810	25,000	Yes	1/10	40°	1.77"	35W	No
80537	MR16FL6/827/LED2	Flood	6.5W	GU5.3	12V	2700K	82	500	1100	25,000	Yes	1/10	40°	1.77"	50W	Yes
80538	MR16FL6/830/LED2	Flood	6.5W	GU5.3	12V	3000K	82	500	730	25,000	Yes	1/10	40°	1.77"	50W	Yes
80539	MR16FL6/850/LED2	Flood	6.5W	GU5.3	12V	5000K	82	500	1190	25,000	Yes	1/10	40°	1.77"	50W	Yes
80540	MR16NFL6/830/LED2	Narrow Flood	6.5W	GU5.3	12V	3000K	82	520	2420	25,000	Yes	1/10	20°	1.77"	50W	Yes

Acceptable for use in sealed metal landscape luminaires when protected from the elements.

[SPEC SHEET AVAILABLE HERE.](#)

ProLED MR16 Black



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	Beam Spread	MOL	Eq. Wattage	ENERGY STAR [®]
81103	MR16NFL4/827/LED	Narrow Flood, Black	4W	GU5.3	10-15V	2700K	82	250	30,000	Yes	1/10	20°	1.97"	20W	No
81098	MR16FL4/827/LED	Flood, Black	4W	GU5.3	10-15V	2700K	82	250	30,000	Yes	1/10	40°	1.97"	20W	No
81099	MR16WFL4/827/LED	Wide Flood, Black	4W	GU5.3	10-15V	2700K	82	250	30,000	Yes	1/10	60°	1.97"	20W	No
82094	MR16NFL4.5/827/LED	Narrow Flood, Black	4.5W	GU5.3	10-15V	2700K	82	390	30,000	Yes	1/10	20°	1.97"	35W	No
82095	MR16FL4.5/827/LED	Narrow Flood, Black	4.5W	GU5.3	10-15V	2700K	82	390	30,000	Yes	1/10	40°	1.97"	35W	No

Use on incompatible systems may shorten lamp life. Acceptable for use in sealed metal landscape luminaires when protected from the elements



[SPEC SHEET AVAILABLE HERE.](#)



ProLED IP Rated LED JC Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
JC2S														
81091	JC2S/827/LED2	IP65 Rated	1.4W	G4	10-15V	2700K	82	140	40,000	No	1/10	0.98"	20W	No
81092	JC2S/830/LED2	IP65 Rated	1.4W	G4	10-15V	3000K	82	150	40,000	No	1/10	0.98"	20W	No
JC2														
81109	JC2/827/LED2	Omnidirectional, IP65 Rated	2.3W	G4	10-15V	2700K	82	250	40,000	No	1/10	1.57"	20W	No
81108	JC20/2WW/LED2	Omnidirectional, IP65 Rated	2.3W	G4	10-15V	3000K	82	250	40,000	No	1/10	1.57"	20W	No
JC20														
81100	JC20/2WW/BA15S/LED2	IP65 Rated	2.3W	BA15s	10-15V	3000K	82	250	40,000	No	1/10	2.00"	20W	No
81102	912/1WW/LED2	IP65 Rated	1.2W	Wedge	10-15V	3000K	82	120	40,000	No	1/10	1.51"	10W	No
81101	3155/2WW/LED2	IP65 Rated	2.3W	Wedge	10-15V	3000K	82	250	40,000	No	1/10	1.67"	20W	No

[SPEC SHEET AVAILABLE HERE.](#)



ProLED Omnidirectional IP65 JC Lamps

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR®
81998	JC1/830/OMNI/IP65/LED	IP65 Rated	1.2W	G4	10-15V	3000K	82	110	15,000	No	1/10	1.18"	10W	No
81999	JC2/830/OMNI/IP65/LED	IP65 Rated	1.5W	G4	10-15V	3000K	82	200	15,000	No	1/10	1.46"	20W	No
81996	JC3/830/OMNI/IP65/LED	IP65 Rated	2W	G4	10-15V	3000K	82	300	15,000	No	1/10	1.61"	20W	No

May not be compatible with electronic transformers. Suitable for use in sealed metal landscape luminaires. IP65 rated lamps are rated for use outdoors where exposed directly to water from rain or irrigation. This lamp is not for submersible use.

SPEC SHEET AVAILABLE HERE.



ProLED Traditional JC Series

Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
Mini Wedge														
80791	912/1WW/LED	Omnidirectional	1W	Wedge	10-18V	3000K	82	75	20,000	Yes	1/50	1.18"	10W	No
JC10														
80692	JC10/1WW/BA15S/LED	Omnidirectional	1.5W	BA15s	10-24V	3000K	82	150	30,000	Yes	1/40	1.70"	10W	No
80693	JC10/1WW/LED	Omnidirectional	1.5W	G4	10-24V	3000K	82	150	30,000	No	1/10	1.21"	10W	No
JC20														
80691	JC20/2WW/BA15S/LED	Omnidirectional	2.4W	BA15s	10-24V	3000K	82	250	30,000	Yes	1/40	2.01"	20W	No
80690	JC20/2WW/LED	Omnidirectional	2.4W	G4	10-24V	3000K	82	250	30,000	No	1/40	1.81"	20W	No
80815	JC20/2NW/LED	Omnidirectional	2.4W	G4	10-24V	5000K	82	260	30,000	No	1/10	1.81"	20W	No
JC35														
80830	JC35/4WW/LED	Omnidirectional	4.5W	GY6.35	10-18V	3000K	82	450	30,000	No	1/30	1.71"	35W	No
JC50														
81997	JC50/5WW/LED	Omnidirectional	5.5W	GY6.35	10-18V	3000K	82	550	30,000	No	1/30	1.71"	50W	No

May not be compatible with all electronic transformers.
Not for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires; traditional JC lamps require protection from elements.

SPEC SHEET AVAILABLE HERE.

ProLED Traditional LED Series

3 YR WARRANTY



Product #	Product Code	Description	Wattage	Base	Voltage	Color Temp.	CRI	Lumens	Useful Life ¹	Dimmable ²	Pkg. Qty.	MOL	Eq. Wattage	ENERGY STAR [®]
81078	JC3VWFL/827/LED	Very Wide Flood	3.3W	G4	12V	2700K	82	200	25,000	No	1/10	1.38"	20W	No

May not be compatible with all electronic transformers.
Not for use in enclosed luminaires. Suitable for use in sealed metal landscape luminaires; traditional JC lamps require protection from elements.

¹ Useful Life is defined as the point in time at which the LED will maintain at least 70% of its initial lumens. The LED will continue to operate past this point at decreased light levels.

² May not be compatible with all Dimming systems, Dimming performance may vary by system. Please check www.halcolighting.com for up-to-date dimmer compatibility information. Use on incompatible systems may shorten lamp life.

³ To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.



LANDSCAPE LIGHTING

The Art of Outdoor Illumination

Bringing over 40 years of experience in landscape lighting, Sollos offers a full portfolio of quality LED products engineered for the best performance offering dynamic functionality to provide safety, security and quality illumination. Whether you are looking for path lighting for a single walkway or a full portfolio of products for a complete transformation of your outdoor space – Sollos has what you need!



Product #	Product Code	Fixture Model	Finish	Lamp Supplied
UP AND ACCENT LIGHTS				
BCB065 Contemporary Bullet				
20080S	BCB065-AB-MR16FL4/827/LED	BCB065-AB	Antique Brass	MR16FL4/827/LED
27602S	BCB065-TZ-MR16FL4/827/LED	BCB065-TZ	Textured Bronze	MR16FL4/827/LED
BMB062 Modern Bullet				
27605S	BMB062-TB-MR16FL4/827/LED	BMB062-TB	Textured Black	MR16FL4/827/LED
27604S	BMB062-TZ-MR16FL4/827/LED	BMB062-TZ	Textured Bronze	MR16FL4/827/LED
PATH LIGHTS				
PTH075 Traditional Hat				
27613S	PTH055-AB-15-JC2/830/OMNI/IP65	PTH055-AB-15	Antique Brass	JC2/830/OMNI/IP65/LED
PSH040 Straight Hat				
27616S	PSH040-TZ-12-JC2/830/OMNI/IP65	PSH040-TZ-12	Textured Bronze	JC2/830/OMNI/IP65/LED
PSH075 Straight Hat				
27626S	PSH075-TZ-18-JC2/830/OMNI/IP65	PSH075-TZ-15	Textured Bronze	JC2/830/OMNI/IP65/LED
WELL LIGHTS				
932017S	WPO055-CB-PAR36WFL4/827/IP67/LED	WPO055-CB	Composite Black	PAR36WFL4/827/IP67/LED
TRANSFORMERS				
Commercial Series				
Integrated Series Built-In Photocell and Timer				
997012	TR12PC-INT-100	100 VA	Black Polycarbonate	
997016	TR12SS-INT-200	120 VA	Stainless Steel	



Product #	Product Code	Wattage	Base	Materials
LAMPS & FIXTURE				
MR16 RGB-W LED Lamp				
82099	MR16FL6/RGBW/LED	6	GU5.3	
PAR36 RGB-W LED Lamp				
82142	PAR36WFL10/RGBW/IP68/LED	10	MP Term	
Ledge Light RGB-W LED Fixture				
27516	LLA055/RGBW/2/TB	2		Textured Black Aluminum
27517	LLA055/RGBW/2/TZ	2		Textured Bronze Aluminum




Contact your rep today to learn more about Sollos Landscape Lighting.

To find out more about the complete product portfolio, visit solloslighting.com.

Sign Up for MyHalco Today



Scan to view the digital guide

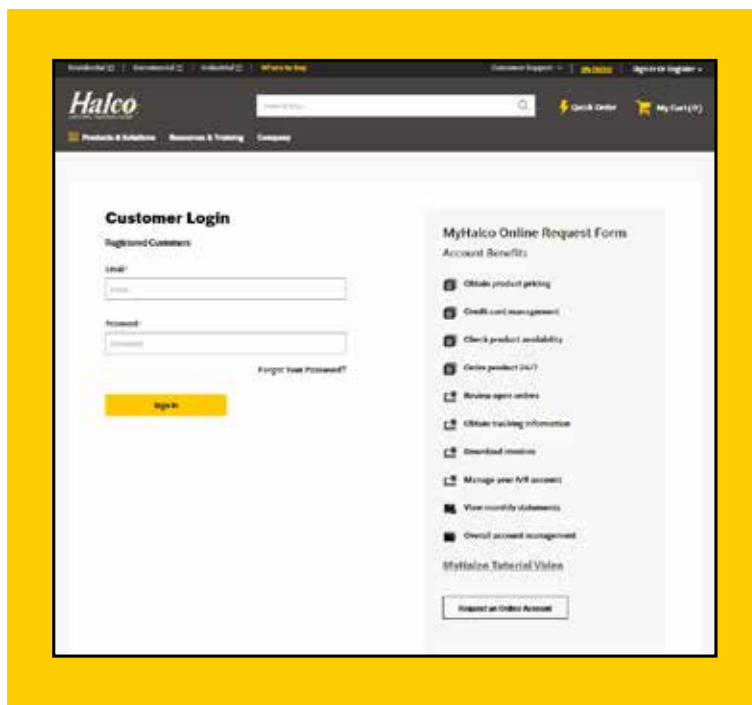

MyHalco is an online portal that lets you access your account 24/7...

- Obtain Product Pricing
- Check Product Availability
- Place Orders and Review Open Orders
- Track Shipments
- Download Invoices and Monthly Statements

Best of all – you can download your price list any time you want!

Signing up is easy. Look for MyHalco on the home page of the website, click on it and you will be directed to the sign-up page. Complete a short online application and within 24 hours you will receive a password to begin using MyHalco.

Don't delay – sign up at halcolighting.com!



800.677.3334
FAX: 800.880.0822
www.halcolighting.com

Atlanta
2940 Pacific Drive
Norcross, GA 30071

Houston
6319 Brookhill Drive
Houston, TX 77087

Chicago
845 Lively Blvd
Wood Dale, IL 60191

Los Angeles
4820 Schaefer Avenue
Chino, CA 91710

Cleveland
3501 Croton Avenue
Cleveland, OH 44115

Phoenix
3103 E. Broadway, Ste 100
Phoenix, AZ 85040