



# TEST REPORT

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**

**ANSI C63.10: 2013**

**RSS-GEN: Issue 5**

**RSS-247: Issue 2**

**Test report  
On Behalf of  
Anker Innovations Limited  
For  
Soundcore Life 2  
Model No.: A3023  
FCC ID: 2AOKB-A3023  
IC: 23451-A3023**

**Prepared for :** Anker Innovations Limited  
Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon,  
Hongkong

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Oct. 08, 2018 ~ Oct. 17, 2018

**Date of Report:** Oct. 18, 2018

**Report Number:** HK1809141096E



### TEST RESULT CERTIFICATION


**Applicant's name** ..... : Anker Innovations Limited  
 Address ..... : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong  
**Manufacture's Name**..... : Anker Innovations Limited  
 Address ..... : Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong

**Product description**


Trade Mark: ..... Soundcore  
 Product Name..... : Soundcore Life 2  
 Model and/or type reference .. : A3023  
 FCC Rules and Regulations Part 15 Subpart C Section 15.247  
**Standards** ..... : ANSI C63.10: 2013  
 RSS-GEN: Issue 5  
 RSS-247: Issue 2

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test**..... :  
 Date (s) of performance of tests..... : Oct. 08, 2018 ~ Oct. 17, 2018  
 Date of Issue..... : Oct. 18, 2018  
 Test Result..... : **Pass**

Testing Engineer :   
 \_\_\_\_\_  
 (Gary Qian)

Technical Manager :   
 \_\_\_\_\_  
 (Eden Hu)

Authorized Signatory :   
 \_\_\_\_\_  
 (Jason Zhou)



<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	6
2.1 . GENERAL DESCRIPTION OF EUT	6
2.2 . CARRIER FREQUENCY OF CHANNELS	7
2.3 . OPERATION OF EUT DURING TESTING	7
2.4 . DESCRIPTION OF TEST SETUP	8
2.5. EQUIPMENT USED IN EUT SYSTEM	8
2.6. MEASUREMENT INSTRUMENTS LIST	9
3. PEAK OUTPUT POWER	10
3.1. MEASUREMENT PROCEDURE	10
3.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	10
3.3. LIMITS AND MEASUREMENT RESULT	11
4. BANDWIDTH	17
4.1. MEASUREMENT PROCEDURE	17
4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
4.3. LIMITS AND MEASUREMENT RESULTS	17
5. CONDUCTED SPURIOUS EMISSION	24
5.1. MEASUREMENT PROCEDURE	24
5.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
5.3. LIMITS AND MEASUREMENT RESULT	25
6. RADIATED EMISSION	29
6.1. TEST LIMIT	29
6.2. MEASUREMENT PROCEDURE	29
6.3. TEST SETUP	31
6.4. TEST RESULT	33
7. BAND EDGE EMISSION	46
7.1. MEASUREMENT PROCEDURE	46
7.2. TEST SET-UP	46
7.3. TEST RESULT	47
8. NUMBER OF HOPPING FREQUENCY	51
8.1. MEASUREMENT PROCEDURE	51
8.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	51
8.3. LIMITS AND MEASUREMENT RESULT	51
9. TIME OF OCCUPANCY (DWELL TIME)	53



<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
9.1. MEASUREMENT PROCEDURE	53
9.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	53
9.3. LIMITS AND MEASUREMENT RESULT	53
10. FREQUENCY SEPARATION	56
10.1. MEASUREMENT PROCEDURE	56
10.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	56
10.3. LIMITS AND MEASUREMENT RESULT	56
11. LINE CONDUCTED EMISSION TEST	58
11.1. LIMITS OF LINE CONDUCTED EMISSION TEST	58
11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	58
11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	59
11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	59
12. ANTENNA REQUIREMENT	60
13. PHOTOGRAPH OF TEST	61
14. PHOTOGRAPHS OF EUT	63



## 1. TEST SUMMARY

### 1.1. TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
PEAK OUTPUT POWER	COMPLIANT
20 DB BANDWIDTH	COMPLIANT
CONDUCTED SPURIOUS EMISSION	COMPLIANT
RADIATED EMISSION	COMPLIANT
BAND EDGES	COMPLIANT
NUMBER OF HOPPING FREQUENCY	COMPLIANT
TIME OF OCCUPANCY	COMPLIANT
FREQUENCY SEPARATION	COMPLIANT
LINE CONDUCTION EMISSION	N/A

Note: N/A means it's not applicable to this item.

### 1.2. TEST FACILITY

#### 1.2.1 Address of the test laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

#### 1.2.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

##### IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAKE Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.

##### FCC Registration No.: CN1229

Test Firm Registration Number : 616276

### 1.3. MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty	=	2.23dB, k=2
Radiated emission expanded uncertainty(9kHz-30MHz)	=	3.08dB, k=2
Radiated emission expanded uncertainty(30MHz-1000MHz)	=	4.42dB, k=2
Radiated emission expanded uncertainty(Above 1GHz)	=	4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	8.80dBm(Max)
<b>Bluetooth Version</b>	V4.1
<b>Modulation</b>	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi$ /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input type="checkbox"/> GFSK
<b>Number of channels</b>	79 for BR/EDR
<b>Hardware Version</b>	40-AK3023-MAE4G
<b>Software Version</b>	V14
<b>Antenna Designation</b>	PCB Antenna
<b>Antenna Gain</b>	1.6dBi
<b>Power Supply</b>	DC 3.7V by battery
Note: 1.The USB port only used for charging and can't be used to transfer data with PC. 2. The BT function of EUT didn't work when charging. 3. The EUT doesn't support BLE.	



## 2.2. CARRIER FREQUENCY OF CHANNELS

### BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

## 2.3. OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link(Hopping mode)

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.




## 2.4. DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

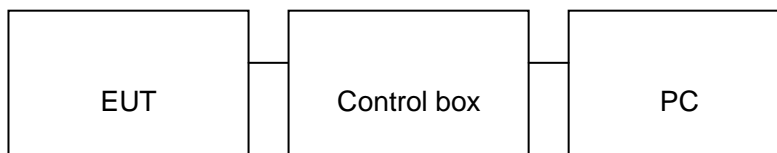

## 2.5. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Soundcore Life 2	Soundcore	A3023	EUT
2	Battery	VDL	902532	Accessory
3	USB Cable	N/A	0.6m unshielded	Accessory
4	AUX in Cable	N/A	1.2m unshielded	Accessory
5	PC	APPLE	A1465	A.E
6	Control box	CSR	USB_SPI_TOOLS	A.E
7	USB Cable	N/A	1m unshielded	A.E
8	Mobile Phone	Huawei	V8	A.E
9	Temporary Antenna Connector	T10	N/A	A.E

Note: The temporary antenna connector is a RF SMA connector with fifty ohm resistor, which is welded to the PCB board or module.



**2.6. MEASUREMENT INSTRUMENTS LIST****TEST EQUIPMENT OF RADIATED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Lab Equipment No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Broad-band Horn Antenna	A-INFOMW	LB-180400-KF	HKE-031	Dec. 28, 2017	1 Year
8.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2017	1 Year
9.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
10.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
11.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A




### 3. PEAK OUTPUT POWER

#### 3.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3.  $RBW >$  the 20 dB bandwidth of the emission being measured,  $VBW \geq RBW$ .
4. Record the maximum power from the Spectrum Analyzer.
5. The maximum peak power shall be less 21dBm.

#### 3.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

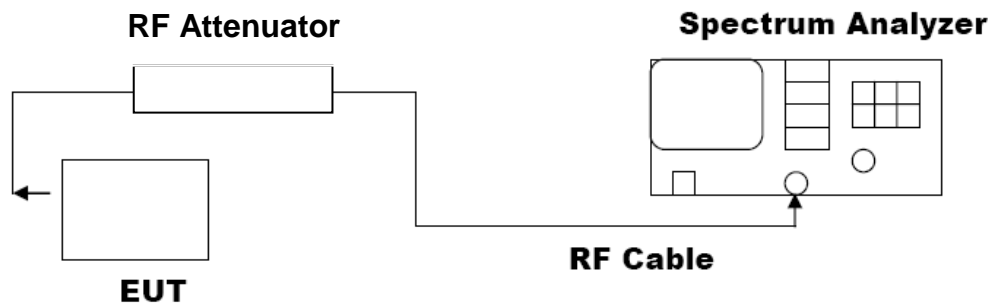




3.3. LIMITS AND MEASUREMENT RESULT


PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	6.90	21	Pass
2.441	8.80	21	Pass
2.480	8.56	21	Pass

CH0

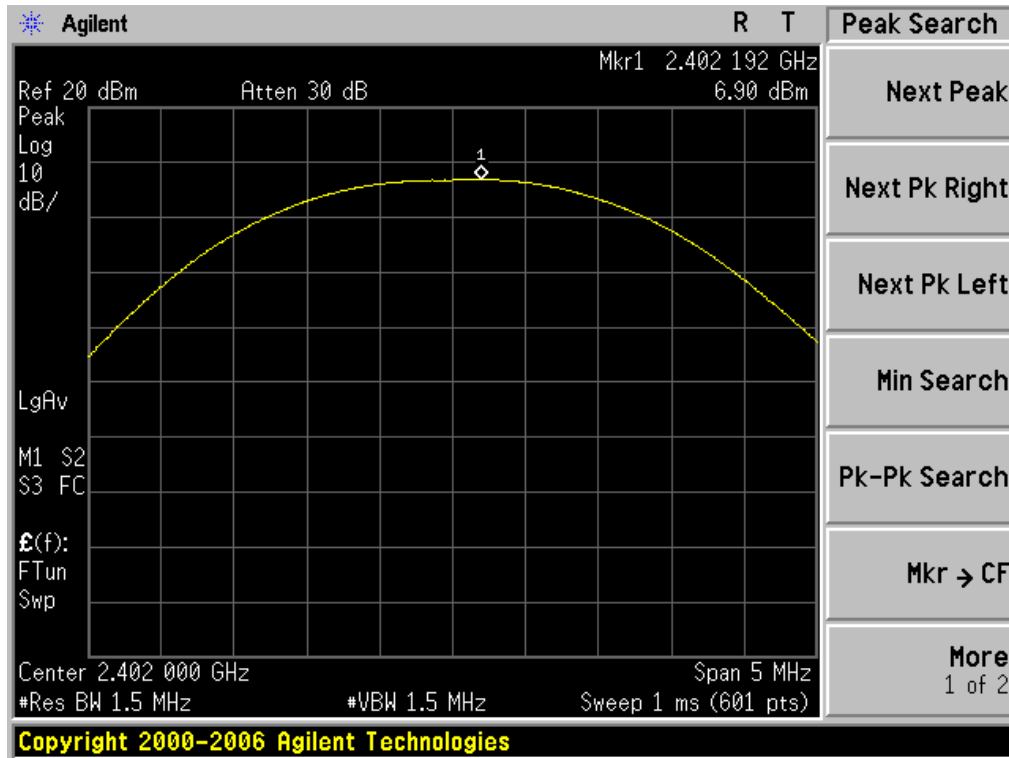




CH39

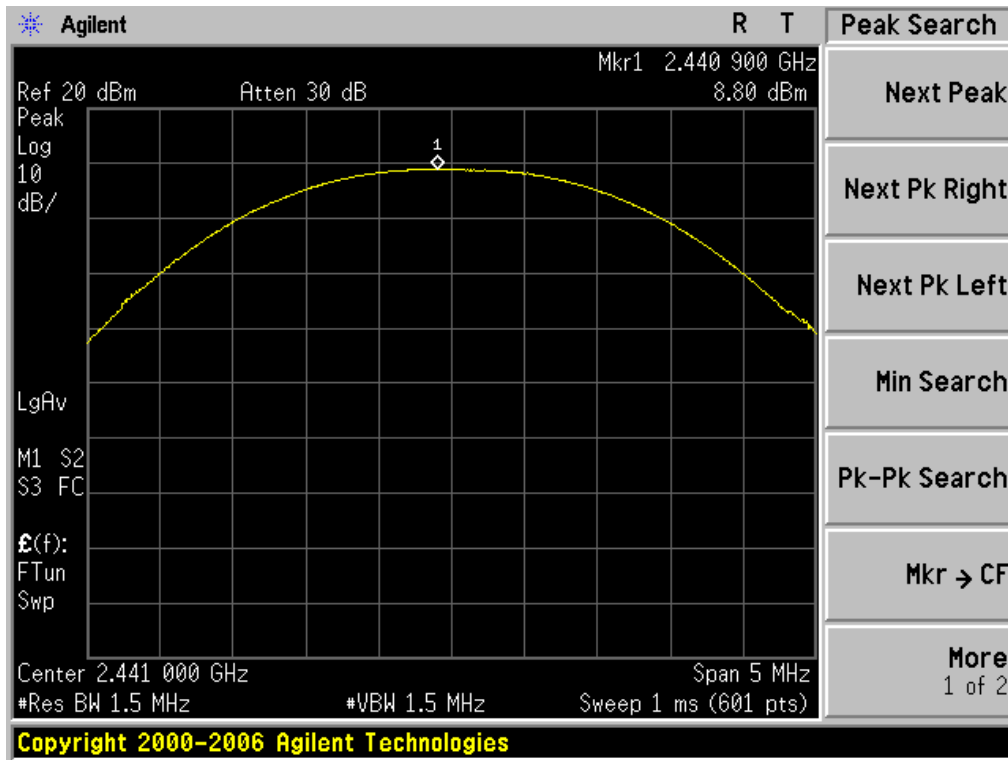


CH78

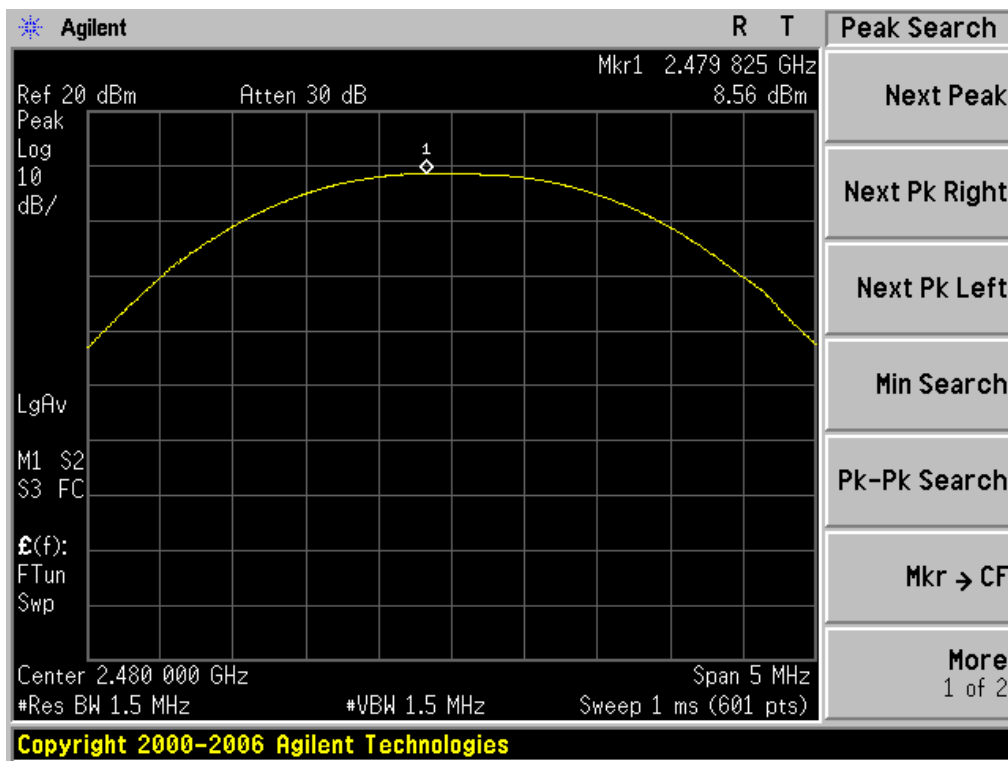




PEAK OUTPUT POWER MEASUREMENT RESULT FOR $\Pi/4$ -DQPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	4.68	21	Pass
2.441	7.20	21	Pass
2.480	6.78	21	Pass

CH0

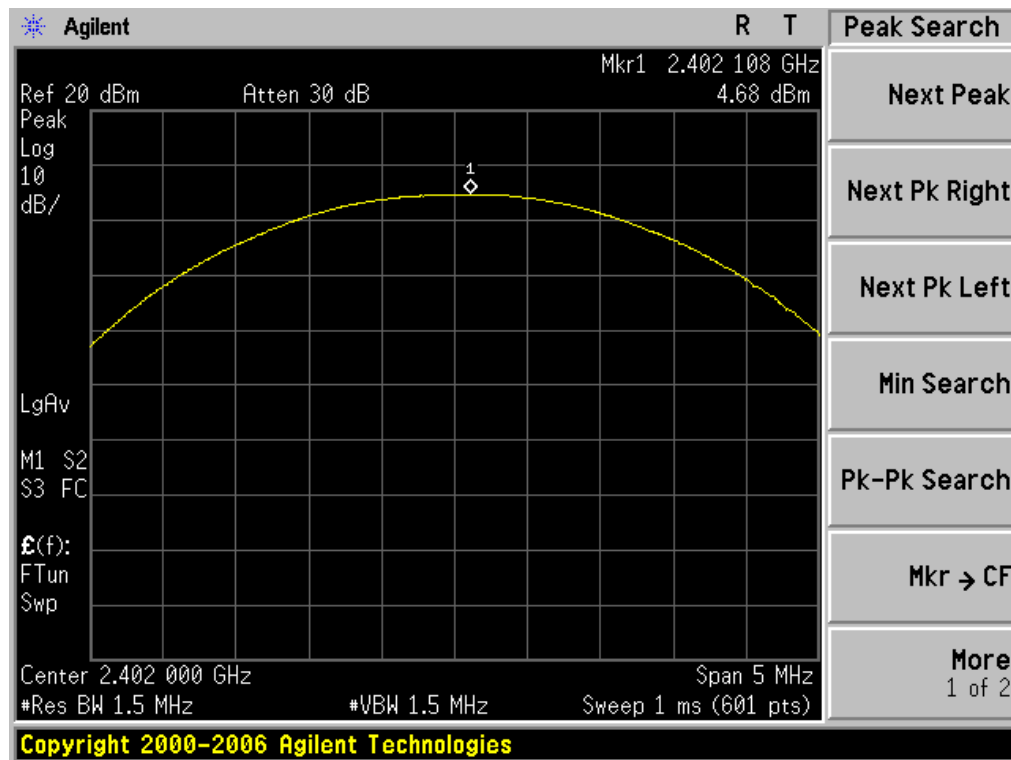




CH39

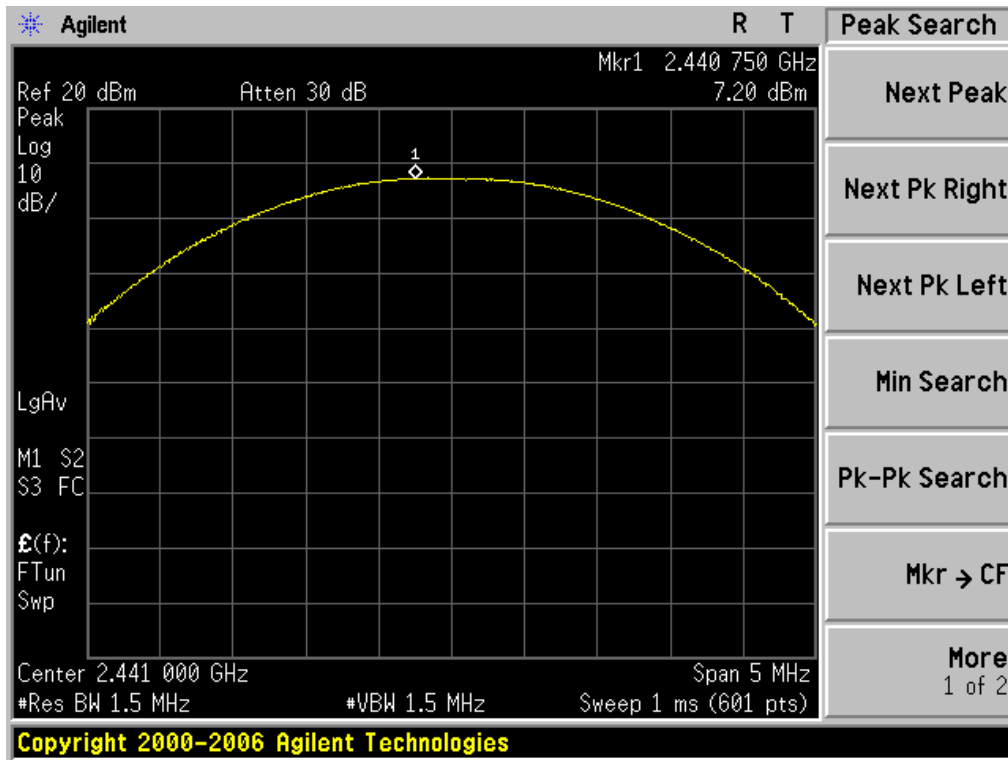


CH78

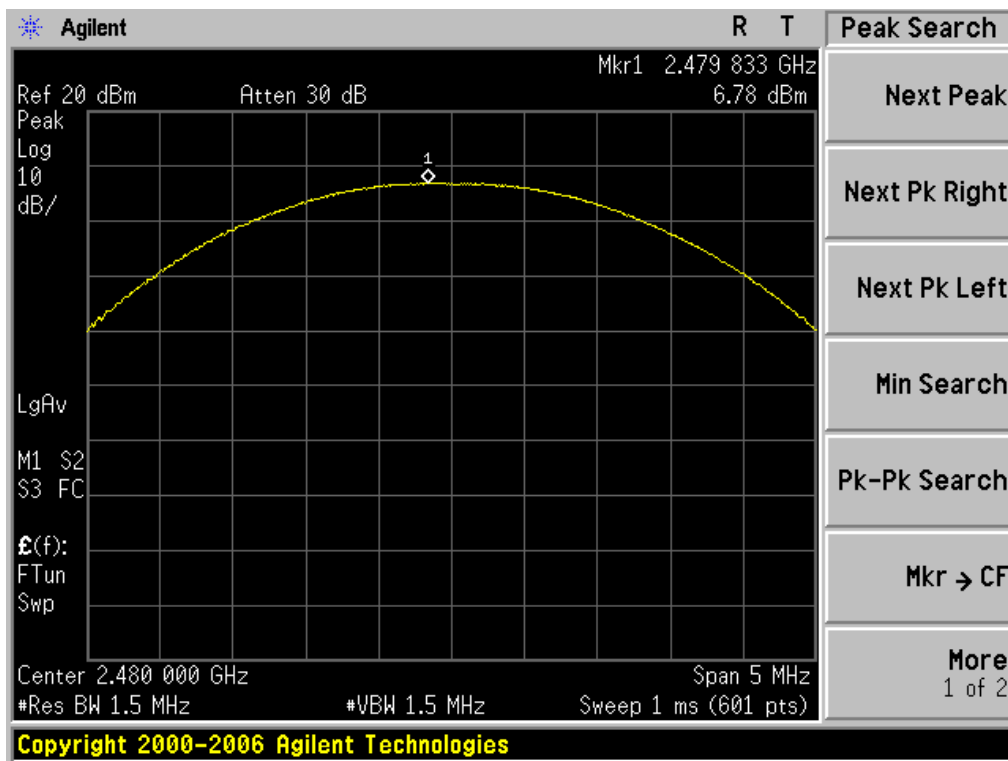




PEAK OUTPUT POWER MEASUREMENT RESULT FOR 8DPSK MODULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	4.87	21	Pass
2.441	7.48	21	Pass
2.480	7.06	21	Pass

CH0

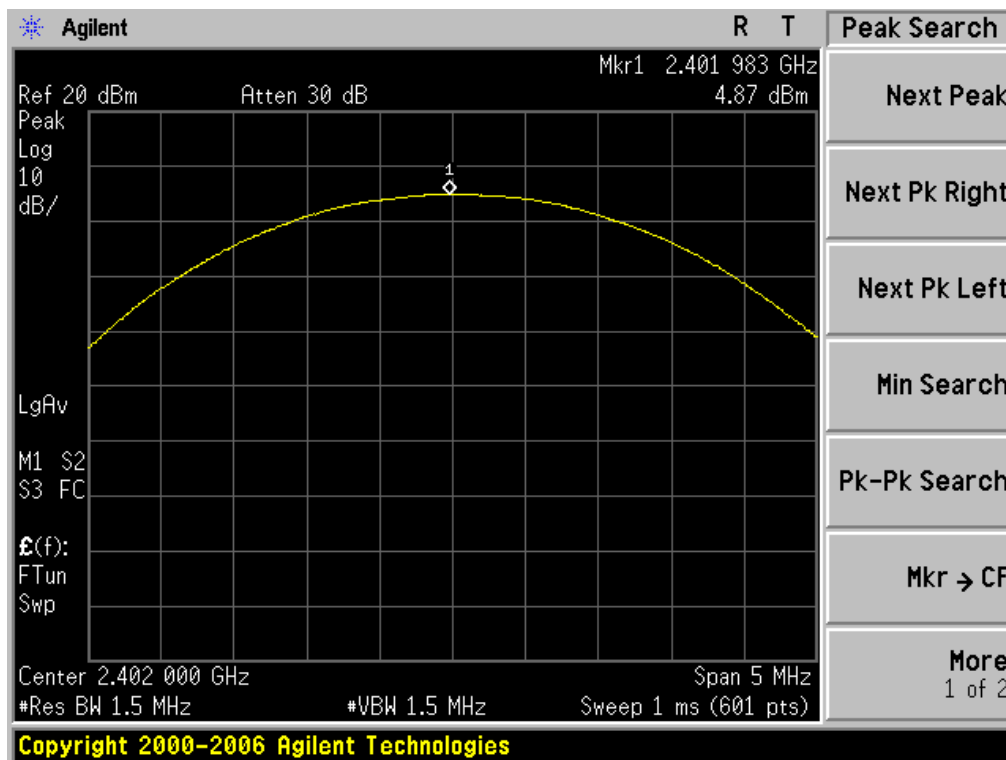




CH39

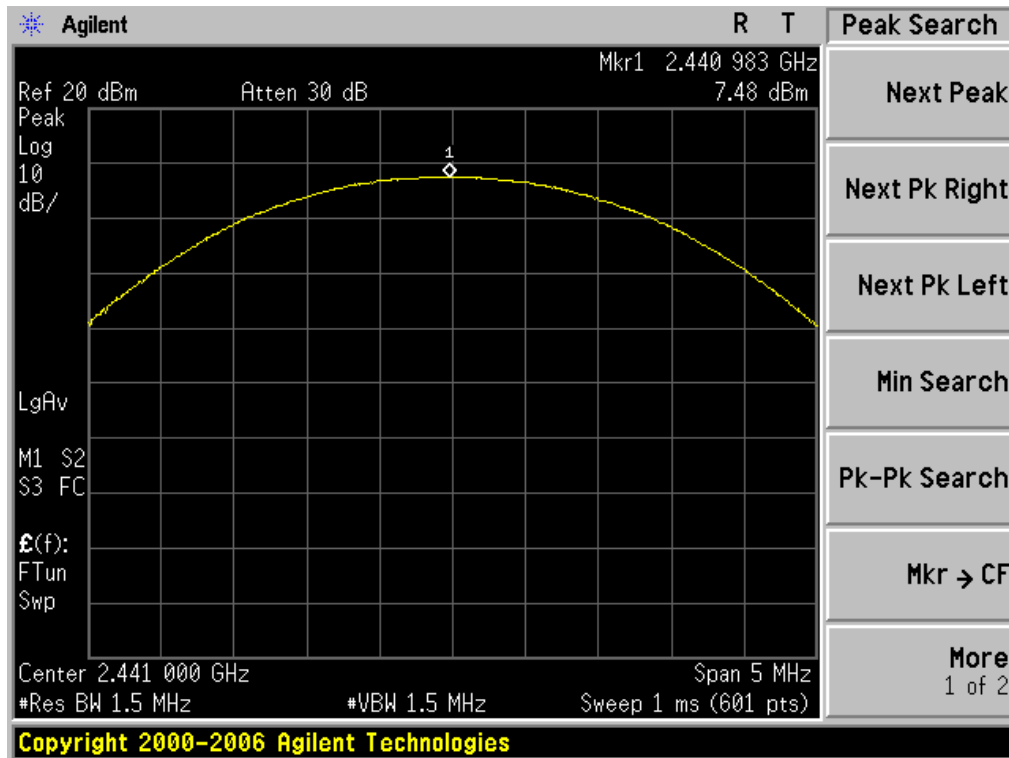

CH78

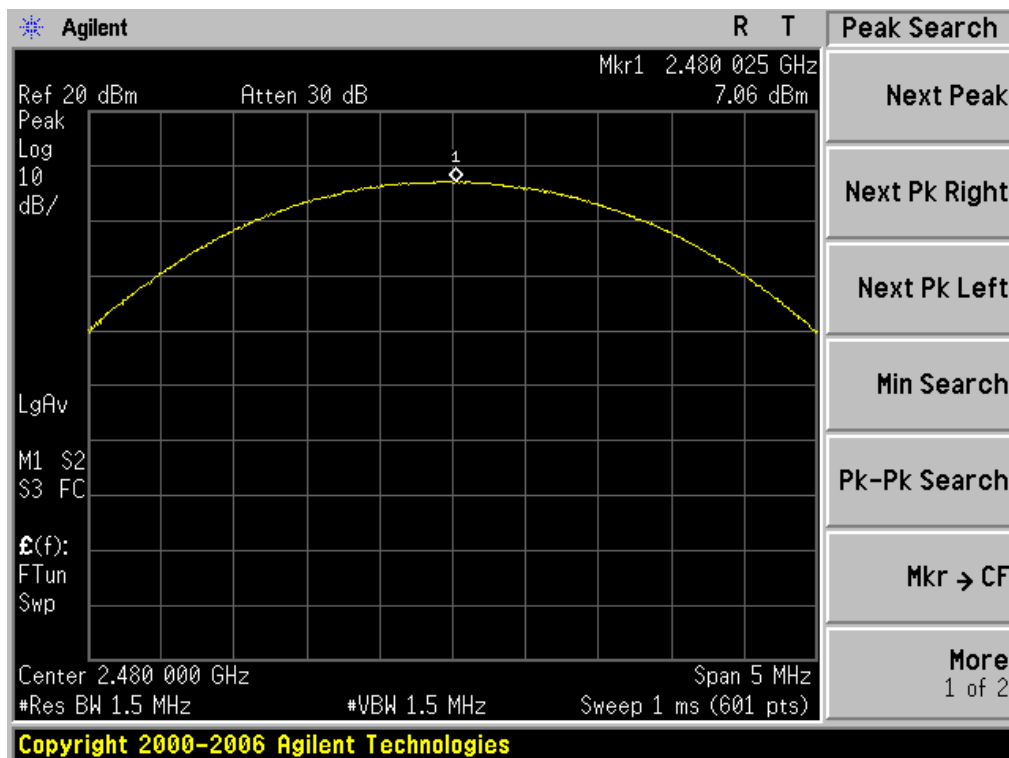




## 4. BANDWIDTH

### 4.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq 3RBW$ ; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

### 4.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

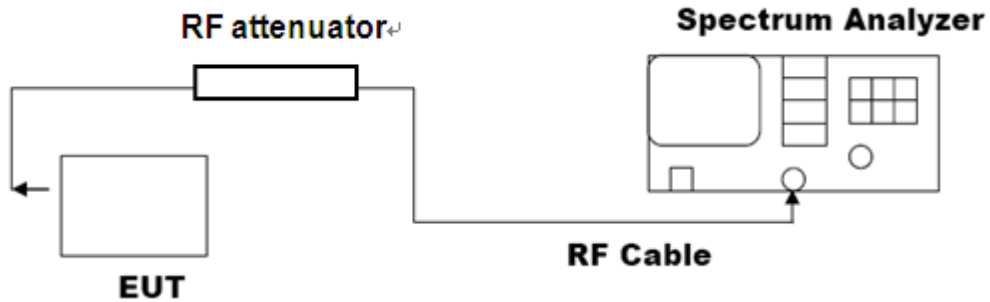


Note: The EUT has been used temporary antenna connector for testing.

### 4.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.946	1.118	PASS
	Middle Channel	0.944	1.114	PASS
	High Channel	0.931	1.100	PASS



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

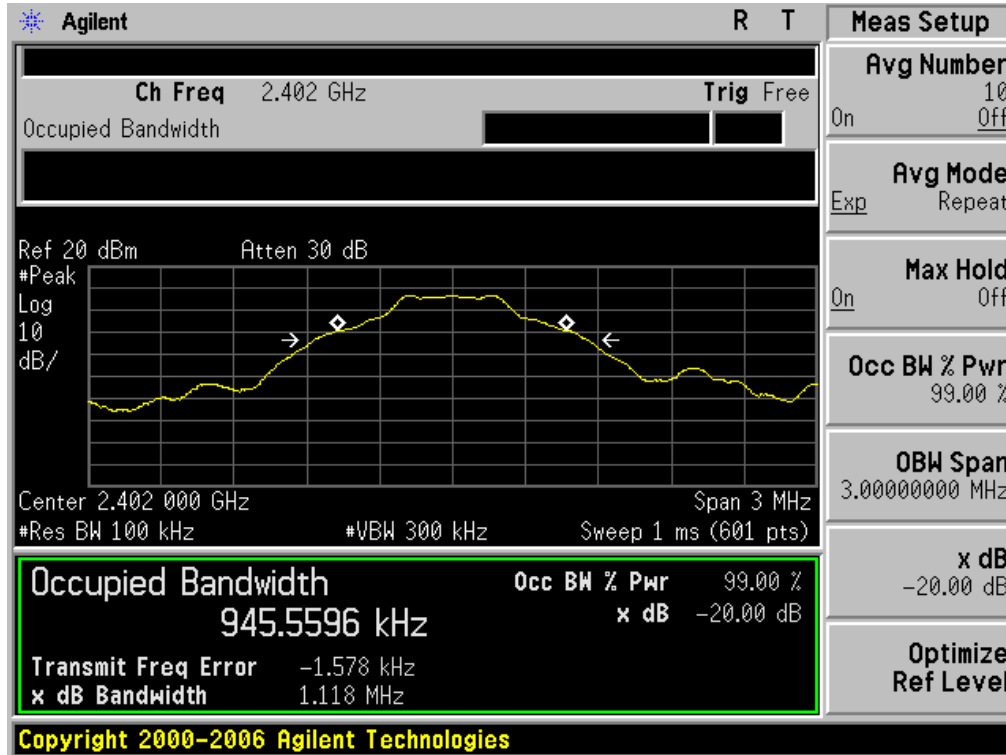


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

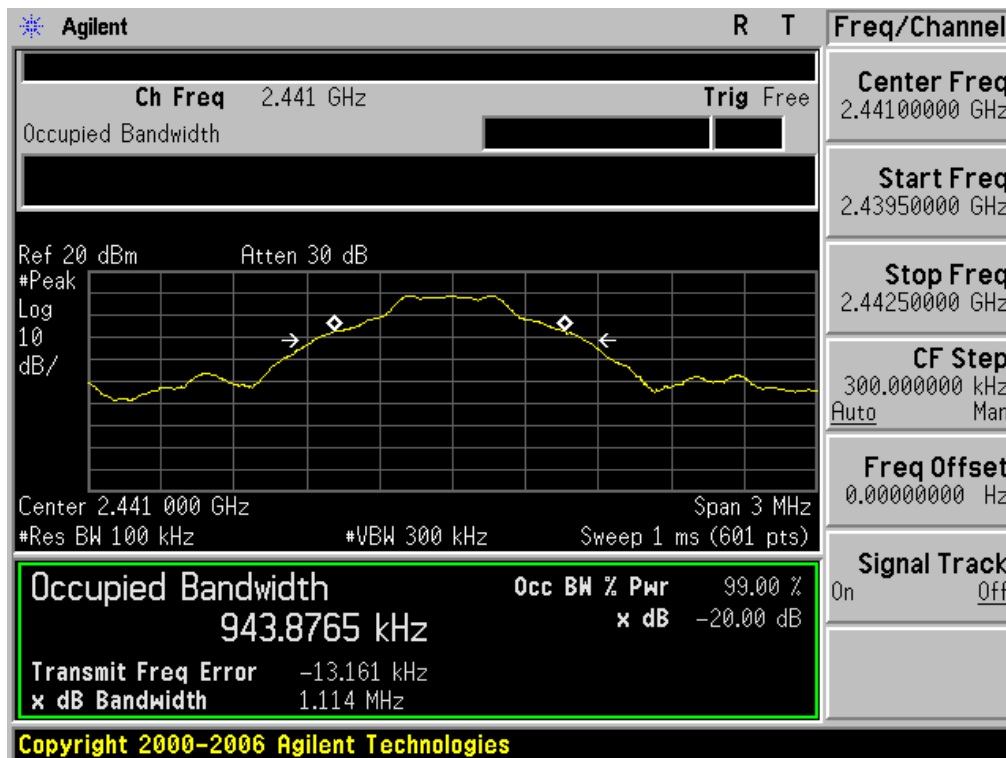




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

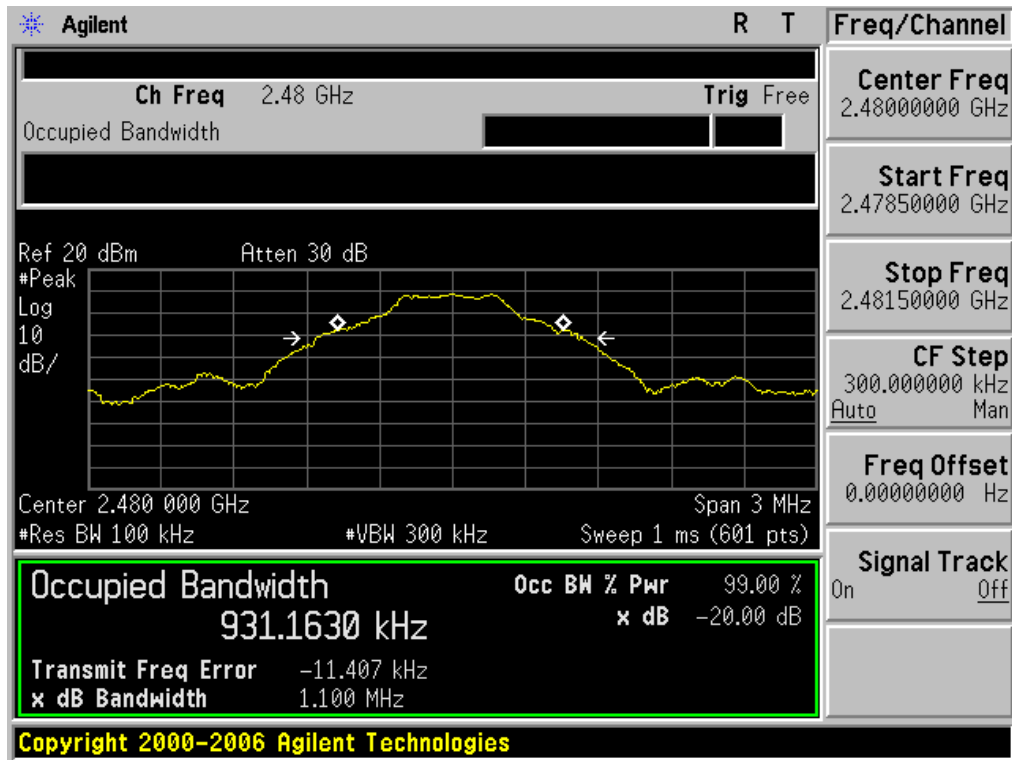




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.203	1.371	PASS
	Middle Channel	1.202	1.364	PASS
	High Channel	1.205	1.371	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

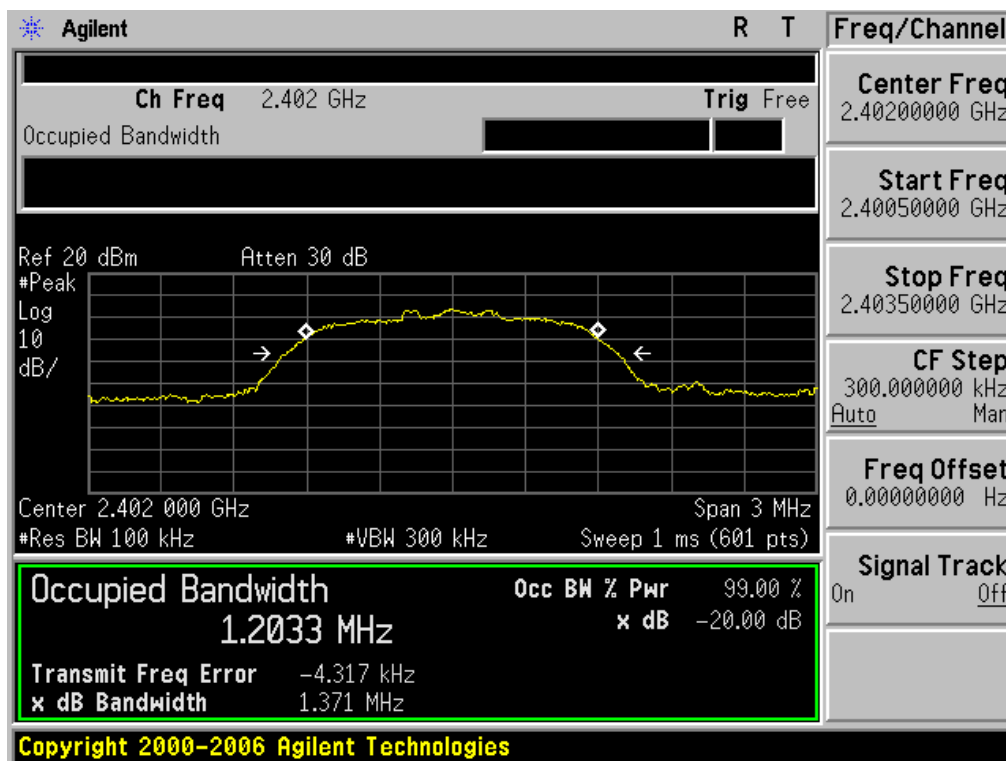




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

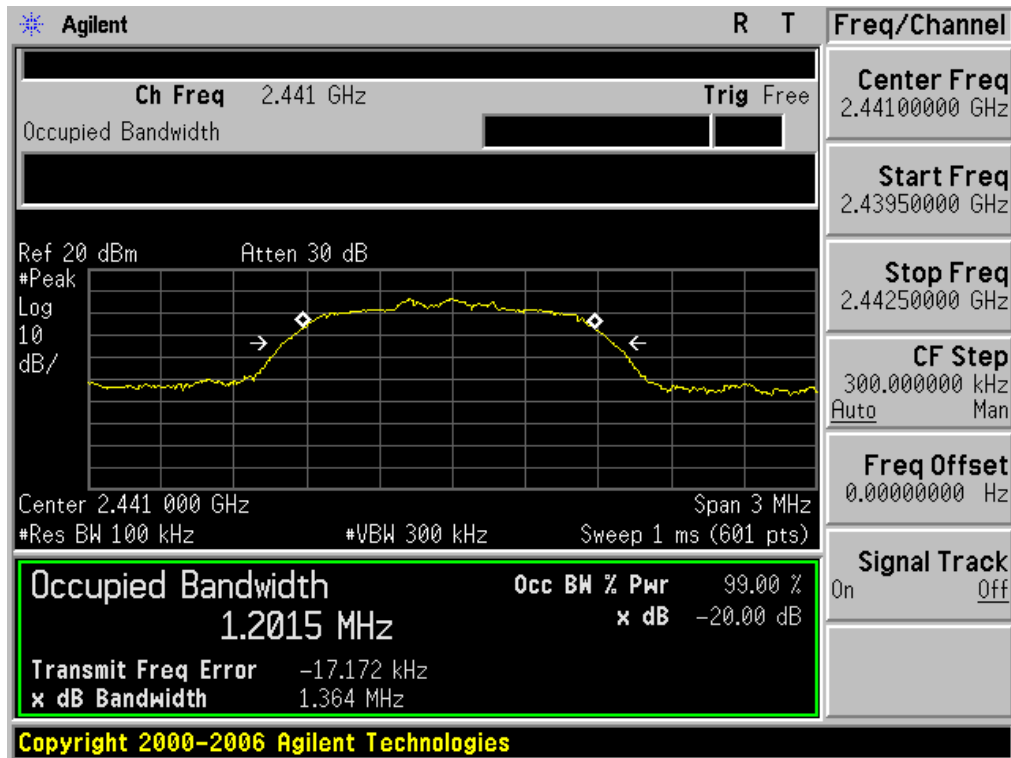


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

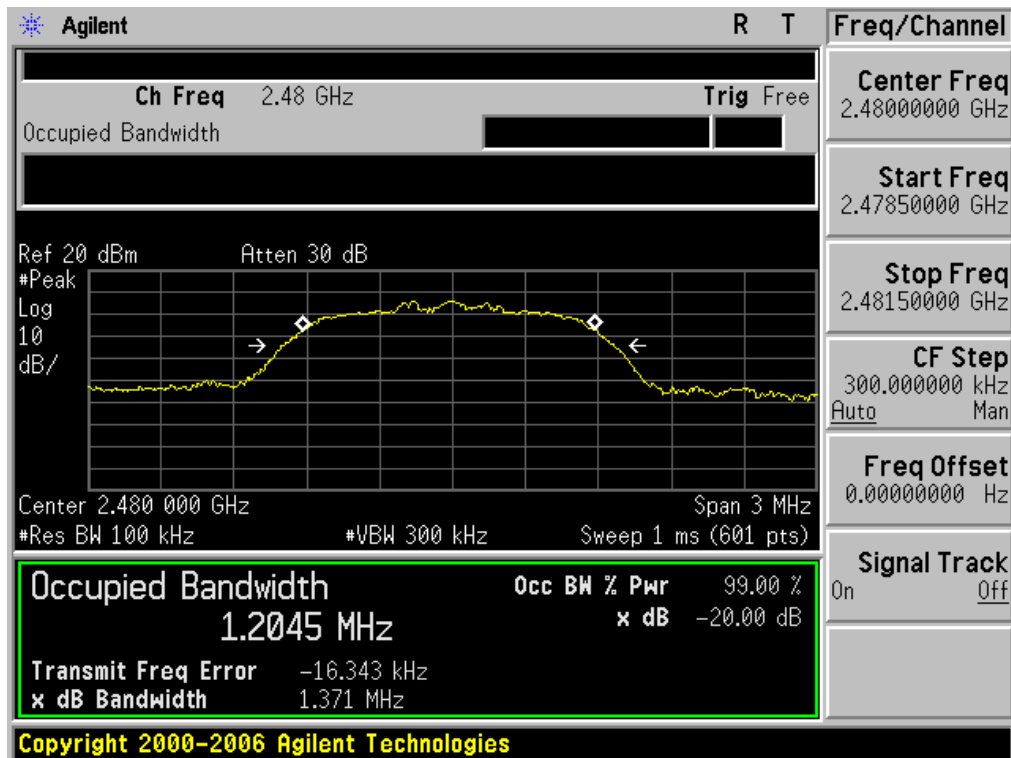




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.215	1.375	PASS
	Middle Channel	1.220	1.364	PASS
	High Channel	1.220	1.377	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

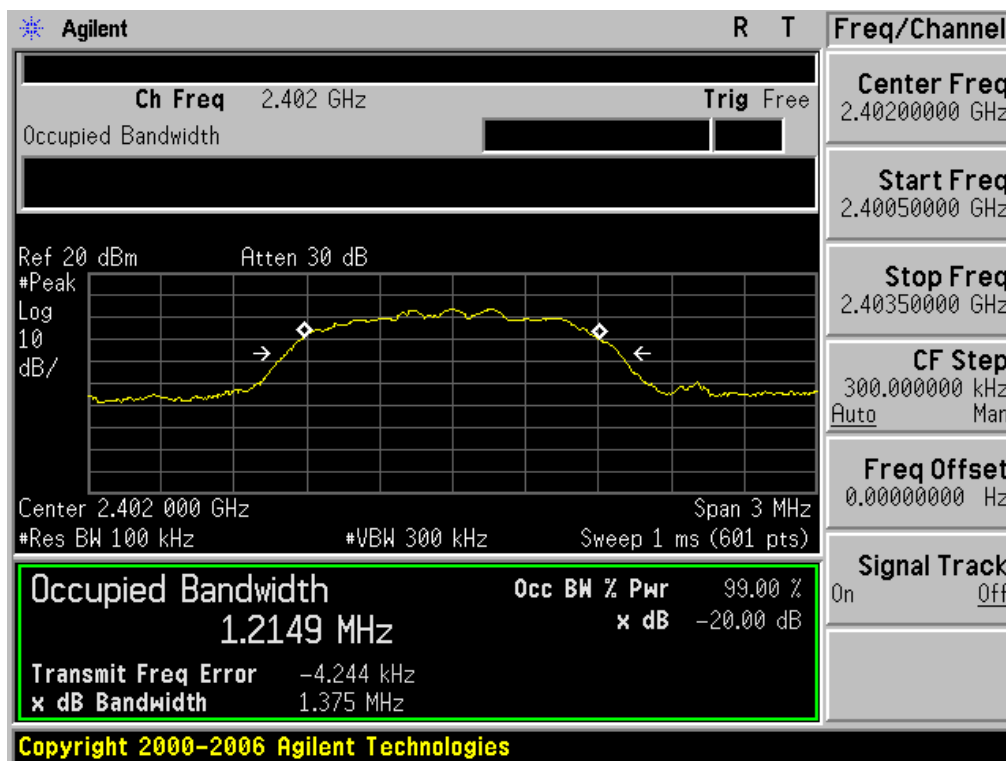




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

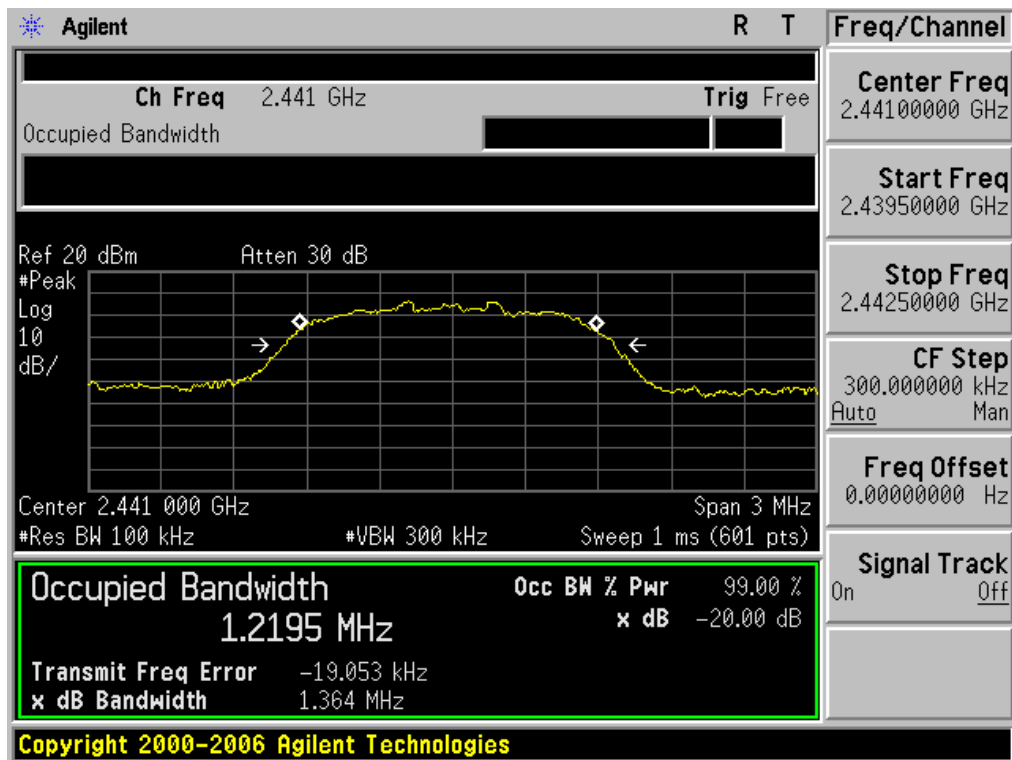

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

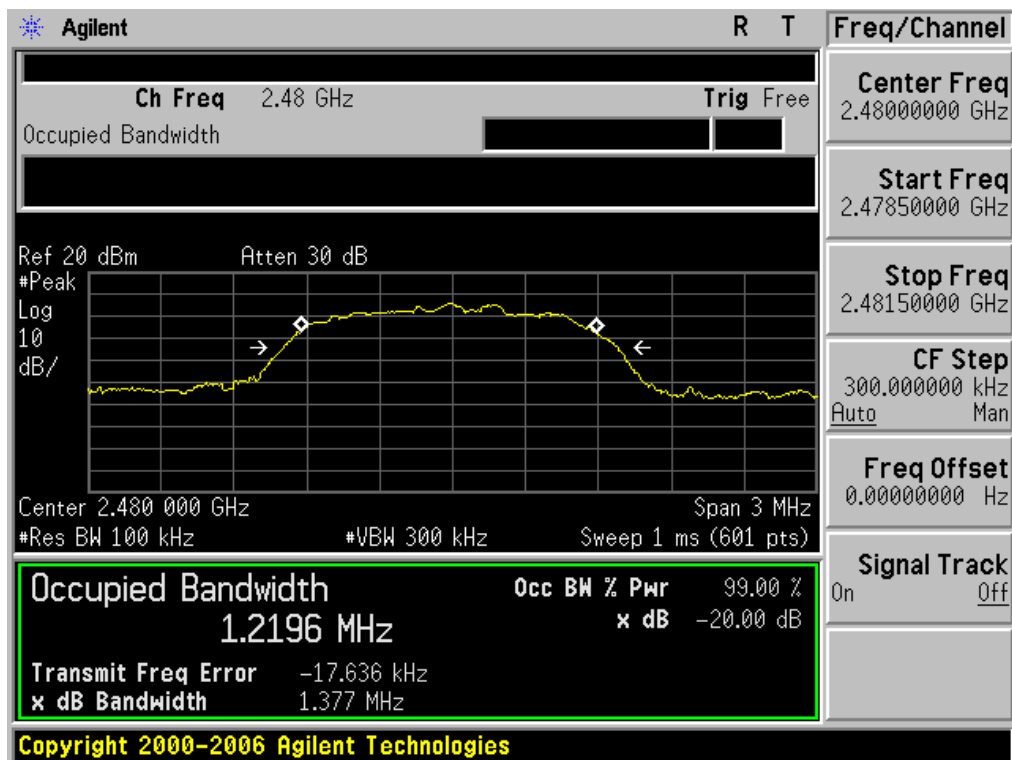


## 5. CONDUCTED SPURIOUS EMISSION

### 5.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100 kHz; VBW = 300kHz; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 5.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

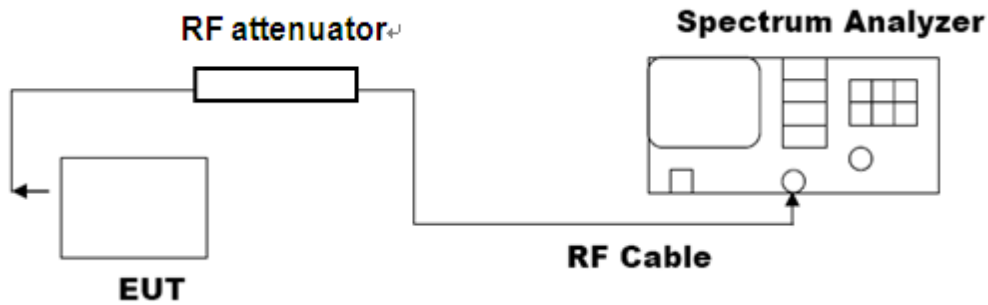







**5.3. LIMITS AND MEASUREMENT RESULT**

<b>LIMITS AND MEASUREMENT RESULT</b>		
<b>Applicable Limits</b>	<b>Measurement Result</b>	
	<b>Test Data</b>	<b>Result</b>
<p><b>FCC requirement:</b>            In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.            In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))</p> <p><b>IC requirement:</b>            In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB.            Attenuation below the general field strength limits specified in RSS-Gen is not required.</p>	<p>At least -20dBc than the limit Specified on the BOTTOM Channel</p>	<p>PASS</p>
	<p>At least -20dBc than the limit Specified on the TOP Channel</p>	<p>PASS</p>





TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

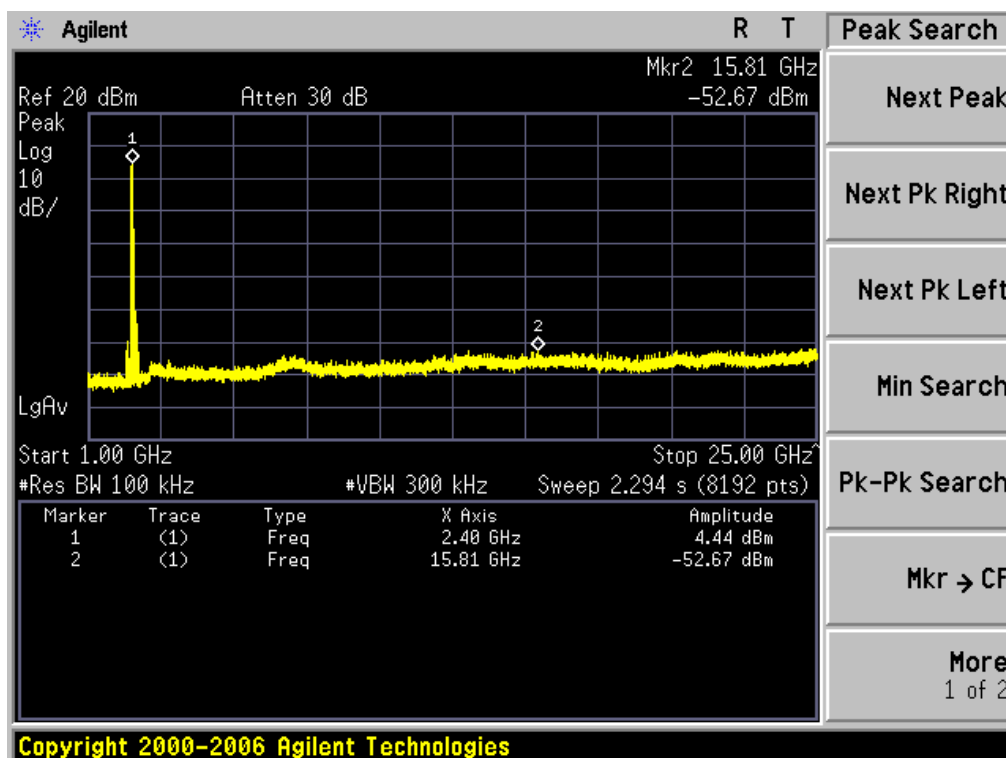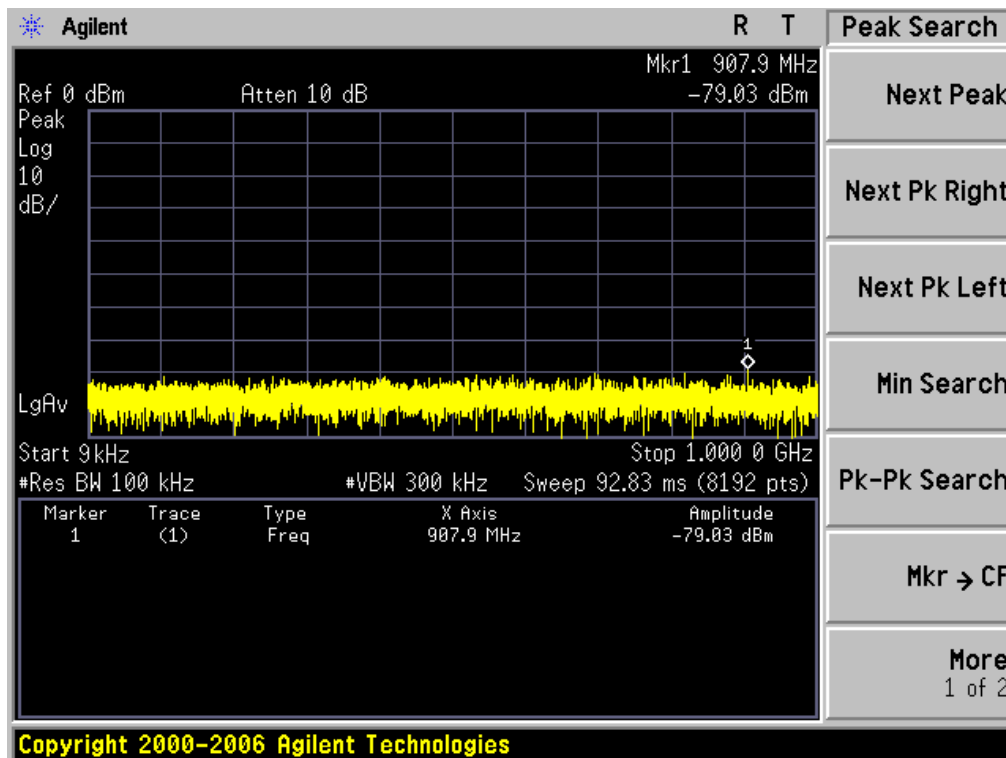





TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

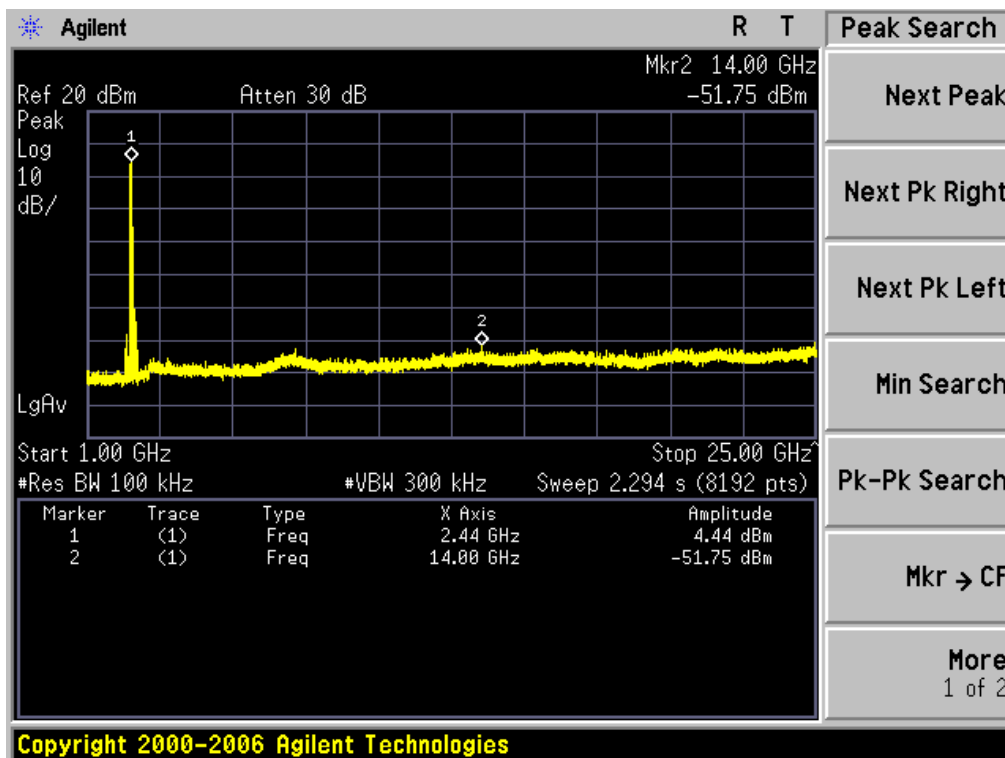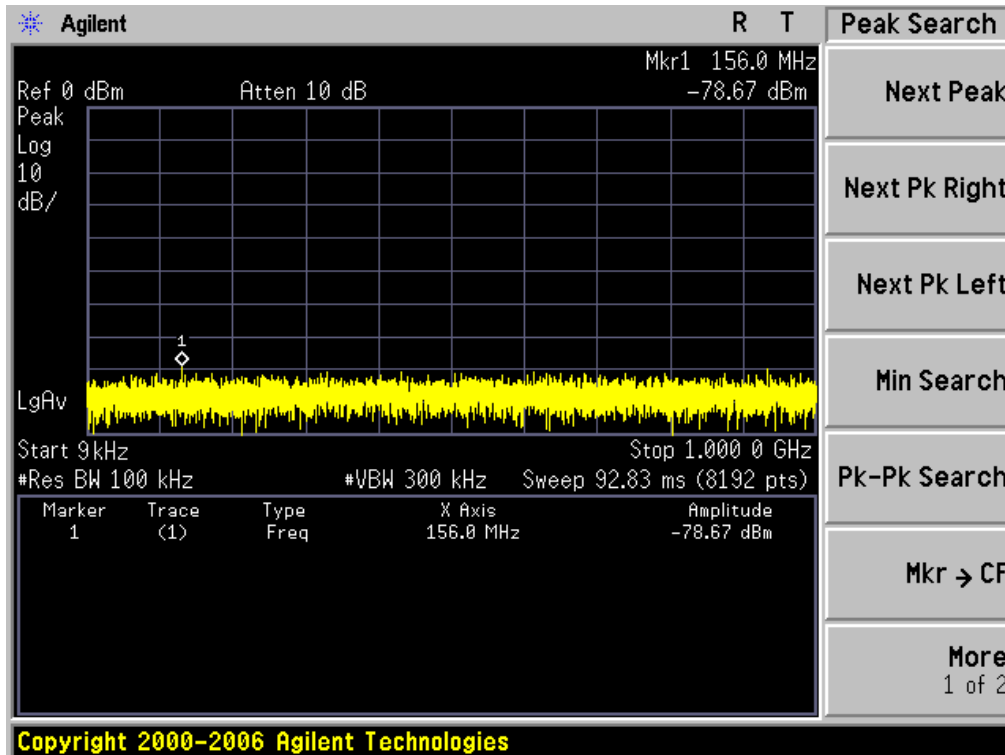



### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

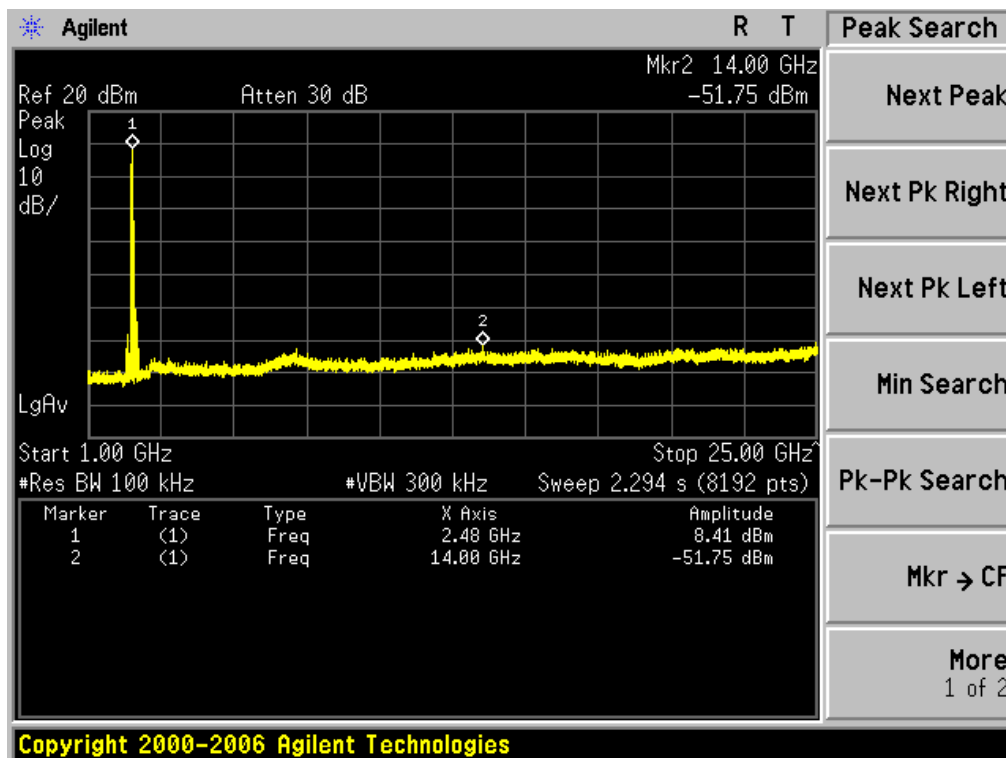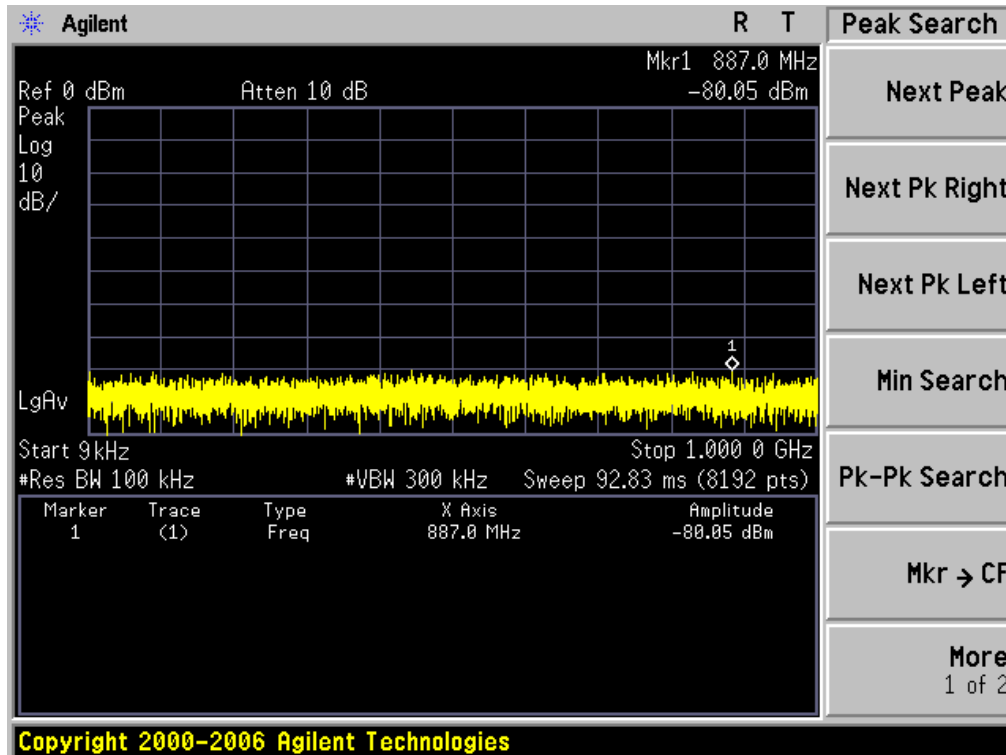



## 6. RADIATED EMISSION

### 6.1. TEST LIMIT

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level dB $\mu$  V = 20 log Emission level  $\mu$  V/m  
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 6.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)




The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average


<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 6.3. TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

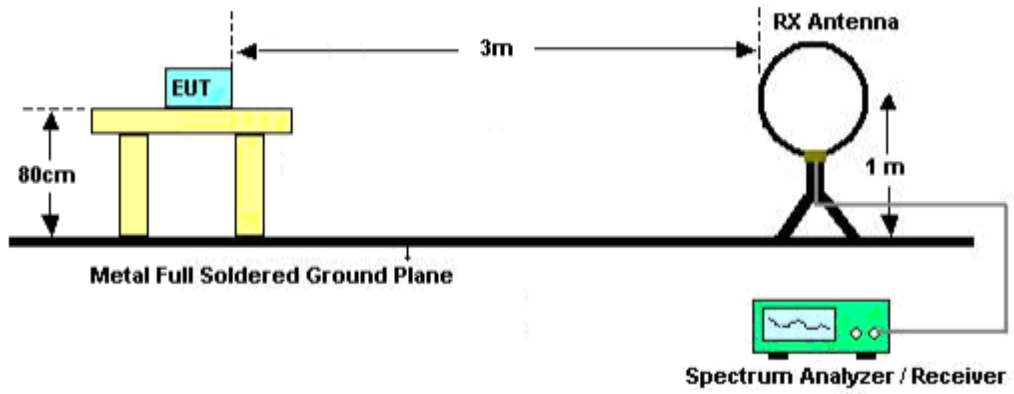


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

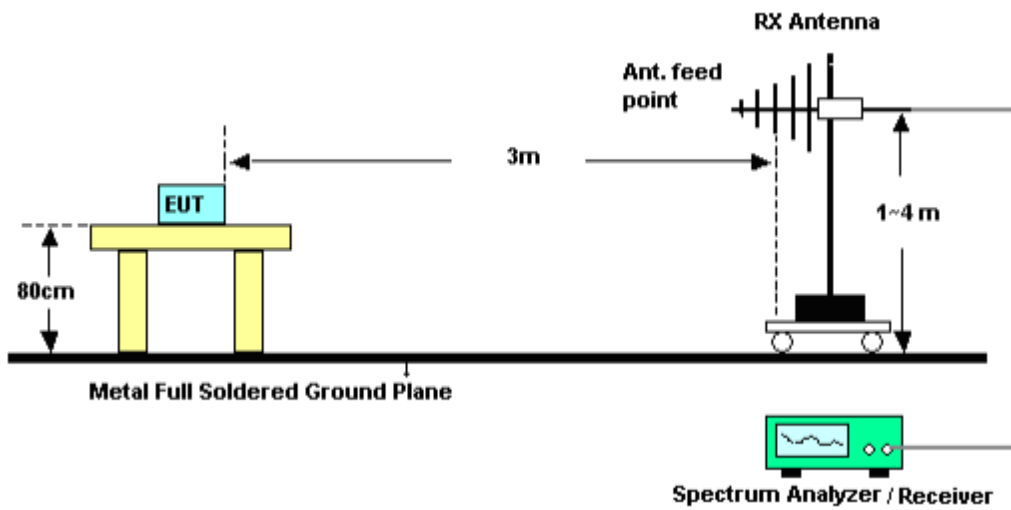



### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

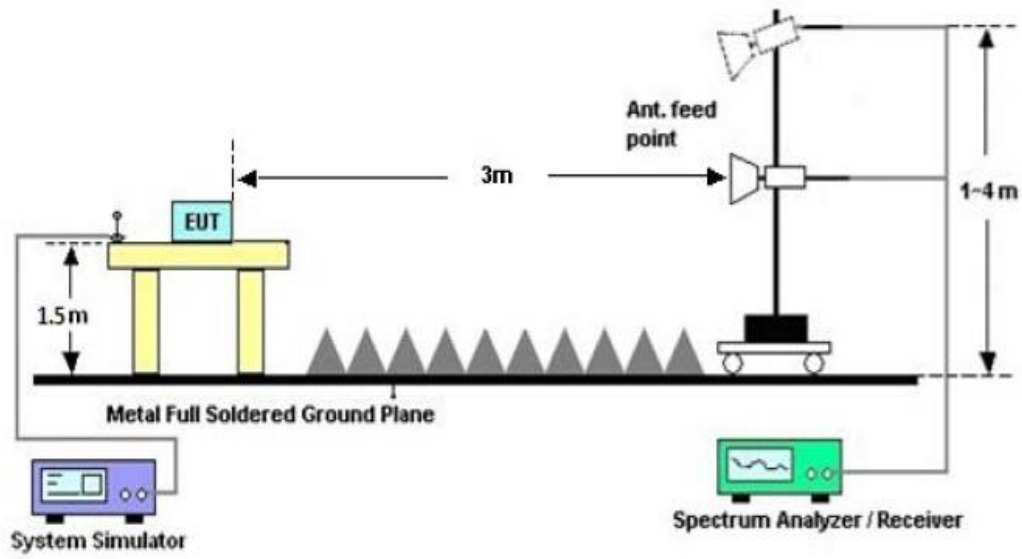





#### **6.4. TEST RESULT**

(Worst Modulation: GFSK)


##### **RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.



**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

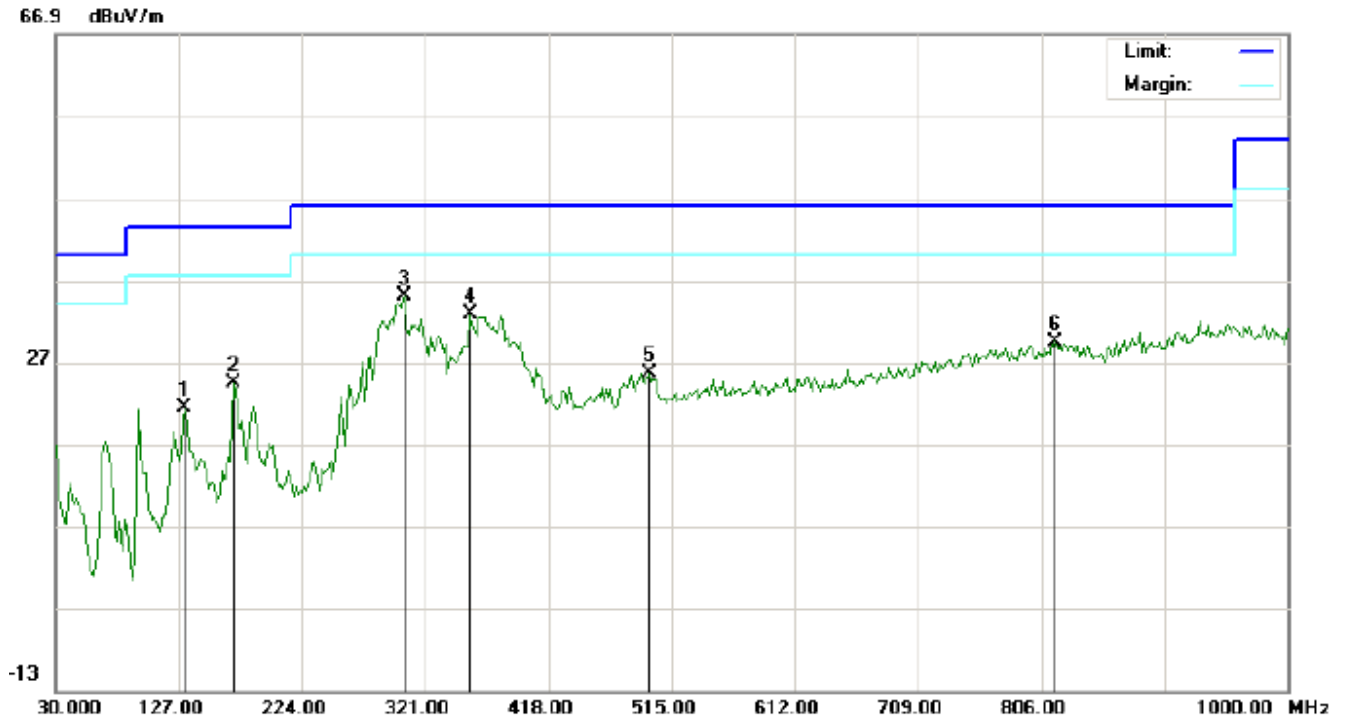

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		131.8500	10.05	11.39	21.44	43.50	-22.06	peak			
2		170.6500	13.78	10.72	24.50	43.50	-19.00	peak			
3	*	304.8333	19.30	15.73	35.03	46.00	-10.97	peak			
4		356.5667	13.96	18.78	32.74	46.00	-13.26	peak			
5		497.2167	4.54	21.10	25.64	46.00	-20.36	peak			
6		817.3167	2.18	27.32	29.50	46.00	-16.50	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	131.8500	17.44	11.80	29.24	43.50	-14.26	peak			
2		164.1833	3.38	15.07	18.45	43.50	-25.05	peak			
3		296.7500	8.17	15.31	23.48	46.00	-22.52	peak			
4		380.8167	3.21	18.94	22.15	46.00	-23.85	peak			
5		631.4000	2.25	23.43	25.68	46.00	-20.32	peak			
6		786.6000	1.88	27.14	29.02	46.00	-16.98	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

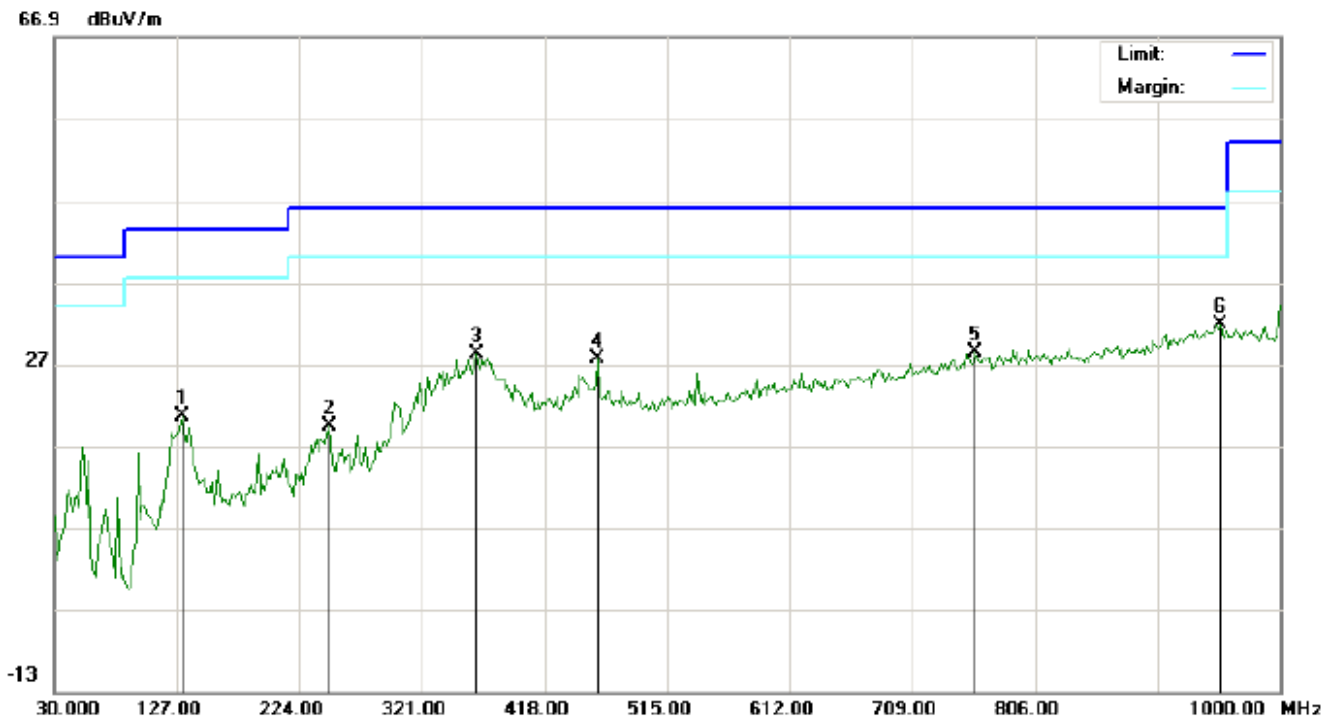


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		131.8500	9.17	11.39	20.56	43.50	-22.94	peak			
2		248.2500	12.31	7.08	19.39	46.00	-26.61	peak			
3		364.6500	9.38	18.84	28.22	46.00	-17.78	peak			
4		460.0333	6.90	20.70	27.60	46.00	-18.40	peak			
5		759.1167	1.67	26.76	28.43	46.00	-17.57	peak			
6	*	953.1167	1.86	29.97	31.83	46.00	-14.17	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

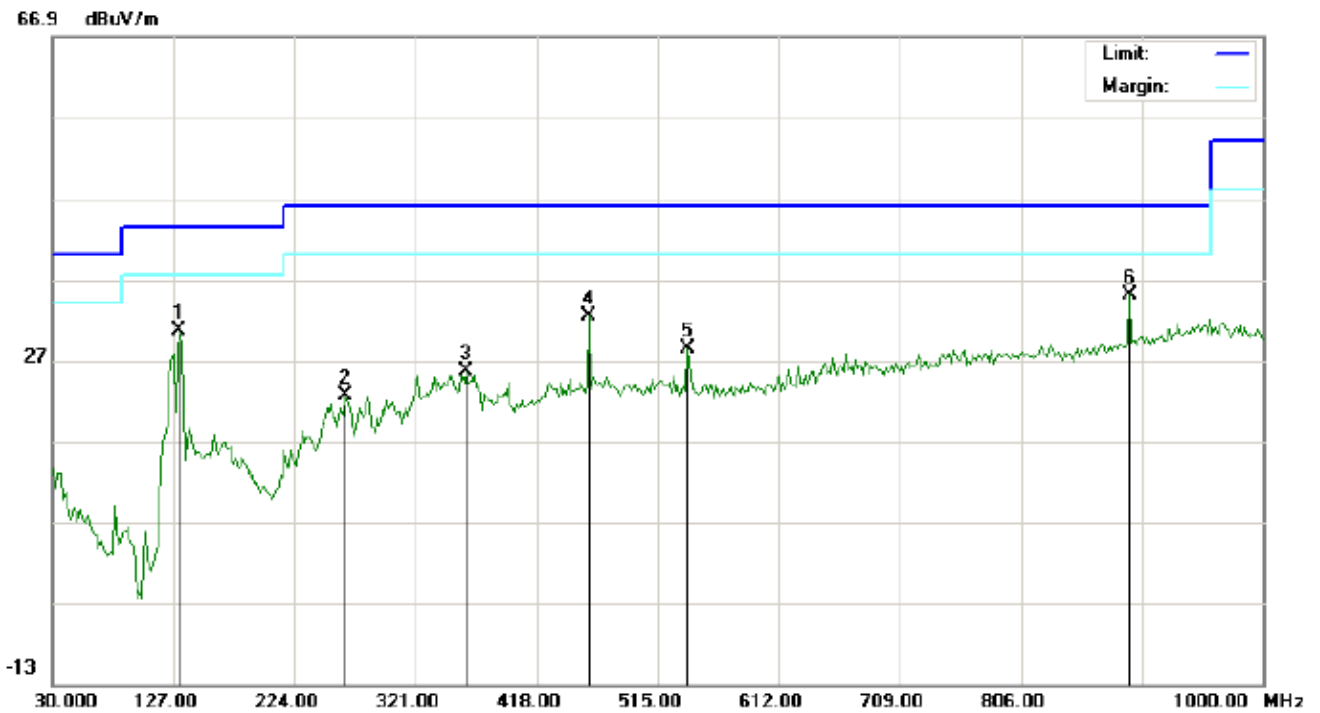

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		131.8500	18.80	11.80	30.60	43.50	-12.90	peak			
2		264.4167	8.28	14.34	22.62	46.00	-23.38	peak			
3		361.4167	6.71	18.82	25.53	46.00	-20.47	peak			
4		460.0333	11.76	20.70	32.46	46.00	-13.54	peak			
5		539.2500	6.19	22.19	28.38	46.00	-17.62	peak			
6	*	893.3000	6.57	28.44	35.01	46.00	-10.99	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

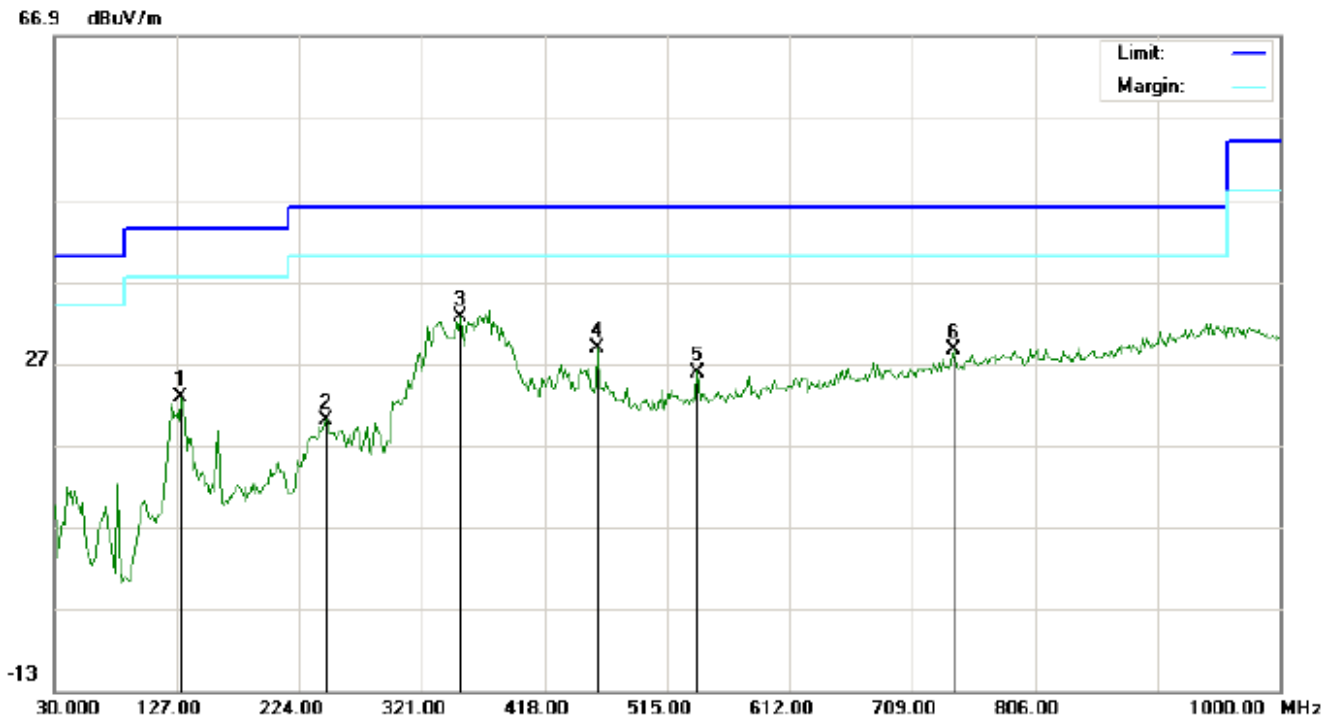


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		130.2333	12.13	10.64	22.77	43.50	-20.73	peak			
2		245.0167	12.69	7.41	20.10	46.00	-25.90	peak			
3	*	351.7167	13.87	18.75	32.62	46.00	-13.38	peak			
4		460.0333	8.17	20.70	28.87	46.00	-17.13	peak			
5		539.2500	3.71	22.19	25.90	46.00	-20.10	peak			
6		741.3333	2.25	26.39	28.64	46.00	-17.36	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

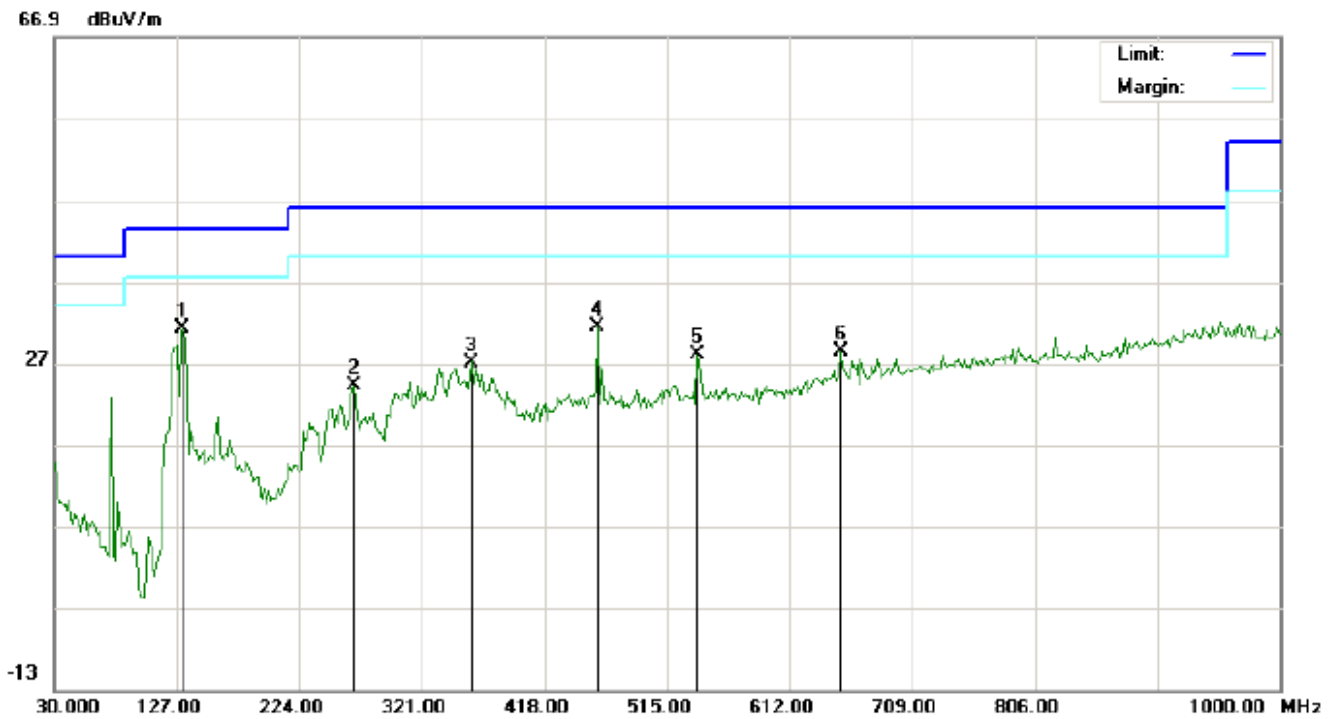

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	131.8500	19.41	11.80	31.21	43.50	-12.29	peak			
2		267.6500	9.84	14.43	24.27	46.00	-21.73	peak			
3		359.8000	8.30	18.80	27.10	46.00	-18.90	peak			
4		460.0333	10.73	20.70	31.43	46.00	-14.57	peak			
5		539.2500	5.86	22.19	28.05	46.00	-17.95	peak			
6		652.4167	4.45	23.91	28.36	46.00	-17.64	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



**RADIATED EMISSION ABOVE 1GHz**

**RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-LOW CHANNEL-HORIZONTAL**

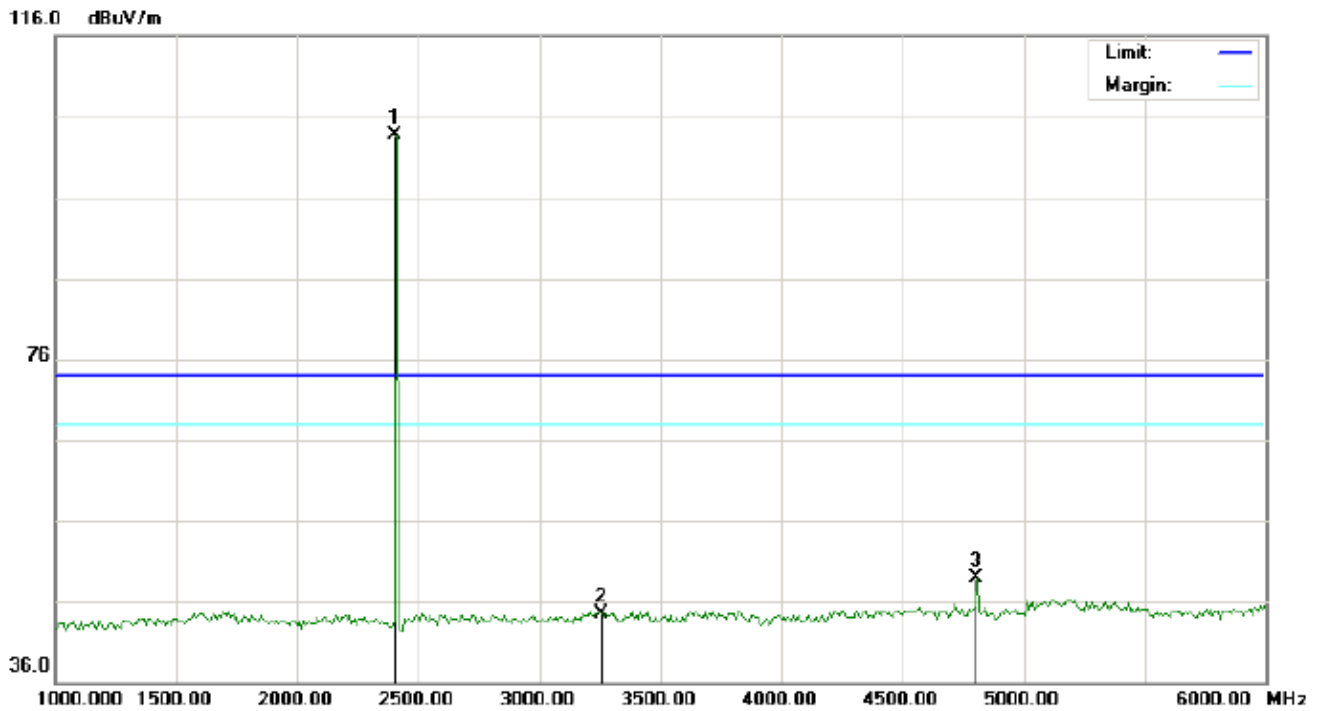


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2402.000	93.36	10.32	103.68	74.00	29.68	peak			
2		3256.000	32.71	11.88	44.59	74.00	-29.41	peak			
3		4804.000	41.21	7.69	48.90	74.00	-25.10	peak			

**RESULT: PASS**





RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-LOW CHANNEL –VERTICAL

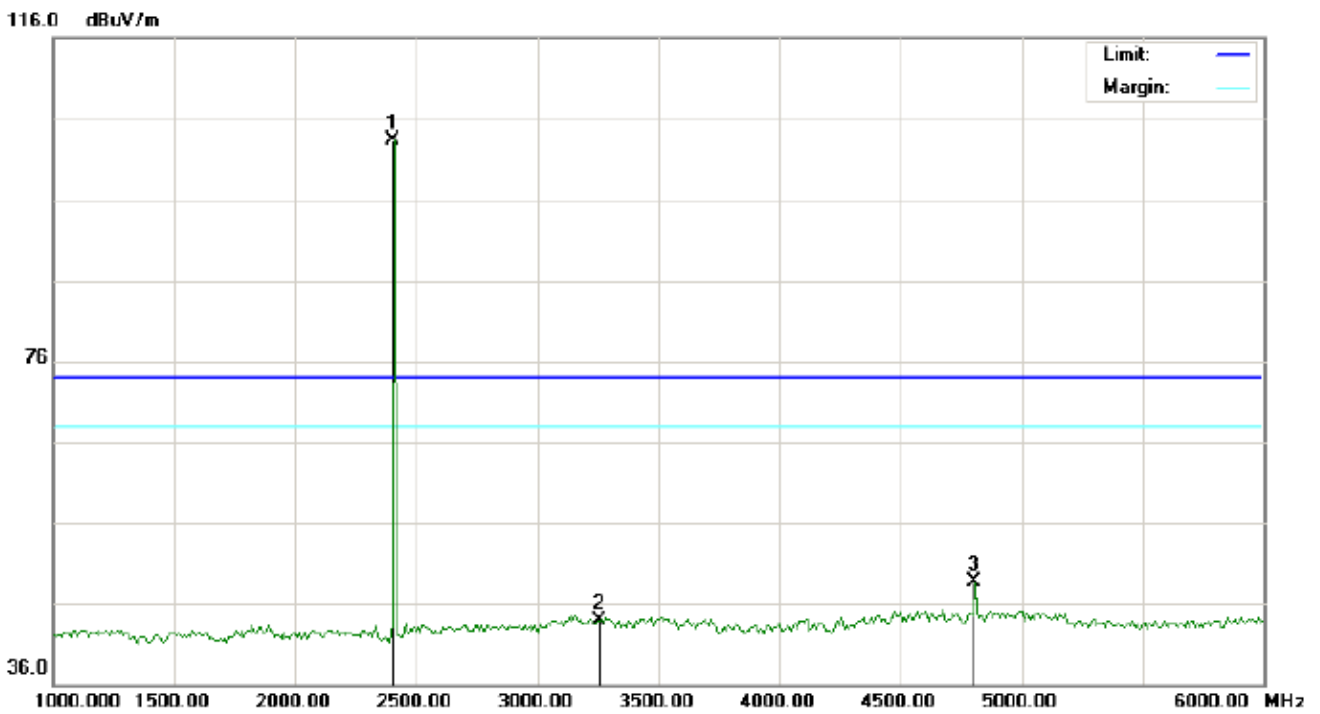


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2402.000	92.89	10.32	103.21	74.00	29.21	peak			
2		3257.000	32.06	11.88	43.94	74.00	-30.06	peak			
3		4804.000	41.05	7.69	48.74	74.00	-25.26	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-MIDDLE CHANNEL-HORIZONTAL

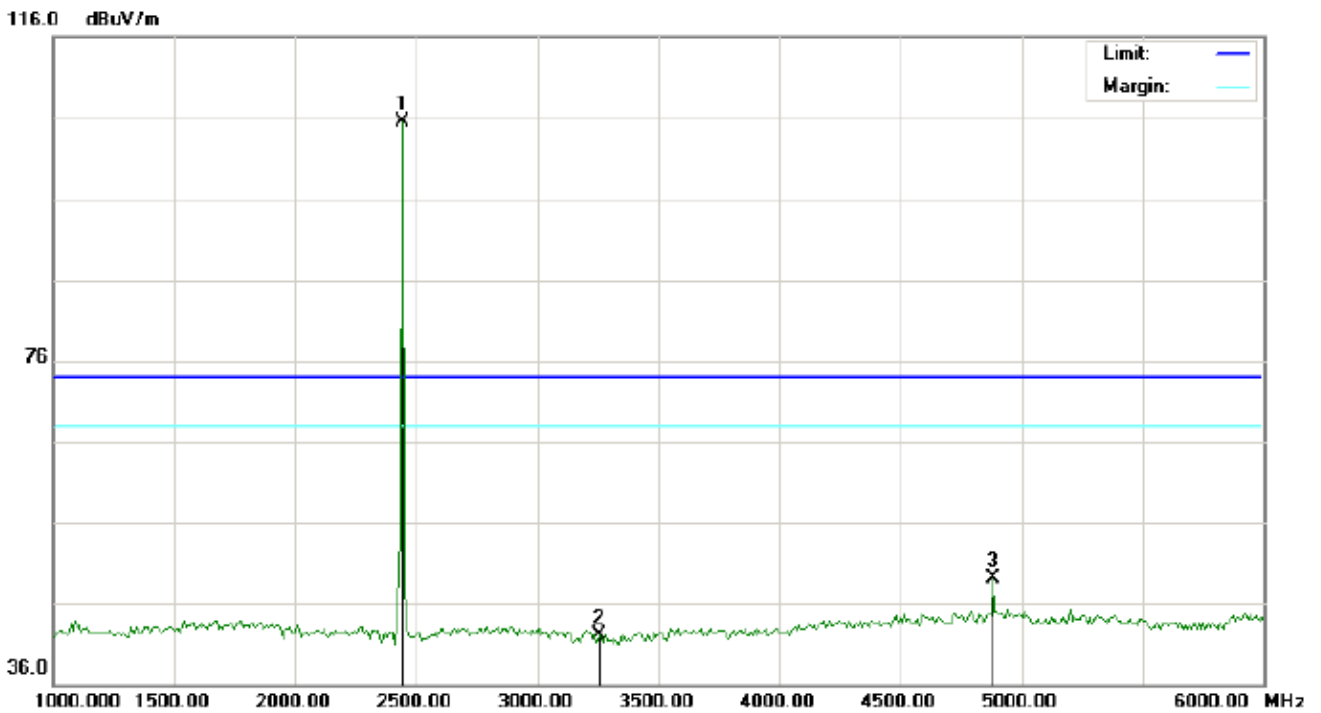


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2441.000	95.23	10.36	105.59	74.00	31.59	peak			
2		3254.000	30.23	11.88	42.11	74.00	-31.89	peak			
3		4882.000	41.16	7.89	49.05	74.00	-24.95	peak			

RESULT: PASS



RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics) - MIDDLE CHANNEL –VERTICAL

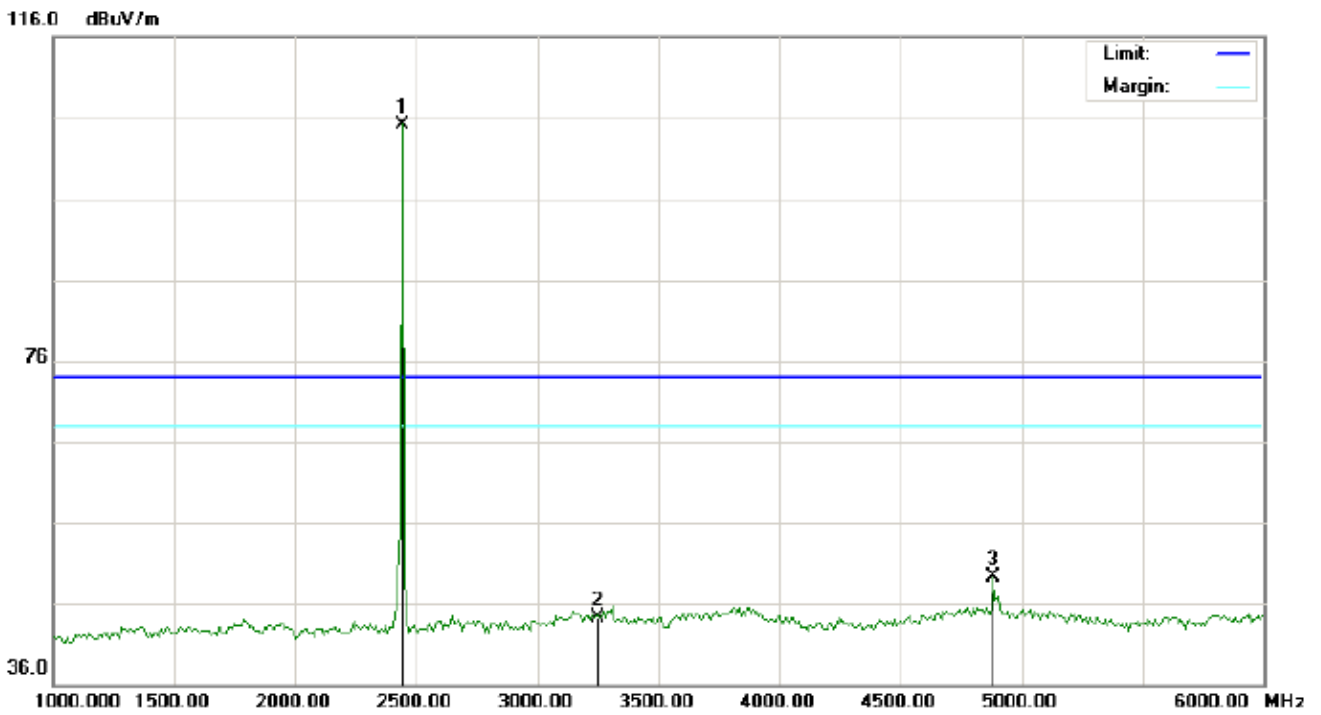


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2441.000	94.70	10.36	105.06	74.00	31.06	peak	cm	degree	
2		3251.000	32.37	11.88	44.25	74.00	-29.75	peak			
3		4882.000	41.39	7.89	49.28	74.00	-24.72	peak			

**RESULT: PASS**



RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL-HORIZONTAL

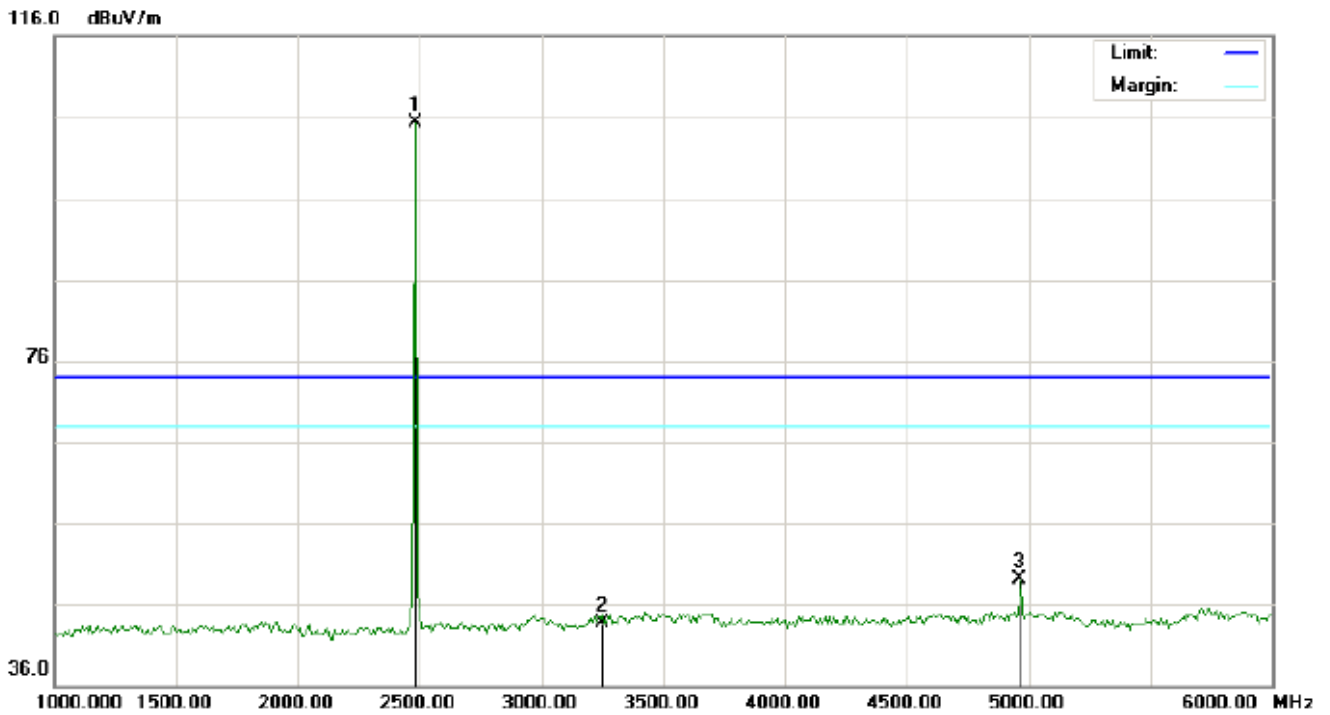


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	94.93	10.41	105.34	74.00	31.34	peak			
2		3251.000	31.91	11.88	43.79	74.00	-30.21	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			

**RESULT: PASS**



RADIATED EMISSION ABOVE 1GHz (1-10<sup>th</sup> Harmonics)-HIGH CHANNEL –VERTICAL

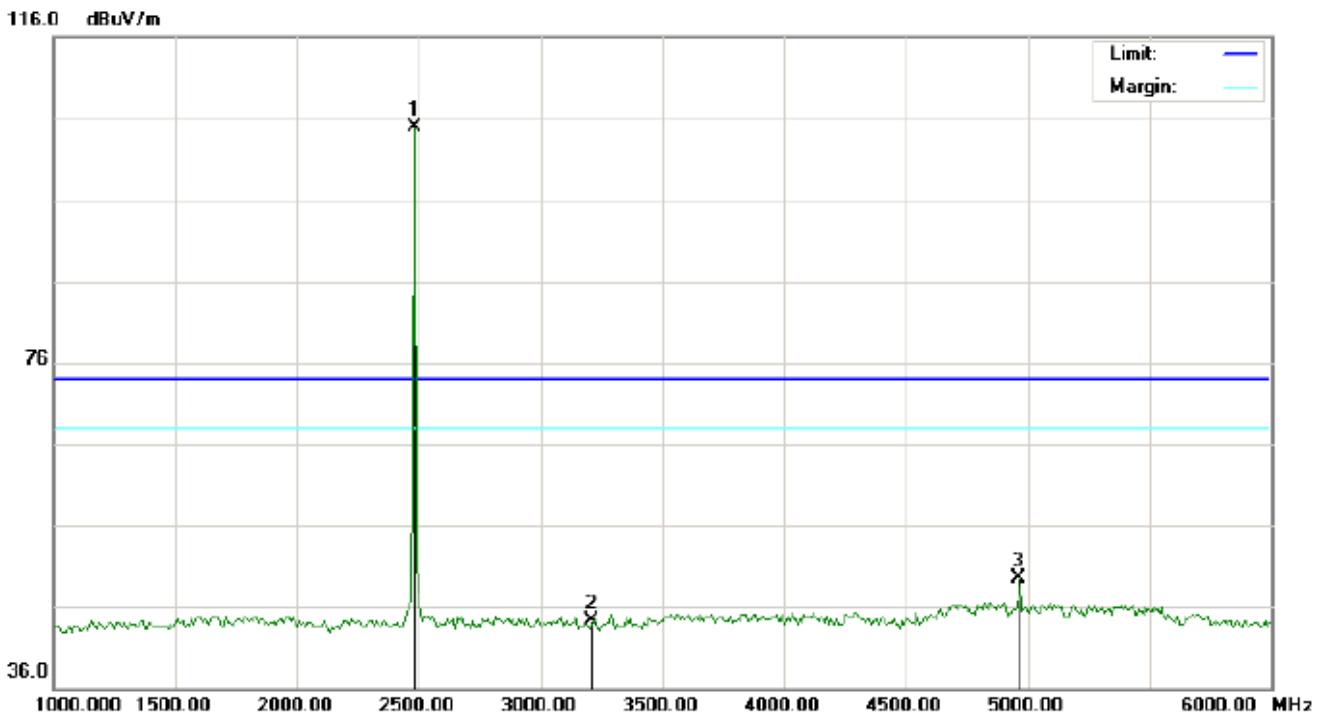

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	94.47	10.41	104.88	74.00	30.88	peak			
2		3210.000	32.38	11.84	44.22	74.00	-29.78	peak			
3		4960.000	41.41	8.09	49.50	74.00	-24.50	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.


The “Factor” value can be calculated automatically by software of measurement system.

## 7. BAND EDGE EMISSION

### 7.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency=Operation Frequency,  
For unrestricted band: RBW=100kHz, VBW=300kHz  
For restricted band: RBW=1MHz, VBW=3\*RBW  
Center frequency =Operation frequency
3. The band edges was measured and recorded.

### 7.2. TEST SET-UP

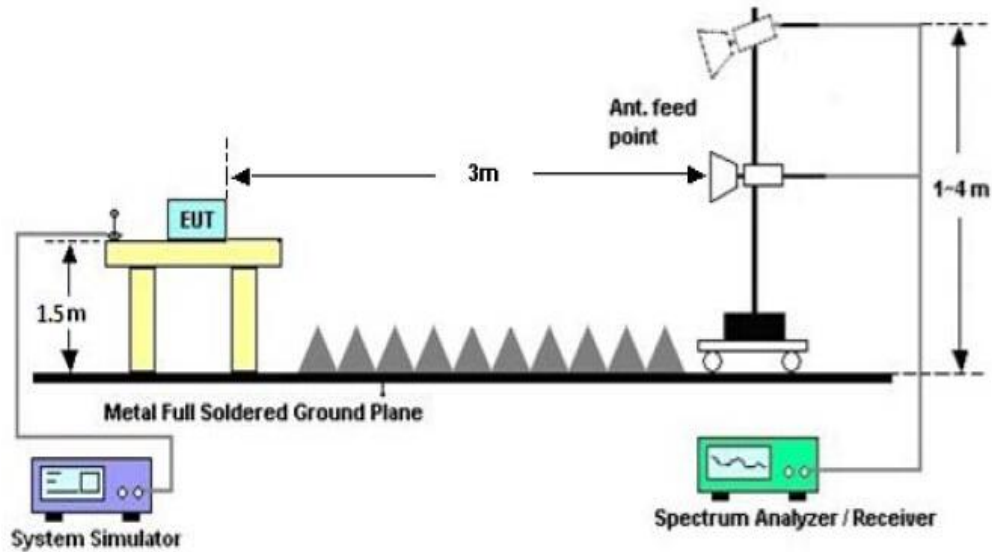




### 7.3. TEST RESULT

(Worst Modulation: GFSK)


TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal

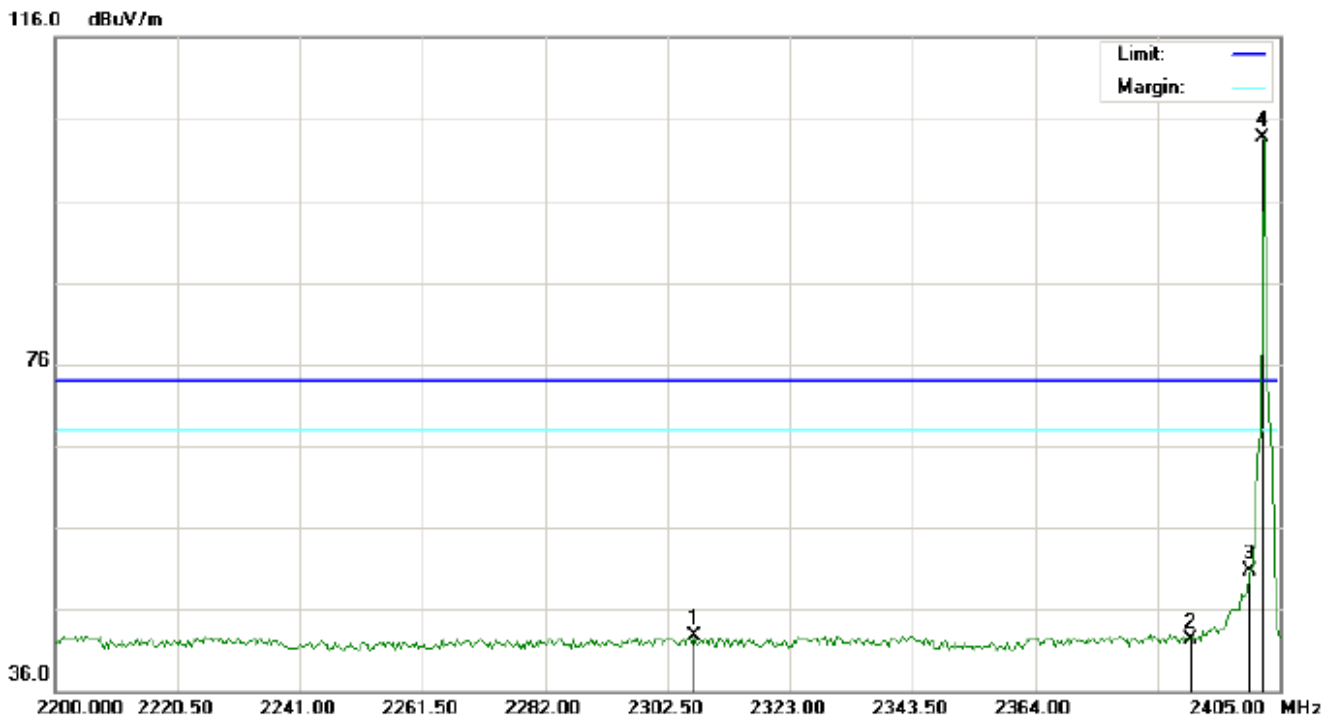

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2306.942	32.41	10.22	42.63	74.00	-31.37	peak			
2		2390.000	32.00	10.31	42.31	74.00	-31.69	peak			
3		2400.000	40.47	10.32	50.79	74.00	-23.21	peak			
4	*	2402.000	93.29	10.32	103.61	74.00	29.61	peak			



TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical

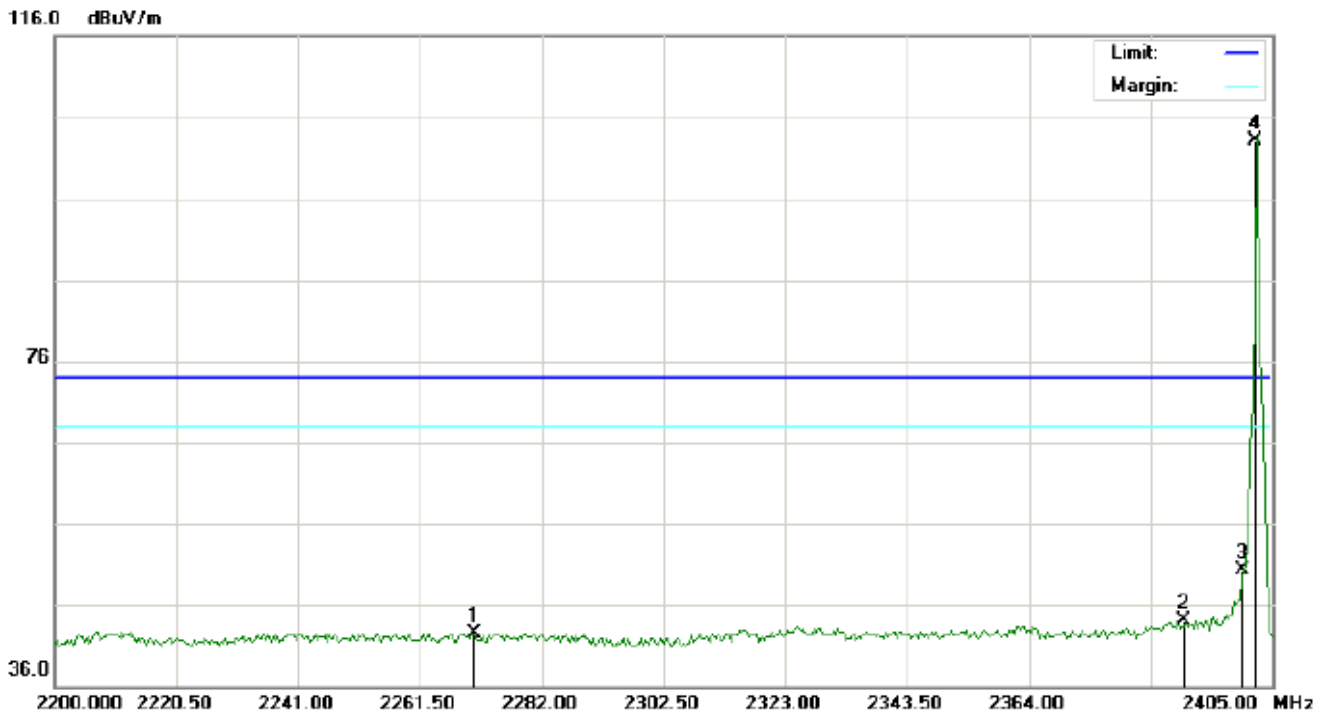


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2270.725	32.31	10.18	42.49	74.00	-31.51	peak			
2		2390.000	33.71	10.31	44.02	74.00	-29.98	peak			
3		2400.000	40.06	10.32	50.38	74.00	-23.62	peak			
4	*	2402.000	92.83	10.32	103.15	74.00	29.15	peak			






TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

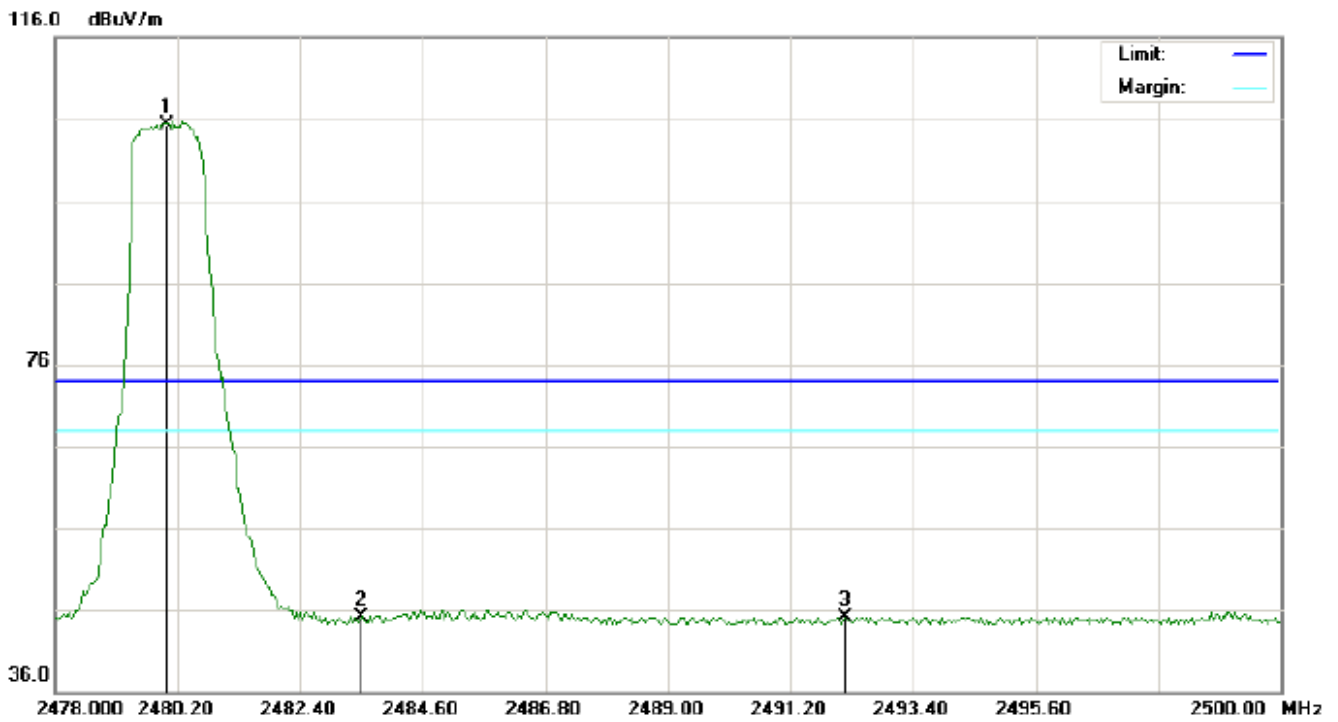

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2480.000	94.90	10.41	105.31	74.00	31.31	peak			
2		2483.500	34.69	10.41	45.10	74.00	-28.90	peak			
3		2492.190	34.74	10.42	45.16	74.00	-28.84	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

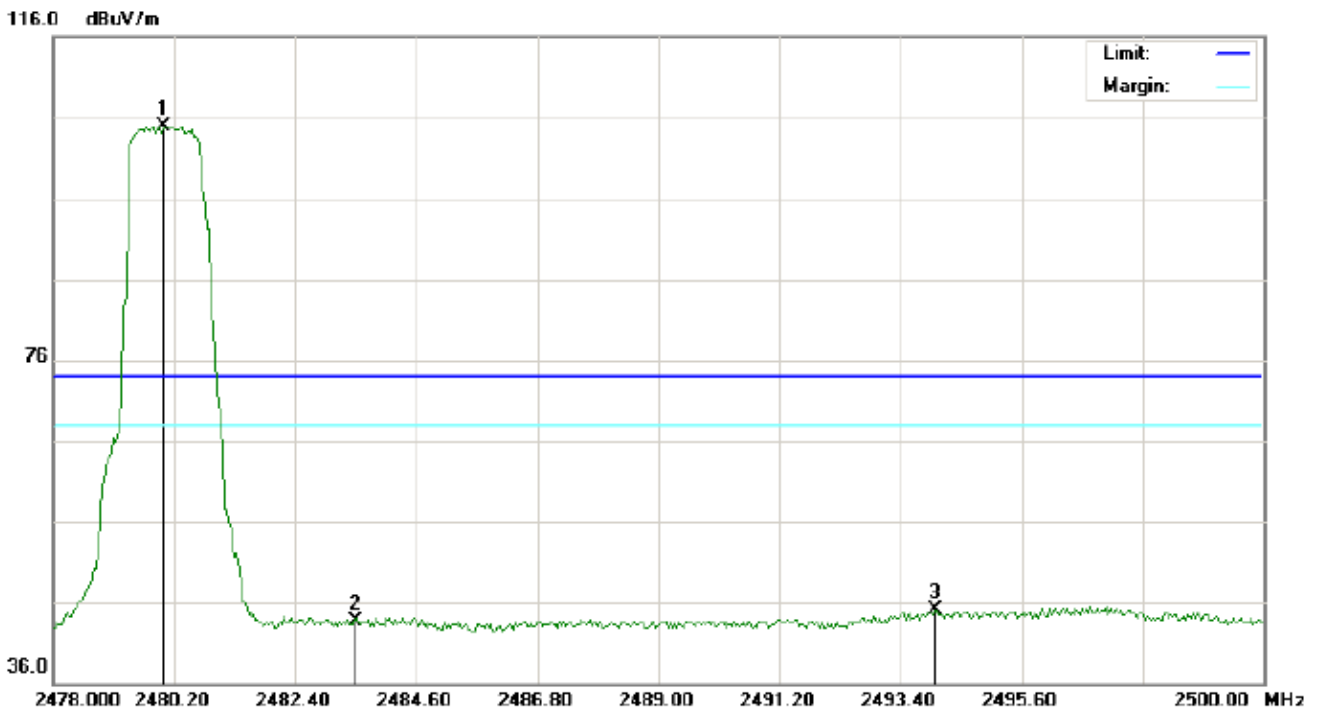

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	94.44	10.41	104.85	74.00	30.85	peak			
2		2483.500	33.26	10.41	43.67	74.00	-30.33	peak			
3		2494.023	34.62	10.42	45.04	74.00	-28.96	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Hopping off and Hopping on have been tested and only worst case recorded

## 8. NUMBER OF HOPPING FREQUENCY

### 8.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
4. Set the Spectrum Analyzer as RBW $\geq$ 1%span, VBW $\geq$ 3RBW.

### 8.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

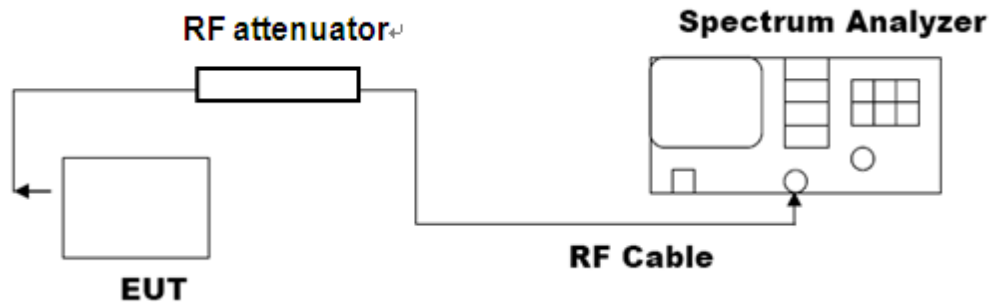


### 8.3. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF HOPPING CHANNEL	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
	$\geq 15$	79	PASS



TEST PLOT FOR NO. OF TOTAL CHANNELS

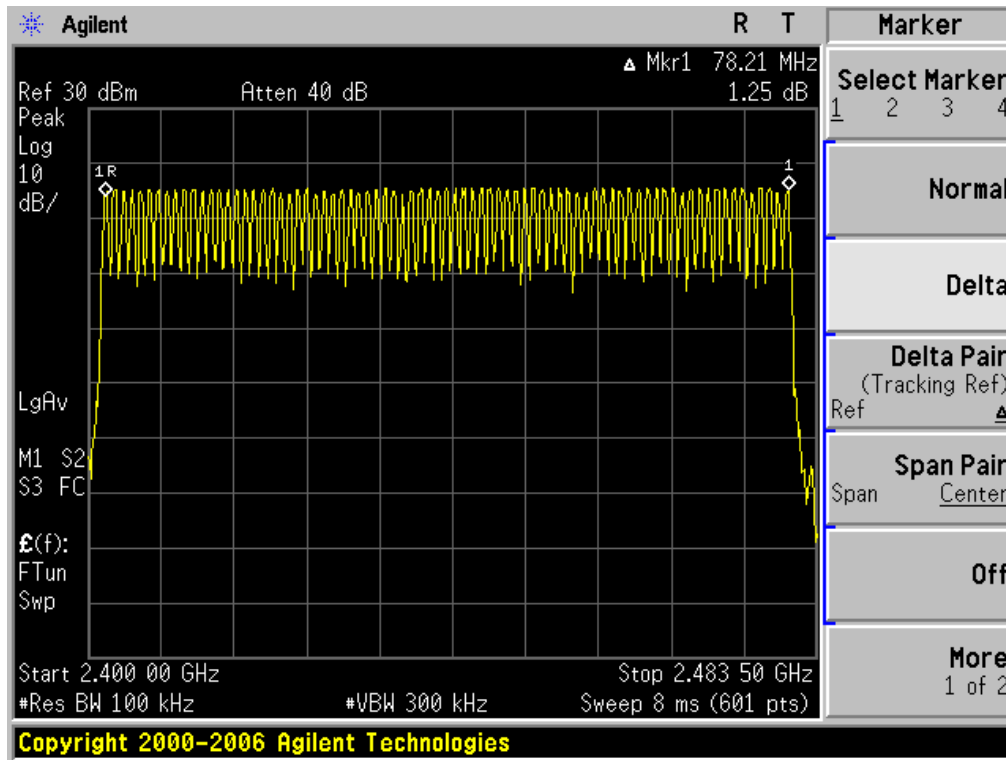


## 9. TIME OF OCCUPANCY (DWELL TIME)

### 9.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
3. Set Span = zero span, centered on a hopping channel
4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

### 9.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

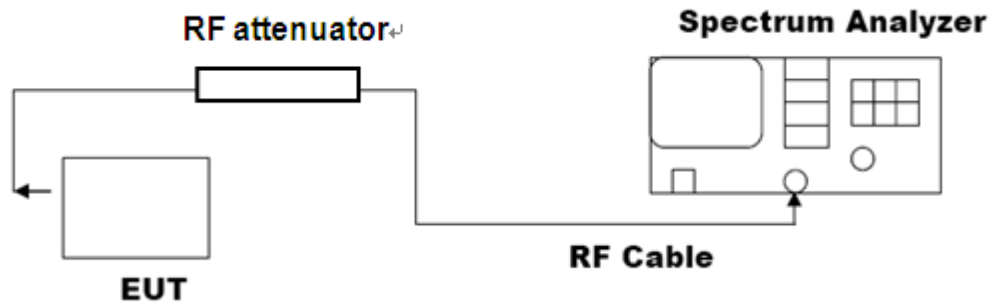

### 9.3. LIMITS AND MEASUREMENT RESULT

#### The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.87	31.6	306.13	400
Middle	2.884	31.6	307.63	400
High	2.87	31.6	306.13	400

Low Channel Time

$$2.87 * (1600/6) / 79 * 31.6 = 306.13 \text{ms}$$

Middle Channel Time


$$2.884 * (1600/6) / 79 * 31.6 = 307.63 \text{ms}$$

High Channel Time


$$2.87 * (1600/6) / 79 * 31.6 = 306.13 \text{ms}$$



### TEST PLOT OF LOW CHANNEL

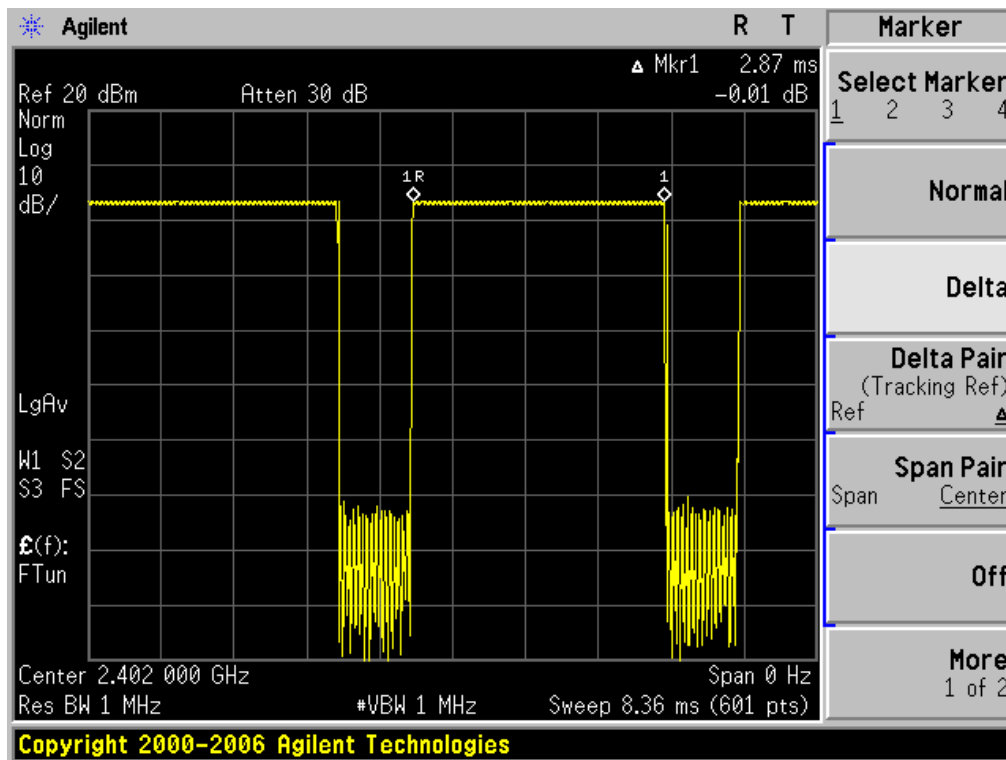


### TEST PLOT OF MIDDLE CHANNEL

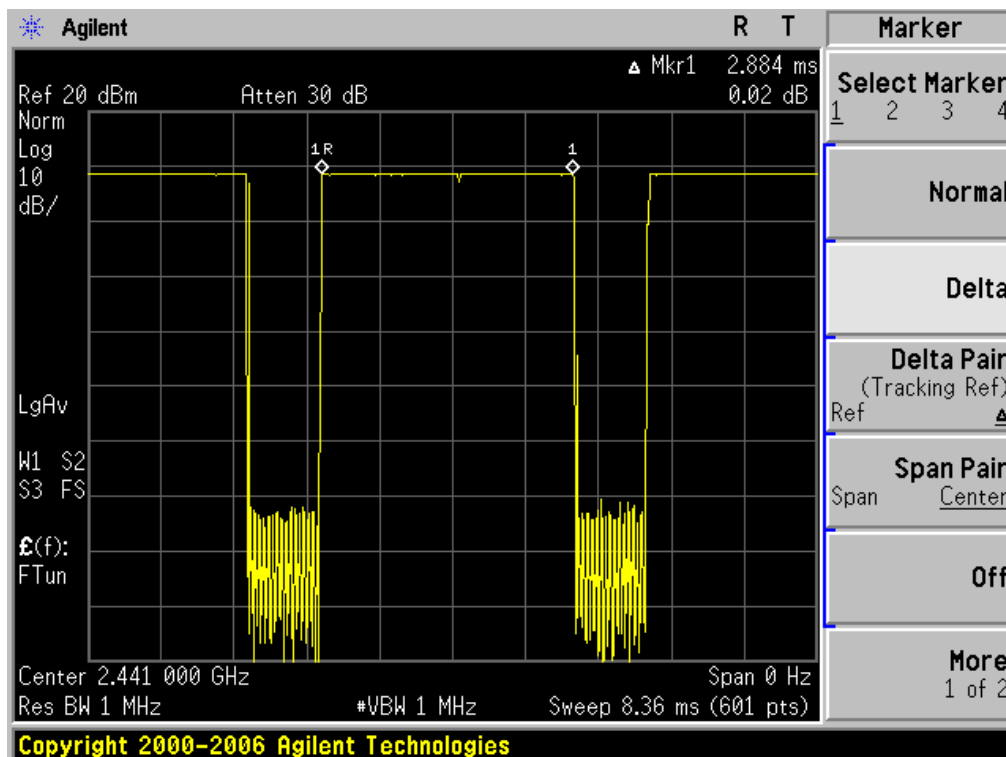



### TEST PLOT OF HIGH CHANNEL

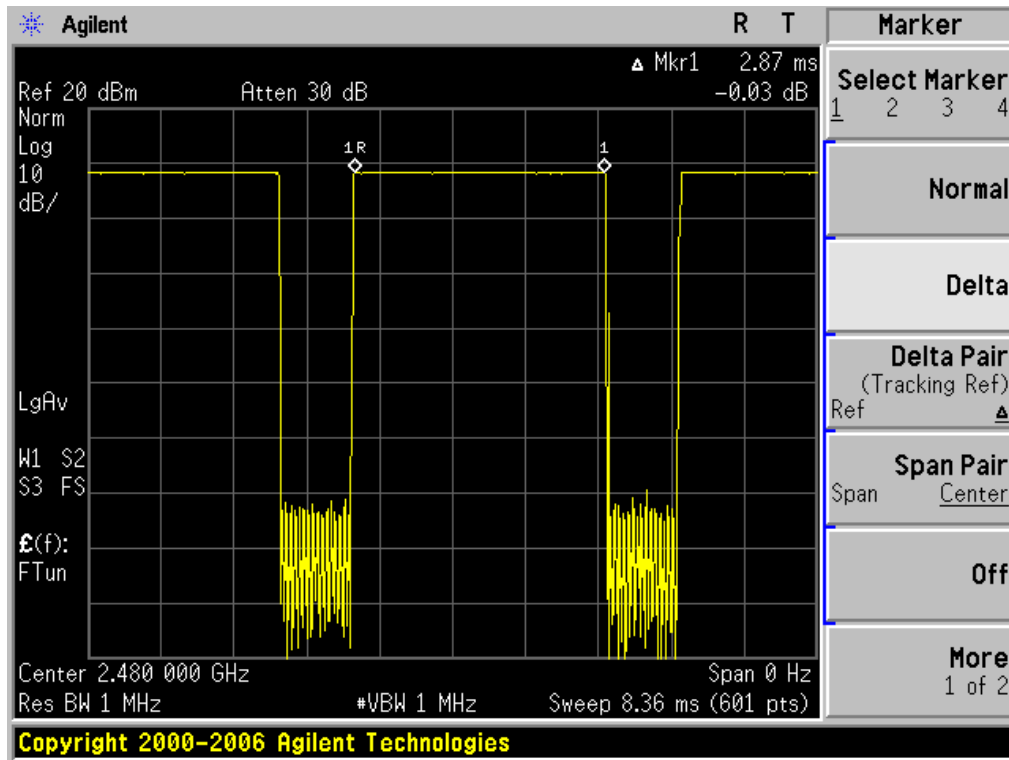


## 10. FREQUENCY SEPARATION

### 10.1. MEASUREMENT PROCEDURE

1. Place the EUT on the table and set it in transmitting mode
2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span Video (or Average) Bandwidth (VBW)  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold

### 10.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

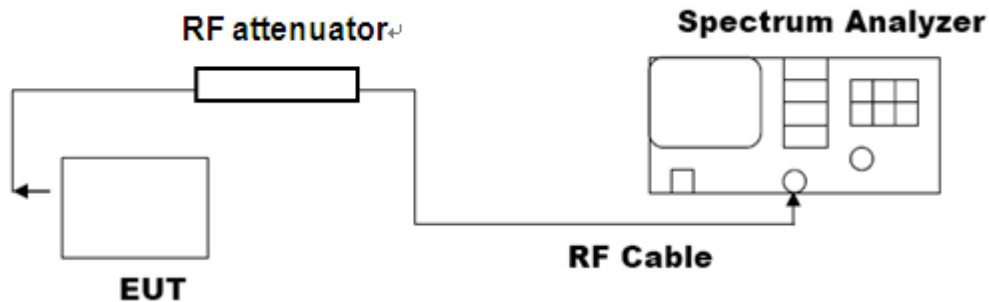


### 10.3. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT
	KHz	KHz	
CH00-CH01	1000	$\geq 25$ KHz or 2/3 20 dB BW	Pass





### TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

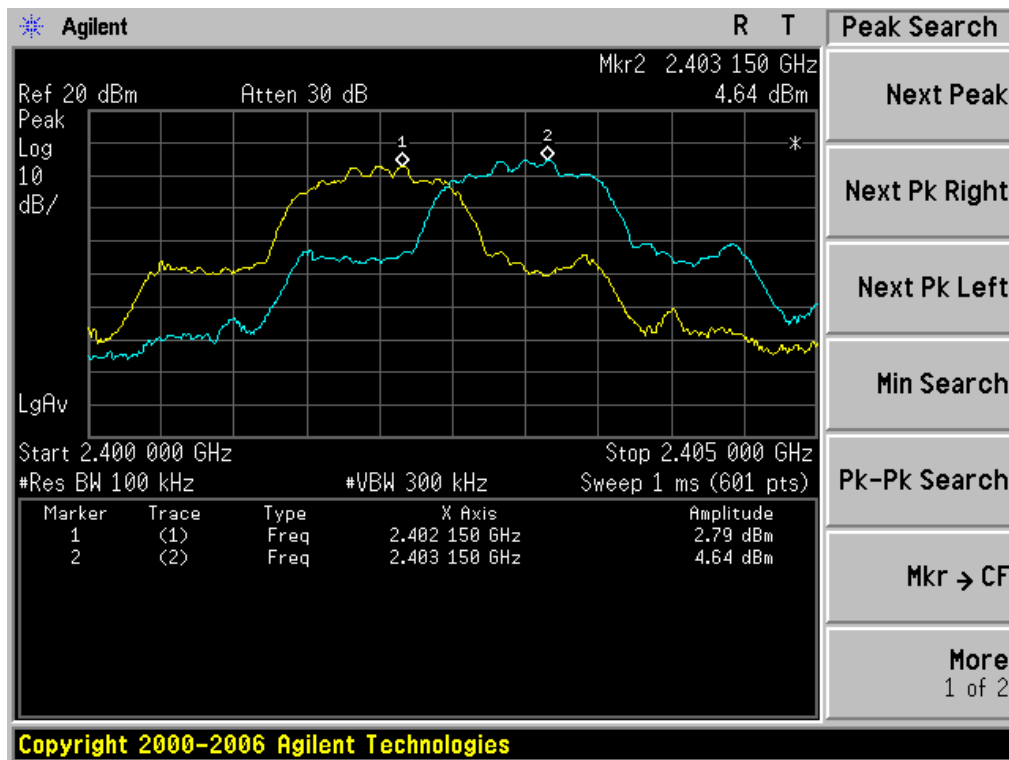

## 11. LINE CONDUCTED EMISSION TEST


### 11.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 11.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

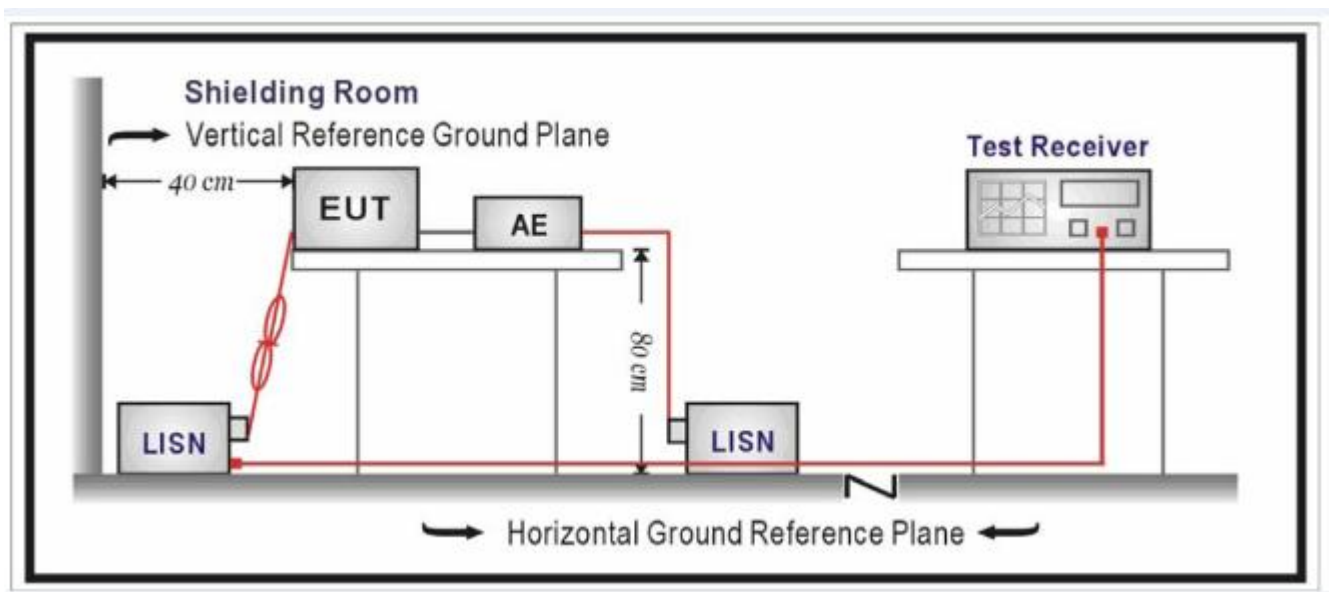



### 11.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10, RSS-GEN (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10, RSS-GEN.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10, RSS-GEN.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 11.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less  $-2\text{dB}$  to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

### 11.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT didn't work when charging.

## 12. ANTENNA REQUIREMENT


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### ANTENNA

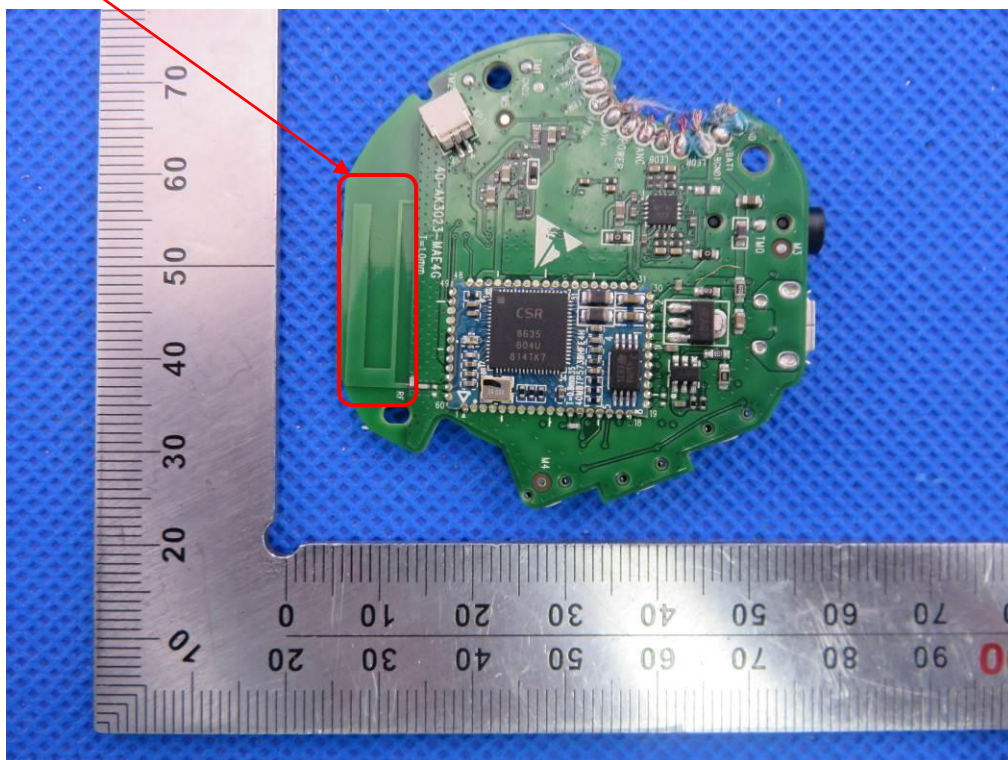

### 13. PHOTOGRAPH OF TEST

FCC RADIATED EMISSION TEST SETUP

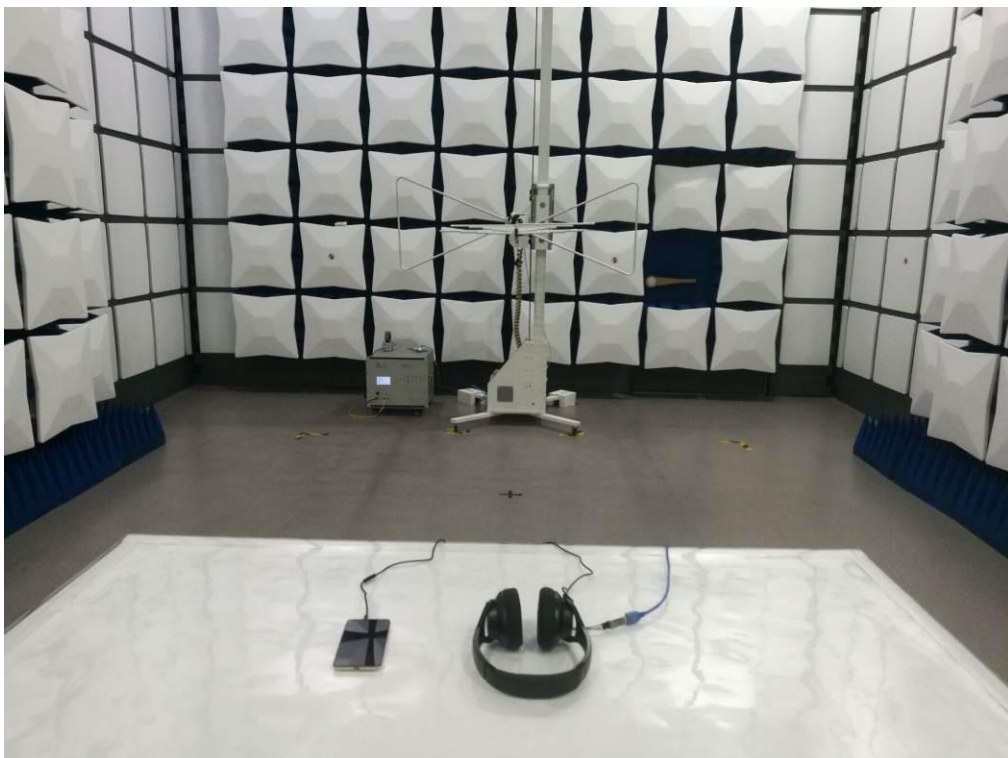





# 14. PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT





BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT (PORT)






OPEN VIEW OF EUT




VIEW OF BATTERY



INTERNAL VIEW OF EUT-1

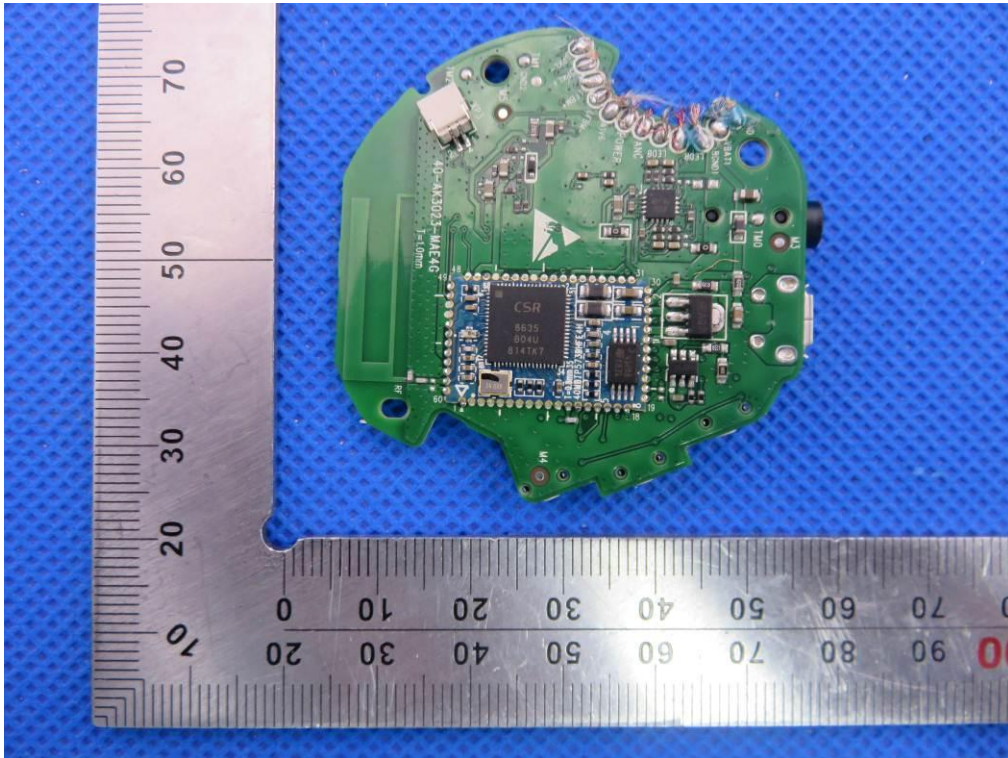


INTERNAL VIEW OF EUT-2

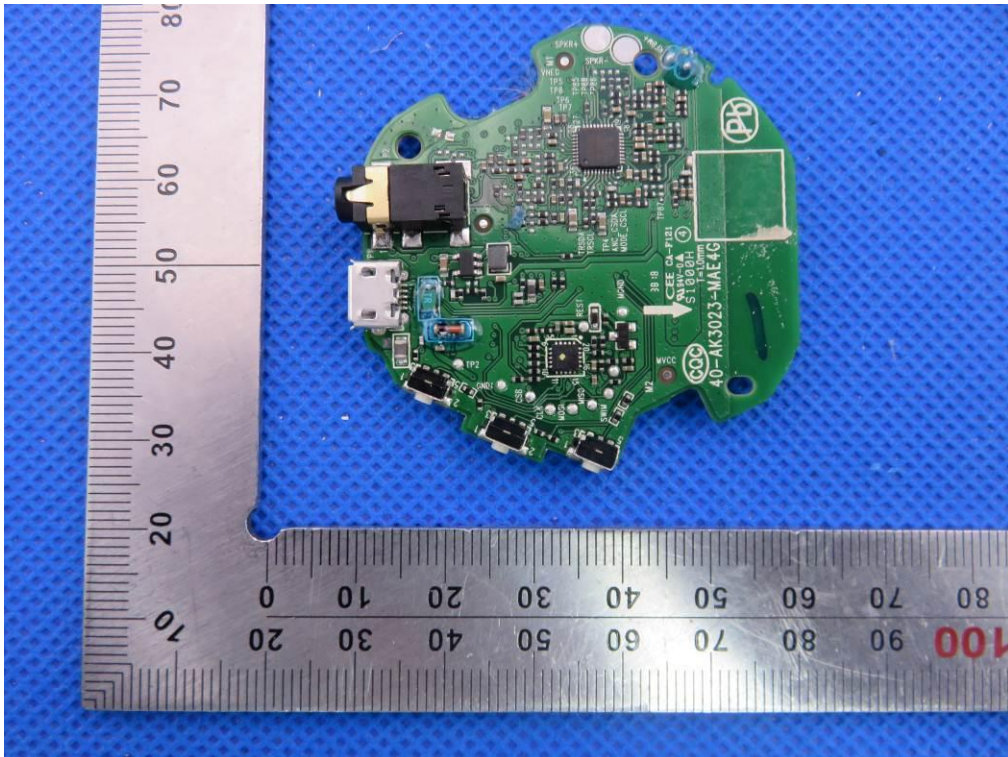




INTERNAL VIEW OF EUT-3

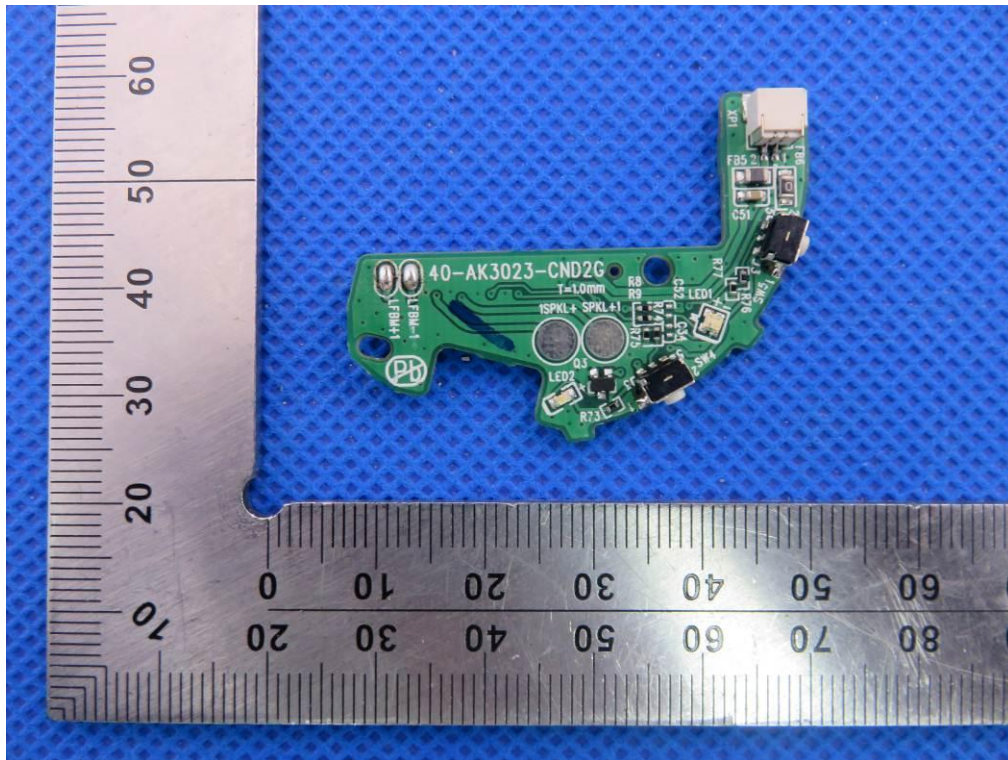

INTERNAL VIEW OF EUT-4

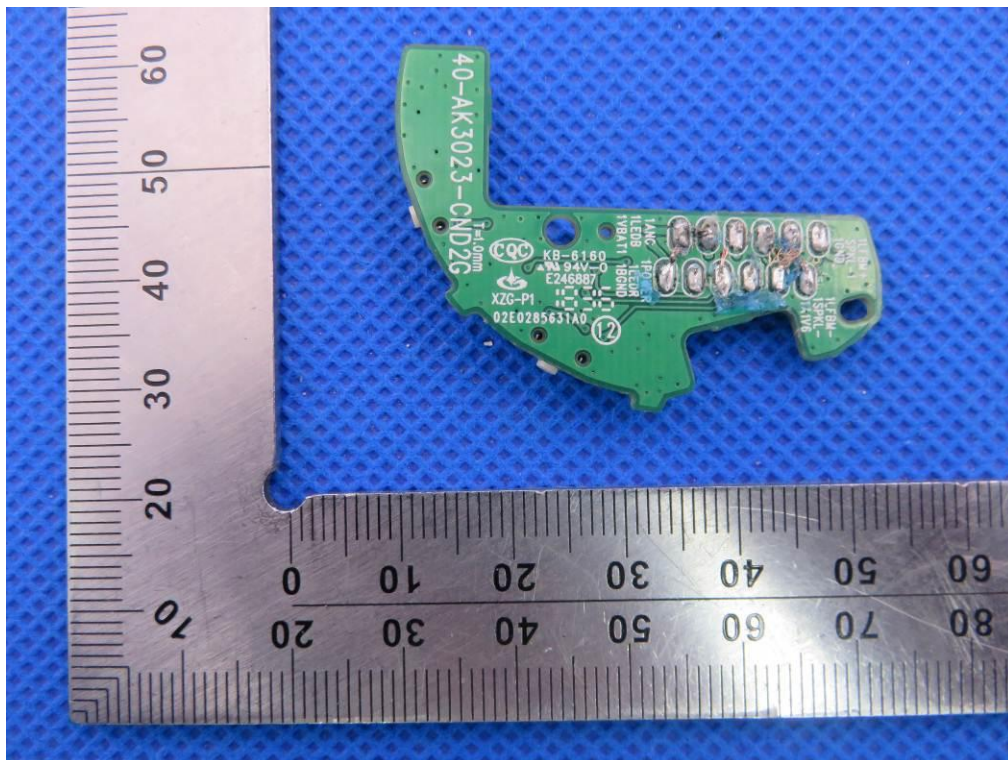

INTERNAL VIEW OF EUT-5



Distance from human body-42mm



----END OF REPORT----