


Item #1001592914 #1001592912 #1001592913 Model #13-0093-W-GB #13-0093-4W-GB

### **USE AND CARE GUIDE**

#### **RECTANGULAR DROP-IN SINK**

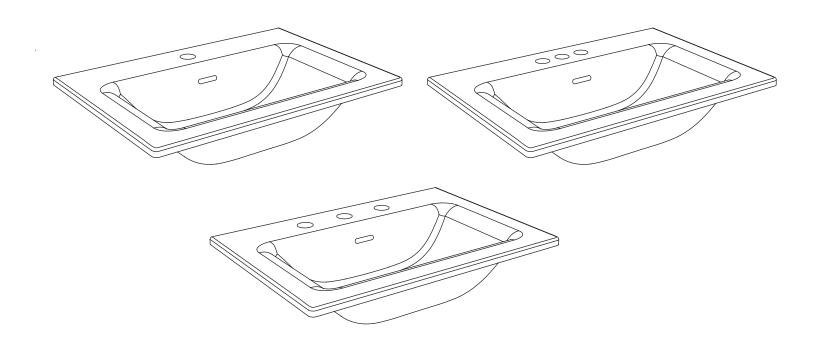

Questions, problems, missing parts? Before returning to the store, call Glacier Bay Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

**HOMEDEPOT.CA** 

#### THANK YOU

### **Table of Contents**

Table of Contents2	Installation
Safety Information	Care and Cleaning6
Warranty	
Pre-Installation3	
Planning Installation	
Tools Required	
Package Contents	

### **Safety Information**

Please read and understand all safety precautions and instructions in this manual before you begin the installation of this product.



**CAUTION:** Handle with care. Vitreous chinaware is glass-like with sharp edges if broken. Do not drop or handle

NOTICE: Observe local plumbing and building codes.

### Warranty

#### LIMITED LIFETIME WARRANTY

Glacier Bay products are manufactured with superior quality standards and workmanship and are backed by our limited lifetime warranty.

Glacier Bay products are warranted to the original consumer purchaser to be free of defects in materials or workmanship. We will replace FREE OF CHARGE any product or parts that proves defective. Simply, return the product / part to any of The Home Depot retail locations or call 1-855-HD-GLACIER to receive the replacement item. Proof of purchase (original sales receipt) from the original consumer purchaser must be made available for all Glacier Bay warranty claims.

This warranty excludes incidental/inconsequential damages and failures due to misuse, abuse or normal wear and tear. This warranty excludes all industrial, commercial & business usage, whose purchasers are hereby, extended a five year limited warranty from the date of purchase, with all other terms of this warranty applying except the duration of warranty.

Some states and provinces do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights that vary from state to state and province to province. Please see a store or contact 1-855-HD-GLACIER for more details.

### **Pre-Installation**



**NOTE:** This sink can be handicapped installed. To comply with the ADA requirements, the sink shall be installed at 34 in. (865 mm) height maximum measured from the floor to top of front rim.

#### **PLANNING INSTALLATION**

Before beginning installation of this product, ensure all parts are present. If any part is missing or damaged, do not attempt to assemble, install, or operate the product. Contact customer service for replacement parts.

If you have a marble or stone countertop that does not have a cutout to accommodate the sink, it is recommended this be done by a professional. Install so future removal is possible. Do not use adhesives or adhesive sealant. This will avoid damage to the top.




**NOTE:** It is recommended to check the desired location for clearance between the backsplash, faucet, plumbing, and vanity.

## **Pre-Installation (continued)**

### **TOOLS REQUIRED**




**NOTE:** You may require different, more specialized tools to install this lavatory to countertop materials other than wood or wood composites.

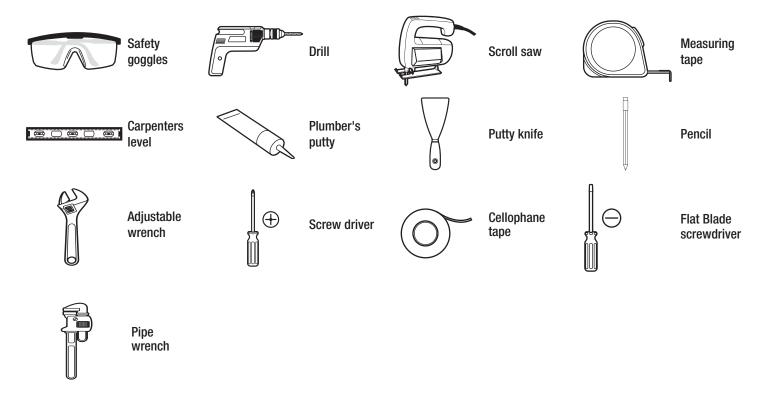


### **PACKAGE CONTENTS**



**NOTE:** The template (B) is to be used as a guide for cutting the sink opening in the countertop, if one does not exist. To avoid possible damage to the cabinet, cut the counter top before installing it to the cabinet.






Part	Description	Quantity
Α	Sink	1
В	Template	1

### Installation

# Cutting the opening

- Affix the template (B) provided to the counter top at the desired location with cellophane tape.
- □ Using a pencil, mark guidelines on the counter top following the template (B).
- □ Drill a clearance hole approximately 1/4 in. to 1/2 in. inside the perimeter line of the template.
- Cut an opening following the perimeter line of the template (B).




## **?** Positioning the sink

Check the cutout alignment by carefully positioning the sink
(A) in the desired mounting poisiton.



**NOTE:** It is recommended to practice the proper insertion two or three times before applying sealant.

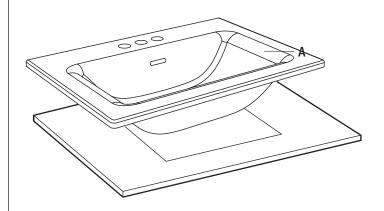

# 3 Installing the drain and plumbing

 Install the drain (not provided) according to the manufacturer's installation instructions.




**CAUTION:** Do not overtighten the drain assembly. This may cause the bowl to forcefully crack during installation or at some time in the future.

 Install the waste system, faucet, and the water supply (not provided) according to the manufacturer's installation instructions.



# 4 Installing the sink

- □ Turn the sink (A) upside-down and apply caulking around the underside of the sink (A) rim near the edge, as shown.
- □ Carefully lower the sink (A) in place, aligning it, and press firmly.
- Wipe off the excess caulking.

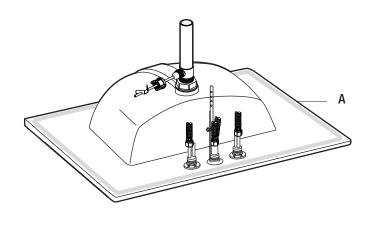

## **Care and Cleaning**

For best results in caring for your sink, we suggest the following:

- □ Clean the outside surface with mild soap, warm water and a soft cloth.
- □ On stubborn stains use a powdered detergent and damp sponge or nylon scouring pad.
- □ Never use abrasive scouring powders, cleansers, or pads because they will scratch, damage, and dull the surface.



Questions, problems, missing parts? Before returning to the store, call Glacier Bay Customer Service 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

**HOMEDEPOT.CA** 

Retain this manual for future use.