

# FCC and ISED Test Report

Apple Inc  
Model: A2843

In accordance with FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN  
(2.4 GHz Bluetooth, Thread, 2.4 GHz WLAN and 5 GHz WLAN)

Prepared for: Apple Inc  
One Apple Park Way, Cupertino  
California, 95014, USA



Add value.  
Inspire trust.

FCC ID: BCGA2843

IC: 579C-A2843

## COMMERCIAL-IN-CONFIDENCE

Document 75954422-24 Issue 01

### SIGNATURE

*A. Lawson*

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Andrew Lawson	Chief Engineer, EMC	Authorised Signatory	28-September-2022

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Report Generation	Lauren Walters	28-September-2022	<i>Lauren Walters</i>

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

ISED Accreditation  
12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15B: 2020, ICES-003: Issue 7: 2020 and ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021) for the tests detailed in section 1.3.



### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2022 TÜV SÜD. This report relates only to the actual item/items tested.

### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuvsud.com/en](http://www.tuvsud.com/en)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



Contents

1      **Report Summary .....2**

1.1    Report Modification Record.....2

1.2    Introduction.....2

1.3    Brief Summary of Results .....3

1.4    Product Information .....4

1.5    Deviations from the Standard.....4

1.6    EUT Modification Record .....4

1.7    Test Location .....5

2      **Test Details .....6**

2.1    Conducted Disturbance at Mains Terminals .....6

2.2    Radiated Disturbance..... 11

3      **Incident Reports ..... 18**

4      **Measurement Uncertainty ..... 19**



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	28-September-2022

**Table 1**

## 1.2 Introduction

Applicant	Apple Inc
Manufacturer	Apple Inc
Model Number(s)	A2843
Serial Number(s)	V09QYNPXN6 and YWL2C4T4WY
Hardware Version(s)	REV 1.0
Software Version(s)	20J42560n
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15B: 2020 ICES-003: Issue 7: 2020 ISED RSS-GEN: Issue 5 (04-2018) + A2 (02-2021)
Order Number	540246998
Date of Receipt of EUT	01-July-2022
Start of Test	30-August-2022
Finish of Test	15-September-2022
Name of Engineer(s)	James Cumming, Mohammad Malik, Colin Brain, Thomas Randall, Taha Shafique and Elliot Callender
Related Document(s)	ANSI C63.4: 2014



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15B, ICES-003 and ISED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15B	ICES-003	RSS-GEN			
Configuration and Mode: AC Powered - Transmitter Idle						
2.1	15.107	3.1	8.8	Conducted Disturbance at Mains Terminals	Pass	ANSI C63.4: 2014
2.2	15.109	3.2	7.1	Radiated Disturbance	Pass	ANSI C63.4: 2014

**Table 2**



## 1.4 Product Information

### 1.4.1 Technical Description

The equipment under test was an Apple TV Set Top Box with Bluetooth®, Thread and IEEE 802.11 a/b/g/n/ac/ax Wi-Fi capabilities in the 2.4GHz and 5GHz bands.

### 1.4.2 EUT Port/Cable Identification

Port	Max Cable Length specified	Usage	Type	Screened
Configuration and Mode: AC Powered - Transmitter Idle				
AC Power Port	2 m	Power	115 V 60 Hz AC Power	No

**Table 3**

### 1.4.3 Test Configuration

Configuration	Description
AC Powered	The EUT was powered by 115 V 60 Hz AC Mains. A switchbox was used to terminate the ethernet port. A switchbox was used to terminate the HDMI port.

**Table 4**

### 1.4.4 Modes of Operation

Mode	Description
Transmitter Idle	The EUT was powered on and configured to have all transmitters disabled. As there was no display output from the EUT, access to exercise the EUT was limited.

**Table 5**

## 1.5 Deviations from the Standard

No deviations from the applicable test standard were made during testing.

## 1.6 EUT Modification Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: A2843, Serial Number: YWL2C4T4WY			
0	As supplied by the customer	Not Applicable	Not Applicable
Model: A2843, Serial Number: V09QYNPXN6			
0	As supplied by the customer	Not Applicable	Not Applicable

**Table 6**



## 1.7 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - Transmitter Idle		
Conducted Disturbance at Mains Terminals	James Cumming	UKAS

**Table 7**

Office Address:

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom

TÜV SÜD conducted the following tests at our Concorde Park Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: AC Powered - Transmitter Idle		
Radiated Disturbance	Mohammad Malik, Colin Brain, Thomas Randall, Taha Shafique and Elliot Callender	UKAS

**Table 8**

Office Address:

TÜV SÜD  
Concorde Park  
Concorde Way  
Fareham  
Hampshire  
PO15 5FG  
United Kingdom



## 2 Test Details

### 2.1 Conducted Disturbance at Mains Terminals

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15B, Clause 15.107  
ICES-003, Clause 3.1  
ISED RSS-GEN, Clause 8.8

#### 2.1.2 Equipment Under Test and Modification State

A2843, S/N: V09QYNPXN6 - Modification State 0

#### 2.1.3 Date of Test

15-September-2022

#### 2.1.4 Test Method

The EUT was setup according to ANSI C63.4, clause 5.2.

The EUT was placed on a non-conductive table 0.8 m above a reference ground plane. A vertical coupling plane was placed 0.4 m from the EUT boundary. A Line Impedance Stabilisation Network (LISN) was directly bonded to the ground-plane. The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN was 0.8 m.

Interconnecting cables that hanged closer than 0.4 m to the ground plane were folded back and forth in the centre forming a bundle 0.3 m to 0.4 m long.

Input and output cables were terminated with equipment or loads representative of real usage conditions.

The EUT was configured to give the highest level of emissions within reason of a typical installation as described by the manufacturer.

#### 2.1.5 Example Calculation

Quasi-Peak level (dB $\mu$ V) = Receiver level (dB $\mu$ V) + Correction Factor (dB)

Margin (dB) = Quasi-Peak level (dB $\mu$ V) - Limit (dB $\mu$ V)

CISPR Average level (dB $\mu$ V) = Receiver level (dB $\mu$ V) + Correction Factor (dB)

Margin (dB) = CISPR Average level (dB $\mu$ V) - Limit (dB $\mu$ V)

## 2.1.6 Test Setup Diagram

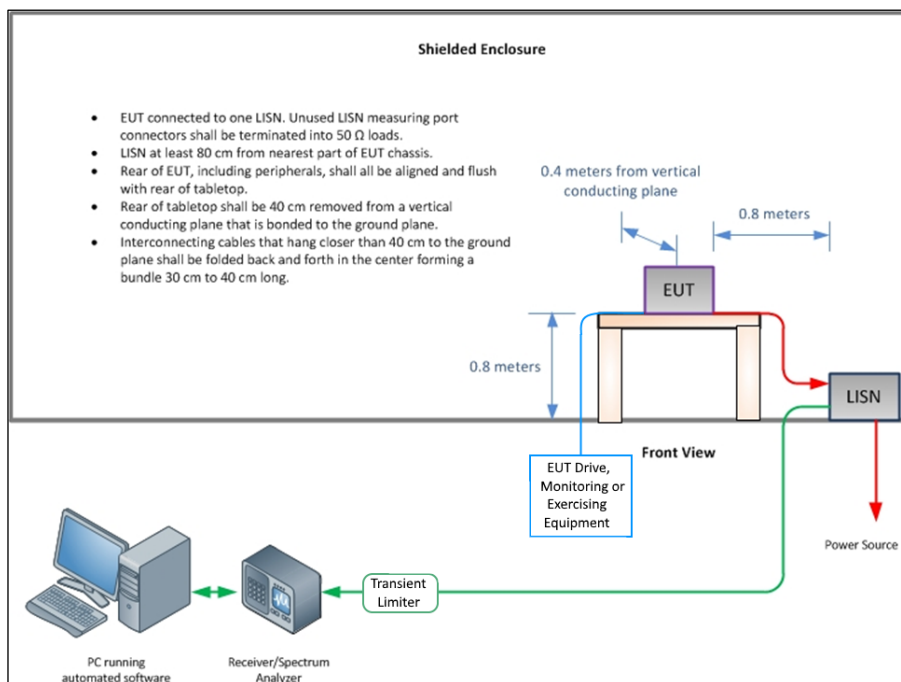


Figure 1 - Conducted Emissions

## 2.1.7 Environmental Conditions

Ambient Temperature 20.8 °C  
Relative Humidity 55.3 %  
Atmospheric Pressure 1013.0 mbar

## 2.1.8 Specification Limits

Required Specification Limits - Class B			
Line Under Test	Frequency Range (MHz)	Quasi-Peak Test Limit (dB $\mu$ V)	CISPR Average Test Limit (dB $\mu$ V)
AC Power Port	0.15 to 0.5	66 to 56 <sup>(1)</sup>	56 to 46 <sup>(1)</sup>
	0.5 to 5	56	46
	5 to 30	60	50
<b>Supplementary information:</b> Note 1. Decreases with the logarithm of the frequency.			

Table 9





2.1.9 Test Results

Results for Configuration and Mode: 115 V AC Powered - Transmitter Idle.

This test was performed to the requirements of the Class B limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

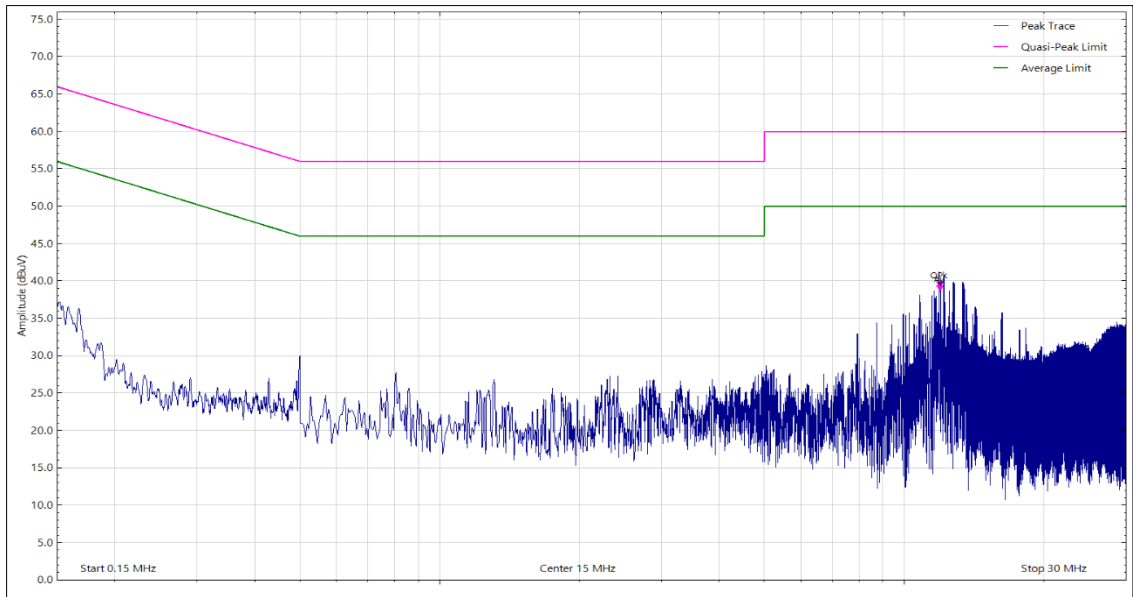


Figure 2 - Graphical Results - Live

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
11.953	38.9	60.0	-21.1	Q-Peak	0	100	Horizontal
11.953	38.3	50.0	-11.7	CISPR Avg	0	100	Horizontal

Table 10

No other final measurements were made as all other peak emissions seen above the measurement system noise floor during the pre-scan were greater than 6 dB below the CISPR Average test limit.

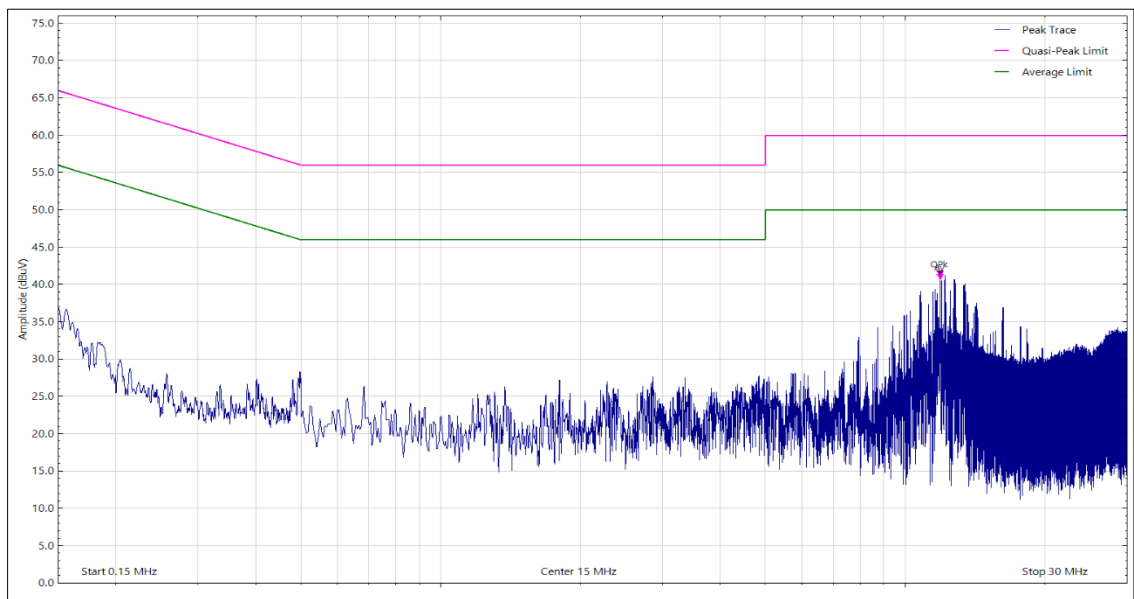


Figure 3 - Graphical Results - Neutral

Frequency (MHz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
11.894	40.8	60.0	-19.2	Q-Peak	0	100	Horizontal
11.894	40.4	50.0	-9.6	CISPR Avg	0	100	Horizontal

Table 11

No other final measurements were made as all other peak emissions seen above the measurement system noise floor during the pre-scan were greater than 6 dB below the CISPR Average test limit.



#### 2.1.10 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 12.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Screened Room (12)	MVG	EMC-3	5621	36	11-Aug-2023
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
Test Receiver	Rohde & Schwarz	ESU40	3506	12	25-Mar-2023
Transient Limiter	Hewlett Packard	11947A	2377	12	28-Feb-2023
Termination (50ohm)	Meca	405-1	3517	12	16-Dec-2022
Cable (SMA to SMA, 2 m)	Rhophase	3PS-1801A-2000-3PS	4113	12	27-Jan-2023
Cable (N-Type to N-Type, 8 m)	Teledyne	PR90-088-8MTR	5450	6	06-Oct-2022
LISN (CISPR 16, Single Phase)	Chase	MN 2050	336	12	04-Jul-2023
LISN (CISPR 16, Single Phase)	Rohde & Schwarz	ESH3-Z5	1390	12	31-Jan-2023

**Table 12**



## **2.2 Radiated Disturbance**

### **2.2.1 Specification Reference**

FCC 47 CFR Part 15B, Clause 15.109  
ICES-003, Clause 3.2  
ISED RSS-GEN, Clause 7.1

### **2.2.2 Equipment Under Test and Modification State**

A2843, S/N: YWL2C4T4WY - Modification State 0

### **2.2.3 Date of Test**

30-August-2022 to 05-September-2022

### **2.2.4 Test Method**

The EUT was set up on a non-conductive table 0.8 m above a reference ground plane within a semi-anechoic chamber on a remotely controlled turntable.

A pre-scan of the EUT emissions profile using a peak detector was made at a 3 m antenna distance whilst varying the antenna-to-EUT azimuth and polarisation.

Using a list of the highest emissions detected during the pre-scan along with their bearing and associated antenna polarisation, the EUT was then formally measured using a Quasi-Peak, Peak or CISPR Average detector as appropriate.

The readings were maximised by adjusting the antenna height, polarisation and turntable azimuth, in accordance with the specification.

### **2.2.5 Example Calculation**

Below 1 GHz:


Quasi-Peak level (dB $\mu$ V/m) = Receiver level (dB $\mu$ V) + Correction Factor (dB/m)  
Margin (dB) = Quasi-Peak level (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Above 1 GHz:

CISPR Average level (dB $\mu$ V/m) = Receiver level (dB $\mu$ V) + Correction Factor (dB/m)  
Margin (dB) = CISPR Average level (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)

Peak level (dB $\mu$ V/m) = Receiver level (dB $\mu$ V) + Correction Factor (dB/m)

### 2.2.6 Test Setup Diagram

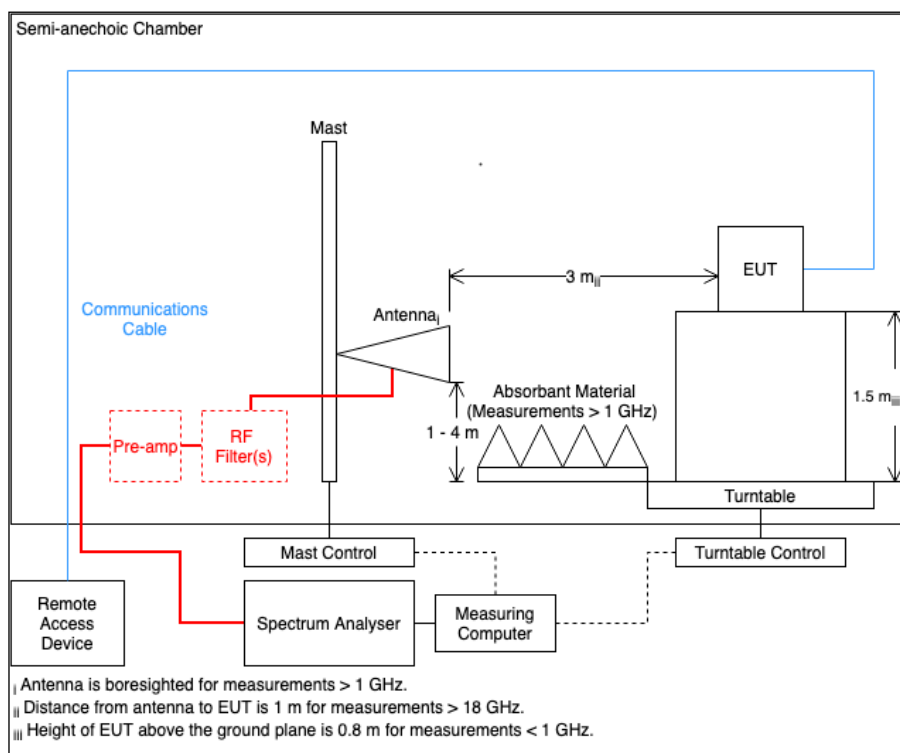

### Figure 4 – Radiated Emissions

### 2.2.7 Environmental Conditions

Ambient Temperature	19.6 - 23.1 °C
Relative Humidity	44.0 - 55.9 %
Atmospheric Pressure	1010.0 mbar

### 2.2.8 Specification Limits

Required Specification Limits, Field Strength - Class B Test Limit at a 3 m Measurement Distance		
Frequency Range (MHz)	Test Limit (µV/m)	Test Limit (dBµV/m)
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

**Supplementary information:**  
Note 1. A Quasi-peak detector is to be used for measurements below 1 GHz.  
Note 2. A CISPR Average detector is to be used for measurements above 1 GHz.  
Note 3. The Peak test limit above 1 GHz is 20 dB higher than the CISPR Average test limit.

**Table 13**



2.2.9 Test Results

Results for Configuration and Mode: AC Powered - Transmitter Idle.

This test was performed to the requirements of the Class B limits.

Performance assessment of the EUT made during this test: Pass.

Detailed results are shown below.

Highest frequency generated or used within the EUT: 5825 MHz

Which necessitates an upper frequency test limit of: 30 GHz

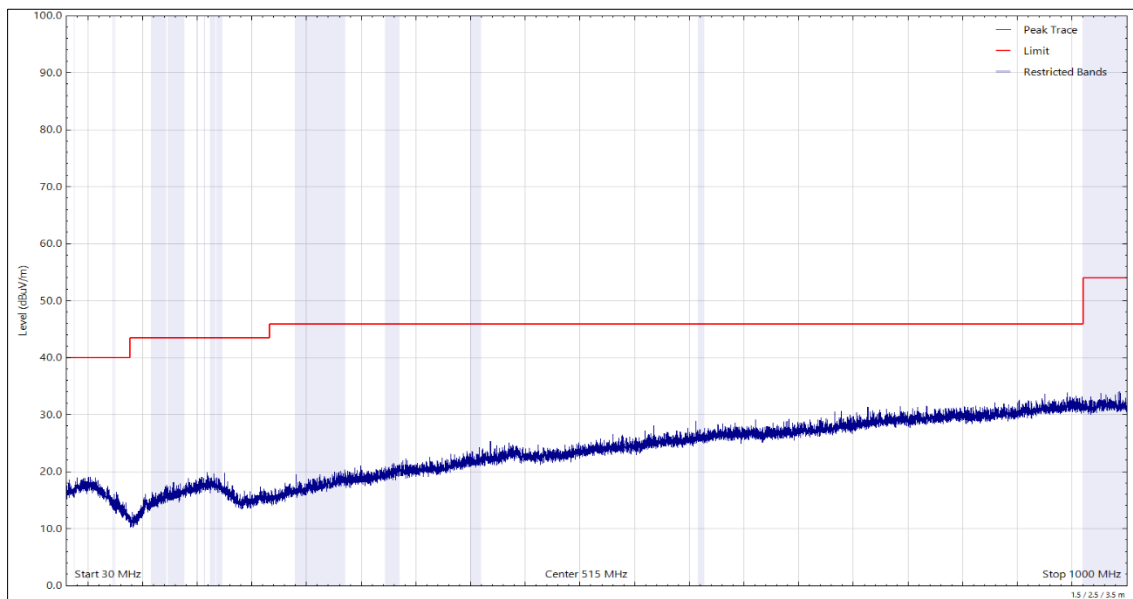


Figure 5 - 30 MHz to 1 GHz, Quasi-Peak, Horizontal

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 14

\*No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.

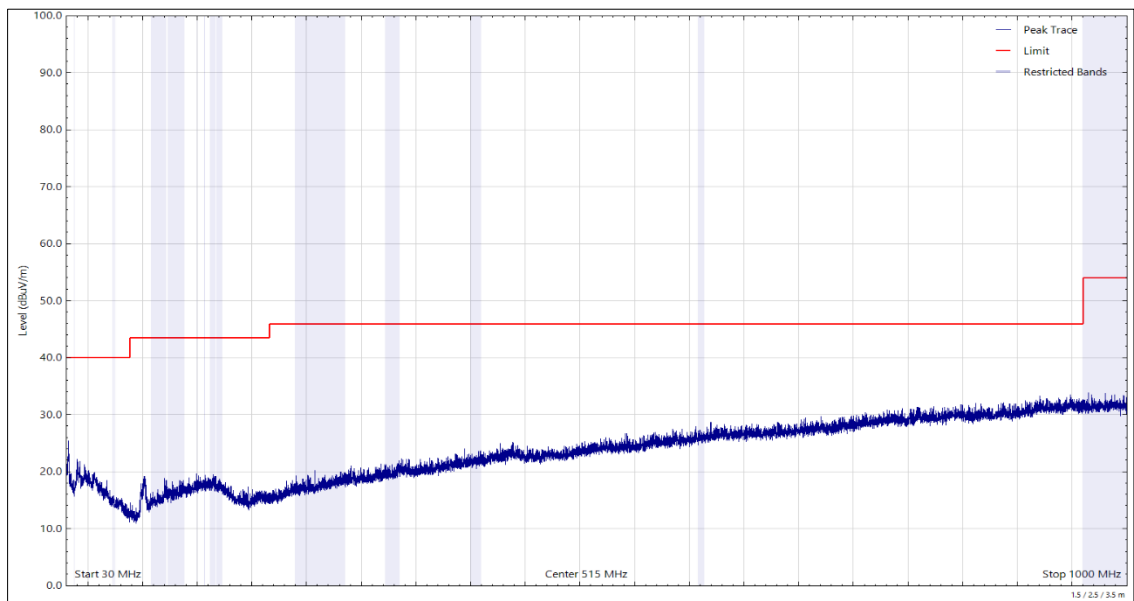


Figure 6 - 30 MHz to 1 GHz, Quasi-Peak, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 15

\*No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.

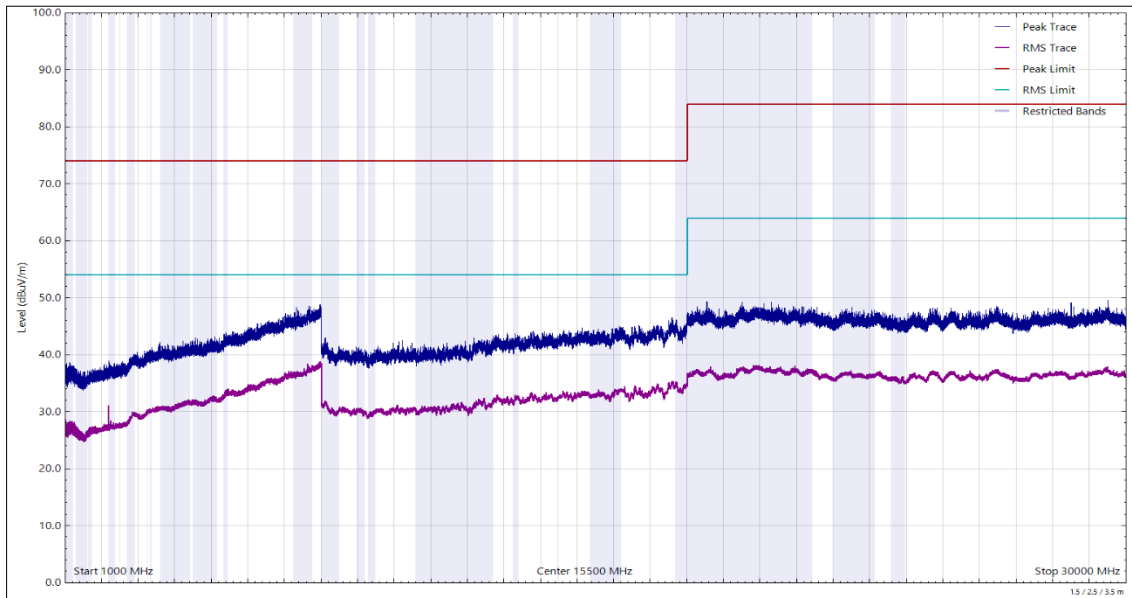



Figure 7 - 1 GHz to 30 GHz, Peak-CISPR Average, Horizontal

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 16

\*No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.



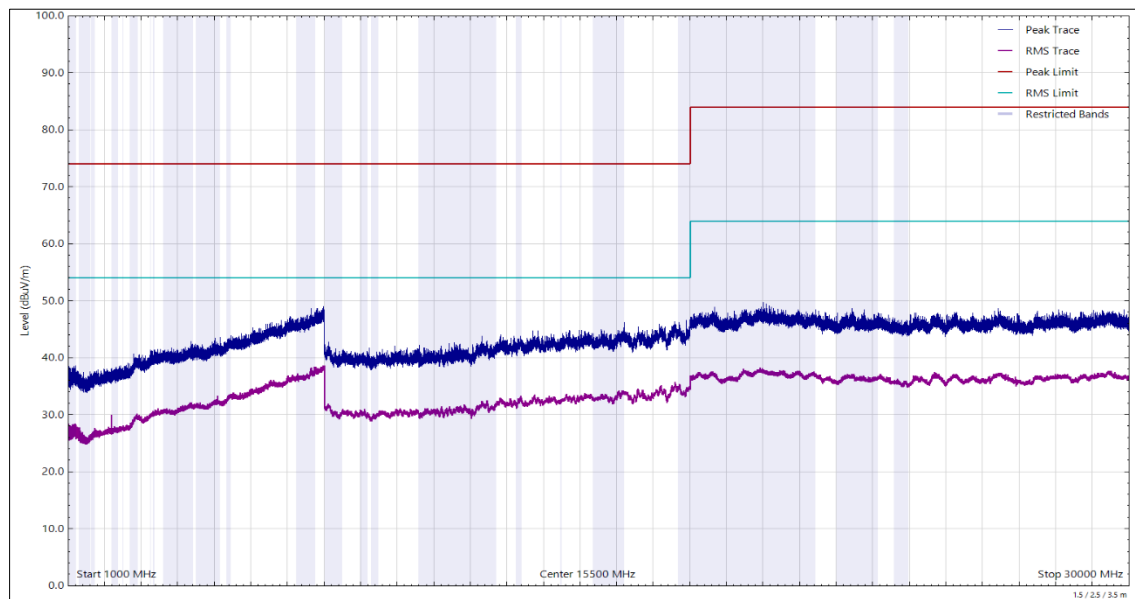

**Figure 8 - 1 GHz to 30 GHz, Peak-CISPR Average, Vertical**

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

**Table 17**

\*No final measurements were made as all peak emissions seen above the measurement system noise floor during the pre-scan were greater than 10 dB below the test limit.

## 2.2.10 Test Location and Test Equipment Used

This test was carried out in RF Chamber 14.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Emissions Software	TUV SUD	EmX V3.1.4	5125	-	Software
EMI Test Receiver	Rohde & Schwarz	ESW44	5912	12	17-Feb-2023
Cable (K Type 2m)	Junkosha	MWX241-01000KMSKMS/B	5937	12	14-May-2023
DRG Horn Antenna (7.5-18GHz)	Schwarzbeck	HWRD750	5941	12	29-May-2023
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5943	24	03-Feb-2024
5m Semi-Anechoic Chamber (Dual-Axis)	Albatross Projects	RF Chamber 14	5958	36	26-Apr-2025
Compact Antenna Mast	Maturo Gmbh	CAM4.0-P	5959	-	TU
Mast & Turntable Controller	Maturo Gmbh	FCU3.0	5960	-	TU
Tilt Antenna Mast	Maturo Gmbh	BAM4.5-P	5961	-	TU
Turntable	Maturo Gmbh	TT1.5SI	5962	-	TU
Modular Power System Mainframe	Keysight Technologies	N6701C	5969	-	O/P Mon



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Expiry Date
Cable (sma to sma 1m)	Junkosha	MWX221-01000AMSAMS/A	5997	12	06-Jun-2023
Cable (N to N 1m)	Junkosha	MWX221-01000NMSNMS/B	5999	12	05-Jun-2023
Cable (SMA to SMA 6.5m)	Junkosha	MWX221-06500AMSAMS/B	6003	12	07-Jun-2023
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6005	12	05-Jun-2023
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6006	12	05-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/A	6008	12	06-Jun-2023
Cable (N to N 7m)	Junkosha	MWX221-07000NMSNMS/B	6016	12	05-Jun-2023
Cable (N to N 8m)	Junkosha	MWX221-08000NMSNMS/A	6017	12	05-Jun-2023
Cable (SMA to SMA 1m)	Junkosha	MWX221-01000AMSAMS/B	6019	12	07-Jun-2023
Horn Antenna (1-10 GHz)	Schwarzbeck	BBHA9120B	6141	12	21-Jun-2023
SAC Switch Unit	TUV SUD	SSU001	6144	12	07-Jul-2023
Digital Multimeter	Fluke	115	6147	12	16-Jun-2023
Humidity & Temperature meter	R.S Components	1364	6150	12	17-Jun-2023
Double Ridge Active Horn Antenna (18-40 GHz)	Com-Power	AHA-840	6187	24	02-Jun-2024
Pre Amp 8 - 18 GHz	Wright Technologies	APS06 0061	6198	12	19-Jul-2023
Cable (SMA to SMA 20cm)	TUV SUD	MH-FH 8-18	6215	12	25-Jul-2023

**Table 18**

TU - Traceability Unscheduled  
O/P Mon – Output Monitored using calibrated equipment



### **3 Incident Reports**

No incidents reports were raised.



## 4 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Conducted Disturbance at Mains Terminals	150 kHz to 30 MHz, LISN, $\pm 3.7$ dB
Radiated Disturbance	30 MHz to 1 GHz, Bilog Antenna, $\pm 5.2$ dB 1 GHz to 40 GHz, Horn Antenna, $\pm 6.3$ dB

**Table 19**

Worst case error for both Time and Frequency measurement 12 parts in  $10^6$ .

### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2007, Clause 4.4.3 and 4.5.1. (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible regarding the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.