Cooking Solutions.





www.bosch-home.co.nz



Contents.

Ovens	04-22
Heating Modes	15
Single ovens	18-20
Double oven	22
Freestanding cookers	22-23
Compact appliances	25-34
Combination steam ovens	30
Combination microwave oven and microwave	30-31
Coffee machine	34
Warming drawers	34
Electric cooktops	37-45
Induction cooktops	40-42
Ceramic cooktops	44-45
Gas cooktops	46-49
Rangehoods	50-57
Reference guides	58-68
Accessories for ovens, cookers and compact appliances	69-70
Customer service	71

When every single one of our appliances makes your life a little bit easier - that's Bosch in every detail.

We believe the perfect built-in appliance must be designed for one thing above all else: to make your time spent in the kitchen as pleasant as possible. Every detail of every appliance has been carefully designed, produced and tested by our engineers to fully satisfy the highest standards in quality, performance and convenience. The result is cutting-edge technology, timeless design and remarkable ease of use, reducing the workload for you and consistently delivering perfect results.

Proven quality

We devote the same high level of care, passion and dedication to all areas of our work - from the first design draft right through to customer service. It's the same Bosch quality that you have been able to rely on for more than 128 years.

Bosch appliances offer premium quality, advanced technology, ease of operation and outstanding German made and engineered technology. These attributes have earned us many accolades, national, and international, such as the red dot design award, the iF design award and other endorsements year after year.

Top performance

What drives us every day is our desire to improve. We strive to make the best even better, by developing functional, durable and energy-efficient innovations that surpass all expectations. Take, for example, the new PerfectBake sensor in our Series 8 ovens - perfectly baked pastries and cakes, at the touch of a button.

Maximum convenience

Bosch is dedicated to making your life easier. Our innovative built-in appliances are easy to use, and you won't waste a second trying to figure out how they work. Sophisticated features deliver the best results every time, and save you considerable effort and expense in the process.







The new generation of ovens.

Put a new spin on your cooking career.

Using the highest quality stainless steel and glass, our ovens and compact appliances combine beautifully to deliver a timeless, elegant and stylish finish to any kitchen with sleek, co-ordinated lines and matching panels.

No matter how complicated a recipe may look, with the Series 8 ovens it will be a piece of cake. These cutting-edge ovens constantly monitor the progress of your cooking and automatically regulate temperature and length of time.







Built-in single ovens

Whether you're preparing poultry, meat, fish, vegetarian dishes, baked goods or desserts, your favourite dishes are always cooked to perfection – and it couldn't be easier. Now you have a master chef to help you in the kitchen: your oven.



Double oven

The Bosch double oven allows you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



Freestanding cookers

Each of the freestanding cookers offers reliable and enduring Bosch technology of the finest standard – technology that makes cooking, baking and roasting easy and more convenient.

Ovens | Control panel

We didn't reinvent the wheel. But we taught it how to cook.

Everything you need at hand: our new, intuitive control ring makes cooking easier than ever. With just a small turn of the stainless steel ring, you can adjust any of your oven's settings. The TFT-touch display, with its clear and straightforward design, guides you through the various menu options. This gives you full control over your dishes at all times.

Control panel with TFT-touchdisplay



You'll always have a complete overview and full control of all your oven's functions. The intuitive control ring and full-width, high-resolution clear-text TFT-touchdisplay with direct select TouchControl-buttons make operating our ovens a breeze. Clear, vivid images and helpful prompts guide you through each step as you navigate through the various programme options.

Control panel with TFT-display



Our intuitive control ring and display with direct select buttons make oven operation a pleasure from day one. Helpful icons inside the control ring provide all the information you need, making it very easy for you to keep track of the progress of your dishes.





Ovens | Functions

The first recipe collection in the form of an oven.

You could search through stacks of cookbooks and old family recipes without ever finding precise information on temperature or cooking time. Thanks to the Bosch Assist function for automatic oven settings, you don't have to worry about that anymore: simply select the desired dish in the control panel and your oven automatically sets the ideal heating mode, temperature and length of time. Of course, you can also select these settings yourself every bit as easily.



PerfectBake

Baking has never been easier. The PerfectBake sensor offers uniquely precise sensitivity, constantly measuring the moisture level of your dishes and automatically regulating the baking process. You'll never have to set the heating mode, length of time or temperature ever again - the PerfectBake sensor has it all under control. Simply select the type of dish, such as 'Cake', and press 'Start'. Your oven will do the rest. The result: bread, cake and quiche baked to perfection.



PerfectRoast

Christmas turkey, Easter lamb or Sunday roast - with the PerfectRoast meat probe, you'll get perfect results every time. Just like a professional chef, but with total ease. Through several highly sensitive measuring points, the probe determines the core temperature of your roast to the exact degree and second, guaranteeing perfect roasting results. Another benefit: you can also use the meat probe in the microwave- and steam oven mode.







Ovens | Features

Perfect features.

Different people need different things in their kitchen, therefore Bosch ovens are available with a wide variety of features. Whether it concerns the interior lighting, the door or the rail system, with our ovens you can find the solution that fits you best.



CoolTouch doors

Of course, safety is also of paramount importance: doors stay cool enough for comfortable handling while the oven is operating to provide maximum protection for large and small hands alike.

Full glass inner door

The full glass inner door has no joints or screws a common area that can accumulate grease. For added convenience, the doors can be easily removed for cleaning.

Enamel coating

The grey enamel interior coating is easy-to-clean and the lighter colour improves visibility during cooking.



Shelf systems

Whether you choose a standard shelf system or one with single or double telescopic rails - all of our shelf systems are safe and easy to use. Selected telescopic rail sets are fully extendable - ideal for conveniently loading and removing baking trays. And for the first time, all shelves are pyrolytic-proof and suitable for microwave and steam operation - Series 8 ovens only.



Lighting versions

Different lighting options guarantee optimal visibility - for example, the energy-saving lateral LED lights not only illuminate your dishes from all sides, but also save you money. The lateral LED lighting also offers separate illumination on each level, which is especially convenient when baking with multiple trays simultaneously.



Oven clock and timer with programming

The electronic clock displays time of day and also acts as a countdown timer with an audible beep to indicate the end of the timer function. Programming adds extra convenience. Simply select the end-time (when you arrive home, e.g. 6.30pm), the length of cooking, along with the cooking function and temperature, and the oven will do the rest.



Precise temperature control

Electronic thermostats monitor the ovens cavity temperature to maintain temperature consistency during the cooking process.



Automatic switch-off

The oven will switch-off after a specific period of time if left unattended.



Child lock

Selected Bosch ovens feature a child lock function. The entire oven can be disabled simply by activating the lock function, helping protect against unwanted use.

Ovens | Cleaning

At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. However, this chore is a thing of the past, thanks to our new EcoClean Direct cleaning aid and pyrolytic self-cleaning function. While the oven is in operation, the special EcoClean Direct coating works to reduce dirt accumulation. The pyrolytic cleaning function burns off grime at the touch of a button – so your oven practically cleans itself. You won't waste a minute on cleaning, leaving you more time to enjoy cooking.



EcoClean Direct

While the oven bakes or roasts, the special direct coating of microfine ceramic particles on its interior walls absorbs grease and residue and breaks them down through oxidation. All you need to do is wipe the areas not coated with EcoClean. The direct coating also regenerates every time you heat the oven, and continues to do so for the entire service life of the appliance. To remove substantial residues, simply activate the EcoClean Direct cleaning programme.*








Pyrolytic cleaning

When you activate the pyrolytic cleaning function, the oven heats up to 480°C and burns off any burned-on grease and food residue. All that's left is a little ash that you can easily remove with a paper towel. Depending on the degree of residue that has accumulated, select one of three different cleaning programmes and press 'Start' - your oven will do the rest for you. And because the baking trays and shelf rails* are all pyrolytic-proof, you can leave them in the oven during cleaning.



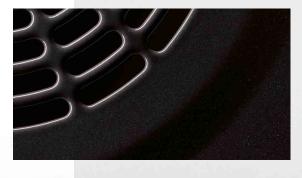





Ovens | Heating modes

Because there's hot and then there's hot.

Truly perfect baking and roasting requires not only the ideal temperature, but also the appropriate heating mode. From 4D Hotair to Hotair Eco, Bosch ovens offer heating modes that deliver everything from haute cuisine to simple daily dishes.



Hotair Eco

Hotair Eco is our improved version of convection, the heating mode most commonly used in homes. Thanks to special temperature controls, your oven maintains perfect temperature. This makes our ovens great for precision cooking on a single baking level - ideal for cakes, casseroles, meat dishes, frozen foods, and much more.



Hot air grilling

An ideal cooking method for meat and poultry where a rotisserie effect is desired. The grill and fan operate alternately, circulating hot air around the food.



Top and bottom heat Eco

In addition to classic top and bottom heat, Series 8 ovens feature a new eco-friendly mode for extremely efficient operation. Prepare perfect sponges, pound cakes, delicate pastries, bread and rolls while saving



Pizza setting

Designed with the pizza-lover in mind, but equally useful for quiches and tarts, this innovative function delivers cooking power for a perfectly crisp, browned base while keeping the topping moist. Suitable also for frozen food. In many cases, preheating is not required.



valuable energy.



Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.



Bottom heating

Only the bottom element is used to generate heat. This method is ideal for reheating or for when a crisp underside is required for pizza bases and pastry cases. It can also be used for drying herbs and bain-marie cooking.



Rapid heating

Most Bosch ovens feature an automatic rapid heating function. On Top and Bottom heating, 200°C can be reached in approximately six minutes, and 175°C on 4D HotAir Plus heating can be reached in approximately five minutes.

Other heating options



Top and bottom heat Uses both upper and lower heating elements



3D HotAir Plus Cook on up to 3 levels simutaneously with even heat distribution



Low temperature



Pre-heat



eep warm Keep food warm without spoiling or drying out



Full-width grill Grill large quantities with precise temperature control



Half-width grill Can select just the centre section of the grill



Top element with a more powerful bottom heating element, perfect for crispy bases and tin bakery





Ovens | Pyrolytic

Ovens.

Bosch ovens bring style and elegance to the kitchen.







HNG6764S1A **60cm Stainless Steel Pyrolytic Oven**

Heating functions

14 functions + Added steam + Microwave

Capacity

67 litres cavity volume

5 shelf positions

Convenience

SoftClose door - opening and closing

Dish Assist

PerfectBake Sensor

PerfectRoast Sensor

Added Steam Microwave

1 level telescopic rail - standard

Cleaning

Pyrolytic

Cavity Lighting

LED - ceiling, sides

Safety

Quadruple-glazed door

Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58-59

HRG6767S1A 60cm Stainless Steel Pyrolytic Oven

Heating functions

15 functions + Added steam

Capacity

71 litres cavity volume

5 Shelf positions

Convenience

SoftClose Door - opening and closing

Dish Assist

PerfectBake Sensor

PerfectRoast Sensor

Added Steam

2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

LED - ceiling, sides

Quadruple-glazed door

Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58-59

HBG6767S1A **60cm Stainless Steel Pyrolytic Oven**

Heating functions

13 functions

Capacity

71 litres cavity volume

5 shelf positions

Convenience

SoftClose Door - opening and closing

Dish Assist

PerfectBake Sensor

PerfectRoast Sensor

2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

Halogen - ceiling

Safety

Quadruple-glazed door

Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58-59

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.





HBG6753S1A 60cm Stainless Steel Pyrolytic Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftClose Door - opening and closing 10 Auto Programs

2 level telescopic rails - fully extendable

Cleaning

Pyrolytic

Cavity Lighting

Halogen - ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58-59

HBG672BS1A **60cm Stainless Steel Pyrolytic Oven**

Heating functions

8 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftClose Door - opening and closing 10 Auto Programs

Cleaning

Pyrolytic

Cavity Lighting

Halogen - ceiling

Safety

Quadruple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

Exclusive model. See website for stockists.

For complete specifications see pg.58-59

Ovens | EcoClean

Ovens.

Bosch ovens bring style and elegance to the kitchen.







HBG655HS1A 60cm Stainless Steel EcoClean Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftClose Door - opening and closing 10 Auto Programs

2 level telescopic rails - fully extendable

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

HBG655HW1A 60cm White EcoClean Oven

Heating functions

13 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftClose Door - opening and closing 10 Auto Programs

2 level telescopic rails - fully extendable

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

HBG633BS1A 60cm Stainless Steel EcoClean Oven

Heating functions

10 functions

Capacity

71 litres cavity volume 5 shelf positions

Convenience

SoftClose Door - opening and closing

Cleaning

EcoClean Direct - rear wall

Cavity Lighting

Halogen - ceiling

Safety

Triple-glazed door Child lock

Dimensions (HxWxD)

595 x 595 x 548mm

For complete specifications see pg.58-59

For complete specifications see pg.58-59

For complete specifications see pg.58-59



Ovens | Other

Ovens.



HVA541NS0 90cm Stainless Steel Catalytic Oven

Heating functions

9 functions

Capacity

77 litres cavity volume

4 shelf positions

Convenience

Electronic clock/timer

Cleaning

Catalytic liners - rear wall & sides

For complete specifications see pg.58-59

Cavity Lighting

Halogen - sides

Safety

Triple-glazed door

Child Lock

Dimensions (HxWxD)

478 x 896 x 568mm



HBM43S550A 60cm Stainless Steel EcoClean **Double Oven**

Heating functions

3 functions - top oven

5 functions - bottom oven

Capacity

35 litres cavity volume - top oven

67 litres cavity volume - bottom oven

2 shelf positions - top oven

5 shelf positions - bottom oven

Convenience

Electronic touch-control clock/timer

2 level telescopic rail - standard (bottom oven)

Cleaning

EcoClean liners - rear wall, side walls & ceiling (both cavities)

Cavity Lighting

1 lamp - ceiling (top & bottom oven)

Triple-glazed door Child lock

Dimensions (HxWxD)

888 x 595 x 550mm

For complete specifications see pg.58-59



HSB738356A 90cm Freestanding Catalytic Oven

OVEN

Heating functions

8 functions

Capacity

112 litres cavity volume

4 shelf positions

Convenience

Electronic touch-control clock/timer

1 level telescopic rail - standard

Rotisserie kit

Storage compartment

Height-adjustable legs

Cleaning

Catalytic liners - rear wall & sides

Safety

Triple-glazed door

СООКТОР

Heating functions

6 gas burners:

1 x wok burner,

1 x high-speed burner,

2 x standard burners,

2 x economy burners

Convenience

Electronic ignition

3 pc cast iron pan supports

Safety

Flame failure device

Other

Suitable for NG or LPG

Dimensions (HxWxD)

845-880 x 898 x 600mm

For complete specifications see pg.60-61



HGV74W355A 60cm Freestanding EcoClean Oven

OVEN

Heating functions

8 functions

Capacity

67 litres cavity volume

5 shelf positions

Convenience

Electronic touch-control clock/timer

2 level telescopic rail - standard

Storage compartment

Height-adjustable legs

Cleaning

EcoClean rear wall, side walls & ceiling

Safety

Triple-glazed door

Child lock

СООКТОР

Heating functions

- 4 gas burners:
- 1 x wok burner,
- 2 x standard burners,
- 1 x economy burner

Convenience

Electronic ignition

2 pc cast iron pan supports

Safety

Flame failure device

Other

Suitable for NG or LPG

Dimensions (HxWxD)

For complete specifications see pg.60-61

900 x 600 x 600mm



HCE858451A **60cm Freestanding Pyrolytic Oven**

OVEN

Heating functions

10 functions

AutoPilot40

Capacity

67 litres cavity volume

5 shelf positions

Convenience

Electronic touch-control clock/timer with end-time programming

SoftClose door

Height-adjustable legs

Cleaning

Pyrolytic clean

Safety

Quadruple-glazed door

Child lock

COOKTOP

Heating functions

4 induction cooking zones

17-stage power setting with PowerBoost for each zone

Convenience

Electronic -/+ touch-controls & timer for each zone

WipeProtection

Safety

2-stage residual heat indicators Child lock

Dimensions (HxWxD)

900 x 600 x 600mm



HCE854451A 60cm Freestanding Pyrolytic Oven

OVEN

Heating functions

10 functions

AutoPilot40

Capacity

67 litres cavity volume

5 shelf positions

Electronic display with retractable control knob and touch control buttons

SoftClose door

Height-adjustable legs

Cleaning

Pyrolytic cleaning

Safety

Quadruple-glazed door

Child lock

COOKTOP

Heating functions

4 ceramic cooking zones

Convenience

Electronic -/+ touch-controls & timer for each zone

4-stage residual heat indicators Child lock

Dimensions (HxWxD)

900 x 600 x 600mm

For complete specifications see pg.60-61

For complete specifications see pg.60-61



The new generation of compacts.

Compact appliances.

Bosch compact appliances offer exceptional cutting-edge features and extras. Matching controls and metal-touch-control panels mean that you can mix and match compact appliances for a coordinated look. With electronic controls, operating functions are harmonised for easy use.










Combination steam ovens

Cooking with steam helps retain vitamins and minerals in fresh foods as well as maintain original colour, shape and consistency.



of microwave technology. With the combination microwave oven you can add speed to your traditional cooking process without compromising on taste.

Microwave with grill

Standard microwave cooking, with the addition of a grill to offer more cooking options.

Coffee machine

Whether your preference is a Latte or a double shot Cappuccino, our compact coffee machine brings café-style drinks to your home.

Warming drawers

Bosch warming drawers ensure food stays just at the right serving temperature. You can gently defrost, prove dough or slow cook. They are the perfect partner for Bosch's Series 8 60cm wide built-in ovens and compact appliances.





The new Series 8 generation of combination steam ovens.

Steams so gently that even vitamins stay for dinner.

There is no healthier or tastier way to prepare food than in a Series 8 combination steam oven. When gently cooked in steam, foods retain their vitamins and aroma while bringing out their full and natural flavour. Vegetables stay crisp, while poultry and fish remain juicy and tender. With steam, you can even cook without adding oil or fat. Thanks to its integrated water tank, the oven doesn't need a direct water connection, giving you much more flexibility in choosing its location.


Menu cooking

With the Series 8 combination steam oven, you can prepare an entire set menu using up to three levels at once. Salmon with asparagus and rosemary potatoes? Cook them all together and everything will turn out perfectly. Need to prepare dessert, too? No problem. Thanks to the moisture in the oven, there's no intermingling of flavours - each dish retains its own authentic flavour.



Preserving vitamins and minerals

Dishes that are cooked in hot steam not only retain their vitamins and minerals, but also their full, natural flavour. So you can also go easy on the extra seasoning, and use much less salt when cooking. In short, healthy food has never tasted better.

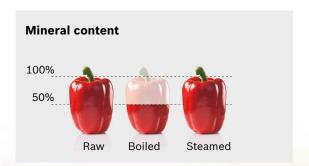



The new Series 8 microwave.

Some gourmets shouldn't be kept waiting.

Sometimes you just can't get food to the table fast enough. Our new Series 8 microwave helps you speed up the cooking process and give you perfect control over your menu and your schedule. Whether you're heating food, pre-cooked meals or frozen foods, you'll get outstanding results quickly, hygienically and without compromising on taste. So instead of killing time waiting for dinner to be ready, you and your loved ones will have much more time to enjoy it.

Power levels and automatic programmes

Our Series 8 microwave with high-resolution TFT displays allow you to heat, defrost, roast or grill anything - thanks to 900 watts with five power levels and, depending on the model, also with an additional 1,300 watt grill with three power levels. The AutoPilot programme also helps you achieve the best possible results with next to no effort. Just insert your roast, enter its weight and select the right programme from the menu. The rest takes care of itself.



Compacts | Overview

Compact appliances.

The collection of Bosch compact built-in appliances are designed to give you perfect symmetry in your kitchen.







CSG656RS1A 60cm Stainless Steel Combination **Steam Oven**

Heating functions

14 functions + 4 steam

Capacity

- 47 litres cavity volume
- 1 litre water tank
- 4 Shelf positions

Convenience

SoftClose Door - opening and closing

Dish Assist

PerfectBake sensor

PerfectRoast meat probe

1 level telescopic rail - fully extendable

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Triple-glazed door Child Lock

Dimensions (HxWxD)

454 x 595 x 550mm

For complete specifications see pg.62

CSG656BS1B **60cm Stainless Steel Combination Steam Oven**

Heating functions

12 functions + 4 steam

Capacity

47 litres cavity volume

1 litre water tank

4 Shelf positions

Convenience

SoftClose Door - opening

SoftClose Door - closing

Dish Assist

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Safety

Triple-glazed door

Child Lock

Dimensions (HxWxD)

454 x 595 x 550mm

For complete specifications see pg.62

CMG656RS1A **60cm Stainless Steel Combination Microwave Oven**

Heating functions

12 functions + microwave

Capacity

45 litres cavity volume

3 Shelf positions

Convenience

SoftClose Door - opening and closing

Dish Assist

Cleaning

EcoClean Direct - rear, sides & ceiling

Cavity Lighting

LED - ceiling

Safety

Quadruple-glazed door

Child Lock

Dimensions (HxWxD)

454 x 595 x 550mm

For complete specifications see pg.62





CMG633BS1B 60cm Stainless Steel Combination **Microwave Oven**

Heating functions

6 functions + microwave

Capacity

45 litres cavity volume

3 Shelf positions

Convenience

SoftClose Door - opening and closing

14 Auto Programs

Cavity Lighting

LED - ceiling

Safety

Triple-glazed door Child Lock

Dimensions (HxWxD)

454 x 595 x 550mm

BEL634GS1A **60cm Stainless Steel Microwave**

Heating functions

Microwave + grill

Capacity

21 litres cavity volume

Convenience

Bottom control panel

Left hand hinge

10 Auto Programs

Cavity Lighting

LED - ceiling

Dimensions (HxWxD)

382 x 595 x 318mm

For complete specifications see pg.62

For complete specifications see pg.62



The new Series 8 built-in coffee machine.

Now your favourite café is open 24/7.

Espresso, cappuccino or latte macchiato? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch Barista technology guarantees a full-bodied aroma and perfect crema - for coffees as delicious as those brewed in your favourite café.



SensoFlow system for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow system heats the water to just the right temperature, for a full-bodied espresso aroma from the first cup to the last.



A choice of coffee at the touch of a button

Want the perfect espresso, cappuccino or latte macchiato? With the OneTouch function, it'll be ready in an instant. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.



Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato.



Compacts | Overview

Compact appliances.







60cm Stainless Steel Coffee Machine

Heating function

SensoFlow System

Capacity

2.4 litre water tank 1kg coffee bean container

Convenience

Programmable options CreamPro milk nozzle AromaPro brewing 19 bar pressure

Cleaning

Descaling Programs Auto Cleaning Milk system

Lighting

Display lighting

Safety

Locking function

Dimensions (HxWxD)

454 x 595 x 375mm

60cm Stainless Steel Warming Drawer

Heating function

30°C - 80°C temperature control

Capacity

52 litres cavity volume 290mm height

Convenience

Fully extendable drawer Ceramic glass base element Push open drawer

Dimensions (HxWxD)

290 x 595 x 544mm

60cm Stainless Steel Warming Drawer

Heating function

30°C - 80°C temperature control

Capacity

20 litres cavity volume 140mm height

Convenience

Fully extendable drawer Ceramic glass base element Push open drawer

Dimensions (HxWxD)

141 x 595 x 544mm

For complete specifications see pg.63

For complete specifications see pg.63

For complete specifications see pg.63






The new generation of electric cooktops.


Electric cooktops.

There is a wide range of induction and ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.









FlexInduction cooktops

The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. Enjoy total flexibility and control with two standard round zones and the FlexZone.

Induction cooktops

Quite simply, Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.

Ceramic cooktops

With their electronic touchcontrols and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.


Electric cooktops | Induction

The best cooking needs just one ingredient. Bosch Induction.

Modern cooking offers so many wonderful new tastes and textures, you need a cooktop that's flexible enough to keep up.

Old pots, new technology

Most of your old pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. So, if a fridge magnet sticks to your pot, you know it's induction-ready. In general, special stainless steel, iron and enamel are all suitable.

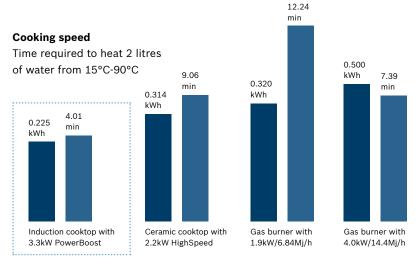

Source: BSH Hausgeräte GmbH Germany (overseas test results)



DirectSelect 2.0

Maintain control even in the most hectic kitchen situations. Select your desired power level - including intermediate levels - with complete accuracy.



DirectSelect 1.0

Enjoy total convenience with DirectSelect. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/repeatedly.



TouchSelect

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.





FlexInduction

Introducing Bosch FlexInduction, the result of decades of research and development. Introducing freedom in the kitchen.

Ideal for small pots, large pots, multiple pans, frying pans or casserole dishes - you name it, the system allows you to control pots and pans separately. An electromagnetic current applies heat only where it's needed - in the pot. At the touch of a button induction zones become one large induction surface.



17-stage power setting

Enjoy total control on every recipe with 17-stage power settings. This function allows cooking zones to be set in increments of 0.5 (e.g. 0.5, 1, 1.5, 2...9).



PowerBoost

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.



Dual function timer including automatic switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (i.e. level 5.5) for up to 99 minutes - ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.



Automatic pot detection

Bosch Induction cooktops feature automatic pot detection, which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.



QuickStart

Start cooking quicker. Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

Available on selected models only.



ReStart

Things happen quickly in the kitchen - if you spill something on the control panel or accidentally switch-off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

Available on selected models only



Energy Consumption Display

Each time you finish cooking, your Energy Consumption Display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption).

Available on selected models only.



WipeProtection

Stay in complete cooking control even while you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surfaces easily, without losing your cooking settings.





Child lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.





2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'- residual heat insufficient to cook, but zone is still hot enough to advocate caution.



Automatic safety switch-off


Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.


Electric cooktops | Induction overview

Induction cooktops.

Cooking with induction provides faster results and efficient cooking at higher and lower temperatures. The TouchSelect, DirectSelect 1.0 and DirectSelect 2.0 intuitive controls all boast 17-stage power settings. Bosch Induction cooktops make the entire cooking process so much easier to manage.







PIV975N17E 90cm FlexInduction Cooktop

Heating functions

5 induction cooking zones

2 large FlexInduction zones

1 small FlexInduction zone

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect 2.0 touch-controls

Dual timer with auto switch-off for each zone

Cleaning

WipeProtection

2-stage residual heat indicators Child lock

Dimensions (WxD)

916 x 527mm

PIN875N17E 80cm FlexInduction Cooktop

Heating functions

4 induction cooking zones

1 large FlexInduction zone

2 standard zones

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect 2.0 touch-controls

Dual timer with auto switch-off for each zone

Cleaning

WipeProtection

2-stage residual heat indicators Child lock

Dimensions (WxD)

816 x 527mm

PIB775N17E **70cm Induction Cooktop**

Heating functions

4 induction cooking zones

1 automatic extendable zone

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect 2.0 touch-controls

Dual timer with auto switch-off for each zone

Cleaning

WipeProtection

Safety

2-stage residual heat indicators

Child lock

Dimensions (WxD)

710 x 527mm

For complete specifications see pg.64

For complete specifications see pg.64





PIV675N17E **60cm FlexInduction Cooktop**

Heating functions

4 induction cooking zones

2 large FlexInduction zones

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect Classic controls

Dual timer with auto-switch-off for each zone

Cleaning

WipeProtection

Safety


2-stage residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

Exclusive model. See website for stockists.

For complete specifications see pg.64



PIN675N17E 60cm FlexInduction Cooktop

Heating functions

4 induction cooking zones

1 large FlexInduction zone

2 standard zones

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect 2.0 touch-controls

Dual timer with auto switch-off for each zone

Cleaning


WipeProtection

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm



PIE675N14E 60cm Induction Cooktop

Heating functions

4 induction cooking zones

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect Classic controls

Dual timer with auto switch-off for each zone

Cleaning

WipeProtection

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

606 x 527mm

Exclusive model. See website for stockists.

For complete specifications see pg.64

Electric cooktops | Induction overview

Induction cooktops.



PIE651F17E 60cm Induction Cooktop

Heating functions

4 induction cooking zones

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect 1.0 touch-controls

Dual timer with auto switch-off for each zone QuickStart

ReStart

Energy Consumption display

Cleaning


WipeProtection

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm



PIL611B18E 60cm Induction Cooktop

Heating functions

3 induction cooking zones

17-stage power setting with PowerBoost for each zone

Convenience

TouchSelect electronic controls

Dual timer with auto switch-off for each zone QuickStart

ReStart

Safety

2-stage residual heat indicators Child lock

Dimensions (WxD)

592 x 522mm



PIV375N17E 30cm FlexInduction Cooktop

Heating functions

2 induction cooking zones

1 FlexInduction zone

17-stage power setting with PowerBoost for each zone

Convenience

DirectSelect Classic controls

Dual timer with auto switch-off for each zone

Cleaning

WipeProtection

Safety

2-stage residual heat indicators

Dimensions (WxD)

306 x 527mm

For complete specifications see pg.65

For complete specifications see pg.65



Electric cooktops | Ceramic overview

Ceramic cooktops.

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as being practical and easy-to-clean.







PKN675N14A 60cm Ceramic Cooktop

Heating functions

- 4 QuickTherm cooking zones
- 1 dual circuit zones
- 1 dual circuit/extended roasting zone
- 17-stage power setting

Convenience

DirectSelect 2.0 touch-controls

Dual timer with auto switch-off for each zone Automatic electronic boil start

Cleaning

WipeProtection

Safety

2-stage residual heat indicators

Child lock

Dimensions (WxD)

606 x 527mm

PKF645D17A 60cm Ceramic Cooktop

Heating functions

- 4 QuickTherm cooking zones
- 1 dual circuit zone
- 17-stage power setting

Convenience

TouchSelect controls

Dual timer with auto switch-off for each zone ReStart

Safety

2-stage residual heat indicators

Dimensions (WxD)

583 x 513mm

PKE645C17A 60cm Ceramic Cooktop

Heating functions

4 QuickTherm cooking zones 9-stage power setting

Convenience

Rotary control knobs


4-stage residual heat indicators

Dimensions (WxD)

583 x 513mm

For complete specifications see pg.65

For complete specifications see pg.65



PKF375N14E 30cm Ceramic Cooktop

Heating functions

2 QuickTherm cooking zones

- 1 dual circuit zone
- 9-stage power setting

Convenience

DirectSelect Classic controls Dual timer with auto switch-off for each zone

Safety

2-stage residual heat indicators

Dimensions (WxD)

306 x 527mm



Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.



Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casserole and other (special) cooking dishes.



Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.



QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

The new generation of gas cooktops.

Gas cooktops.

Our German-designed gas cooktops are available in a range of different styles.





Stainless steel cooktops

With a stainless steel base, all models offer a flame failure device. Other features include up to six burners, a dedicated wok burner for high intensity cooking and cast-iron pan supports.



Control dials

The control dials match the design of our range of ovens so that you can perfectly coordinate your appliances.



Cast-iron supports

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.



High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner, which provides up to 18Mj/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.



Flexible burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of the pan.



Flame failure device

For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

One-hand ignition

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one-hand, there is also no separate ignition button to clean.



Gas cooktops | Overview

Gas Cooktops.

The cooktop of choice in most professional kitchens, modern gas cooktops are as stylish as they are practical.







PCR915B91A 90cm Stainless Steel Gas Cooktop

Heating functions

5 burners

1 x 18Mj/h dual flame wok burner

1 high-speed burner

2 standard burners

1 economy burner

Convenience

One-hand ignition via control knobs Cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

915 x 520mm

Other

Suitable for NG or LPG

PCT915B9TA 90cm Stainless Steel Gas Cooktop

Heating functions

6 burners

2 x 18Mj/h dual flame wok burner

2 standard burners

2 economy burners

Convenience

One-hand ignition via control knobs Cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

915 x 520mm

Suitable for NG or LPG

PCI815B91A **76cm Stainless Steel Gas Cooktop**

Heating functions

4 burners

1 x 14.4Mj/h triple flame wok burner

1 standard burner

1 economy burner

Convenience

One-hand ignition via control knobs Cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

762 x 520mm

Suitable for NG or LPG

For complete specifications see pg.68

For complete specifications see pg.68





PCQ715B90A 70cm Stainless Steel Gas Cooktop

Heating functions

5 burners

1 x 14.4Mj/h triple flame wok burner

- 1 high-speed burner
- 2 standard burners
- 1 economy burner

Convenience

One-hand ignition via control knobs Cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

702 x 520mm

Other

Suitable for NG or LPG



PCH615B9TA 60cm Stainless Steel Gas Cooktop

Heating functions

4 burners

- 1 x 18Mj/h dual flame wok burner
- 1 high-speed burner
- 1 standard burners
- 1 economy burner

Convenience

One-hand ignition via control knobs Cast-iron pan supports

Safety

Flame failure

Dimensions (WxD)

582 x 520mm

Other

Suitable for NG or LPG

For complete specifications see pg.68



Rangehoods | Convenience

Rangehoods.



Halogen lighting

Integrated halogen lighting ensures that the cooking area is clearly illuminated. They are more efficient than standard lights and are designed to last longer.





LED lighting

The new LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.





EcoSilence Drive®

Relax in a guieter kitchen with family and friends The new EcoSilence Drive® motor operates without carbon brushes, eliminating the disadvantages of conventional motors. Instead of energy loss, wear and noise, you get efficiency, durability, and smooth operation. To reduce motor noise even further, we have optimised the airflow inside the hood. The result: low noise levels with high power.



Rim ventilation filter

With its smooth uninterrupted surface and grease separation, the rim ventilation filter from Bosch has a multipatented filter sealing system and flow-optimised filter system with 12-layer filter mats.




Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.




Metal grease filter


Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure filters operate at maximum efficiency, they should be cleaned regularly.

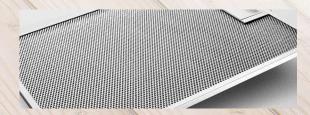

Dishwasher-safe metal filters

For easy cleaning, all Bosch filters can be safely loaded into any Bosch dishwasher for sparkling clean results.

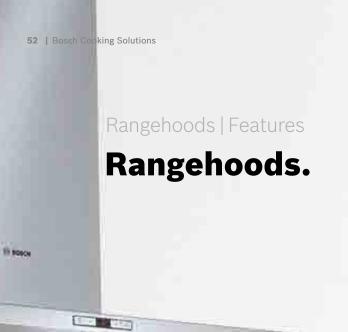

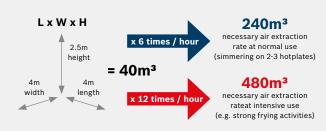


Bosch extraction rates are tested inline with EU standards. See page 66-67 for more information.

What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: minimum of 6 times per hour; and a maximum of 12 times per hour.


Air Extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.



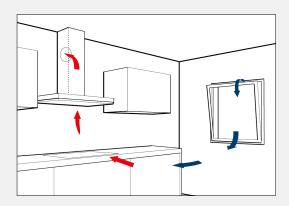

Ducted extraction

Ducting out is the most effective method of extraction. Ideally the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. Most Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.

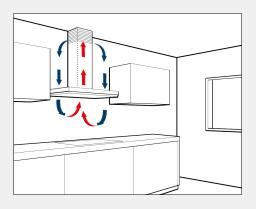

Recirculation kit

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises of a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.



CleanAir module

The CleanAir module is a special active carbon filter with a large slatted surface, the module reduces odours by up to 95%, every bit as good as the ducted system. The surface of the CleanAir filter is the equivalent of around 50 football pitches.*

*Accessory to be purchased seperately. Available for selected Bosch Rangehoods.



Variable power settings

All Bosch rangehoods feature variable power settings, which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting, which gives an extra boost to the performance when required.



Automatic run-on

Selected Bosch rangehoods automatically continue to run-on for approximately 10 minutes after normal operation to ensure remaining odours are removed. The rangehood then automatically switches off.



Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.



Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.



Electronic control

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function, control at your fingertips.



Electronic button control

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.



Rocker switch control

It doesn't get any easier: 3 push-buttons for 3 power levels and one for turning the lights on and off.

Rangehoods | Overview

Rangehoods.



DIB091U51P 90cm Island Stainless Steel **Canopy Rangehood**

Power functions

980m3/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive motor

Convenience

Whisper-quiet: 54dB at 450m3/h (150mm ducted) Sound insulation mats Electronic controls with LED display 4 x 3W LED Softlights with dimmer function

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

744-924 x 900 x 600mm (ducted) or 744-1044 x 900 x 600mm (recirculated)



DWB091E51A 90cm Stainless Steel Canopy Rangehood

Power functions

820m3/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive motor

Convenience

Whisper-quiet: 59dB at 430m3/h (150mm ducted) Sound insulation mats Electronic controls with LED display 3 x 3W LED Softlights with dimmer function

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

628-954 x 900 x 500mm (ducted) or 628-1064 x 500 x 500mm (recirculated)



DWW098E50A 90cm Stainless Steel **Canopy Rangehood**

Power functions

890m3/h maximum extraction capacity 3 power settings + 2 intensive settings with automatic revert to previous setting Automatic run-on EcoSilence Drive motor

Convenience

Whisper-quiet: 50dB at 370m3/h (150mm ducted) Sound insulation mats Electronic controls wth LED display 3 x 3W LED Softlights with dimmer function

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)

For complete specifications see pg.66-67

For complete specifications see pg.66-67



DWW097A50A 90cm Stainless Steel Canopy Rangehood

Power functions

730m³/h maximum extraction capacity 3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive® motor

Convenience

Whisper-quiet: 49dB at 360m3/h (150mm ducted) Sound insulation mats Electronic button control

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

3 x 3W LED lights

672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)



DEE918PAU 90cm Stainless Steel **Canopy Rangehood**

Power functions

1000m3/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Quiet: 64dB at 680m3/h (180mm ducted) Multi-stage fan regulation Push button controls

2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

707-1077 x 875 x 530 (ducted) or 707-1195 x 875 x 530 (recirculated)



DWB09W850A 90cm Stainless Steel **Canopy Rangehood**

Power functions

760m3/h maximum extraction capacity 3 power settings

Convenience

Quiet: 61dB at 460m3/h (150mm ducted) Rocker switch controls 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

642-954 X 900 X 500 (ducted) or 642 x 1064 x 900 x 500mm (recirculated)

For complete specifications see pg.66-67

For complete specifications see pg.66-67

Rangehoods | Overview

Rangehoods.



DWW09W651A 90cm Stainless Steel **Canopy Rangehood**

Power functions

650m3/h maximum extraction capacity 3 power settings

Convenience

Quiet: 61dB at 430m3/h (150mm ducted) Rocker switch controls 3 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

799-976 x 900 x 500mm (ducted or recirculated)



DWW06W650A 60cm Wall-Mounted Stainless Steel **Pyramidial Rangehood**

Power functions

650m3/h maximum extraction capacity 3 power settings

Convenience

(150mm ducted) Rocker switch controls 2 x 30W halogen lights (DWW06W650A)

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

Quiet: 61dB at 430m3/h

799-976 X 600 X 500mm (ducted or recirculated)



DHL895CAU **86cm Integrated Rangehood**

Power functions

820m3/h maximum extraction capacity with Rim Ventilation

3 power settings + 1 intensive setting with automatic revert to previous setting EcoSilence Drive motor Automatic run-on

Convenience

Quiet: 55dB at 400m3/h (150mm ducted) Push button controls

2 x 1W LED Lights with dimmer function

Cleaning

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

418 x 860 x 282mm (ducted or recirculated)

For complete specifications see pg.66-67

For complete specifications see pg.66-67



DHL785BAU **70cm Integrated Rangehood**

Power functions

730m3/h maximum extraction capacity with Rim Ventilation

3 power settings + 1 intensive setting with automatic revert ro previous setting Automatic run-on

Convenience

Quiet: 63dB at 540m3/h (150mm ducted)

Push button controls with electronic display

2 x 20W halogen lights

Dishwasher-safe metal grease filters Electronic filter saturation indicator

Dimensions (HxWxD)

418 x 700 x 282mm (ducted or recirculated)



DHL755BAU 73cm Integrated Rangehood

Power functions

650m3/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Quiet: 56dB at 320m3/h (150mm ducted) Slide controls 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

255 x 730 x 380mm (ducted or recirculated)



DHL555BAU 53cm Integrated Rangehood

Power functions

650m3/h maximum extraction capacity 3 power settings + 1 intensive setting

Convenience

Quiet: 56dB at 320m3/h (150mm ducted) Slide controls 2 x 20W halogen lights

Cleaning

Dishwasher-safe metal grease filters

Dimensions (HxWxD)

255 x 530 x 380mm (ducted or recirculated)

For complete specifications see pg.66-67

For complete specifications see pg.66-67

Reference Guide Ovens.

	Features	Single ovens HNG6764S1A	HRG6767S1A / 2A	HBG6767S1A
Model	reatures			
N	VAC slab ()	Series 8	Series 8	Series 8
Dimensions	Width (cm)	60	60	60
	Appliance dimensions (HxWxD)	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm
	Built-in dimensions (HxWxD)	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x
		550mm	550mm	550mm
	Cavity dimensions (HxWxD)	357 x 480 x 392mm	357 x 480 x 415mm	357 x 480 x 415mm
	N. I. Cl. ii C. ii	47	4.7	10
leating Functions	Number of heating functions	17	17	13
	4D Hot Air	•	•	•
	Hot Air Eco	•	•	•
	Hot Air Standard			
	3D Hot Air Plus			
	Conventional top/bottom heat	•	•	•
		•	•	•
	Conventional top/bottom heat ECO			•
	Circulating Air			
	Hot air grilling	•	•	•
	Grill large area	•	•	•
	Grill small area	•	•	•
	Pizza setting	•	•	•
		-	-	
	Bottom heat	•	•	•
	Intensive heat	•	•	
	Slow cooking	•	•	•
	Drying/Desiccation	•	•	•
	Plate warming	•	•	
	Keep warm	•	•	•
	Defrost		•	•
				•
Added Steam	Reheating	•	•	
	Dough Proving	•	•	
/licrowave	Microwave	900wt		
ensor & Automatic	BoschAssist - automatic oven settings	•	•	•
unctions	PerfectBake™ Sensor	•	•	•
	PerfectRoast meat probe	•	•	•
	AutoPilot (Automatic Programs)			
	Rapid heat up	•	•	•
	Sabbath setting	•	•	•
Capacity	Volume (cavity litres)	67 litres ●	71 litres ●	71 litres
	Water Tank 1L			
Design		Stainless steel & black	Stainless steel & black	Stainless steel & black
· ·		glass with straight bar	glass with straight bar	glass with straight bar
		handle	handle	handle
	Cavity	Enamel Anthracite	Enamel Anthracite	Enamel Anthracite
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Graphic Display
				Bosch Control Ring with
	Controls	Bosch Control Ring with	Bosch Control Ring with	DOSCII COITHOLIMING WITH
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	TFT Display
	Controls Electronic touch-control clock/timer with LED display and end-time programming			
	Electronic touch-control clock/timer with LED display and end-time programming	TFT Display	TFT Display	TFT Display ●
	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology	TFT Display •	TFT Display •	TFT Display •
	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting	TFT Display	TFT Display	TFT Display
	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology	TFT Display	TFT Display	TFT Display
	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners	TFT Display	TFT Display	TFT Display
Cleaning	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners	TFT Display	TFT Display	TFT Display
_	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs	TFT Display	TFT Display	TFT Display
_	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes	TFT Display	TFT Display	TFT Display
-	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs	TFT Display	TFT Display	TFT Display
-	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes	TFT Display	TFT Display	TFT Display
-	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan	TFT Display	TFT Display 3 x LED 5 Quadruple glazed	TFT Display
-	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator	TFT Display	TFT Display	TFT Display 1 x Halogen 5 Quadruple glazed
afety	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function	TFT Display	TFT Display 3 x LED 5 Quadruple glazed	TFT Display 1 x Halogen 5 Quadruple glazed
afety	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C	TFT Display 1 x Halogen 5 Quadruple glazed Quadruple glazed 300°C
afety	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function	TFT Display	TFT Display 3 x LED 5 Quadruple glazed	TFT Display 1 x Halogen 5 Quadruple glazed
afety	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C	TFT Display 1 x Halogen 5 Quadruple glazed Quadruple glazed 300°C
echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz	TFT Display
echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz 2 x fully extendable -	TFT Display I x Halogen 1 x Halogen Quadruple glazed Quadruple glazed 300°C 3.65kw 220-240 / 50-60Hz 2 x fully extendable -
afety echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz 2 x fully extendable-pyrolytic compatible	TFT Display I x Halogen 1 x Halogen Guadruple glazed Augustian State of the sta
echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz 2 x fully extendable -	TFT Display I x Halogen 1 x Halogen Quadruple glazed Quadruple glazed 300°C 3.65kw 220-240 / 50-60Hz 2 x fully extendable -
echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Split grill trays	TFT Display	TFT Display	TFT Display 1 x Halogen 5 Quadruple glazed Quadruple glazed 300°C 3.65kw 220-240 / 50-60Hz 2 x fully extendable-pyrolytic compatible 2
Safety Fechnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz 2 x fully extendable-pyrolytic compatible	TFT Display I x Halogen 1 x Halogen Guadruple glazed Augustian State of the sta
Cleaning Safety Fechnical equirements Supplied accessories	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Split grill trays	TFT Display	TFT Display	TFT Display 1 x Halogen 5 Quadruple glazed Quadruple glazed 300°C 3.65kw 220-240 / 50-60Hz 2 x fully extendable-pyrolytic compatible 2
echnical equirements	Electronic touch-control clock/timer with LED display and end-time programming SoftClose/Open technology Interior Lighting No. of shelf positions Removable door Pyrolytic EcoClean Direct EcoClean Direct EcoClean Liners Catalytic Liners Descaling Programs Door - no. glass panes Automatic safety switch-off Cooling fan Residual heat indicator Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Split grill trays Universal trays	TFT Display	TFT Display 3 x LED 5 Quadruple glazed Quadruple glazed 300°C 3.45kw 220-240 / 50-60Hz 2 x fully extendable - pyrolytic compatible 2 1 x pyrolytic compatible	TFT Display I x Halogen S Quadruple glazed Quadruple glazed 300°C 3.65kw 220-240 / 50-60Hz 2 x fully extendable - pyrolytic compatible 1 x pyrolytic compatible

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

UD067F004A	LIDO 670DC4 A	UDOGETHOA	UDGGGGUNAG	LIDOCOODO 4 C	LINAE 44 NOO	Double oven
HBG6753S1A	HBG672BS1A	HBG655HS1A	HBG655HW1A	HBG633BS1A	HVA541NS0	HBM43S550A
Series 8	Series 8	Series 8	Series 8	Series 8	Series 6	Series 6
60	60	60	60	60	60	60
595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	595 x 595 x 548mm	478 x 896 x 568mm	888 x 595 x 550mm
585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	585-595 x 560-568 x	467-470 x 860-864 x	872-886 x 560-570 x
550mm	550mm	550mm	550mm	550mm	560mm	550mm
357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	308 x 615 x 405mm	172 x 468 x 433mm (top): 392 x 482 x 418mm
13	8	13	13	10	9	(bottom) 3 (top) & 5 (bottom)
•	•	•	•	•	3	3 (top) & 3 (bottom)
•	•	•	•	•	•	
	-				•	
						• (bottom)
•	•	•	•	•	•	• (top & bottom)
•	•	•	•	•		
					•	
•	•	•	•	•	•	• (bottom)
•	•	•	•	•	•	• (top & bottom)
•		•	•	•	•	● (top)
•	•	•	•	•	•	• (battam)
•		•	•	•	•	• (bottom)
 •		•	•			
 •		•	•			
-						
•		•	•			
•	•	•	•			
 10	10	10	10			
•	•	•	•	•		•
•	• ·	•		•		05 11: (1.) 0.07 11:
71 litres	71 litres	71 litres	71 litres	71 litres	77 litres	35 litres (top) & 67 litres (bottom)
						(Bottom)
Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	White & straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel straight ba handle
Enamel Anthracite	Enamel Anthracite	Enamel Anthracite	Enamel Anthracite	Enamel Anthracite	Enamel	Grey Enamel
TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	TFT Touch Symbol	Electronic clock / timer	
Display	Display	Display	Display	Display		
Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring	Bosch Control Ring with TFT Display	Bosch Control Ring	Retractable rotary	Retractable rotary control knobs
TFT Display	TFT Display	with TFT Display	With IFT Display	with TFT Display	control knobs	•
•	•	•	•	•		
1 x Halogen	1 x Halogen	1 x Halogen	1 x Halogen	1 x Halogen	2 x Halogen	2 x Lamps - Standard bulb
5	5	5	5	5	4	2 (top) 5 (bottom)
•	•	•	•	•	•	•
•	•					
		Ceiling / Sides / Rear wall	Ceiling / Sides / Rear wall	Ceiling / Sides / Rear wall		
		**dii	**CIII	v+uII		Ceiling / Sides / Rear wall
					Sides / rear wall	
					,	
Quadruple glazed	Quadruple glazed	Triple glazed	Triple glazed	Triple glazed	Triple glazed	Triple glazed
•	•	•	•	•		
•	•	•	•	•	•	•
•	•	•	•	•		
•	•	•	•	•		•
300°C	300°C	300°C	300°C	300°C	250°C	275°C
3.65kw	3.65kw	3.65kw	3.65kw	3.65kw	3.00kw	5.50kw
220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	220-240 / 50-60Hz	240 / 50-60Hz
0 f ll		2 x fully extendable	2 x fully extendable		1 x standard	
2 x fully extendable -		0	2	2	extension 1	3
pyrolytic compatible	2		/	Z	1	J
	2	2	-			2
pyrolytic compatible 2				1		2
pyrolytic compatible 2 1 x pyrolytic compatible	1 x pyrolytic compatible	1	1	1	2	2
pyrolytic compatible 2				1 1	2	

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Freestanding Ovens.

Oven Features

Product overv	iew	Freestanding Ovens			
Model	Features	HSB738356A Series 6	HGV73W355A Series 4	HCE858451A Series 6	HCE854451A Series 6
уре		Electric	Electric	Electric	Electric
imensions	Width (cm)	90	60	60	60
	Appliance dimensions (HxWxD)	845 x 898 x 600mm	900 x 600 x 600mm	900 x 600 x 600mm	900 x 600 x 600mm
	Cavity dimensions (HxWxD)	339 x 746 x 433mm	329 x 479 x 420mm	329 x 479 x 420mm	329 x 479 x 420mm
ven specifica	ations				
eating	Number of heating functions	8	8	10	10
unctions	3D HotAir Plus				
	3D HotAir		•	•	•
	Hot Air	•			
	HotAir Eco			•	•
	Top/bottom heating	•	•	•	•
	Top/bottom heating and hot air	•			
	Bottom heating	•	•	•	•
	Fan assisted top/bottom heating				
	Hot Air Grilling	•	•	•	•
	Grill/rotary spit	•			
	Full Surface Grill	•	•	•	•
	Half Surface Grill		•	•	•
	Pizza setting		•	•	•
	Keep Warm			•	•
	Defrost	•	•	•	•
utomatic	AutoPilot (automatic programs)			40	40
unction	Memory function			•	•
	Sabbath setting			•	•
	Rapid heat up		•	•	•
apacity	Volume (usable litres)	112 litres	67 litres	67 litres	67 litres
esign		Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal bar handle	Stainless steel with metal ba
	Cavity	Enamel	Enamel	Enamel	Enamel
	Display	Electronic clock/timer	Electronic clock/timer	Electronic LED display	Electronic LED display
	Controls	Rotary control knobs	Rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	Electronic touch-control clock/ timer with LED display and end-time programming	•	•	•	•
	SoftClose technology			•	•
	Interior light	2 x 25wt	1 x 40wt	2 x 25wt	2 x 25wt
	No. of shelf positions	4	5	5	5
	Removable door	•	•	•	•
	Height adjustable	● (by 35mm)	● (by 15mm)	● (by 15mm)	• (by 15mm)
	Other	Storage compartment	Storage compartment	Storage compartment	Storage compartment
leaning	Pyrolytic cleaning function			•	•
	EcoClean Liners				
	Catalytic Liners	Sides / rear wall	Ceiling / sides / rear wall		
afety	Door - no. glass panes	Triple glazed	Triple glazed	Quadruple glazed	Quadruple glazed
ancty	Automatic safety switch-off	TTIPLE BLAZECT	птріс віагец	•	•
	Child lock function	•	•	•	•
	Cooling fan	•	•	•	•
upplied	Telescopic Railing	1 x standard extension			
cessories	Wire Racks	2	1	2	2
	Split grill trays		1	1 x pyrolytic compatible	1 x pyrolytic compatible
	Universal trays		1	1 x pyrolytic compatible	1 x pyrolytic compatible
	Baking trays	2	1	1 x pyrolytic compatible	1 x pyrolytic compatible
	Daniil Gays	1	*	1 pyrony ac companion	- A pyrony do compadible

Reference Guide Freestanding Ovens.

Cooktop Features

Product overv	iew	Freestanding Cooktop			
Model	Features	HSB738356A Series 6	HGV73W355A Series 4	HCE858451A Series 6	HCE854451A Series 6
Туре		Gas	Gas	Induction	Ceramic
Cooktop speci	fications				
Burner /		6 burners including:	4 burners including:	4 induction zones including:	4 cooking zones including:
Zone Output (Size)	Front left	Triple flame Wok burner - 14.4Mj/h	Wok Burner - 13Mj/h	Standard zone: 1.8Kw (180mm)	Standard zone: 1.8kW (180mm)
	Rear left	Standard burner - 6.48Mj/h	Standard burner - 6Mj/h	Standard zone: 1.8kW (180mm)	Extendable zone: 1.6 and 2.4kW (170-260mm)
	Front centre	High-speed burner - 10.8Mj/h			
	Rear centre	Economy burner - 3.6Mj/h			
	Front right	Economy burner - 3.6Mj/h	Economy burner - 3.6Mj/h	Standard zone: 2.2kW (220mm)	Extendable zone: 0.75 and 2.2kW (120-210mm)
	Rear right	Standard burner - 6.48Mj/h	Standard burner - 6Mj/h	Standard zone: 1.4kW (145mm)	Standard zone: 1.2kW (145mm)
	17-stage power setting			•	
	PowerBoost			•	
Cooktop Design		Stainless steel gas cooktop	Stainless steel gas cooktop	Ceramic glass induction cooktop	Ceramic glass cooktop
J	3-pc cast-iron trivets with rubber feet	•		·	
	2-pc cast-iron trivets with rubber feet		•		
	Enamelled burner caps	•	•		
Cooktop Controls	Electronic -/+ touch-controls & timer for each zone			•	
	One-hand electronic ignition (via control knob)	•	•		
Cooktop	Flame failure fitted to each burner	•	•		
Safety	2-stage residual heat indicators				
	4-stage residual heat indicators			•	•
	Wipe Protection			•	
	Child lock			•	
	Automatic safety switch off			•	
Supplied	LPG conversion kit	•	•		
accessories	Wok ring support	1	1		
	Cross support for Espresso	1			
Optional accessories				Refer to page	Refer to page
Technical	Maximum temperature (oven)	260°C	300°C	300°C	300°C
requirements	Total connected load	3.2kW total connected load 45.36Mj/h total gas connected load	3.2kW total connected load; 28.6Mj/h total gas connected load	10.9kW total connected load	11.3kW total connected load
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Other	Suitable for NG and LPG	Suitable for NG and LPG		

Reference Guide Compact Appliances.

Model	Eestures	Combination Steam CSG656RS1A	CSG656BS1B	Combination Microwave CMG656RS1A	CMG633BS1B	Microwave BEL634GS1A
vioue:	Features					
		Series 8	Series 8	Series 8	Series 8	Series 8
imensions	Width (cm)	60	60	60	60	60
	Appliance dimensions (HxWxD)	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	455 x 595 x 548mm	382 x 594 x 318mm
	Built-in dimensions (HxWxD)	450-455 x 560-568 x	450-455 x 560-568 x	450-455 x 560-568 x	450-455 x 560-568 x	362-382 x 560-568
		550mm	550mm	550mm	550mm	300mm
	Cavity dimensions (HxWxD)	235 x 480 x 415mm	235 x 480 x 415mm	237 x 480 x 392mm	237 x 480 x 392mm	220 x 350 x 270mm
Jostina		18	16	14	8	2
leating unctions	Number of heating functions					2
unctions	4D Hot Air	•	•	•	•	
	Hot Air Eco	•	•	•	•	
	Conventional top/bottom heat	•	•	•		
	Conventional top/bottom heat ECO	•	•	•		
		•	•	•	_	
	Hot air grilling				•	
	Grill - large area	•	•	•	•	
	Grill - small area	•	•	•	•	
	Pizza setting	•	•	•		
	Bottom heat	•	•	•		
	Intensive heat	•				
	Slow cooking	•	•	•		
	Drying	•				
	Plate warming	•	•	•		
		-		-		
	Keeping Warm	•	•	•	•	
dded Steam	Steaming	•	•			
	Reheating	•	•			
	Dough proving	•	•			
		•	•			
	Defrost	•	_	1000	1000	000
Microwave	Microwave			1000wt	1000wt	900wt
	Combi Microwave variable			•	•	
	Variable Quartz Grill					•
Sensor &	BoschAssist - automatic oven settings	•	•	•		
			_	-		
Automatic	PerfectBake™ Sensor	•		•		
unctions	PerfectRoast meat probe	•		•		
	AutoPilot (Automatic Programs)				14	10
	Rapid heat up	•	•	•	•	
				-		
	Sabbath setting	•	•	•		
Capacity	Volume (usable litres)	47	47	45	45	21
	1L water tank	•	•			
Design		Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & black glass with straight bar handle	Stainless steel & bla glass with left hand side opening door
	Odt					
	Cavity	Enamel Anthracite	Enamel Anthracite	Enamel Anthracite	Enamel Anthracite	Stainless Steel
		TFT Touch Graphic	TFT Touch Graphic	TFT Touch Graphic	TFT Touch Symbol	TFT Touch Symbol
	Display		Display	Display	Display	Display
	Display	Display				
	Controls	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring with	Bosch Control Ring with	Bosch Control Ring
			Bosch Control Ring with TFT Display	TFT Display	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time	Bosch Control Ring				
	Controls Electronic touch-control clock/ timer with LED display and end-time programming	Bosch Control Ring with TFT Display	with TFT Display	TFT Display ●	TFT Display	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology	Bosch Control Ring with TFT Display	with TFT Display	TFT Display •	TFT Display	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming	Bosch Control Ring with TFT Display	with TFT Display	TFT Display	TFT Display	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology	Bosch Control Ring with TFT Display	with TFT Display	TFT Display •	TFT Display	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions	Bosch Control Ring with TFT Display	with TFT Display • 1 x LED	TFT Display	TFT Display 1 x LED	with TFT Display
Planing	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door	Bosch Control Ring with TFT Display 1 x LED 3	with TFT Display 1 x LED 3	TFT Display	TFT Display 1 x LED	with TFT Display
Cleaning	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions	Bosch Control Ring with TFT Display 1xLED 3 Ceiling / Sides /	with TFT Display 1 x LED 3 Ceiling / Sides /	TFT Display 1 x LED 3 Ceiling / Sides /	TFT Display 1 x LED	with TFT Display
Cleaning	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct	Bosch Control Ring with TFT Display 1xLED Ceiling / Sides / Rear wall	with TFT Display 1 x LED 2 Ceiling / Sides / Rear wall	TFT Display	TFT Display 1 x LED	with TFT Display
Cleaning	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program	Bosch Control Ring with TFT Display 1xLED Ceiling / Sides / Rear wall	with TFT Display 1xLED 3 Ceiling / Sides / Rear wall	TFT Display 1 x LED 3 Ceiling / Sides /	TFT Display • 1xLED 3	with TFT Display
Cleaning	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct	Bosch Control Ring with TFT Display 1xLED Ceiling / Sides / Rear wall	with TFT Display 1 x LED 2 Ceiling / Sides / Rear wall	TFT Display 1 x LED 3 Ceiling / Sides /	TFT Display 1 x LED	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program	Bosch Control Ring with TFT Display 1 x LED Ceilling / Sides / Rear wall	with TFT Display 1xLED 3 Ceiling / Sides / Rear wall	TFT Display 1 x LED 3 Ceiling / Sides /	TFT Display • 1xLED 3	with TFT Display
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes	Bosch Control Ring with TFT Display 1 x LED Ceilling / Sides / Rear wall Triple glazed	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed	TFT Display	TFT Display 1 x LED 3 Triple glazed	with TFT Display 1xLED
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off	Bosch Control Ring with TFT Display 1xLED 3 Ceiling / Sides / Rear wall Triple glazed	with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed •	TFT Display 1 x LED 3 Triple glazed	with TFT Display 1xLED
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan	Bosch Control Ring with TFT Display 1xLED 3 Ceilling / Sides / Rear wall Triple glazed	with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1xLED 3 Triple glazed	with TFT Display 1xLED
	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off	Bosch Control Ring with TFT Display 1xLED 3 Ceiling / Sides / Rear wall Triple glazed	with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed •	TFT Display 1 x LED 3 Triple glazed	with TFT Display 1xLED
Safety	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan	Bosch Control Ring with TFT Display 1xLED 3 Ceilling / Sides / Rear wall Triple glazed	with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1xLED 3 Triple glazed	with TFT Display 1xLED
Gafety	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature	Bosch Control Ring with TFT Display 1 x LED Ceilling / Sides / Rear wall Triple glazed 250°C	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1xLED 3 Triple glazed 275°C	with TFT Display 1 x LED Double glazed
Gafety	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 7 riple glazed 250°C 3.3kW	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW	with TFT Display 1 x LED Double glazed
echnical equirements	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1xLED 3 Triple glazed 275°C	with TFT Display 1 x LED Double glazed
Safety Technical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 7 riple glazed 250°C 3.3kW	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW	with TFT Display 1 x LED Double glazed
Safety Technical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW	with TFT Display 1 x LED Double glazed
Safety Technical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 3 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Safety Fechnical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays	Bosch Control Ring with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed Triple glazed 3 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable	with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1xLED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Safety Fechnical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 3 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Safety Technical equirements Supplied	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 3 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
echnical equirements	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan	Bosch Control Ring with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed Triple glazed 3 250°C 3.3kW 220-240V / 50-60Hz 1 x fully extendable 2	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
echnical equirements	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan Steam container, punched Size S	Bosch Control Ring with TFT Display 1 x LED Ceiling / Sides / Rear wall Triple glazed 3.3kW 220-240V / 50-60Hz 1 x fully extendable 1	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 3.3kW 220-240V / 50-60Hz	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
echnical equirements	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan Steam container, punched Size S Steam container, punched Size XL	Bosch Control Ring with TFT Display 1 x LED 2 Ceiling / Sides / Rear wall Ceilling / Sides / Rear wall 3 Sides / Rear wall 1 x fully extendable 1 x fully extendable 1 1	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 3.3kW 220-240V / 50-60Hz 1 1	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Safety Fechnical equirements Supplied	Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan Steam container, punched Size S Steam container, unpunched Size S	Bosch Control Ring with TFT Display IxLED Ceilling / Sides / Rear wall Triple glazed Triple glazed 3.3kW 220-240V / 50-60Hz 1 x fully extendable 1	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz 1 1 1	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Cleaning Safety Fechnical requirements Supplied accessories	Controls Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan Steam container, punched Size S Steam container, punched Size S PerfectRoast - multi-point	Bosch Control Ring with TFT Display 1 x LED 2 Ceiling / Sides / Rear wall Ceilling / Sides / Rear wall 3 Sides / Rear wall 1 x fully extendable 1 x fully extendable 1 1	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 3.3kW 220-240V / 50-60Hz 1 1	TFT Display Ix LED Ceiling / Sides / Rear wall Quadruple glazed Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz
Safety Technical equirements Supplied	Electronic touch-control clock/ timer with LED display and end-time programming SoftClose/Open technology Interior lighting No. of shelf positions Removable door EcoClean Direct Descaling program Drying Door - no. glass panes Automatic safety switch off Cooling fan Child lock function Maximum temperature Total connected load Power requirements Telescopic Railing Wire Racks Universal trays Baking trays Glass pan Steam container, punched Size S Steam container, unpunched Size S	Bosch Control Ring with TFT Display IxLED Ceilling / Sides / Rear wall Triple glazed Triple glazed 3.3kW 220-240V / 50-60Hz 1 x fully extendable 1	with TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Triple glazed 250°C 3.3kW 220-240V / 50-60Hz 1 1 1	TFT Display 1 x LED 3 Ceiling / Sides / Rear wall Quadruple glazed 300°C 3.65kW 220-240V / 50-60Hz 1 x standard extension 1 1	TFT Display 1 x LED 3 Triple glazed 275°C 3.65kW 220-240V / 50-60Hz	Double glazed 1.99kW 220-240V / 50-60Hz

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

Reference Guide Coffee machine.

Product overvie	w	Coffee Machine
Model	Features	CTL636ES1
		Series 8
Dimensions	Appliance dimensions (HxWxD)	455 x 594 x 375mm
	Built-in dimensions (HxWxD)	449 x 558 x 354mm
Design		Stainless steel & black glass
	Display	TFT Touch Graphic Display
	Controls	Bosch Control Ring with TFT Display
Convenience	SensoFlow System: constant brewing temperature	•
	AromaPro Concept: Optimnal aroma extraction	•
	Intelligent AutoValve system switches automatically between steam and hot water	
	SilentCeram drive ceramic grinding unit	•
	Coffee outlet height-adjustable up to 15cm (max)	•
	Flexible milk solution: decide for yourself if you prefer connecting the yes milk container or using any other container	•
	Bean container with aroma protection lid for up to 1kg	•
	Water pump with 19 bar pressure	•
	One touch function for Ristretto, Espresso, Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffe Latte at the touch of a button	•
	6 Personalised beverages: Save favourite beverages with individual names and adjustable mixing ratio of milk and espress	•
	Fully programmable functions including grinding grade, cup size, strength and temperature	•
	Milk froth, warm milk and hot water separately available	•
	Early warning of bean container and water tank close to empty	•
	Bean container and water tank empty indicator	•
	Removable brewing unit and 2.4L water tank	•
Cleaning	Fully automatic-descaling and cleaning program Fully automatic rinse cycle when switched on and off	•
	Hygienic single portion cleaning function	
	Steam blast: Fully-automatic steam cleaning of the milk system after every beverage	•
	Removable milk nozzle for easy cleaning (dishwasher safe)	•
	Display of remaining cups before cleaning or descaling	
Safety Technical	Child-proof lock	•
Technical requirements	Total connected load	1600w
	Power requirements	220-240V / 50-60Hz
Supplied	1 water filter cartridge	•
accessories	1 measuring spoon	•
	1 milk container and hose	•
	1 set assembly screws	•

Reference Guide Warming drawers.

Product overv	iew	Warming Drawers		
Model	Features	BID630NS1A	BID630NS1A	
		Series 8	Series 8	
Dimensions (HxWxD)	Appliance dimensions (HxWxD)	290 x 595 x 548mm	141 x 595 x 548mm	
	Built-in dimensions (HxWxD)	290 x 560-568 x 550mm	140 x 560-568 x 550mm	
	Cavity dimensions (HxWxD)	242 x 468 x 458mm	92 x 468 x 458mm	
Suitable for	Slow cooking	•	•	
	Proving yeast dough	•	•	
	Defrosting	•	•	
	Keeping food warm	•	•	
	Pre-warming cups, plates and ovenware	•	•	
Temperature range	from approx. 40-80°C	•	•	
Design		Stainless steel and black glass	Stainless steel and black glass	
	Volume (cavity litres)	52 litres	20 litres	
	Electronic rotary temperature control	•	•	
	Inner compartment ceramic glass base element	•	•	
Technical requirements	Max weight load	25kg	25kg	
	Total connected load	0.81kW	0.81kW	
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	

Reference Guide Electric Cooktops.

Product overv	iew	FlexInduction					Induction
Model	Features	PIV975N17E	PIN875N17E	PIV675N17E	PIN675N17E	PIV375N17E	PIB775N17E
		Series 8	Series 8	Series 8	Series 8	Series 6	Series 8
Dimensions	Width (cm)	90	80	60	60	30	70
	Appliance dimensions (WxD)	916 x 527mm	816 x 527mm	606 x 527mm	606 x 527mm	306 x 527mm	710 x 527mm
	Cut-out dimensions (WxD)	880 x 490-500mm	750-780 x 490- 500mm	560 x 490-500mm	560 x 490-500mm	270 x 490-500mm	560 x 490-500mm
Design		Black ceramic glass Stainless steel side profiles with bevelled front					
Burner / Zone Output (Size)		5 zones including:	4 zones including:	4 zones including:	4 zones including:	2 zones including:	4 zones including 1 extendable:
	Full FlexZone	3.3kW / 3.6kW					
	Lower/Upper Flex Zones	2.0kW / 2.5kW					
	Middle Flex Zone	2.0kW / 3.2kW	2.0kW / 3.2kW	3.3kW / 3.6kW	2.0kW / 3.2kW	2.0kW / 3.2kW	
	Small FlexZone	2.6kW / 3.2kW					
	Rear Left Zone						1.8kW / 2.8kW
	Rear Left Extendable Zone						2.0kW / 2.6kW
	Rear Right Zone		2.4kW / 3.5kW		1.4kW / 1.8kW		1.4kW / 1.8kW
	Front Left Zone						1.8kW / 2.8kW
	Front Right Zone		1.4kW / 1.8kW		2.2kW / 3.7kW		2.2kW / 3.7kW
	Front Centre Zone						
	Rear Centre Zone						
Performance	Power setting	17 stage					
	PowerBoost	•	•	•	•	•	•
	FlexZone	•	•	•	•	•	
	Power Management	•	•	•			•
Convenience	WipeProtection	•	•	•	•		•
	Spill protection						
	QuickStart						
	ReStart						
	Energy consumption display						
	Timer with automatic switch-off	•	•	•	•	•	•
	Automatic pan detection	•	•	•	•	•	•
	Automatic boil start						
Safety	ChildLock	•	•	•	•		•
	Residual heat inducator	•	•	•	•	•	•
Controls	Direct Select Classic	•	•	•	•		•
	Direct Select					•	
	TouchSelect						
	Rotary control knobs						
Technical requirements	Total connected load	10.8kW	7.2kW	7.2kW	7.2kW	3.6kW	7.2kW
	Power requirements	220-240V / 50-60Hz					
	Min. thickness of workshop	20mm	20mm	20mm	20mm	20mm	20mm
	Min. thickness of worktopover Bosch oven	30mm	30mm	30mm	30mm	30mm	30mm
Optional accessories*		Refer to page 70					

			Ceramic			
PIE675N14E	PIE651F17E	PIL611B18E	PKN675N14A	PKF645D17A	PKE645C17A	PKF375N14E
Series 6	Series 6	Series 4	Series 8	Series 4	Series 4	Series 8
60	60	60	60	60	60	30
606 x 527mm	592 x 522mm	592 x 522mm	606 x 527mm	583 x 513mm	583 x 513mm	306 x 527mm
560 x 490-500mm	560 x 490-500mm	560 x 490-500mm	560 x 500mm	560 x 490-500mm	560 x 490-500mm	270 x 490-500mm
Black ceramic glass Stainless steel side profiles with bevelled front	Black ceramic glass, Frameless profiles with bevelled front and sides	Black ceramic glass frameless profile	Black ceramic glass Stainless steel side profiles with bevelled ceramic front	Black ceramic glass Stainless steel frame	Black ceramic glass Stainless steel frame	Black ceramic glass Stainless side profiles with bevelle front
4 zones including:	4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	2 zones including:
1.8kW / 2.5kW	1.8kW / 2.8kW	2.4kW / 3.5kW	1.6kW / 2.4kW	2.0kW	2.0kW	
1.4kW / 1.8kW	1.4kW / 1.8kW	1.4kW / 1.8kW	1.2kW	1.2kW	1.2kW	
1.8kW / 2.5kW	1.8kW / 2.8kW	1. 1007	1.2kW	1.2kW	1.2kW	
2.2kW / 3.3kW	2.2kW / 3.7kW	2.2kW / 3.7kW	0.75kW / 2.2kW	0.75kW / 2.2kW	0.75kW / 2.2kW	
, , , , ,	,	,	,	,	,	0.8kW / 2.0kW
						1.2kW
17 stage	17 stage	17 stage	17 stage	17 stage	9 stage	9 stage
•	•	•				
		•				
_						
•			_			
			•			
	•	•				
	•	•		•		
	•					
•	•	•	•			•
•	•	•				
			•			
•	•	•	•	•	•	
•	•		•	•	•	•
			•			
•	•					
		•	•	•		
					•	
7.2kW	7.2kW	4.6kW	7.2kW	6.6kW	6.6kW	3.2kW
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
20mm	20mm	20mm	20mm	20mm	20mm	20mm
30mm	30mm	30mm	20mm	20mm	20mm	30mm
Refer to page 70	Refer to page 70	Refer to page 70	Refer to page 70	Refer to page 70		


Reference Guide Rangehoods.

Product overv	iew	Canopy				
Model	Features	DIB091U51P	DWB091E51A	DWW098E50A	DWW097A50A	DEE918PAU
		Series 8	Series 6	Series 6	Series 4	Series 4
Dimensions	Width (cm)	90	90	90	90	90
	Appliance dimensions (HxWxD)	744-924 x 900 x 600mm (ducted) or 744-1044 x 900 x 600mm (recirculated)	628-954 x 900 x 500mm (ducted) or 628-1064 x 900 x 500mm (recirculated)	672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)	672-954 x 900 x 500mm (ducted) or 672-1064 x 900 x 500mm (recirculated)	707-1077 x 875 x 530mm (ducted) or 707-1195 x 875 x 530mm (recirculated)
Design	Style	Island Canopy	Slimline Canopy	Slimline Canopy	Slimline Canopy	Slimline Canopy
	Finish	Stainless Steel				
	7 segment LED display	•	•	•		
	On/Off main switch control	•	•	•	•	•
	Electronic controls with low lift push buttons	•	•	•		
	Electronic backlit low lift push button controls				•	
	Push button controls					•
	Slide controls					
	Rocker switches					
	Concealed controls					
	Lighting	4 x 3W LED SoftLights with dimmer function	3 X 3W LED SoftLights with dimmer function	3 x 3W LED SoftLights with dimmer function	3 x 3W LED	2 x 20W Halogen
Power functions	Maximum extraction rate	980m3/h	820m3/h	890m3/h	730m3/h	1000m3/h
Tuttetions	3 power levels	•	•	•	•	•
	Intensive setting (s)	2	2	2	1	1
	Intensive setting with automatic switch back to previous setting 6 mins	•	•	•	•	
	Residual shutdown with automatic run-on time	•	•	•	•	
	Rim ventilation system		•			
	EcoSilence Drive brushless motor	•	•	•	•	
	Powerful twin motor					
	Powerful single motor					•
Noise*		54dB at 450m3/h (150mm ducted)	59dB at 430m3/h (150mm ducted)	50dB at 370m3/h (150mm ducted)	49dB at 360m3/h (150mm ducted)	64dB at 680m3/h (180mm ducted)
	Sound insulation mats	•	•	•	•	
Convenience	Dishwasher-safe metal grease filter(s)	3	3	3	3	3
	Saturation indicator for filters	•	•	•	•	
Technical requirements	Total connected load	272W	269W	169W	139W	250W
	Power requirements	220-240V / 50Hz				
	Connection diameter	120mm and 150mm	120mm and 150mm	120mm and 150mm	120mm and 150mm	180 mm
Optional accessory	Active Carbon Filter	•	•			•
	Recirculating Kit	•	•	•	•	
	CleanAir Active Carbon Filter	•	•	•	•	
	CleanAir Recirculation Kit	•	•	•	•	•
Other	Ducted and recirculated air operation	•	•	•	•	•
	Clean Air Recirculating	•	•	•	•	•

Air extraction calculation examples to help you calculate your own requirements

Kitchen dimensions: L x W x H	Room volume	Minimum extraction rate (6 x per hour)	Maximum extraction rate (12 x per hour)
3 x 4 x 2.5m =	30m³	6 x 30m³ = 180m³/h	12 x 32m³ = 360m³/h
4 x 4 x 2.5m =	40m³	6 x 40m³ = 240m³/h	12 x 40m³ = 480m³/h
4 x 5 x 2.5m =	50m³	6 x 50m³ = 300m³/h	12 x 50m³ = 600m³/h
Calculate yourself			

DWB09W850A	DWW09W651A	DWW06W650A	DHL895CAU	DHL785BAU	DHL755BAU	DHL555BAU
Series 2	Series 2	Series 2	Series 8	Series 6	Series 4	Series 4
90	90	60	86	70	73	53
642 - 954 x 900 x 500mm (ducted) or 642-1064 x 900 x 500mm (recirculated)	799-976 x 900 x 500mm (ducted or recirculated)	799-976 x 600 x 500mm (ducted or recirculated)	418 x 860 x 282mm (ducted or recirculated)	418 x 700 x 282mm (ducted or recirculated)	255 x 730 x 380mm (ducted or recirculated)	255 x 530 x 380mm (ducted or recirculated
Box Canopy	Pyramid Canopy	Pyramid Canopy	Integrated	Intgrated	Integrated	Integrated
Stainless Steel	Stainless Steel	Stainless Steel	Steel body with metallic finish	Steel body with metallic finish	Steel body with metallic finish	Steel body with metalli finish
•	•	•	•	•	•	•
			•	•		
2 x 20W Halogen	2 x 20W Halogen	2 x 30W Halogen	2 x 1W LED with dimmer	2 x 20W Halogen	2 x 20W Halogen	2 x 20W Halogen
2 x 20W Halogen	2 x 20W Halogell	2 x 30 W Halogell	function	2 X 20W Halogen	2 X 20W Halogen	2 x 20 W Halogell
760m3/h	650m3/h	650m3/h	820m3/h	730m3/h	650m3/h	650m3/h
•	•	•				
			1	1	1	1
			•	•		
			•	•		
			•			
•	•	•			•	•
61dB at 460m3/h	61dB at 430m3/h	61dB at 430m3/h	55dB at 400m3/h	63dB at 540m3/h	56dB @ 320m3/h	56dB at 320m3/h
(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)	(150mm ducted)
3	3	2	2	2	2	2
	•	•	•	•		
290W	215W	235W	272W	315W	240W	240W
220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz
150mm	150mm	150mm	150mm	120mm and 150mm	120mm and 150mm	120mm and 150mm
•	•	•	•	•		
•						
•	•	•			•	•
			-			•
•	•	•	•	•	•	•

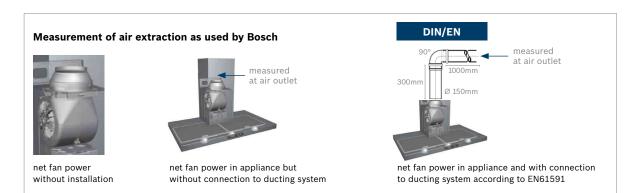


Reference Guide Gas Cooktops.

Product overvi	lew					
Model	Features	PCR915B91A	PCT915B9TA	PCI815B91A	PCQ715B90A	PCH615B9TA
		Series 6	Series 6	Series 6	Series 6	Series 6
Dimensions	Width (cm)	90	90	76	70	60
	Appliance dimensions (WxD)	915 x 520mm	915 x 520mm	762 x 520mm	702 x 520mm	582 x 520mm
	Cut-out dimensions (WxD)	850 x 490-500mm	850 x 490-500mm	560 x 480-490mm	560 x 480-490mm	560 x 480-490mm
Design		Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Burner / Zone Output		5 burners including:	6 burners including:	4 burners including:	5 burners including:	4 burners including:
	Front left	High-speed burner: 10.8Mj/h	Dual flame wok burner: 18Mj/h	Triple flame wok burner: 14.4Mj/h	Economy burner: 3.6Mj/h	Dual flame wok burner: 18Mj/h
	Rear left	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h		Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/l
	Front centre	Dual flame wok burner: 18Mj/h	Economy burner: 3.6Mj/h	Economy burner: 3.6Mj/h	Triple flame wok burner: 14.4Mj/h	
	Rear centre		Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/h		
	Front right	Standard burner: 6.1Mj/h	Dual flame wok burner: 18Mj/h	High speed burner: 10.8Mj/h	Standard burner: 6.1Mj/h	Economy burner: 3.6Mj/h
	Rear right	Standard burner: 6.1Mj/h	Standard burner: 6.1Mj/h		High-speed burner: 10.8Mj/h	High-speed burner: 10.8Mj/h
Convenience	Cast-iron trivets with rubber feet					
	3-pc cast-iron trivets with rubber feet	•	•			
	2-pc cast-iron trivets with rubber feet			•	•	•
	Enamelled cast-iron burner caps	•	•	•	•	•
	Enamelled steel pan supports					
	One-hand electronic ignition	•	•	•	•	
Safety	Flame failure fitted to each burner	•	•	•	•	•
Controls	Rotrary controls - Black & Stainless Steel	•	•	•	•	•
	Sword controls - silver					
Technical requirements		44.6Mj/h	55.4Mj/h	34.9Mj/h	41Mj/h	38.5Mj/h
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
	Min. thickness of worktop	30mm	30mm	30mm	30mm	30mm
Supplied accessories	Wok ring support	1	1	1	1	1
	Espresso cross support	1	1			
	LPG conversion kit	•	•	•	•	•
Other	Suitable for NG or LPG	•	•	•	•	•

Accessories.

Oven Accessories	Wire rack insert. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ324000	
	Pizza pan.	HEZ617000	
	Split Grill tray, enameled - Pryo proof. Fits all Series 8 60cm & 45cm built in	HEZ625071	
	ovens, combination microwaves & combination steam ovens Baking tray - Pyro proof. Fits all Series 8 60cm & 45cm built	HEZ631070	
	in ovens, combination microwaves & combination steam ovens Multipurpose pan - Pryo proof.	HEZ632070	
	Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens		
	Lid for Professional pan. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ633001	
	Professional pan - Pyro proof. Fits all Series 8 60cm & 45cm built in ovens, combination microwaves & combination steam ovens	HEZ633073	
	Wire rack (standard). Fits HBG633B51A, HBG655HW1A & HBG655HS1A	HEZ634000	
	Wire rack (standard). Fits HBG672BS1A, HBG6753S1A, HBG6767S1A & HRG6767S1A	HEZ634070	
	Wire rack (microwave). Fits HNG6764S1A, CMG633BS1B & CMG656RS1A	HEZ634080	
	Wire rack (steam). Fits CSG656BS1A & CSG656RS1A	HEZ664070	

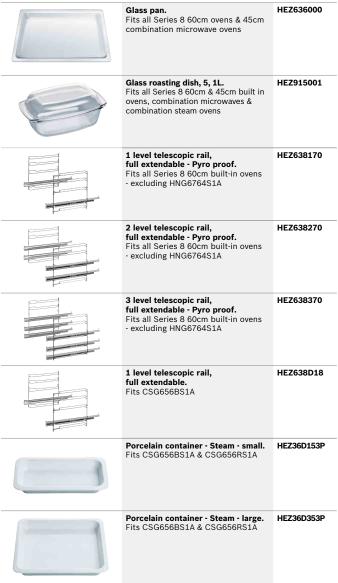

Accessories.

Cooktop Accessories	WMF Stainless Steel Roaster with Glass Lid. Suitable for FlexInduction cooktops & 60cm built-in ovens	HEZ390011		Recirculation Kit. Suitable for DIB091U51P	DHZ5385
	Steam insert for HEZ390011 roaster	HEZ390012		Recirculation Kit. Suitable for DWB091E51A, DWW098E50A, DWW097A50A	DHZ5345
	Cookware set. Suitable for Induction & Ceramic cooktops. Consists of 1 frying pan, 3 saucepans & 2 glass lids	HEZ390042		Recirculation Kit. Suitable for DWB09W850A	DHZ5325
	WMF Stainless Steel Wok. Suitable for Induction & Ceramic cooktops	HEZ390090		Deliver of the second file	DUZENZE
	Griddle Plate Cast Aluminium. Suitable for FlexInduction cooktops	HEZ390522		Recirculation set / charcoal filter. Suitable for DWW06W851A, DWW09W851A	DHZ5275
	Teppanyaki - small. Suitable for FlexInduction cooktops	HEZ390511	3	Recirculation kit. Suitable for DHL895CAU and DHL785BAU	DHZ5605
	Teppanyaki - large. Suitable for FlexInduction cooktops	HEZ390512			
Rangehood Accessories	CleanAir Recirculation Kit. Suitable for DIB091U51P	DSZ6230		Active Carbon Filter. Suitable for DIB091U51P, DWB091E51A, DWW098E50A, DWW097A50A	DHZ5346
				Active Carbon Filter. Suitable for DWB09W850A	DHZ5326
	CleanAir Recirculation Kit. Suitable for DWB09W850A	DSZ6200			
	CleanAir Recirculation Kit. Suitable for DWB091E51A, DWW098E50A, DWW097A50A	DSZ6240		Active Carbon Filter. Suitable for DWW09W651A & DWW06W650A	DHZ5276
	CleanAir Recirculation Kit. Suitable for DEE918PAU	DHZ5705		Active Carbon Filter. Suitable for DHL895CAU & DHL785BAU	DHZ5316
	CleanAir Active Carbon Filter. Suitable for DIB091U51P, DWB091E51A, DWW098E50A, DWW097A50A, DWB09W850A	DSZ5201		Charcoal Filter. Suitable for DHL755BAU & DHL555BAU	DHZ7305
	CleanAir Active Carbon Filter. Suitable for DEE918PAU	DHZ5706			
	CleanAir Active Carbon Filter. Suitable for DIB091U51P, DWB091E51A, DWW098E50A, DWW097A50A, DWB09W850A CleanAir Active Carbon Filter.	DSZ5201		Charcoal Filter. Suitable for DHL755BAU &	DHZ

Quality Service.

The customer service of Bosch, before and after purchase.

Important notes

Model numbers and specifications are for reference only and subject to change without prior notice.

For additional information on products, please refer to your local Bosch retailer. Bosch is continuously seeking to improve specification, design and production of its appliances and alterations may take place regularly.

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance.

The electrical and water connection should only be made in accordance with the regulations of the national authorities.

For model and accessory availability, please contact BSH Home Appliances Limited.

(See back cover for details)

Quality service for quality appliances

Quality of our after-sales service is just as important as the quality of our products. In the unlikely event that service is required on your appliance, our extensive network of authorised service agents throughout New Zealand will ensure you are provided with the full support to ensure your appliance is operating at optimal condition.

Warranty

All Bosch products are covered under a 2-year comprehensive parts and labour warranty.



BSH Home Appliances Ltd

Unit F2, 4 Orbit Drive Mairangi Bay Auckland 0632

PO Box 33-1033 Takapuna Auckland 0740

Phone: (09) 477 0492 Fax: (09) 477 2647

Sales Support

Phone: 0800 807 723 Fax: 0800 256 535 Email: bshnz-cs@bshg.com

Customer Service (Technical Support)

Phone: 0800 245 700 Fax: 0800 245 700

Email: aftersales.nz@bshg.com

www.bosch-home.co.nz

Printed in New Zealand



FSC® C014371

Whilst every care has been taken in the preparation of this publication, BSH does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

This document is printed on an environmentally responsible paper, produced using Elemental Chlorine Free (ECF), FSC Certified Mixed Source pulp sourced from Well Managed & Legally Harvested Forests, and manufactured under the strict ISO14001 Environmental Management System.