

**Series 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel  
CSG656RS2A**



**Included accessories**

1 x grid, 1 x universal pan, 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S

**Optional accessories**

HEZ530000 : Half tray  
HEZ531010 : Baking tray, non-stick ceramic coated  
HEZ625071 : Grill tray, anthracite enamelled  
HEZ632070 : Multipurpose pan, anthracite enamelled

**The compact steam oven with PerfectBake and PerfectRoast: you get perfect results, automatically and gently.**

- **Steam function:** for gentle, healthy food preparation.
- **Added Steam:** achieve cooking results that are crispy on the outside and juicy on the inside.
- **TFT touchdisplay:** easy and intuitive oven control with touchscreen.
- **EcoClean Direct:** easy cleaning thanks to a coating that breaks down grease while you bake.
- **LED lighting:** perfect illumination of foods with minimum energy consumption.

**Technical Data**

Color / Material Front : Stainless steel  
Built-in / Free-standing : Built-in  
Door opening : Drop down  
Cleaning : Catalytic liners (all sides), Hydrolytic  
Control Panel Material : Stainless steel  
Door Material : Glass  
Dimensions (HxWxD) : 455 x 594 x 548 mm  
Dimensions of the packed product (HxWxD) : 520 x 650 x 710 mm  
Min. required niche size for installation (HxWxD) : 450-455 x 560-568 x 550 mm  
Cavity dimensions : 235 x 480 x 415 mm  
Usable volume of cavity : 47 l  
Number of interior lights : 1  
Net weight : 36.0 kg  
Gross weight : 38.3 kg  
EAN code : 4242005125944  
Connection Rating : 3300 W  
Fuse protection : 16 A  
Voltage : 220-240 V  
Frequency : 50; 60 Hz  
Length electrical supply cord : 150 cm



4 242005 125944

## **Series 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel CSG656RS2A**

**The compact steam oven with PerfectBake and PerfectRoast: you get perfect results, automatically and gently.**

### **Heating Functions**

- Compact steam oven with 14 heating methods:  
4D HotAir  
Drying Full width grill 4D HotAir Eco Intensive heat Half width grill Top/bottom heating Top/bottom heating Eco Pizza setting Slow cooking Bottom heating Hot air grilling Preheat ovenware Keep warm
- Additional heating methods with steam: Pure steaming, Reheating, Dough Proving, Defrost setting
- Automatic rapid heat function
- Temperature range 30 °C - 250 °C

### **Sensor Technology & Automatic Programs**

- Bosch Assist - a menu of dishes for automatic cooking
- PerfectBake baking sensor, PerfectRoast multipoint meat probe

### **Design**

- TFT Touch Graphic Display
- Drop down door
- LED lighting
- Cavity volume: 47 net usable litres
- Anthracite enamel cavity with 3 shelf positions

### **Convenience**

- Automatic temperature proposal  
Actual temperature display Residual heat indicator Meat probe function Sabbath setting
- Cavity with shelf support rails, 1 level telescopic rail, fully extendable, safety stop function
- Electronic clock/timer with end time programming
- Large 1 litre water tank
- Water tank empty indicator
- Info button
- EcoClean Direct: coating of ceiling, back panel, side liners
- Additional functions:  
Descaling programme  
drying function
- Full glass inner door

### **Safety and Environment**

- Triple glazed door
- Maximum door temperature 40° C
- Child lock function, Automatic safety switch off function, Residual heat indicator, Start button, Door contact switch
- Integrated cooling fan

### **2 year warranty**

### **Accessories**


- 1 x steam container, punched, size S, 1 x steam container, punched, size XL, 1 x steam container, unpunched, size S, 1 x grid, 1 x universal pan

### **Technical Info**

- Appliance dimensions (HxWxD): 455 mm x 594 mm x 548 mm
- Installation dimensions (HxWxD): 450 mm - 455 mm x 560 mm - 568 mm x 550 mm
- Total connected load electric: 3.3 KW
- Length of mains cable: 150 cm

## Series 8, Built-in compact oven with steam function, 60 x 45 cm, Stainless steel CSG656RS2A


Installation with a hob.

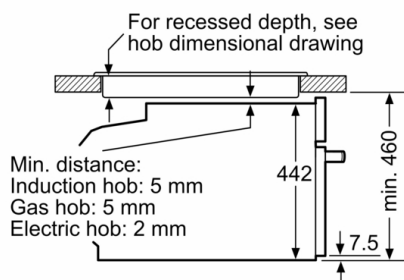


measurements in mm

If the compact appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

Hob type	min. worktop thickness	
	fitted	flush
Induction hob	42 mm	43 mm
Full surface Induction hob	52 mm	53 mm
Gas hob	32 mm	43 mm
Electric hob	32 mm	35 mm

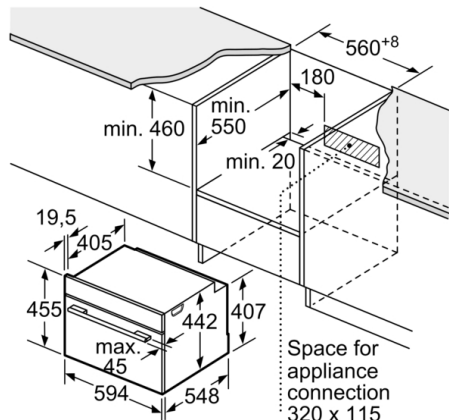

measurements in mm

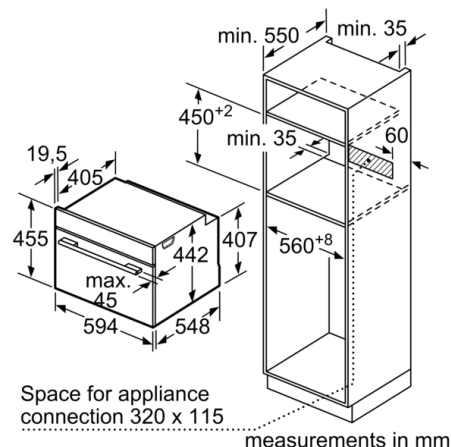

measurements in mm

