

## #01\_WLAN2.4GHz\_802.11b 1Mbps\_Bottom Face\_0mm\_Ch6


Communication System: 802.11b; Frequency: 2437.0 MHz; Duty Cycle: 1:1.004  
Medium: HSL\_2450\_230406 Medium parameters used:  $f= 2437.0$  MHz;  $\sigma= 1.82$  S/m;  $\epsilon_r = 39.0$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10012-CAB

**Area Scan (60.0 mm x 80.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.889 W/kg; SAR (10g) = 0.409 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = 0.02 dB  
SAR (1g) = 0.952 W/kg; SAR (8g) = 0.436 W/kg; SAR (10g) = 0.391 W/kg

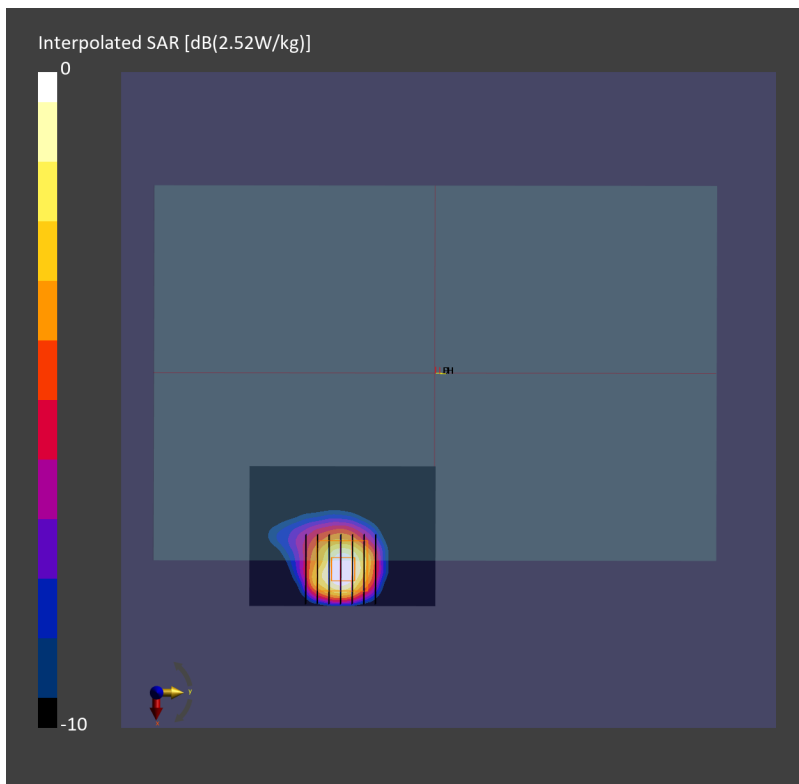

## #02\_WLAN5GHz\_802.11n-HT40 MCS0\_Bottom Face\_0mm\_Ch54


Communication System: 802.11n; Frequency: 5270.0 MHz; Duty Cycle: 1:1.056  
Medium: HSL\_5G\_230407 Medium parameters used:  $f= 5270.0$  MHz;  $\sigma= 4.77$  S/m;  $\epsilon_r = 37.1$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(5.34, 5.34, 5.34); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10599-AAC

**Area Scan (100.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.758 W/kg; SAR (10g) = 0.236 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = 0.01 dB  
SAR (1g) = 0.825 W/kg; SAR (8g) = 0.290 W/kg; SAR (10g) = 0.252 W/kg

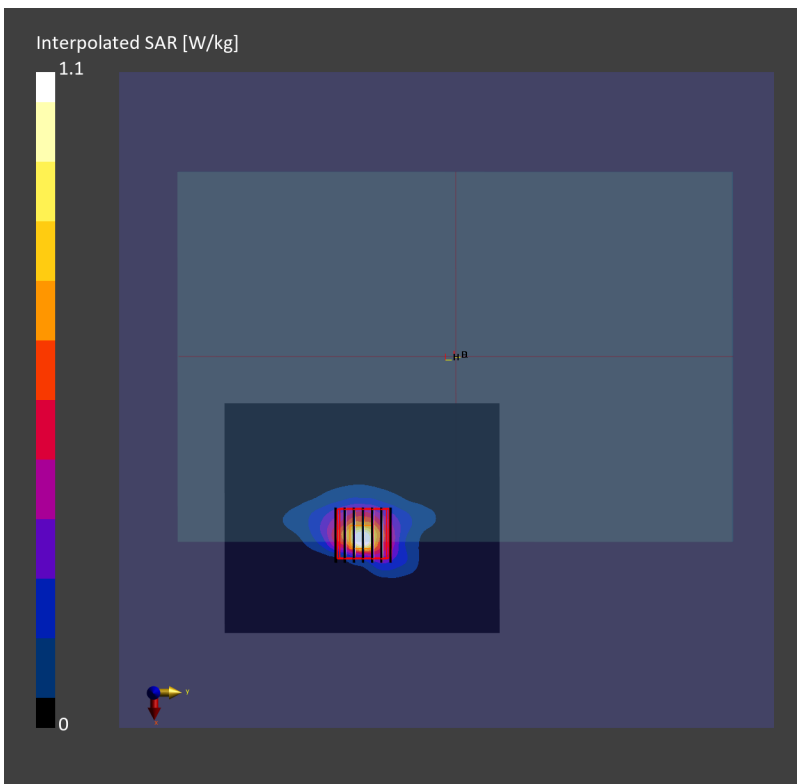

### #03\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 1\_0mm\_Ch110


Communication System: 802.11n; Frequency: 5550.0 MHz; Duty Cycle: 1:1.056  
Medium: HSL\_5G\_230407 Medium parameters used:  $f= 5550.0$  MHz;  $\sigma= 5.10$  S/m;  $\epsilon_r = 36.6$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

#### DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(4.66, 4.66, 4.66); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10544-AAC

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.771 W/kg; SAR (10g) = 0.208 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.888 W/kg; SAR (8g) = 0.238 W/kg; SAR (10g) = 0.204 W/kg

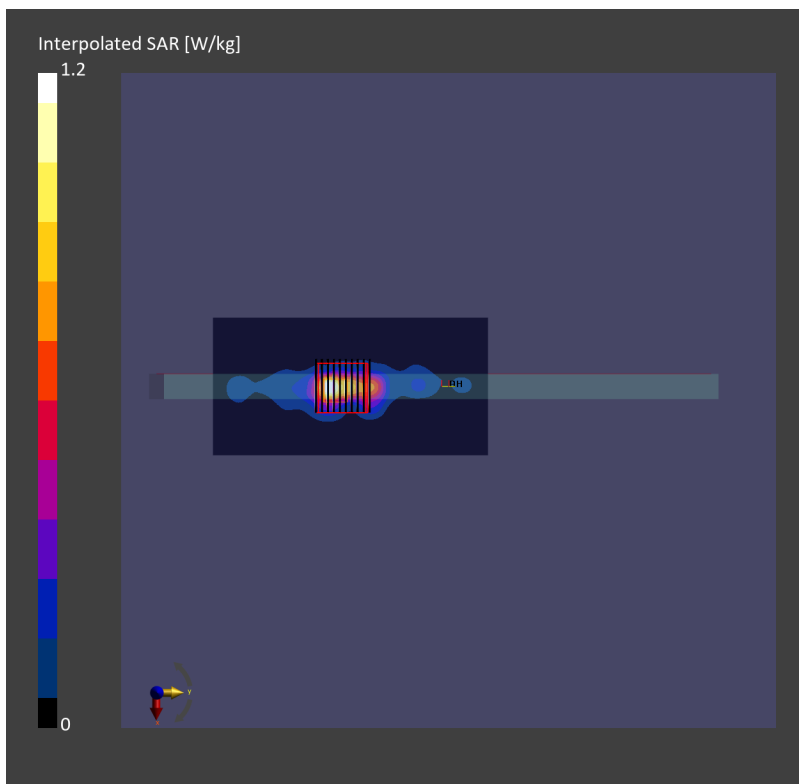

## #04\_WLAN5GHz\_802.11n-HT40 MCS0\_Edge 1\_0mm\_Ch159


Communication System: 802.11n; Frequency: 5795.0 MHz; Duty Cycle: 1:1.056  
Medium: HSL\_5G\_230407 Medium parameters used:  $f= 5795.0$  MHz;  $\sigma= 5.39$  S/m;  $\epsilon_r = 36.1$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(4.96, 4.96, 4.96); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: WLAN, 10599-AAC

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.758 W/kg; SAR (10g) = 0.195 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 2.5 mm x 2.5 mm x 1.2 mm  
Power Drift = -0.02 dB  
SAR (1g) = 0.890 W/kg; SAR (8g) = 0.226 W/kg; SAR (10g) = 0.190 W/kg

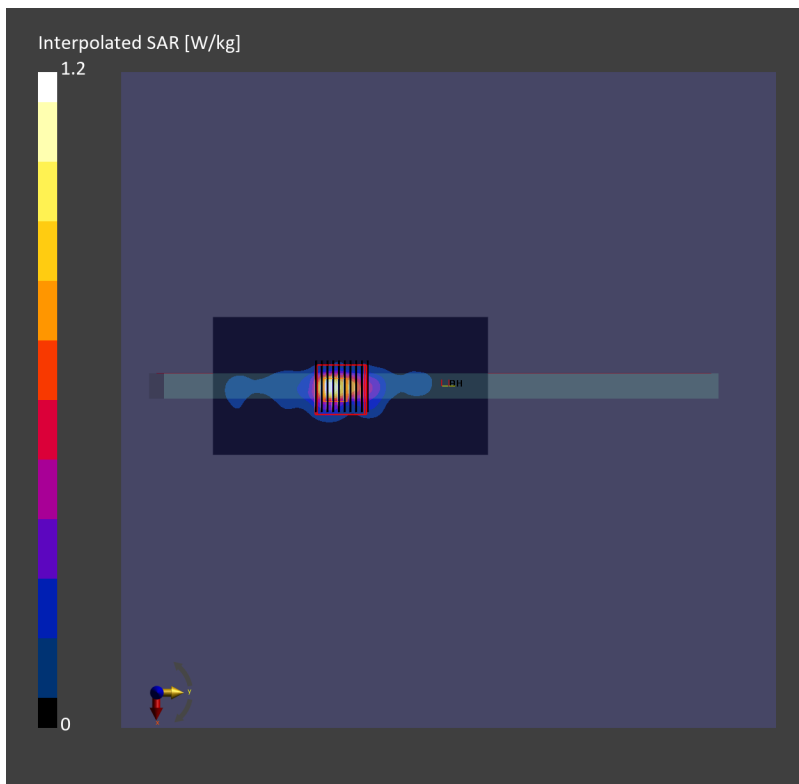

## #05\_Bluetooth\_1Mbps\_Bottom Face\_0mm\_Ch78

Communication System: Bluetooth; Frequency: 2480.0 MHz; Duty Cycle: 1:1.302  
Medium: HSL\_2450\_230406 Medium parameters used:  $f = 2480.0$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 38.8$   
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7306; ConvF(7.54, 7.54, 7.54); Calibrated: 2022-07-28
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1694; Calibrated: 2022-11-18
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.2.4.1816
- UID: Bluetooth, 10032-CAA

**Area Scan (60.0 mm x 120.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.316 W/kg; SAR (10g) = 0.143 W/kg;

**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm  
Power Drift = -0.00 dB  
SAR (1g) = 0.240 W/kg; SAR (8g) = 0.109 W/kg; SAR (10g) = 0.098 W/kg

