

FCC Test Report

Report No.: AGC09881200501FE04

FCC ID : XPYNINAB4

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: NINA-B4

BRAND NAME : u-blox

MODEL NAME: NINA-B400, NINA-B410, NINA-B406, NINA-B416

APPLICANT : u-blox AG

DATE OF ISSUE : Dec. 10, 2020

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the codecated restroy/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 110

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	9/	Dec. 10, 2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restrict/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Report No.: AGC09881200501FE04 Page 3 of 110

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6 DB BANDWIDTH	19
8.1. MEASUREMENT PROCEDURE	19
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	
9.1. MEASUREMENT PROCEDURE	25
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Peet Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com. he test results



Page 4 of 110

10.1. MEASUREMENT PROCEDURE	36
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	39
11.1. MEASUREMENT PROCEDURE	39
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	41
11.4. TEST RESULT	41
12. FCC LINE CONDUCTED EMISSION TEST	
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	102
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	102
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	103
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	103
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	104
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	108
APPENDIX B: PHOTOGRAPHS OF EUT	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 110

1. VERIFICATION OF COMPLIANCE

Applicant	u-blox AG		
Address	Zuercherstrasse 68, Ch-8800 Thalwil, Switzerland		
Manufacturer	u-blox AG		
Address	Zuercherstrasse 68, Ch-8800 Thalwil, Switzerland		
Product Designation	NINA-B4		
Brand Name	u-blox		
Test Model	NINA-B400, NINA-B406		
Series Model	NINA-B410, NINA-B406, NINA-B416		
Difference Description See the NINA-B4_Operational Description_r1			
Date of test	Jul. 24, 2020 to Dec. 10, 2020		
Deviation	No any deviation from the test method		
Condition of Test Sample	Normal		
Test Result	Pass		
Report Template	AGCRT-US-BLE/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Buch. Jang	
, GC	Erik Yang (Project Engineer)	Dec. 10, 2020
Reviewed By	Max 2 hang	
No.	Max Zhang (Reviewer)	Dec. 10, 2020
Approved By	Formerties	
	Forrest Lei (Authorized Officer)	Dec. 10, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 110

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "NINA-B4". It is designed by way of utilizing the O-QPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.405 GHz to 2.480GHz
RF Output Power	5.698dBm (Max)
Modulation	O-QPSK
Number of channels	16 Channel
Antenna Designation	NINA-B400:External Antenna(Comply with requirements of the FCC part 15.203) NINA-B406: Integral Antenna(Added at manufacturer's request)
External Antenna : Antenna 1: FlatWhip-2400-SMA-RPSMA :3dBi Antenna 2: Ex-IT 2400-RP-SMA 28-001:-MHF 28-001 :3dBi Antenna 3: Ex-IT 2400-RP-SMA 70-002 :3dBi Antenna 4: InSide-2400: 3dBi Integral Antenna : u-blox PCB Trace Antenna:3dBi	
Hardware Version	A
Software Version	V1.0
Power Supply	DC 3.3V

Note:

1.All the models would be marketed with the CRYSTAL A (EPSON FA-118T) or the CRYSTAL B (Taisaw TZ31 24CIW-B4017). Both of them have the same size and radio parameters. The version of the CRYSTAL A had b een tested with all the items and the version of the CRYSTAL B only had been tested with bandwidth test and RF output power test for the difference.

2.Please refer to NINA-B4_Certification_AppNote_(UBX-20037320) for the specifications of various antennas.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 110

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2405MHZ	
C C	1	2410MHZ	
2400~2483.5MHZ	G 2 : F 5 5 9	\C\	
	14	2475MHZ	
GO CO	15	2480MHZ	

Remark: 5 MHz channel spacing

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: XPYNINAB4** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional rad iator shall be considered sufficient to comply with the provisions of this section.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 8 of 110

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8 dB
- Uncertainty of RF power density, conducted, Uc = ±2.6 dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7 dB
 Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feating/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of ACC where test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 9 of 110

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	2405MHz TX
2	2440MHz TX
3	2475MHz TX
4	2480MHz TX

Note

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The test software is the Putty which can set the EUT into the individual test modes.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written application of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.




Page 10 of 110


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	NINA-B4	NINA-B400/ NINA-B406	XPYNINAB4	EUT
2	PC	NbI-WAQ9R	DC 5V	AE
3	PC Adapter	HW-200200CP1	DC 5V	AE
4	control board	EPS-35-3.3	DC 3.3V	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	
15.207	Conducted Emission	Compliant

Note: The NINA-B400 model for all test items. The NINA-B406 model for Radiated Emission and Conducted Emission test.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Restro/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC The test result presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report in the report apply only to the test report should be addressed to AGC by agc@agc-cert.com.



Page 11 of 110

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
LISN	R&S	ESH2-Z5	100086	Jul. 03,2020	Jul. 02,2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Aug. 26, 2019	Aug. 25, 2020
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 09, 2019	Sep. 08, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 12 of 110

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

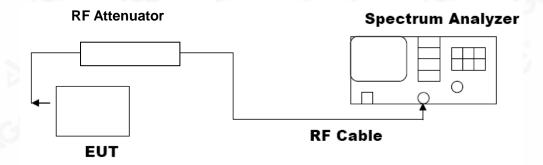

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





7.3. LIMITS AND MEASUREMENT RESULT


CRYSTAL A

PEAK OUTPUT POWER MEASUREMENT RESULT FOR O-QPSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.405	3.182	30	Pass
2.440	3.930	30	Pass
2.475	-0.146	30	Pass
2.480	-3.228	30	Pass

CH₀



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.










CH14



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC where test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 16 of 110

g/Inspection The test results

CRYSTAL B

PEAK OUTPUT POWER MEASUREMENT RESULT FOR O-QPSK MOUDULATION			
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.405	3.297	30	Pass
2.440	4.873	30	Pass
2.475	5.698	30	Pass
2.480	-2.575	30	Pass

CH₀



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated feet Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issue of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.










CH14



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC where test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 19 of 110

8. 6 DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

CRYSTAL A

LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Applicable Limits			
	Frequency(GHz)	Test Data (MHz)	Criteria	
>500KHZ	2.405	1.526	PASS	
	2.440	1.569	PASS	
	2.475	1.560	PASS	
	2.480	1.560	PASS	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





TEST PLOT OF BANDWIDTH FOR CH00



TEST PLOT OF BANDWIDTH FOR CH07



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF BANDWIDTH FOR CH14



TEST PLOT OF BANDWIDTH FOR CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 22 of 110

/Inspection The test results the test report.

CRYSTAL B

LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Applicable Limits			
	Frequency(GHz)	Test Data (MHz)	Criteria	
>500KHZ	2.405	1.546	PASS	
	2.440	1.462	PASS	
	2.475	1.566	PASS	
	2.480	1.568	PASS	

TEST PLOT OF BANDWIDTH FOR CH00




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Festi Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF BANDWIDTH FOR CH07



TEST PLOT OF BANDWIDTH FOR CH14

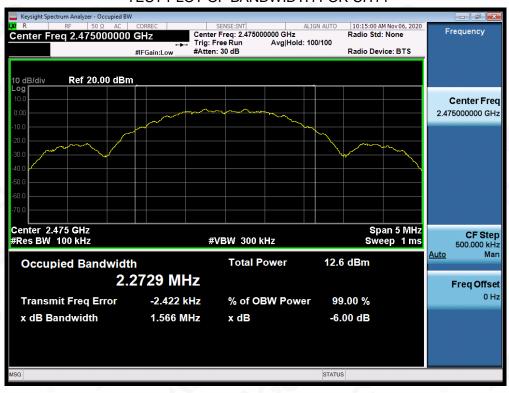

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





TEST PLOT OF BANDWIDTH FOR CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 25 of 110

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
A soulis able 1 insite	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS		


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Factorian (Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of ACC whe test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





TEST RESULT FOR ENTIRE FREQUENCY RANGE


O-QPSK MODULATION IN CH00

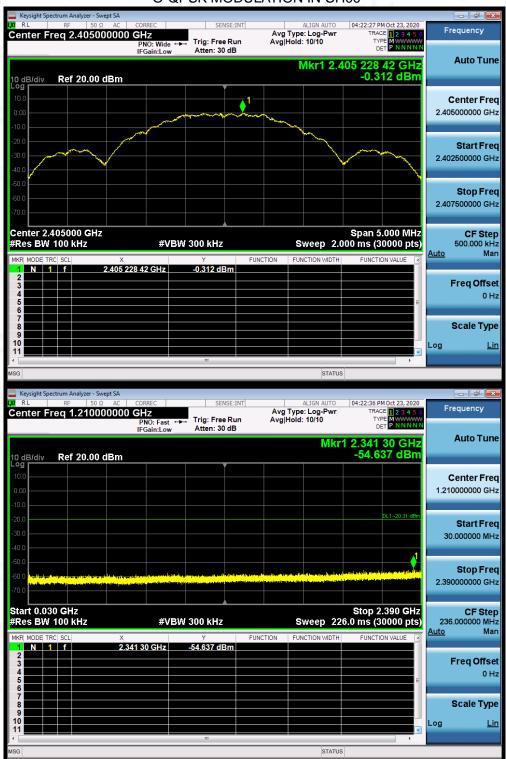


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





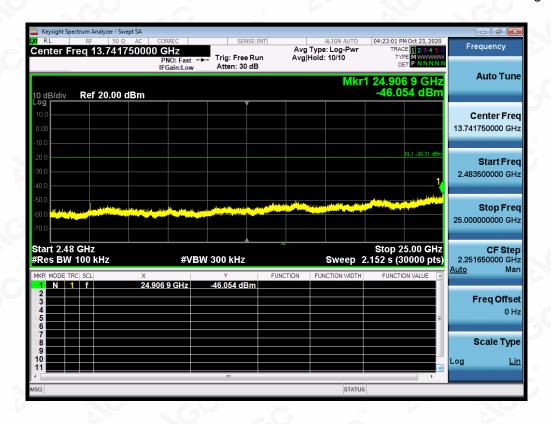


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Specificated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purporization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







O-QPSK MODULATION IN CH07

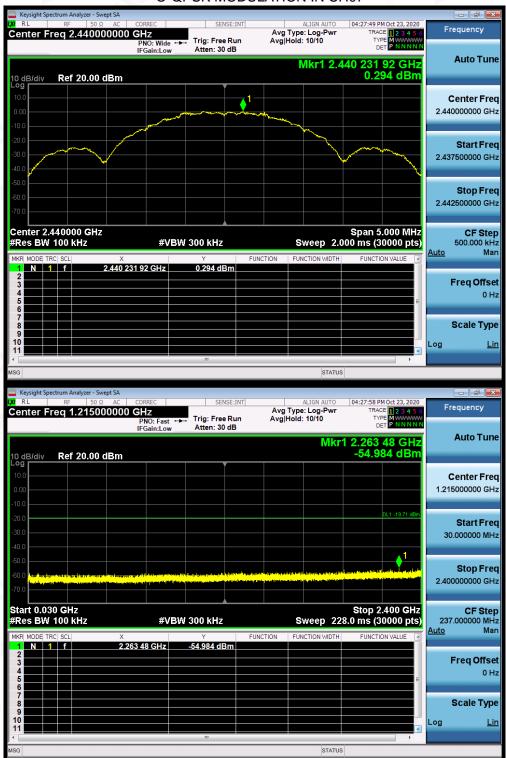


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





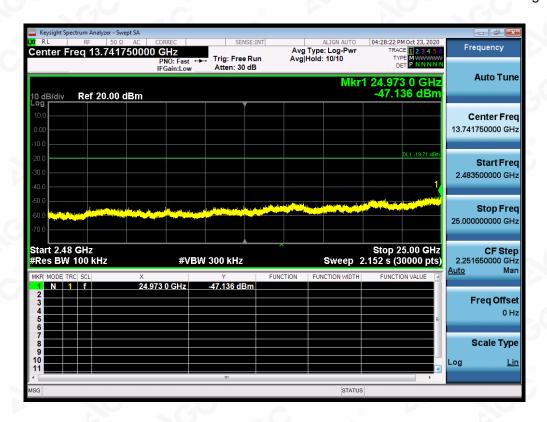

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exphorization of AGC where test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.







O-QPSK MODULATION IN CH14



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





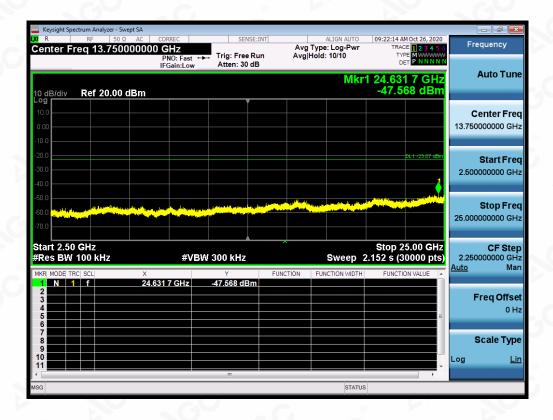

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Specificated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purporization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.







O-QPSK MODULATION IN CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





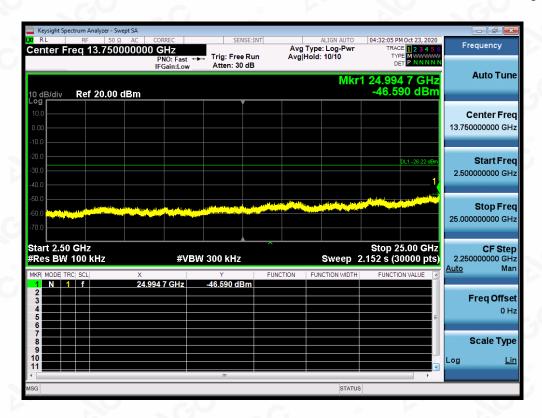

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST RESULT FOR BAND EDGE


O-QPSK MODULATION CH00



O-QPSK MODULATION IN HIGH CH14



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





O-QPSK MODULATION IN HIGH CH15



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesthod/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 36 of 110

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
2405MHz	-10.918	8	Pass
2440MHz	-9.217	8	Pass
2475MHz	-13.562	8	Pass
2480MHz	-16.463	8	Pass

TEST PLOT OF SPECTRAL DENSITY FOR CH00



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




TEST PLOT OF SPECTRAL DENSITY FOR CH07



TEST PLOT OF SPECTRAL DENSITY FOR CH14







TEST PLOT OF SPECTRAL DENSITY FOR CH15





Page 39 of 110

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

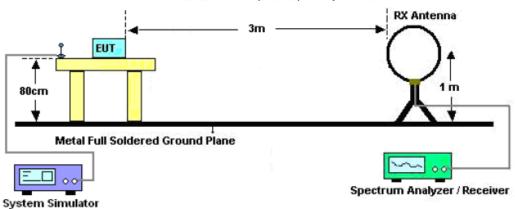

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

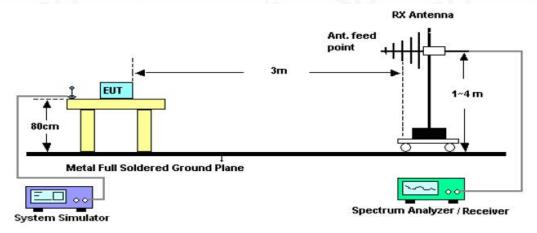

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

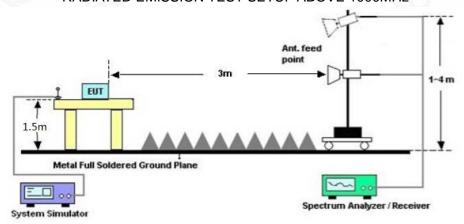



Page 41 of 110

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.




Page 42 of 110

RADIATED EMISSION BELOW 1GHZ

Antenna 1

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

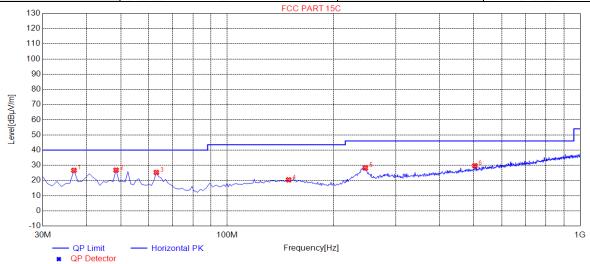

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	26.63	11.16	40.00	13.37	150	219	Horizontal
2	48.4300	26.79	11.71	40.00	13.21	150	28	Horizontal
3	62.9800	25.27	10.42	40.00	14.73	150	358	Horizontal
4	149.3100	20.40	14.88	43.50	23.10	150	359	Horizontal
5	246.3100	28.18	14.75	46.00	17.82	150	301	Horizontal
6	503.3600	29.72	22.26	46.00	16.28	150	232	Horizontal


RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Page 43 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

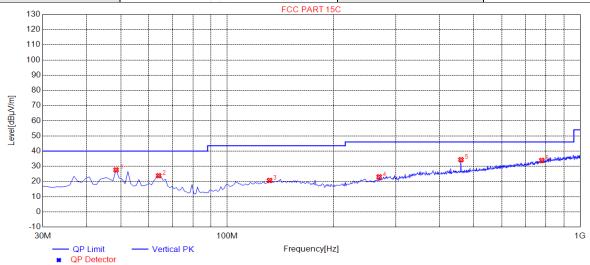

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.4300	27.59	11.71	40.00	12.41	150	233	Vertical
2	63.9500	23.79	10.25	40.00	16.21	150	32	Vertical
3	131.8500	20.64	14.28	43.50	22.86	150	285	Vertical
4	269.5900	23.03	15.38	46.00	22.97	150	291	Vertical
5	459.7100	34.32	21.18	46.00	11.68	150	360	Vertical
6	778.8400	33.84	27.92	46.00	12.16	150	5	Vertical


RESULT: PASS



Page 44 of 110

Antenna 2

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

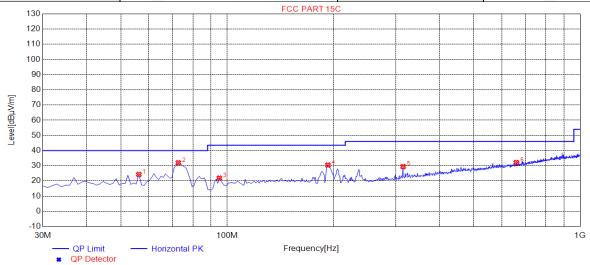


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.1900	24.31	11.20	40.00	15.69	200	330	Horizontal
2	72.6800	31.97	8.67	40.00	8.03	200	359	Horizontal
3	94.9900	21.89	9.32	43.50	21.61	200	171	Horizontal
4	192.9600	30.45	12.38	43.50	13.05	200	302	Horizontal
5	315.1800	29.45	16.48	46.00	16.55	200	168	Horizontal
6	659.5300	32.15	25.29	46.00	13.85	200	268	Horizontal

RESULT: PASS



Page 45 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

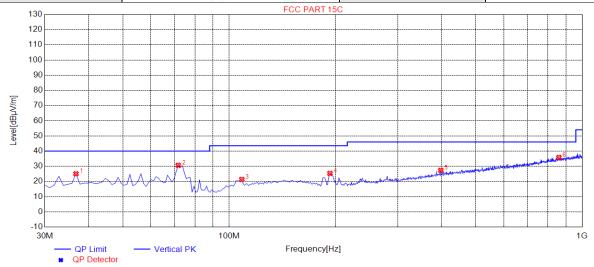

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	25.06	11.16	40.00	14.94	100	203	Vertical
2	71.7100	30.65	8.87	40.00	9.35	100	222	Vertical
3	108.5700	21.30	12.27	43.50	22.20	100	153	Vertical
4	192.9600	25.32	12.38	43.50	18.18	100	137	Vertical
5	397.6300	27.32	19.69	46.00	18.68	100	232	Vertical
6	859.3500	35.83	29.51	46.00	10.17	100	351	Vertical


RESULT: PASS



Page 46 of 110

Antenna 3

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

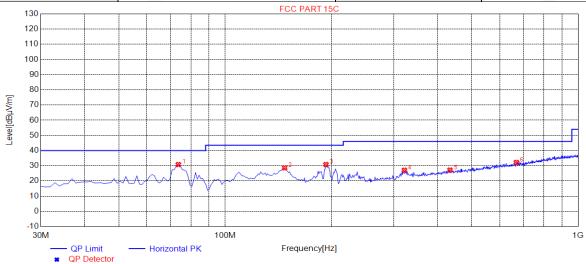


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	73.6500	30.81	8.47	40.00	9.19	200	146	Horizontal
2	147.3700	28.62	14.88	43.50	14.88	100	240	Horizontal
3	192.9600	30.82	12.38	43.50	12.68	100	307	Horizontal
4	321.9700	27.07	16.77	46.00	18.93	100	85	Horizontal
5	433.5200	27.19	20.61	46.00	18.81	100	141	Horizontal
6	668.2600	32.18	25.44	46.00	13.82	100	6	Horizontal

RESULT: PASS



Page 47 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

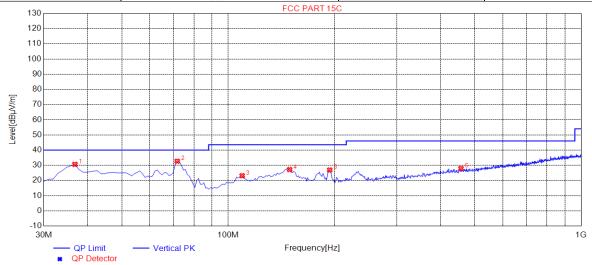

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	36.7900	30.59	11.16	40.00	9.41	100	213	Vertical
2	71.7100	32.67	8.87	40.00	7.33	100	256	Vertical
3	109.5400	23.11	12.37	43.50	20.39	100	329	Vertical
4	149.3100	27.16	14.88	43.50	16.34	100	272	Vertical
5	193.9300	26.90	12.34	43.50	16.60	100	200	Vertical
6	456.8000	27.88	21.12	46.00	18.12	100	123	Vertical


RESULT: PASS



Page 48 of 110

Antenna 4

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

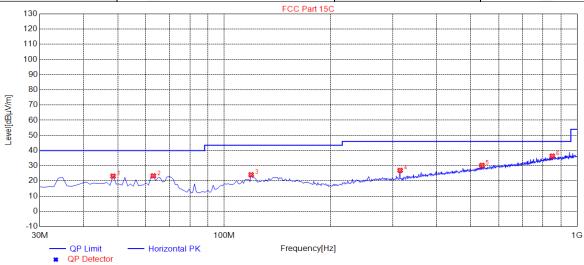


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.4300	23.17	11.71	40.00	16.83	100	1	Horizontal
2	62.9800	23.33	10.42	40.00	16.67	100	37	Horizontal
3	119.2400	24.06	13.39	43.50	19.44	100	1	Horizontal
4	315.1800	26.96	16.48	46.00	19.04	100	169	Horizontal
5	537.3100	30.26	22.98	46.00	15.74	100	3	Horizontal
6	850.6200	36.37	29.33	46.00	9.63	100	278	Horizontal

RESULT: PASS



Page 49 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

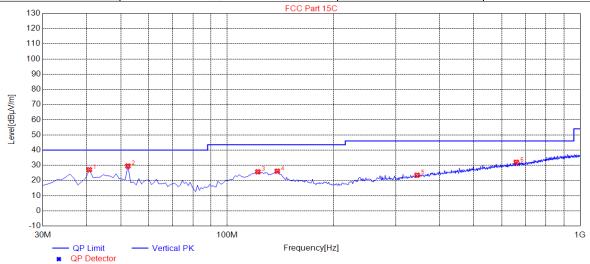


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6700	27.06	11.91	40.00	12.94	100	255	Vertical
2	52.3100	29.51	11.49	40.00	10.49	100	117	Vertical
3	122.1500	25.70	13.62	43.50	17.80	100	181	Vertical
4	138.6400	26.13	14.78	43.50	17.37	100	112	Vertical
5	345.2500	23.46	17.67	46.00	22.54	100	35	Vertical
6	659.5300	31.99	25.29	46.00	14.01	100	257	Vertical

RESULT: PASS



Page 50 of 110

EUT	u-blox	Model Name	NINA-B406
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

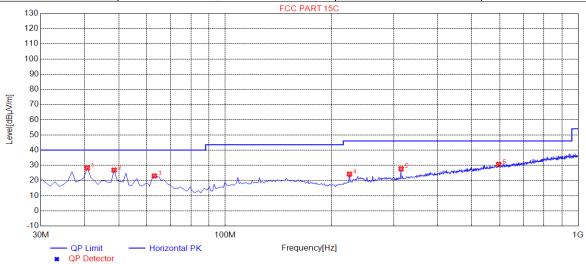

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6700	28.16	11.91	40.00	11.84	150	335	Horizontal
2	48.4300	26.83	11.71	40.00	13.17	150	198	Horizontal
3	62.9800	22.95	10.42	40.00	17.05	150	325	Horizontal
4	224.9700	24.19	13.66	46.00	21.81	150	17	Horizontal
5	315.1800	27.67	16.48	46.00	18.33	150	119	Horizontal
6	595.5100	30.62	24.24	46.00	15.38	150	144	Horizontal

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Page 51 of 110

/Inspection The test results

EUT	u-blox	Model Name	NINA-B406
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

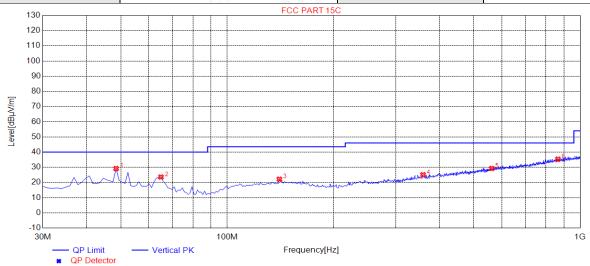

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	48.4300	29.14	11.71	40.00	10.86	150	305	Vertical
2	64.9200	23.56	10.09	40.00	16.44	150	53	Vertical
3	140.5800	22.14	14.88	43.50	21.36	150	360	Vertical
4	358.8300	25.06	18.16	46.00	20.94	150	261	Vertical
5	561.5600	29.20	23.48	46.00	16.80	150	360	Vertical
6	865.1700	35.33	29.56	46.00	10.67	150	1	Vertical

RESULT: PASS Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.
- 2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Page 52 of 110

RADIATED EMISSION ABOVE 1GHZ

Antenna 1

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810.000	43.56	0.08	43.64	74	-30.36	peak
4810.000	34.79	0.08	34.87	54	-19.13	AVG
7215.000	39.51	2.21	41.72	74	-32.28	peak
7215.000	30.28	2.21	32.49	54	-21.51	AVG
		(6)				8

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810.000	46.19	0.08	46.27	74	-27.73	peak
4810.000	34.28	0.08	34.36	54	-19.64	AVG
7215.000	41.93	2.21	44.14	74	-29.86	peak
7215.000	32.55	2.21	34.76	54	-19.24	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 53 of 110

/Inspection The test results

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	46.91	0.14	47.05	74	-26.95	peak
4880.000	37.82	0.14	37.96	54	-16.04	AVG
7320.000	41.34	2.36	43.7	74	-30.3	peak
7320.000	32.17	2.36	34.53	54	-19.47	AVG
@				(2)		
	®					
emark:		3				0
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			- 0

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.35	0.14	46.49	74	-27.51	peak
4880.000	37.81	0.14	37.95	54 ®	-16.05	AVG
7320.000	40.23	2.36	42.59	74	-31.41	peak
7320.000	31.54	2.36	33.9	54	-20.1	AVG
	-0	C			<u>O</u>	
mark:				@		



Page 54 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4950.000	45.92	0.22	46.14	74	-27.86	peak
4950.000	36.84	0.22	37.06	54	-16.94	AVG
7425.000	39.15	2.64	41.79	74	-32.21	peak
7425.000	30.48	2.64	33.12	54	-20.88	AVG
@				(8)		
	(8)				(8)	
Remark:		(8)				8
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			- 6

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4950.000	43.58	0.22	43.8	74	-30.2	peak
4950.000	35.19	0.22	35.41	54	-18.59	AVG
7425.000	39.46	2.64	42.1	74 ®	-31.9	peak
7425.000	28.45	2.64	31.09	54	-22.91	AVG
		@			-C	(8)
emark:				(a)		
actor = Anter	nna Factor + Cable	Loss - Pre-a	mplifier.			

RESULT: PASS



Page 55 of 110

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

BμV/m) (d	rgin Value Type
, ,	(B) Value Type
74 04	
74 -24	1.65 peak
54 -17	7.3 AVG
74 -28	8.8 peak
54 -17	7.21 AVG
@	
	8
7.0	8
	74 -2

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.34	0.22	45.56	74	-28.44	peak
4960.000	36.18	0.22	36.4	54	-17.6	AVG
7440.000	39.56	2.64	42.2	74	-31.8	peak
7440.000	30.22	2.64	32.86	54	-21.14	AVG
	160				G V	<i>a.</i> O
emark:				(8)		

RESULT: PASS



Page 56 of 110

/Inspection The test results

Antenna 2

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dBμV) (dB) (dBμV/m)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810.000	44.39	0.08	44.47	74	-29.53	peak
4810.000	34.27	0.08	34.35	54	-19.65	AVG
7215.000	39.84	2.21	42.05	74	-31.95	peak
7215.000	30.16	2.21	32.37	54	-21.63	AVG
-,C	©	(8)		- C	8	(8)
emark:						

EUT	u-blox	Model Name	NINA-B400
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4810.000	46.53	0.08	46.61	74	-27.39	peak	
4810.000	34.78	0.08	34.86	54	-19.14	AVG	
7215.000	41.54	2.21	43.75	74	-30.25	peak	
7215.000	32.15	2.21	34.36	54	-19.64	AVG	
		10 ^C	0				
emark:			-00		®		
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			®	