

# The easy way to perfect results.

The Bosch kitchen appliance catalogue

Edition 2022











₿ BOSCH

#### Compact appliances ·----

For lovers of cooking, you can add combination steam, pure steam or combination microwave ovens to your kitchen.

#### Ovens -----

High-quality stainless steel combined with sleek black glass offers a timeless design, while sophisticated features deliver the best results meaning less work and more cooking pleasure.

#### **Coffee machine**

For lovers of coffee, your favourite café can be right in your kitchen. The coffee machine design matches the Series 8 ovens for a seamless and coordinated look.

#### Dishwashers

A dishwasher is a must in every modern kitchen to save you the hassle of cleaning up. Choose from under bench, semi and fully integrated models to perfectly integrate into your kitchen.

Scan here to view the Dishwasher overview



#### Warming drawers

Keep your coffee cups on hand for the morning cappuccino or warm up plates before serving dinner. You can also use our warming drawers to defrost, prove dough and so much more.





## Bosch – a brand you can trust.



#### Quality

Our years of experience in home appliances, paired with the latest German engineering, allow us to manufacture quality products that are easy to use and deliver perfect results.



#### Design

Our best for technical perfection, perceivable quality and simple operation is reflected in our designs. Bosch is the No.1 brand in design, with over 200 design awards over the past five years. Tangible quality and engineering precision support the functions of each appliance and serve to improve quality of life for the user.



#### Australia's Most Trusted Brand for Ovens 2022

Bosch has been awarded Australia's Most Trusted Brand 2022 for Ovens as voted by Australians, revealed exclusively by Reader's Digest. Australian Reader's Digest engaged an independent market research agency to conduct a stand-alone survey of a representative sample of more than 3,000 Australians.



#### Performance

With Bosch Assist and advanced sensor technology found in PerfectBake and PerfectRoast, the Bosch Series 8 ovens and compact appliances will modify the cooking process from start to finish for perfect baking and roasting results.



A little peace of mind for your daily life at home with Bosch sensor technology for perfect cooking results. Our FlameSelect gas cooktop technology will let you adjust power levels precisely and our self-cleaning functions will save you the trouble of cleaning up.

## Find the right appliance for your dream kitchen.

### Ovens & Compact Appliances pages 17-47



#### 60cm built-in ovens

Our ovens combine highquality stainless steel and black glass for a sleek finish on all models. Multiple cooking and cleaning options offer convenience.



#### **Combination steam** and full steam ovens

Cooking with steam helps retain vitamins and minerals in fresh foods, as well as maintain original colour, shape and consistency.



#### **Combination microwave** and pure microwave ovens

Add speed to your traditional cooking process without compromising on taste.



#### Microwave oven

Built-in microwave used for thawing, heating and food preparation. Every dish is a perfect success thanks to 8 pre-set automatic programs.



#### Coffee machine

Whether your preference is a skinny latte, a double shot cappuccino or a delicious hot chocolate, our coffee machine brings café-style drinks to your home.



#### Warming drawers

Ensure food stays at just the right serving temperature. You can also defrost, prove dough or slow cook.



#### **Double ovens**

Bosch double ovens allow you to roast in the bottom oven cavity while grilling in the top oven for maximum cooking convenience.



#### 90cm built-in ovens

With a large interior cavity, boasting 112 usable litres (net), pyrolytic self-cleaning function and telescopic rails for total convenience.



#### Freestanding gas cookers

Freestanding cookers offer total flexibility in your kitchen layout. Our models combine the latest ovens and cooktops in one appliance with perfect precision.



#### Freestanding electric cooker

Cooking and cleaning is made especially easy with 8 heating modes and a glass-ceramic cooktop all in one appliance. The slim 60cm width allows it to fit into smaller spaces with ease.



#### Freestanding induction cooker

Enjoy fast and safe cooking with the integrated induction cooktop that is also easy to clean. The oven below comes with 8 heating modes and 30 pre-set automatic programs.

### Cooktops pages 48-71



#### 2-in-1 vented cooktops

For freedom and flexibility in designing your kitchen, we've developed 2-in-1 cooktops with integrated ventilation. These appliances combine the latest technologies of our induction cooktops and rangehoods in a single appliance.



#### **Induction cooktops**

Bosch has a range of induction cooktops that are designed to make it easier and quicker for you to create the dishes you love.



#### Gas cooktops

The cooktop of choice in most professional kitchens, the Bosch FlameSelect gas cooktops are innovative, stylish and help you to always achieve perfect results.



#### Ceramic cooktops

With their electronic touchcontrols and flexible cooking zones, Bosch ceramic cooktops combine great looks with smart function and design.

### Rangehoods pages 72-84



#### Canopy wall-mounted rangehoods

Canopy wall-mounted rangehoods provide a focal point in any kitchen. Choose a design that complements your style, plus they are also packed full of convenient features.



#### Integrated rangehoods

Sleek in design, Bosch fully integrated rangehoods are neatly concealed beneath the cupboard for a seamless look in the kitchen. Performance that is not seen or heard.



#### **Slideout rangehoods**

Extend when in use and slides neatly away when not in operation. Practically disappears into your upper cabinet, giving you a sleek kitchen finish.



#### **Integrated GlassVisor** rangehoods

Space efficient rangehoods with a compact design allowing extra storage space, and a fold out GlassVisor for extraction and cabinetry protection.





## Contents

Ovens & Compact Appliances	
Built-in ovens & compacts	30-37
Series 8 ovens and compacts	30-33
Series 6, 4 & 2 ovens and compacts	34-37
Large capacity ovens	40-41
90cm ovens	40
Double ovens	42
Freestanding cookers	46-47
Cooktops	
2-in-1 Cooktops with integrated ventilation	54
Induction cooktops	58-60
Gas cooktops	64-66
Ceramic cooktops	70-71
Rangehoods	
Wall-mounted rangehoods	78-79
Integrated rangehoods	80-81
Integrated GlassVisor rangehoods	82
Retractable slideout rangehoods	84
Reference guides	88-107
Accessories	108-109
Technical diagrams	110-121
Customer service	122



### Your every day kitchen: Look for Series 4

These appliances are perfect for first time home owners wanting reliable appliances with a contemporary design that deliver value for money.



Series 4 | HBA574EB0A 60cm Pyrolytic Oven\*



Series 4 | MBA534BB0A Built-in Double Oven\*



Series 4 | VBC5540S0 90cm Built-in Oven



Series | 4 DHL555BAU 53cm Integrated Rangehood



Series 4 | DFS097A51A 90cm Slideout Rangehood



Series 4 | PKE611BA2A 60cm Electric Ceramic Cooktop



Series 4 | PUJ611BB5E 60cm Induction Cooktop



Series 4 | HXU09AH50A Freestanding Dual Gas Cooker



#### Want a bit more? Look for Series 6

These appliances are perfect for families that need easy to operate home appliances with additional cooking features, a timeless design and German quality.



Series 6 | VBD578FB0 90cm Pyrolytic Oven



Series 6 | MBG5787S0A Built-in Double Oven



Series 6 | DHL785BAU 70cm Integrated Rangehood



Series 6 | PCT9A5B90A 90cm Stainless Steel Gas Cooktop



Series 6 | PVQ811F15E 80cm Cooktop with Integrated Ventilation\* 90cm Integrated GlassVisor Rangehood



Series 6 | DBB97AM60A



Series 6 | PVS875FB5E 80cm Combilnduction Cooktop



Series 6 | HLS79R351A Freestanding Induction Cooker



Series 6 | HSB738357A Freestanding Dual Gas Cooker



#### Best in class: Look for Series 8

These appliances are perfect if you want the latest technology with a premium finish and outstanding German quality. With a self-cleaning oven, steam oven, microwave oven, coffee machine and warming drawer all your cooking needs are covered. The FlexInduction cooktop makes cooking to perfection a breeze.



Series 8 | HSG656XB6A 60cm EcoClean Oven with Full Steam



Series 8 | CSG656RB1A 60cm Combination Steam Oven



Series 8 | CTL636EB6 Black Glass Coffee Machine



Series 8 | PXE875DC1E 80cm FlexInduction Cooktop



Series 8 | PKM875DP1A 80cm Electric Cooktop



Series 8 | PRS9A6D70A 90cm Gas Cooktop



Series 8 | BIC630NB1A 60cm Warming Drawer



Series 8 | DHL895DAU 86cm Integrated Rangehood



Series 8 | HSB838357A Freestanding Dual Fuel Pyrolytic Cooker



### The smart way of cooking!

Staying up-to-date on your daily cooking can be time-consuming. Home Connect takes the guesswork out of cooking. You can choose from a world of exciting recipes and transfer the ideal cooking settings directly to your oven. Just use your smart device to select your desired dish, and the oven automatically sets the required temperature and cooking time for you.

The Home Connect app allows you to monitor, adjust and get updates on the status of the program via your smart device. By activating voice control you can free up your hands! Ask when dinner will be ready or make changes on the go while you prepare side dishes.



Series 8 | PXV975DV1E 90cm FlexInduction Cooktop See page 58.



Series 8 | DWB91PR50A 90cm Canopy Rangehood See page 78.



Series 8 | HSG656XB6A Black Glass Oven See page 30.



Series 8 | CTL636EB6 Black Glass Coffee Machine See page 32.



## Ovens & Compact Appliances





## Your favourite café is now open 24/7.

Latte, cappuccino or espresso? With the Series 8 built-in coffee machine, you can treat yourself and your guests to any beverage at the touch of a button. Bosch barista technology guarantees a full-bodied aroma and perfect crema – for coffees as delicious as those brewed by your favourite café.

#### SensoFlow System for a perfect aroma

The optimal brewing temperature for an espresso is between 90°C and 95°C. If the temperature is any higher or lower, the flavour of the beans is only partially released or the coffee is bitter. Our smart SensoFlow System heats the water to just the right temperature for a full-bodied espresso aroma from the first to the last cup.

#### Your choice of coffee at the touch of a button

With the MyCoffee function, save your 8 favourite beverages with individual names. Innovative technology regulates the release of coffee, hot milk and foam to deliver the beverage of your choice at the touch of a button.

#### Automatic cleaning of the milk system

Now you can clean your coffee maker as easily as you prepare your morning pick-me-up. Each time you make a coffee drink with milk, the milk system is automatically rinsed out with a blast of steam. The coffee machine takes total charge of the milk system's daily maintenance, so that you can concentrate on enjoying your cappuccino or latte macchiato instead of cleaning.



#### Warming drawers

Our Series 8 warming drawers can do much more than just keep food and plates warm; they're also perfect for slow-cooking meat, defrosting frozen foods and proving dough.

The warming drawers from Bosch can be installed either separately or in combination with Series 8 ovens, compact ovens and our built-in automatic coffee machine. The practical 'push and pull' technology ensures they are always easy to open, even when you have both hands full. They are measured at 14cm height with 20 usable litres (net). Available in black or stainless steel.





### **Bosch Assist**

Bosch sensor technology. The oven that cooks by itself.



#### **Bosch Assist**

Series 8 Ovens with graphic displays come with advanced sensor technology found in PerfectRoast and PerfectBake functions. They offer an extensive menu of food categories that help create your perfect meal. Simply select the desired dish, press start and your oven automatically sets the ideal heating mode, temperature and length of time, monitoring and modifying the cooking as required for the best results. Of course, you can also select these settings yourself just as easily.



#### PerfectBake

Baking has never been easier, thanks to the unique PerfectBake sensor. This function constantly measures the precise moisture level of your dishes and automatically adjusts the entire baking process. This means you'll never have to set the heating mode, length of time or temperature ever again. Simply choose the type of dish, press start and let your Bosch oven bake your food to perfection\*.



#### PerfectRoast meat probe

Achieve the perfect roast lamb, turkey, meats and fish. The PerfectRoast meat probe features three sensitive measuring points and uses the lowest temperature reading to determine the core temperature before calculating the cooking time required. The results are simply perfect. Used manually or with Bosch Assist, you can modify the core temperature (within a recommended range) and combine with steam cooking functions.

### **AutoPilot**



#### AutoPilot automatic programs

Thanks to our selection of AutoPilot programs, meal time is now easier than ever. Our pre-set automatic programs allow you simply to select the relevant dish with confidence that you'll get perfect cooking results every time. AutoPilot determines the cooking mode, temperature and duration. It even switches off the program towards the end of the cooking time. Cooking couldn't be simpler.

## Add a new spin to your kitchen design with the Series 8 Black Glass Oven range.

Combining a sleek premium design with intuitive features. Bosch Series 8 cooking appliances use the highest quality stainless steel and black glass to deliver a timeless, elegant and stylish finish to any kitchen. With just a turn of the simplistic control ring, you can navigate through the entire cooking menu with ease.

#### Series 8 TFT Touch Graphic Display



The iconic control ring and clear TFT screen display, combined with the DirectSelect TouchControl buttons, make operating the Series 8 ovens simpler than ever before. Food images and helpful prompts guide you through each step, giving you total flexibility and control of cooking functions.

#### Series 8 TFT Touch Symbol Display



The intuitive control ring and clear TFT display with DirectSelect icons make it easy to operate your oven. Shortcuts to the two most commonly used heating functions, helpful icons and clear descriptions inside the control ring provide all the information you need to keep track of your cooking.



### Healthier enjoyment with Bosch steam ovens.

Food prepared with steam not only tastes wonderful, it's also a healthier alternative to other cooking methods. With steam, food retains its original vitamins and aromas while releasing the full natural flavour. For added peace of mind, Bosch steam ovens have integrated water tanks, so no direct water connection is needed.



#### Combination steam oven

The best of both worlds, the Series 8 built-in oven (HSG656XB6A) has the power to use pure steam or add bursts of steam alongside conventional heating methods. Use the full steam function for gentle, healthy food preparation; perfect for fish, vegetables and even some desserts.

#### Compact ovens with steam

Bosch steam compacts come equipped with full steam and added steam functions. Having the ability to cook entirely with steam allows you to bring out the maximum nutrients from healthy ingredients. Small but great, these appliances come with everything you need.



#### Functions available with Full Steam



#### Steaming

Steaming at 30°C-100°C for succulent dishes and preservation of colour, taste, vitamins and minerals.



#### Reheating

Reduce food waste by reheating at 80°C-180°C, resulting in greater moisture and regeneration.



#### Dough proving

Whilst proving at approximately 40°C, dough will rise considerably faster than at room temperature.



Low temperature steaming at 30°C-60°C is ideal for defrosting delicate food such



#### Sous-vide cooking

Vacuum-seal your food for slow cooking with steam, at a consistent low temperature ranging from 50°C-95°C to enjoy maximum flavour. Intensify the taste with added herbs and oils. Suitable for meat, fish and vegetables.

## Add bursts of steam for food that's crispy on the outside and juicy on the inside.

Say goodbye to the stress of using too much or too little water at the wrong stage of the cooking process. Thanks to the Bosch Added Steam function, dishes such as breads and roasts turn out crispy on the outside and juicy on the inside; vegetables stay crisp, poultry and fish become juicy and tender.



### Serie 8 HRG6769B2A



"Added steam gives us many more options with our cooking."

Incentivised review.

\*Average rating for HRG6769B2A is 4.9 stars.

#### Added steam function

Enhance your cooking results by adding the perfect amount of moisture to your dishes, thanks to the added steam function. With the option of three intensity levels: low, medium or high. Create succulent roasts and perfectly browned bread crusts with ease. Steam is introduced into the cooking compartment at varying intervals and degrees of intensity depending on the dish.

#### Ovens with added steam

Cooking results improve when moisture is added to the process. The Series 8 oven range with added steam function does exactly that. Through the combination of circulated hot air cooking and added moisture, you can achieve perfect cooking results.

#### Ovens with hot air steam

For deliciously crispy crusts and fluffy breads, simply fill the water in the removable dishwasher-safe water bowl which sits in the bottom of the oven, then set the heating mode to 'HotAir Steam'.

#### Added steam is compatible with selected heating functions







Hot air grilling



Top/bottom heating



For fast, efficient and even steam distribution throughout the cavity, the steam is released from the back panel right next to the ventilation fan.



Keep warm PerfectRoast



## Bosch Microwaves and Microwave Ovens. Full enjoyment in just a short time.



#### **Combination Microwave Ovens**

Heat, defrost or roast your dishes using the Bosch combi microwave, with a choice of five power levels up to 900 watts for maximum performance. Additionally, these microwaves allow for grilling with up to 2800 watts. The AutoPilot program helps achieve the best possible results with very little effort. Just insert your roast, select the AutoPilot program, enter the roast's weight, then press start and the oven does the rest.



#### **Built-In Microwaves**

The 38cm niche built-in microwave can be used for thawing, heating and perfect preparation of food. With the AutoPilot 8, every dish is a perfect success thanks to the 8 preset automatic programs.



#### **Freestanding Microwave**

For time saving preparation of food by thawing, heating and grilling. Every dish is a perfect success thanks to 8 preset automatic programs.

## Gourmet results even when you're in a hurry.

The compact combination microwave oven enables you to achieve perfect baking and roasting results very quickly. Whether you want to bake, roast or simply heat up something tasty, the intelligent combination of convection heating and on-demand microwave gives you perfect results in less time.



## Features and functions for everyday use.



#### **Half Trays**

The Series 6 and 4 slim-sized universal pans are ideal for preparing two versions of the same dish. They're also perfect for smaller quantities. For example, cook potato wedges on one slim tray and stuffed tomatoes on a second one. Because the trays are separated, the liquid from the tomatoes won't flow into the potatoes. When dishes need to be refrigerated before or after cooking, they also fit inside Bosch refrigerators - as well as our dishwashers for cleaning.



#### CoolTouch doors

Bosch ovens meet the highest safety standards: the best Bosch CoolTouch oven doors reach a maximum temperature of only 30°C\*. This means that curious children are even better protected against burns. The extra measure of safety is made possible by 30% better ventilation.



#### Precise temperature control

Electronic thermostats monitor the oven cavity temperature to maintain temperature consistency during the cooking process.



#### Telescopic rail system

The Bosch telescopic rails are fully or partially extendable (depending on model) and are ideal for loading and removing trays with ease. Whether you choose a single or double rail option, all shelves are pyrolytic proof and compatible with microwave and steam cooking. Trays are also interchangeable between Series 8 full-sized ovens and compact appliances.



#### SoftMove and SoftClose

SoftMove on Series 8 and SoftClose on Series 6 models is a special damping mechanism. Oven doors open and close more softly and more quietly than ever. This convenient feature not only offers a premium finish, it also protects the oven and door during the life of the oven.



Depending on the model, Bosch ovens and compact appliances offer our classic halogen lighting, LED ceiling light or the multi-level LED lighting.



Energy-efficient LED lighting offers vibrant illumination and longevity. The multi-level LED lighting offers illumination on each level, which is exceptionally convenient when baking on multiple levels.



Integrated halogen lighting ensures the interior cavity is brightly lit. More efficient than standard lights, they are durable and designed to last longer.



#### ClipRail telescopic rails

Standard shelf systems provide no more than three positions for telescopic rails. Bosch is now offering one telescopic rail system for all levels. These rails can be installed on any level - including the grill level for more convenient toasting. The level-independent rails are easy to install and uninstall, therefore they can be easily clicked on a different level.

### Features explained

Perfect baking and roasting not only requires the right temperature, but also the appropriate heating function. From 4D HotAir to slow cooking, Bosch ovens offer heating functions that deliver everything from haute cuisine to everyday feasts.



#### 4D HotAir\*

Thanks to 4D HotAir, you can place your food on any shelf from level one to four, and the results will be consistently perfect. The rotating fan alternates its direction during cooking to distribute heat evenly on every level. For reliable results 'top to bottom', you can also bake and roast on up to four different levels simultaneously.<sup>^</sup>



#### 3D HotAir

3D HotAir distributes the heat quickly and evenly throughout the entire oven cavity, allowing you to cook on up to three levels simultaneously. It's especially convenient when you need to cook both sweet and savoury dishes simultaneously without intermingling the flavours.



#### HotAir Eco/Gentle

HotAir Eco/Gentle uses less energy by using a single tray. This energy-efficient function distributes less heat into the oven and uses residual heat to maintain the set temperature.



#### Top and bottom heating\*

Uses both the upper and lower heating elements. Heat travels to the centre of the oven which is the best position to obtain the selected temperature. Suitable for traditional baking and roasting and offers best results for cakes with moist toppings.



#### Top and bottom heat Eco

In addition to the top and bottom heat function, selected Series 8 ovens feature an eco-friendly mode, which supports cooking on a single shelf for energy-efficient cooking. Prepare perfect sponges, pound cakes, delicate pastries and bread rolls while saving valuable energy.



#### **Bottom heating**

For cooking in a bain-marie and for the final baking stage. The heat is emitted from the lower heating element.



#### Intensive heating

Combines the top element with a more powerful bottom heating element that is perfect for crispy bases and baking in tins.



#### Hot air grilling\*

Achieve rotisserie-style cooking for meat and poultry. The grill and fan alternate which produces even and crisp cooking results.



#### Grill, small area or large area

For grilling flat items, such as steaks and sausages, for making toast and for cooking au gratin.



#### Pizza setting

Create crispy pizzas or give any dish that extra heat that's needed from underneath by using a combination of heating elements.



#### Keep warm\*

A feature that keeps cooked food warm.



#### Slow cooking

For gentle and slow cooking of seared, tender pieces of meat in ovenware without a lid.



#### Preheat ovenware

A feature that is useful for preheating ovenware and even dinnerware.



A function for drying fruits, vegetables and herbs with maximum flavour. This function can also be used for drying out the oven cavity after the added steam function has been used.



#### Rapid heating

With rapid heating you can shorten the heat-up time for selected heating functions, including 4D HotAir and top and bottom heating.



#### Fan forced hot air

A fan disperses heat evenly for cakes and pastries baked on two levels.



#### Fan assisted top and bottom heating

Uses both upper and lower heating elements while a fan disperses heat evenly.



#### Defrost

Perfect for gentle defrosting of meat, poultry, bread and much more.



For plated meals and baked items. Cooked food is gently reheated. The steam ensures the food does not dry out.



#### Dough proving\*

For yeast dough and sourdough, dough will rise considerably more quickly than at room temperature. The surface of the dough does not dry out.



Cooks vacuum-sealed food at low temperatures and 100% steam, retaining nutrients and flavours.



Steam is introduced into the cooking compartment at varying intervals and degrees of intensity depending on the dish.



#### HotAir Steam

Use with steam bowl for delicious baking and roasting results.

## At last, someone in the house who enjoys cleaning up.

Anyone who has ever cleaned an oven by hand knows how exhausting and time-consuming it can be. This chore is now a thing of the past, thanks to pyrolytic self-cleaning and EcoClean Direct.

#### Pyrolytic self-cleaning: the oven that cleans itself

During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue\*. This achieves thorough cleaning results with minimal effort.

#### Simply follow these 3 steps:

- 1. Activate the pyrolytic cleaning function.
- 2. Choose from three different cleaning levels, depending on the degree of residue that has accumulated.
- 3. Once the program is finished, wipe off the thin layer of ash in the base of the oven.



#### Cleaning Assist (hydrolyse)

The cleaning assistance program is a quick alternative for occasionally cleaning the cooking compartment. The cleaning assistance softens dirt by vaporising the soapy water, making it easier to remove.

- 1. Mix 0.4 litres water with a drop of washing-up liquid and pour into the centre of the cooking compartment floor.
- 2. Select the bottom heat function at 80°C for 4 minutes.
- 3. Switch the appliance off and leave the cooking compartment to cool for approx. 20 minutes.
- 4. Once cool, remove the remaining water with an absorbent sponge cloth and clean the smooth surfaces in the cooking compartment with a dish cloth or a soft brush.
- 5. In order to dry the cooking compartment, leave the appliance door open at approx. 30° angle for one hour.



#### EcoClean Direct: makes cleaning easier

While your dishes bake or roast, the special direct coating of microfine ceramic particles on the oven cavity walls absorbs grease and residue and breaks them down through oxidation.

Simply follow the below steps and reduce your cleaning time significantly\*:

- 1. Activate the EcoClean Direct cleaning program.
- 2. Once completed, clean remaining surfaces that don't have the special coating.
- 3. Wipe the base of the oven and inside of the glass door.



#### Universal pan and baking tray with ceramic non-stick coating

In addition to the classic universal pan, Bosch offers a universal pan and baking tray with a ceramic non-stick coating. This special non-stick coating makes the surface easy to clean. The ceramic coating has another advantage: you no longer need to use baking paper or to grease the tray, which makes baking, roasting and cleaning much easier.



<sup>\*</sup>Please remove all accessories when activating the specific EcoClean Direct program.

<sup>#</sup>Metal racks may show slight discolouration after prolonged use of the pyrolytic function. To prevent this, you may choose to remove the wire racks during the pyrolytic cycle. Features may vary depending on models. Please check individual product specifications.



The built-in 10 amp oven is made for easy installation – simply plug into a power point and start cooking.



### Serie 8 Oven and compact range

#### Combination steam ovens.



Home Connect















































#### HSG656XB6A 60x60cm Combination Steam Oven with Full and Added Steam

#### **Key Features**

- ► 17 heating functions
- ▶ 71 litres (net) cavity volume
- ▶ 5 shelf positions
- ► TFT Touch Graphic Display
- ► Multi-level pure steaming 1 litre removable water tank with empty tank indicator

#### Cleaning

- ► EcoClean Direct: rear wall, side walls and ceiling
- ► Hydrolyse cleaning
- ► Drying function
- ► Descaling program

#### Convenience

- ▶ SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► Bosch Assist
- ► PerfectRoast 3 point meat probe
- ► PerfectBake sensor
- ► 3-level telescopic rails

#### Safety

- ► Triple-glazed door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 grill tray
- ▶ 1 non-perforated steam tray
- 2 perforated steam trays

#### HRG6769B2A 60x60cm Pyrolytic Oven with Added Steam

#### **Key Features**

- ► 17 heating functions
- ▶ 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Graphic Display
- ► Added steam 1 litre removable water tank with empty tank indicator

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning
- ► Drying function
- ► Descaling program

- Convenience ▶ SoftMove door
- ► Temperature display
- Automatic temperature proposal
- ► Multi-level LED lighting
- Bosch Assist
- ► PerfectRoast 3 point meat probe
- ▶ PerfectBake sensor
- ▶ 3-level telescopic rails (pyro-proof)

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- 2 wire racks
- ▶ 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

### HRG6753B1A 60x60cm Pyrolytic Oven with Added Steam

#### **Key Features**

- ► 15 heating functions
- ► 71 litres (net) capacity
- ▶ 5 shelf positions
- ► TFT Touch Symbol Display
- ► Added steam 1 litre removable water tank with empty tank indicator

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning
- ► Drying function
- ► Descaling program

#### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs
- ▶ 2-level telescopic rails (pyro-proof)

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

#### **Dimensions (HxWxD)**

595 x 594 x 548mm



#### Conventional ovens.







































60x60cm EcoClean Direct Oven

















#### HBG6753B1A 60x60cm Pyrolytic Oven

#### **Key Features**

- ► 13 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

#### HBG675BB2A 60x60cm Pyrolytic Oven

#### **Key Features**

- ► 13 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

#### **Key Features**

HBG633BB1B

- ► 10 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► TFT Touch Symbol Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Cleaning

- ► EcoClean Direct: rear wall
- ► Hydrolyse cleaning

#### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs
- ► 2-level telescopic rails (pyro-proof)

#### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting
- ► AutoPilot10: 10 automatic programs

#### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► Halogen lighting

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan (pyro-proof)
- ► 1 grill tray (pyro-proof)

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 grill tray

### **Dimensions (HxWxD)**

595 x 594 x 548mm

### Oven and compact range

#### Combination compact ovens.







Coffee machine.

Home Connect







CTL636EB6

60x45cm Built-in

**Coffee Machine** 

► One-touch preparation

► SensoFlow System

► TFT Touch Graphic Display

► Removable brewing unit

► AromaPro Concept: optimal aroma

**Key Features** 

extraction

























#### CMG633BB1A 60x45cm Combination **Microwave Oven**

- ► 7 heating functions
- ► TFT Touch Symbol Display

#### **Key Features**

- ► 45 litres (net) capacity
- ▶ 3 shelf positions
- ► Conventional cooking combined with microwave (up to 900W power)

### Cleaning

CSG656RB1A

Steam Oven **Key Features** 

60x45cm Combination

▶ 18 heating functions

▶ 3 shelf positions

tank indicator

► 47 litres (net) capacity

► TFT Touch Graphic Display

► Multi-level pure steaming – 1 litre

removable water tank with empty

- ► EcoClean Direct: rear wall, side walls and ceiling
- ► Hydrolyse cleaning
- ► Drying function
- ► Descaling program

#### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ▶ Bosch Assist
- ► PerfectRoast 3 point meat probe
- ► PerfectBake sensor
- ► 1-level telescopic rails

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan
- ► 1 non-perforated steam tray
- ► 2 perforated steam trays

### Convenience

- ► SoftMove door
- ► Temperature display
- ► Automatic temperature proposal
- ► LED lighting
- ► AutoPilot14: 14 automatic programs

#### Convenience

Hygiene

► MyCoffee function

► AutoMilk Clean

- ► CoffeeSensor Pro: automatically adjusts grinding unit to bean variety
- ► SilentCeram Drive: quiet, premium grinder made from non-wearing ceramic

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 1 wire rack
- ▶ 1 universal pan

#### **Supplied Accessories**

- ► 1 BRITA water filter cartridge
- ► 1 measuring spoon
- ▶ 1 milk container, connection hose and pipe
- ▶ 1 test strip
- ► 1 set assembly screws

#### **Dimensions (HxWxD)** 455 x 594 x 375mm

Dimensions (HxWxD) 455 x 594 x 548mm







## BIC630NB1A 60cm Warming Drawer

#### **Key Features**

- ► 40°C-80°C temperature control
- ► 20 litres (net) capacity

#### Convenience

- ► Fully extendable telescopic drawer
- ► Ceramic-glass base element
- ► Suitable for: plate warming, keep warm, slow cooking, defrost and proving dough





### Oven range

### Serie | 6

### Pyrolytic ovens.









**}**[30











## Serie 4

































#### HBT578FS2A 60x60cm Pyrolytic Oven

#### **Key Features**

- ► 10 heating functions
- ▶ 71 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 30: 30 automatic programs
- ► 1-level telescopic rails
- ► SoftClose door
- ► Temperature display
- ► Single point meat probe
- ► Automatic temperature proposal

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan
- ▶ 1 grill tray
- ▶ 1 half tray

#### **Dimensions (HxWxD)** 595 x 594 x 548mm

### HRA574EB0A 60x60cm Pyrolytic Oven with HotAir Steam

#### **Key Features**

- ▶ 8 heating functions
- ▶ 71 litres (net) capacity
- ▶ 5 shelf positions
- ► LED Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► Autopilot 10: 10 automatic programs
- ► 1-level telescopic rails

#### HBA574EB0A 60x60cm Pyrolytic Oven

#### **Key Features**

- ▶ 7 heating functions
- ▶ 71 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1-level telescopic rails
- ► Temperature display
- ► Autopilot 10: 10 automatic programs

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)

#### **Supplied Accessories**

- ▶ 2 wire rack
- ▶ 1 universal pan
- ▶ 1 baking tray

#### **Supplied Accessories**

- ▶ 2 wire racks
- ► 1 universal pan
- ▶ 1 split grill tray

#### **Dimensions (HxWxD)** 595 x 594 x 548mm

#### **Dimensions (HxWxD)** 595 x 594 x 548mm



#### FcoClean ovens.





















### HBA574BS0A 60x60cm Pyrolytic Oven

#### **Key Features**

- ▶ 7 heating functions
- ► 71 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► Temperature display
- ► AutoPilot 10: 10 automatic programs

#### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)

#### Supplied Accessories

- ▶ 2 wire racks
- ► 1 universal pan
- ▶ 1 split grill tray









Halogen Lighting













LED Display







### 60x60cm EcoClean Direct Oven

### **Key Features**

HBA534BB0A

- ▶ 7 heating functions
- ▶ 71 litres (net) capacity
- ▶ 5 shelf positions
- ► LED Display

#### Cleaning

- ► EcoClean Direct: rear wall
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► Temperature display

#### **Key Features**

HBA534ES0A

- ► 7 heating functions
- ▶ 71 litres (net) capacity

60x60cm EcoClean Direct Oven

- ▶ 5 shelf positions
- ► LED Display

#### Cleaning

- ► EcoClean Direct: rear wall
- ► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► Temperature display

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)

#### **Supplied Accessories**

- ▶ 2 wire rack
- ► 1 universal pan
- ▶ 1 baking tray

#### **Supplied Accessories**

- ▶ 2 wire rack
- ► 1 universal pan
- ▶ 1 baking tray

#### **Dimensions (HxWxD)** 595 x 594 x 548mm


### Oven and compact range

### Serie 2

EcoClean ovens.







Built-in microwaves.



















LED Display



















#### HBF134EB0A 60x60cm EcoClean Direct Oven

#### **Key Features**

- ► 5 heating functions
- ► 66 litres (net) capacity
- ▶ 5 shelf positions
- ► LED Display

#### HBF133BS0A 60x60cm EcoClean Direct Oven

#### **Key Features**

- ► 5 heating functions
- ► 66 litres (net) capacity
- ▶ 5 shelf positions
- ► LED Display

#### BEL554MS0A 60cm Built-in Microwave

#### **Key Features**

- ▶ 5 microwave power levels up to 900W
- ► 25 litres (net) capacity
- ► Grill function with up to 1200W
- ► LED Display

#### Cleaning

► EcoClean Direct: rear wall

#### Cleaning

► EcoClean Direct: rear wall

#### Cleaning

► Hydrolyse cleaning

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming

#### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming

#### Convenience

- ► Retractable control knobs
- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 8: 8 automatic programs

#### Safety

► Triple-glazed door

#### Safety

- ► Triple-glazed door
- ► Child lock (controls)

#### Safety

► Single-glazed door

#### **Supplied Accessories**

- ▶ 1 wire rack
- ▶ 1 universal pan
- ► 1 baking tray

#### **Supplied Accessories**

- ▶ 1 wire rack
- ▶ 1 universal pan
- ► 1 baking tray

#### **Dimensions (HxWxD)** 595 x 594 x 548mm

#### **Supplied Accessories**

- ▶ 1 raised grill rack
- ▶ 1 turntable

Dimensions (HxWxD)

382 x 594 x 388 mm



# Serie | 2



### Freestanding microwave.





















FEL053MS2A

**Key Features** 

► LED Display

▶ 25 litres (net) capacity



**49cm Freestanding Microwave** 

► Grill function with up to 1000W

▶ 5 microwave power levels up to 800W





### BEL653MB3A 60cm Built-in Microwave

### **Key Features**

- ▶ 5 microwave power levels up to 800W
- ▶ 25 litres (net) capacity
- ► Grill function with up to 1000W
- ► LED Display

### Cleaning

► Hydrolyse cleaning

- Convenience ► Rotary control knobs
- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 8: 8 automatic programs

### Safety

► Single-glazed door

### Convenience

Cleaning

► Rotary control knobs

► Hydrolyse cleaning

- ► LED lighting
- ► Electronic clock/timer with end-time programming
- ► AutoPilot 8: 8 automatic programs

### Safety

► Single-glazed door

### **Supplied Accessories**

- ► 1 raised grill rack
- ▶ 1 turntable

Dimensions (HxWxD)

382 x 595 x 375mm

### **Supplied Accessories**

- ▶ 1 raised grill rack
- ▶ 1 turntable

Dimensions (HxWxD) 290 x 495 x 370mm



Large capacity ovens. More room for your favourite dishes.



With up to 112 usable litres of oven capacity, you have even more space for roasting and baking your favourite dishes. The larger capacity, combined with Bosch HotAir even heat distribution, means you can cook simultaneously on all levels. The wider trays provide more surface area for roasting big batches of potatoes and vegetables. This makes our 90cm ovens perfect for entertaining your friends and family.

### 90cm ovens




### XXL Cavity - 112 usable litres

The full-size 90cm oven offers 112 usable litres of cooking space and larger baking trays. The increased cavity creates uniform baking results on up to five levels due to the improved heat circulation between the racks.

### XL Cavity - 85 usable litres

The compact 90cm oven models have an interior capacity of 85 usable litres. It also comes with the large baking trays which can be used on up to four levels.

### Double ovens

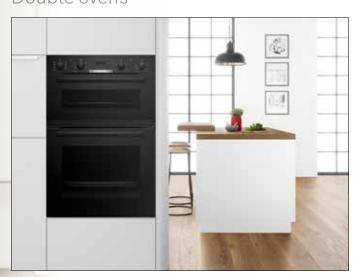

Enjoy the convenience of cooking multiple dishes at the same time with our double ovens. Perfect for entertainers or large families.

Choosing a double oven can also be a great way to save energy; if you would like to cook a small meal, you have the flexibility of just using the smaller cavity oven.

## 90cm oven range

## Serie | 6

Pyrolytic ovens.

Pyrolytic compact oven.



































VBC578FS0

**Key Features** 

► LCD Display

▶ 1 rotisserie kit



90x48cm Pyrolytic Oven

► 10 heating functions

▶ 4 shelf positions

▶ 85 litres (net) capacity





### VBD578FB0 90x60cm Pyrolytic Oven

### **Key Features**

- ► 10 heating functions
- ► 112 litres (net) capacity
- ▶ 5 shelf positions
- ► LCD Display
- ▶ 1 rotisserie kit

### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails
- ► Temperature display

### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 baking tray
- ▶ 1 universal pan insert grid

### VBD578FS0 90x60cm Pyrolytic Oven

- ► 10 heating functions
- ► 112 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display
- ▶ 1 rotisserie kit

### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails
- ► Temperature display

### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ► 1 baking tray
- ▶ 1 universal pan insert grid

### **Key Features**

### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ▶ 1 ClipRail telescopic rails
- ► Temperature display

### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ▶ 1 baking tray
- ▶ 1 universal pan insert grid

Dimensions (HxWxD) 475 x 896 x 572mm

Dimensions (HxWxD) 594 x 896 x 570mm



# Serie 4

Catalytic oven.

Catalytic compact oven.





















### **Key Features**

- ▶ 8 heating functions
- ► 112 litres (net) capacity
- ► 5 shelf positions
- ► LED Display
- ► 1 rotisserie kit

### Cleaning

- ► Catalytic cleaning: rear wall and side walls
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails

### Safety

- ► Triple-glazed door
- ► Child lock (controls)

### **Supplied Accessories**

- ► 1 wire rack
- ► 1 universal pan
- ► 1 baking tray

Dimensions (HxWxD)

594 x 896 x 570mm

















# VBC5540S0 90x48cm Catalytic Cleaning Oven

### **Key Features**

- ► 7 heating functions
- ▶ 85 litres (net) capacity
- ▶ 4 shelf positions
- ► LED Display

### Cleaning

- ► Catalytic cleaning: rear wall and side walls
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting
- ► Electronic clock/timer with end-time programming
- ► 1 ClipRail telescopic rails

### Safety

- ► Triple-glazed door
- ► Child lock (controls)

### **Supplied Accessories**

- ▶ 1 wire rack
- ► 1 universal pan
- ► 1 baking tray

Dimensions (HxWxD) 475 x 896 x 572mm

more information www.bosch-home.com.au | 41

# Double oven range

## Serie 6



















# Serie 4





















### MBG5787S0A 60x89cm Pyrolytic Double Oven

### **Key Features**

► LCD display

### Top Oven

- ▶ 4 functions
- ▶ 34 litres (net) cavity volume
- ▶ 3 shelf positions

### Bottom Oven

- ▶ 10 functions
- ▶ 71 litres (net) cavity volume
- ▶ 5 shelf positions

### Cleaning

- ► Pyrolytic self-cleaning (top and bottom oven)
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting (top & bottom)
- ► Electronic clock/timer with end-time programming
- ▶ 1 ClipRail telescopic rails
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs
- ► Single point meat probe
- ▶ SoftClose door
- ► Automatic temperature proposal

- ► Quadruple-glazed CoolTouch door (top & bottom)
- ► Child lock (controls & door)

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ▶ 1 split grill tray

### MBA534BB0A 60x89cm EcoClean Direct Double Oven

### **Key Features**

► LED display

### Top Oven

- ▶ 3 functions
- ► 34 litres (net) cavity volume
- ▶ 3 shelf positions

### Bottom Oven

- ▶ 7 functions
- ▶ 71 litres (net) cavity volume
- ► 5 shelf positions

### Cleaning

- ► EcoClean Direct: rear wall
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting (ceiling)
- ► Electronic clock/timer with end-time programming

### MBA534BS0A 60x89cm EcoClean Direct Double Oven

### **Key Features**

► LED display

### Top Oven

- ▶ 3 functions
- ▶ 34 litres (net) cavity volume
- ► 3 shelf positions

### Bottom Oven

- ▶ 7 functions
- ▶ 71 litres (net) cavity volume
- ► 5 shelf positions

### Cleaning

- ► EcoClean Direct: rear wall
- ► Hydrolyse cleaning

### Convenience

- ► Retractable control knobs
- ► Halogen lighting (ceiling)
- ► Electronic clock/timer with end-time programming

### Safety

- ► Triple-glazed door (top & bottom)
- ► Child lock (controls)

### Safety

- ► Triple-glazed door (top & bottom)
- ► Child lock (controls)

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ▶ 1 split grill tray

### **Supplied Accessories**

- ▶ 2 wire racks
- ▶ 1 universal pan
- ▶ 1 split grill tray

### Dimensions (HxWxD) 888 x 594 x 550mm



# Freestanding cookers from Bosch let you plan your kitchen the way you want.

With a Bosch freestanding cooker, you can be totally flexible in your kitchen layout and in the way you cook. Our models combine the latest ovens and cooktops in one appliance with perfect precision. Induction cooktops allow for faster and more flexible cooking, electric cooktops ensure maximum convenience and our gas cooktops let you cook like a professional.

### Freestanding cookers with gas cooktops

### Professionally fired up





### High-power wok burner

The powerful wok burner provides up to 14 MJ/h. It is suitable for use with flat-based pans or with a wok using the wok ring provided.



### **Cast-iron supports**

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

### Freestanding cooker with induction cooktop

### Flexible on the outside, intelligent on the inside





### CombiZone

With CombiZone, you have the freedom to use your biggest pans and trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard zones into one large cooking zone.





### MoveMode

you to switch from boil to simmer at just the right moment, MoveMode is perfect for you. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first highpowered cooking task to the next. You are always in control.

When your recipe requires



Practical drawer space for your kitchen utensils.

### Our oven features

### Fit every kitchen and every need





### 3D HotAir

3D HotAir distributes the heat quickly and evenly

throughout the entire oven cavity, allowing you to cook on up to three levels simultaneously.





### AutoPilot with up to 30 automatic programs

The AutoPilot program

helps achieve the best possible results with very little effort. Just insert your dish, enter its weight and select the desired program from the menu.





### **Rotary spit**

The rotary spit is ideal for grilling large roasts, such

as rolled roasting joints or poultry. The meat becomes crispy, wellbrowned and cooked evenly. Uniform grilling from all sides - easily done in your kitchen.





### CoolTouch door and child lock

For added safety, selected

Bosch freestanding cookers are fitted with quadruple-glazed CoolTouch doors. The reflective inner glass is designed to keep heat in, while providing a safe-to-touch door on the outside. Child lock doors and displays make the cookers even safer.

Pyrolytic self-cleaning: the oven that cleans itself. During the pyrolytic cleaning function, the oven heats up to 480°C to burn off grease and food residue. Once the program is finished, simply wipe off the thin layer of ash in the base of the oven.

## Freestanding cookers

## Serie 8























#### Oven

### **Key Features**

- ► 10 heating functions
- ► 112 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

#### Cleaning

► Pyrolytic self-cleaning

### Convenience

- ► Height adjustable legs by 50mm
- ▶ 21cm utensil drawer
- ▶ 2 Halogen lights (left & right)
- ► Electronic clock/timer
- ► 1-level telescopic rails
- ► SoftClose door

### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Residual heat indicator

### Cooktop **Key Features**

- ▶ 6 gas burners:
  - 1 x 14 MJ/h wok burner
  - 1 x high-speed burner
  - 2 x standard burners
  - 2 x economy burners
- ► Suitable for NG (ex factory) and LPG (via included conversion kit)

### Convenience

- ► One-hand electronic ignition via controls
- ► Continuous enamelled cast-iron trivets with rubber feet
- ► Continuous enamelled cast-iron trivets with rubber feet

### Serie 6















### HSB738357A 90x90cm Freestanding **Dual Fuel Cooker**

#### Oven

### **Key Features**

- ▶ 8 heating functions
- ► 112 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

#### Cleaning

► Catalytic liners: rear wall and side walls

### Convenience

- ► Height adjustable legs by 50mm
- ▶ 21cm utensil drawer
- ▶ 2 Halogen lights (left & right)
- ► Electronic clock/timer
- ► 1-level telescopic rails

### Safety

- ► Triple-glazed door
- ► Child lock (controls)
- ► Residual heat indicator

### Cooktop **Key Features**

- ▶ 6 gas burners:
  - 1 x 14 MJ/h wok burner
  - 1 x high-speed burner
  - 2 x standard burners
- 2 x economy burners
- Suitable for NG (ex factory) and LPG (via included conversion kit)

### Convenience

- ► One-hand electronic ignition via controls
- Continuous enamelled cast-iron trivets with rubber feet

► Flame failure device fitted to each burner























### HLS79R351A 60x85cm Freestanding Induction/Pyrolytic Cooker

### Oven

### **Key Features**

- ▶ 8 heating functions
- ► 63 litres (net) capacity
- ▶ 5 shelf positions
- ► LCD Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

### Convenience

- ► Height adjustable legs by 50mm
- ▶ 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► 1-level telescopic rails
- ► SoftClose door
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs
- ► Automatic temperature proposal

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Automatic safety switch off

### Cooktop

### **Key Features**

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ▶ 17 power levels
- ► PowerBoost for each zone

### Convenience

- ► MoveMode, QuickStart, ReStart
- ► Dual timer with automatic switch-off
- ► Energy consumption display

### Safety

- ► 2-stage residual heat indicator
- ► Child lock

### **Dimensions (HxWxD)**

850 x 600 x 600mm

900 x 898 x 600mm

















### HKS79R250A 60x85cm Freestanding Ceramic/Pyrolytic Cooker

### Oven

### **Key Features**

- ▶ 8 heating functions
- ► 63 litres (net) capacity
- ► 5 shelf positions
- ► LCD Display

#### Cleaning

- ► Pyrolytic self-cleaning
- ► Hydrolyse cleaning

### Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► SoftClose door
- ► Temperature display
- ► AutoPilot 30: 30 automatic programs

### Safety

- ► Quadruple-glazed CoolTouch door
- ► Child lock (controls & door)
- ► Automatic safety switch off

### Cooktop

### **Key Features**

- ▶ 4 QuickTherm cooking zones: 1 dual circuit zone, 1 dual circuit/extended roasting zone
- ▶ 9 power levels

## Serie 4





Height Adjustable



















### HXR39KI50A 60x85cm Freestanding **Dual Fuel Cooker**

#### Oven

### **Key Features**

- ▶ 7 heating functions
- ► 66 litres (net) capacity
- ► 5 shelf positions
- ► LED Display

#### Cleaning

- ► EcoClean Direct: rear wall, side walls and ceiling
- ► Hydrolyse cleaning

### Convenience

- ► Height adjustable legs by 50mm
- ► 21cm utensil drawer
- ► Halogen lighting
- ► Electronic clock/timer
- ► Retractable knobs
- ► 2-level telescopic rails
- ► SoftClose door

### Oven

### **Key Features**

HXU09AH50A 60x85cm Freestanding

▶ 8 heating functions

**Dual Fuel Cooker** 

► 66 litres (net) capacity

### Cleaning

► EcoClean Direct: rear wall

### Convenience

- ► Height adjustable legs by 50mm
- ► Halogen lighting
- ► Retractable knobs

### Safety

- ► Triple-glazed door
- ► Child lock (controls)

### Safety

► Triple-glazed door

### Cooktop **Key Features**

- ► 4 gas burners:
- 1 x 13.5 MJ/h wok burner
- 2 x standard burners
- 1 x economy burner

### Cooktop **Key Features**

- ► 4 gas burners:
  - 1 x 13.6MJ/h wok burner
- 2 x standard burners
- 1 x economy burner

### Convenience

► Electronic -/+ touch-controls and timer for each zone (cooktop)

### Safety

- ► 2-stage residual heat indicator
- ► Child lock

### Convenience

- ► One-hand electronic ignition via controls
- ► Enamelled cast-iron trivets with rubber feet

### Safety

► Flame failure device fitted to each burner

### Convenience

- ► One-hand electronic ignition via controls
- ► Steel pan supports with rubber feet

### Safety

► Flame failure device fitted to each burner

### **Dimensions (HxWxD)**

850 x 600 x 600mm





# Cooktops



### Cooktops | Induction

# The best cooking needs just one ingredient: Bosch.

Modern cooking offers so many wonderful new tastes and textures – you need a cooktop that's flexible enough to keep up.





#### **Bosch FlexInduction**

The ultimate Bosch Induction experience. Unique technology provides even heating across the entire FlexZone. The FlexZone can be used as two separate zones or combined into a single 'super-zone' where the entire zone becomes your cooking canvas.



### **Bosch Combilnduction**

Experience the magic of CombiZone - two cooking zones can be linked, making the switch from small to large pans effortless. Plus, the MoveMode function automatically switches from boil to simmer with a simple slide of the saucepan.




#### **Bosch Induction**

Bosch's benchmark Induction cooktops put you in control with 17 power levels plus PowerBoost for each zone, dual function timer with automatic switch-off, residual heat indicators, child lock and more.

### Induction speeds up your cooking

Induction cooktops offer the most efficient way of cooking at lower temperatures, ie. melting chocolate, etc.

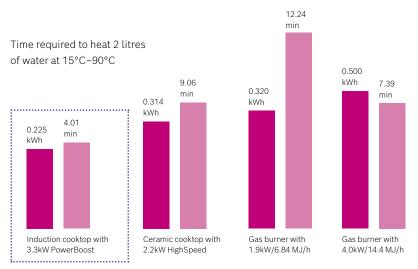

Source: BSH Hausgeräte GmbH, Germany (overseas test results)

### Old pots, new technology

Most of your home pots will also work with induction if they have a magnetic base. All pots and pans with ferromagnetic bases are suitable for induction. As a quick way to determine if your pots and pans are compatible (induction-ready), a fridge magnet should stick to the base. In general, special stainless steel, iron and enamel are all suitable.

The 2-in-1 cooktops with integrated ventilation

Scan here to view the full 2-in-1 cooktops brochure



For some, it's a cooktop that ventilates perfectly.

For others, it's a rangehood that also cooks perfectly.



### CombiZone

If you need more space for a long piece of cookware, such as a roaster or Teppan Yaki plate, Bosch has the into one at the touch of a button.



### DirectSelect 1.0 touch control

Easy to understand and even easier to use, the intuitive operation allows you to select cooking zones with ease and directly set the desired temperature for each zone. You can also adjust the ventilation level



### MoveMode

When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task



The perfect kitchen should allow you to plan as you like, have unrestricted cooking space and easily entertain guests. For greater freedom and flexibility in your ideal kitchen, Bosch offers 2-in-1 cooktops with integrated ventilation, combining the latest technologies of our induction cooktops and rangehoods into a single appliance.







### AutoOn

Air extraction automatically begins on a medium level once a cooking zone is turned on.

### Superior technology

Strong speed air extraction is generated directly at the ventilation module and also above the cooktop. As a result, any steam generated will reduce the grease and odour particles on kitchen surfaces. The highest speed setting creates an approx. 65cm high suction bell, perfect when cooking with high pots.

### The EcoSilence Drive motor

For quiet and efficient operation. With the brushless EcoSilence Drive, friction and wear do not occur as it is driven by a permanent magnet. This means your ventilation module has an extraordinarily long service life, extreme efficiency, and low noise. Optimised air flow inside the ventilation module reduces operating noise – even at full power.



## Serie 6 2-in-1 cooktops with integrated ventilation



### 70cm Induction cooktop with integrated ventilation

### **Heating functions**

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ▶ 17 power levels
- ► PowerBoost for each zone

#### Design

- ► Black ceramic glass
- ► Bevelled front

### Convenience

- ► Electronic DirectSelect 1.0 touch-control
- ► MoveMode: 2 automatic power levels
- ► Timer with automatic switch off for all zones
- ▶ QuickStart
- ► Automatic pan recognition sensor
- ► Energy consumption display

### Cleaning

► WipeProtection pauses all settings for easy cleaning while cooking

### Safety

- ► Automatic safety switch-off
- ▶ 2-stage residual heat indicators
- ► Childproof lock

### Ventilation

- ► 622m³/h maximum extraction capacity
- ► Noise min./max. Normal Level: 42/69 dB
- ▶ 9 power settings + 2 intensive
- ► AutoOn
- ► Automatic run-on time 30 mins
- ► EcoSilence Drive brushless motor
- ► Dishwasher-safe metal grease filter
- ► Electronic filter saturation indicator
- ► Sleek air inlet grid, heat resistant, dishwasher safe

### PVQ811F15E 80cm Induction cooktop with integrated ventilation

### **Heating functions**

- ▶ 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ▶ 17 power levels
- ► PowerBoost for each zone

- ► Black ceramic glass
- ► Frameless

### Convenience

- ► Electronic DirectSelect 1.0 touch-control
- ► MoveMode: 2 automatic power levels
- ► Timer with automatic switch off for all zones
- QuickStart
- ► Automatic pan recognition sensor
- ► Energy consumption display

▶ WipeProtection pauses all settings for easy cleaning while cooking

### Safety

- ► Automatic safety switch-off
- ► 2-stage residual heat indicators
- ► Childproof lock

### Ventilation

- ► 622m³/h maximum extraction capacity
- ► Noise min./max. Normal Level: 42/69 dB
- ▶ 9 power settings + 2 intensive
- ► AutoOn
- ► Automatic run-on time 30 mins
- ► EcoSilence Drive brushless motor
- ► Dishwasher-safe metal grease filter
- ► Electronic filter saturation indicator
- ► Sleek air inlet grid, heat resistant, dishwasher safe

Installation accessories included with the appliance, suitable for unducted recirculation



#### **Unducted Recirculation Kit\***

4 high-performance CleanAir odour filters with optimised odour reduction performance or cooking applications with complex odour molecules (eg. fish).

### Lifetime of 360 hours of cooking (non-regenerative).

- ► A telescopic slider element with a self-gluing fixation frame to easily connect the appliance's air outlet with the cut-out in backpanel of the cabinetry.
- ► A sealing gasket to ensure air tightness, which can be attached on the telescopic slider or a male flat duct.

Replenishment filters can be ordered on the **Bosch Online Shop** using part number: 17004805 (set of four filters).









**HEZ9VDKR0** 















Scan to view the Bosch vented brochure

**Dimensions (HxWxD)** 223 x 710 x 522mm

**Installation Dimensions** 

223 x 560 x 490mm

**Dimensions (HxWxD)** 223 x 802 x 522mm

**Installation Dimensions** 223 x 750 x 490mm

### Installation

# Design your kitchen just how you like.

The new cooktops with integrated ventilation know no limits. Whether it's a functional, space-saving wall planning or an open-plan living concept with an island design, they fit in seamlessly.

All cooktops with integrated ventilation are available in both ducted and recirculation extraction configurations. This means that no matter how you'd like to plan your kitchen design, there is an installation solution to suit your needs.

### Wall design



Just like a regular cooktop, they are installed in your benchtop in accordance with the usual specifications. Whether installed beneath a window or slanted ceiling, the 2-in-1 cooktops with integrated ventilation from Bosch, offer you brand new options when planning your kitchen. Thanks to the ventilation module's compact size, you can add drawers or a cabinet below for additional storage space.

### Island bench design





Experience a new level of freedom in your home when planning your kitchen and enjoy the convenience of preparing your favourite dishes while facing and chatting with your guests. Install your cooktop directly into the benchtop for a unique island design. Unducted recirculation configuration is recommended for this option.

### Cooktops | FlexInduction

# FlexInduction cooktops

Introducing Bosch FlexInduction, the result of decades of research and development. Introducing true freedom in the kitchen.




Serie 8 PXV975DV1E



"Flex zones great for big pans and grills."

Incentivised review. \*Average rating for PXV975DV1E is 4.8 stars.

Ideal for pots, pans and casserole dishes of all shapes and sizes. Thanks to the unique coil shapes you get the ultimate flexibility and heat distribution. At the touch of a button, two induction zones become one large FlexInduction surface.



### MoveMode

Pre-set 3 different power levels and move from boil to simmer in just seconds.

- 1. Perfect for rapid boiling (Power level 9 Front FlexZone)
- 2. Medium heat cooking (Power level 5 Middle FlexZone)
- 3. Ideal for simmering (Power level 1 Back FlexZone)



### PerfectFry sensor - for a steak that is just right

With up to 5 automatic settings, the pan is heated to just the right temperature. Sensors inside the cooktop continuously measure the temperature and maintain it for perfect results. Works with Bosch PerfectFry sensor pan, see page 109 for details.

### Cooktops | Combilnduction


# Combilnduction cooktops

Bosch Combilinduction lets you switch from small to large and oversized pans, like Teppan Yaki, simply and easily. So now there's no limit to the tastes you can create.



### CombiZone

With Bosch Combilnduction, you have the freedom to use your biggest pans and baking trays for more adventurous cooking. Switching from small to large pans is as simple as a single touch that merges two standard cooking zones into one large cooking zone.



When your recipe requires you to switch from boil to simmer at just the right moment, MoveMode is there when you need it. Switch from level 9 to level 1 by simply sliding your pot. MoveMode lets you move seamlessly from your first high-powered cooking task to the next without a hiccup – you are always in control.

### **Accessories**



Teppan Yaki - try beef, prawns, scallops; set your imagination free.



Stainless Steel Roasting Pan - for big roasts and large family dishes.



Premium quality iron non-stick pan suitable for all electric cooktops, including induction.



Premium quality cookware set suitable for all electric cooktops, including induction.



# Induction cooktops

## Serie 8

90cm

FlexInduction.

Induction.


80cm

FlexInduction.



Cook to Hood

Home Connect







### PXV975DV1E 90cm FlexInduction Cooktop

### **Heating functions**

- ► 5 induction cooking zones: 2 large FlexInduction zones for large pans or multiple smaller pans
- ► 1 large 32cm triple circuit zone
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry sensor with 5 automatic frying programs
- ► MoveMode: 3 automatic power levels

### Cleaning

▶ WipeProtection

### Safety

- ▶ 2-stage residual heat indicators
- ► Child lock

### PIV975DC1E 90cm Induction Cooktop

### **Heating functions**

- ► 5 induction cooking zones
- ▶ 1 large 32cm triple circuit zone
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry sensor with 5 automatic frying programs

### Cleaning

► WipeProtection

### Safety

- ▶ 2-stage residual heat indicators
- ► Child lock

### Dimensions (WxD) 916 x 527mm

### PXE875DC1E 80cm FlexInduction Cooktop

### **Heating functions**

- ► 4 induction cooking zones: 1 large FlexInduction zone for large pans or multiple smaller pans
- ► 17 power levels
- ► PowerBoost for each zone
- ► ShortBoost for each zone

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► Keep warm setting
- ► PerfectFry sensor with 5 automatic frying programs
- ► MoveMode: 3 automatic power levels

### Cleaning

► WipeProtection

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

**Dimensions (WxD)** 816 x 527mm

## Serie | 6

60cm

### Combilnduction.



FlexInduction.



### PVS875FB5E 80cm Combilnduction Cooktop

### **Heating functions**

- ► 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost for each zone

### PVS675FB5E **60cm Combilnduction Cooktop**

### **Heating functions**

- ► 4 induction cooking zones: 2 combinable zones 'CombiZone' for large pans
- ► 17 power levels
- ► PowerBoost for each zone

### PXE651FC1E **60cm FlexInduction Cooktop**

### **Heating functions**

- ► 4 induction cooking zones: 1 large FlexInduction zone for large pans or multiple smaller pans
- ► 17 power levels
- ► PowerBoost for each zone

### Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► MoveMode: 2 automatic power levels

### Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► MoveMode: 2 automatic power levels

### Convenience

- ► Electronic DirectSelect 1.0 touch-controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart
- ► Energy consumption display
- ► PerfectFry sensor with 4 automatic frying programs

### Cleaning

▶ WipeProtection

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### **Dimensions (WxD)** 816 x 527mm

### Cleaning

► WipeProtection

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### Dimensions (WxD) 606 x 527mm

### Cleaning

► WipeProtection

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### **Dimensions (WxD)** 592 x 522mm

# Induction cooktops

## Serie 4

60cm

Induction.





### PUE611BB5E **60cm Induction Cooktop**

### **Heating functions**

- ► 4 induction cooking zones
- ▶ 17 power levels
- ► PowerBoost for each zone

### PUJ611BB5E **60cm Induction Cooktop**

### **Heating functions**

- ▶ 3 induction cooking zones including large 28cm cooking zone
- ► 17 power levels
- ► PowerBoost for each zone

### Convenience

- ▶ TouchSelect electronic controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart

### Convenience

- ▶ TouchSelect electronic controls
- ► Dual timer with auto switch-off for each zone
- ► QuickStart
- ► ReStart

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

Dimensions (WxD) 592 x 522mm

# Features and functions for everyday use.



### Safety & Cleaning

### WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

### 2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h' - residual heat insufficient to cook, but zone is still hot enough to advocate caution.

### Child lock

Maximum safety for tiny hands. Lock your cooktop's control panel and prevent accidental little chefs from 'helping out' and hurting themselves. Enjoy the reassurance of maximum safety for both you and your loved ones.

### Automatic safety switch-off

Never worry again if you have forgotten to turn off the cooktop. If you've stopped using it, your Bosch Induction cooktop will automatically shut down.





### Convenience

### **Dual function timer including automatic** switch-off for each zone

Use the independent audible timer to set the length of cooking time or set the cooking zone at a specific temperature (eg. level 5.5) for up to 99 minutes – ideal for busy households. Once the selected time has been reached, the cooking zone is switched off automatically.

### QuickStart

Start cooking more quickly. Bosch QuickStart functionality automatically detects the location of your pot and displays the cooking zone on the control panel. Just select the power level and you're away.

### ReStart

Things happen quickly in the kitchen – spilling something on the control panel or accidentally switching off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

### **Energy consumption display**

Each time you finish cooking, your energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption.)

### **Automatic pot detection**

Bosch Induction cooktops feature automatic pot detection which recognises the diameter of the cookware and determines the size of the cooking zone accordingly. If the pot is removed, the control panel indicator will flash and remain inactive until the pot is detected.

### Keep warm

At the touch of a button, this is the ideal setting for keeping food warm before serving.

### Performance

#### **DirectSelect Premium**

Taking easy-to-use, intuitive controls to the next level, DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

### DirectSelect 1.0

Enjoy total convenience with DirectSelect 1.0. Simply select the required power level from the power settings laid out on the cooktop, without the need to press +/repeatedly.

### **TouchSelect**

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

### 17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

### PowerBoost - now with even more power!

PowerBoost channels increased power to a selected zone to turbocharge the cooking process. With PowerBoost, you can boil 2 litres of water almost three times faster than on a conventional glass-ceramic cooktop.

### ShortBoost

Reduce the time to heat up pans - this boost function heats up the pan for 30 seconds at high power before automatically reducing the heat to the correct power setting.

### Cooktops | FlameSelect

# We didn't discover fire, but we've taken it to a new level. Nine, to be precise.

The FlameSelect gas cooktops from Bosch are packed with innovative technology. They offer you a completely new level of precision when it comes to adjusting the flame by selecting pre-defined power levels. But that's not all. Thanks to our timeless design and carefully selected materials, Bosch gas cooktops are also a true feast for the eyes.




### (1) FlameSelect

# Stop cooking with intuition. Start cooking with perfection.

At Bosch, we want to make your cooking with gas as easy, safe and enjoyable as possible. That's why we developed FlameSelect for you. Unlike conventional gas cooktops with inaccurate power settings, FlameSelect and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels. So now, gas cooktops with FlameSelect offer you all the benefits of gas cooking combined with the comfort and precision of an electric cooktop.

### Nine levels of precise power selection

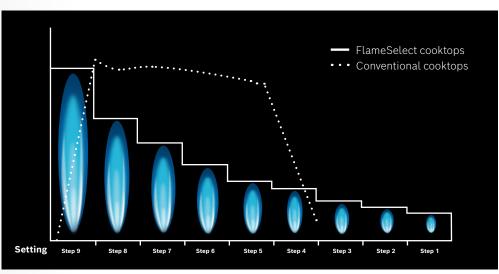

### Easy to use. Easy to clean. Easy to love.



### Our pan supports

When it comes to design you have the choice between single pan supports for easy handling and cleaning, or continuous pan supports for high stability of cookware. Both variants are available in cast iron and are extremely robust.



### Our gas cooktop surfaces

Our cooktops are available in black tempered glass and stainless steel to perfectly match your kitchen and individual taste.

### FlameSelect Gas cooktops

## Serie 8

## Serie 6

FlameSelect black glass.

FlameSelect stainless steel.



(1) FlameSelect





(1) FlameSelect



(1) FlameSelect

### PRS9A6D70A 90cm Black Ceramic Glass **Gas Cooktop**

### **Heating functions**

- ▶ 5 Burners:
- 1 x 22 MJ/h wok burner
- 1 x high-speed burner
- 2 x standard burners
- 1 x economy burner

### PCT9A5B90A 90cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 6 Burners:
  - 2 x 19.5 MJ/h dual flame wok burners
  - 1 x high-speed burner
  - 2 x standard burners
  - 1 x economy burner

### PCR9A5B90A 90cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 5 Burners:
  - 1 x 19.5 MJ/h dual flame wok burner
  - 1 x high-speed burner
  - 2 x standard burners
  - 1 x economy burner

### PCR7A5B90A 75cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 5 Burners:
  - 1 x 19.5 MJ/h dual flame wok burner
  - 1 x high-speed burner
  - 2 x standard burners
  - 1 x economy burner

### Convenience

- ► Digital display indicates the selected power level and residual heat for comfort and safety.
- ► FlameSelect valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Dishwasher safe enamelled cast-iron pan supports

### Convenience

- ► FlameSelect valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

### Convenience

- ► FlameSelect valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

### Convenience

- ► FlameSelect valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Other

► Suitable for NG (ex factory) and LPG (via included

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Safety

► Flame failure for each burner stops gas flow if flames go out

conversion kit)

► Suitable for NG (ex factory) and LPG (via included conversion kit)

### Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

### Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

### Dimensions (WxD)

916 x 527mm

**Dimensions (WxD)** 915 x 520mm

**Dimensions (WxD)** 

750 x 520mm

## Gas cooktops

## Serie 6

Stainless steel.



( Flame Select

### PCI6A5B90A 60cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 4 Burners:
  - 1 x 15 MJ/h wok burner
  - 1 x high-speed burner
  - 1 x standard burner
  - 1 x economy burner

### Convenience

- ► FlameSelect valve technology (precise control in 9 steps)
- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

> Dimensions (WxD) 582 x 520mm





### **PBH6B5B90A** 60cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 4 Burners:
  - 1 x 15 MJ/h wok burner 2 x standard burners
  - 1 x economy burner

### PBH6B5B80A 60cm Stainless Steel **Gas Cooktop**

### **Heating functions**

- ▶ 4 Burners:
  - 1 x 13 MJ/h wok burner
  - 2 x standard burners
  - 1 x economy burner

### Convenience

- ► One-hand ignition via sword control knobs
- ► Enamelled cast-iron pan supports

### Convenience

- ► One-hand ignition via sword control knobs
- ► Enamelled steel pan supports

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Safety

► Flame failure for each burner stops gas flow if flames go out

### Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

### Other

► Suitable for NG (ex factory) and LPG (via included conversion kit)

**Dimensions (WxD)** 580 x 510mm

### Cooktops | Gas features and functions

# Features and functions for everyday use.







### Efficiency

### **One-hand ignition**

Push and turn the ergonomically designed control knobs and the gas ignites automatically. As well as offering the convenience of only using one hand, there is also no separate ignition button to clean.

### Easy clean tempered glass

Premium models with a tempered glass base are easy to clean for total convenience with a frameless finish for a stylish and sleek look.

### Cleaning rounded off to perfection

The rounded edges of our gas cooktops ensure effortless cleaning – dirt simply doesn't have anywhere to collect.

Features may vary depending on models. Please check individual product specifications.

### Simplicity

### **FlameSelect**

FlameSelect and its patented valve technology offer you incremental heat regulation within nine precisely defined power levels, making your cooking with gas as easy, safe and enjoyable as possible.

#### Flame failure device

For added safety, all Bosch gas cooktops feature a flame failure device. This feature stops the supply of gas to the burners if the flame is extinguished.

### **Cast-iron supports**

Cast-iron pan supports are both stylish and highly durable, providing solid and robust support for your cooking pans.

### Performance

### High-power wok-style burner

Selected gas cooktop models feature a powerful wok-style burner which provides up to 19.5 MJ/h. Suitable for use with flat-based pans or with a wok using the wok ring provided.

#### Flexible burners

All our gas cooktops feature different burner combinations for greater flexibility. With wok, high-speed, standard and economy burners, you can cook more efficiently with the burner most suited to the size of your pan.



Cooktops | Ceramic

# The world of Bosch ceramic cooktops.

There is a wide range of ceramic cooktops to choose from. As you would expect from Bosch, all are made using high-quality materials, are easy to use and add versatility, style and elegance to any kitchen.





### Cooktops | Ceramic features and functions

# Features and functions for everyday use.







### Safety & Cleaning

### WipeProtection

Stay in complete cooking control even when you've had a spill or boil-over. Bosch WipeProtection locks the control panel for 20 seconds so you can clean the surface of the control panel easily, without losing your cooking settings.

### 2-stage residual heat indicators

Provides clear indication of when a zone is still hot after use. Two levels: 'H' means residual heat sufficient to finish off cooking or to keep items warm; 'h'residual heat insufficient to cook, but zone is still hot enough to advocate caution.

### Convenience

### Dual circuit cooking zone

Available on selected ceramic cooktops, this energy-saving feature allows you to select a smaller cooking zone for small pans, and a larger zone for larger pans.

#### ReStart

Things happen quickly in the kitchen if you spill something on the control panel or accidentally switch off the cooktop, ReStart will store your last selected settings. Those settings can be instantly recalled by simply pressing the main power switch within 4 seconds.

### Energy consumption display\*

Each time you finish cooking, your energy consumption display shows exactly how much power you've used. So if you wish, you can adapt your cooking style to save energy and money. (For example, placing a lid on a pot can help reduce your energy consumption.)

### Extendable zone

Selected cooking zones can be extended giving you a much larger area to accommodate big saucepans, casseroles and other large cooking dishes.

### Automatic electronic boil start

The automatic electronic boil start heats the hotplate using the highest heat setting and then reverts down to the simmer setting you have previously selected, reducing the risk of boil overs.

### Keep warm

At the touch of a button, this is the ideal setting for keeping food warm before serving.

### Performance

#### **DirectSelect Premium**

Taking easy to use, intuitive controls to the next level, DirectSelect Premium gives you complete cooking control with intermediate levels and unsurpassed accuracy.

#### **TouchSelect**

With this control panel, you can regulate the desired cooking zone easily. Select your cooking zone and use the +/- keys to choose the power level you need.

### QuickTherm technology

For improved control and flexibility, heat is delivered to the cooking zone in approximately three seconds. This feature is quicker than standard ceramic zones or electric-sealed plates.

### 17 power levels

Enjoy total control on every recipe with 17 power levels. This function allows cooking zones to be set in increments of 0.5 (eg. 0.5, 1, 1.5, 2...9).

### **PowerBoost**

PowerBoost now on selected Bosch ceramic cooktops lets you heat up large volumes of water even faster than on the highest power level.

## Ceramic cooktops

With electronic touch-controls and extendable cooking zones, Bosch ceramic cooktops combine great looks with smart function and design. The smooth ceramic glass cooktop surface is tough and durable as well as practical and easy-to-clean.

## Serie 8







# Serie 4



### PKM875DP1A **80cm Ceramic Cooktop**

### **Heating functions**

- ▶ 4 QuickTherm cooking zones: 2 dual circuit zones. 1 dual circuit/extended roasting zone
- ► 17 power levels
- PowerBoost for each zone

### PKG775DB1A 70cm Ceramic Cooktop

### **Heating functions**

- ▶ 4 QuickTherm cooking zones: 2 dual circuit zone
- ► 17 power levels

### PKN675DB1A **60cm Ceramic Cooktop**

### **Heating functions**

- ► 4 QuickTherm cooking zones: 1 dual circuit zones. 1 dual circuit/extended roasting zone
- ▶ 17 power levels

### PKE611BA2A 60cm Ceramic Cooktop

### **Heating functions**

- ▶ 4 QuickTherm cooking zones
- ▶ 17 power levels

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- ► Dual timer with auto switch-off for each zone
- ▶ Keep warm setting
- ► Energy consumption display

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- ► Dual timer with auto switch-off for each zone
- ► Keep warm setting
- ► Energy consumption display
- ► Automatic electronic boil start

### Convenience

- ► Electronic DirectSelect Premium touch-controls
- ► ReStart quickly reinstates previous settings
- ► Dual timer with auto switch-off for each zone
- ► Keep warm setting
- ► Energy consumption display
- ► Automatic electronic boil start

### Convenience

- ► Electronic TouchSelect +/touch-controls
- ► ReStart quickly reinstates previous settings

### Cleaning

▶ WipeProtection

### Cleaning

► WipeProtection

### Cleaning

▶ WipeProtection

### Safety

- ▶ 2-stage residual heat indicators
- ► Child lock

### Safety

- 2-stage residual heat indicators
- ► Child lock

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### Safety

- ► 2-stage residual heat indicators
- ► Child lock

### Dimensions (WxD)

816 x 527mm

### Dimensions (WxD)

710 x 527mm

**Dimensions (WxD)** 606 x 527mm

Dimensions (WxD)

592 x 522mm

# Serie | 2



### PKE611CA2A 60cm Ceramic Cooktop

### **Heating functions**

- ► 4 QuickTherm cooking zones
- ▶ 9 power levels

### Convenience

► Side control sword knobs

### Safety

► Residual heat indicator

Dimensions (WxD) 592 x 522mm







# Rangehoods






Rangehoods

# A breath of fresh air in hood design.


The right rangehood can reduce odours and steam and leave your kitchen feeling fresh and clean. And a Bosch hood will do it all with silent efficiency.





# **Ducted extraction**

Ducting out is the most effective method of extraction. Ideally, the rangehood should be sited on an outside wall, or an outside wall can be reached via ducting. All Bosch extractors are now standardised to facilitate a 150mm diameter outlet for maximum performance, although smaller ducting can be used if required. Please refer to the installation guide for further advice on best practice installation.




#### **Recirculation kit**

Odours are extracted and filtered, then purified air is returned to the room. The kit comprises a carbon filter and all components needed to ensure that odour free air is returned into the kitchen. To maintain performance, the carbon filter should be replaced on a regular basis. A recirculation kit needs to be purchased as a separate accessory.

# What extraction rate do I need?

It is recommended that air be extracted (or exchanged) in a room depending on your type of cooking: a minimum of 6 times per hour; and a maximum of 12 times per hour.

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height.

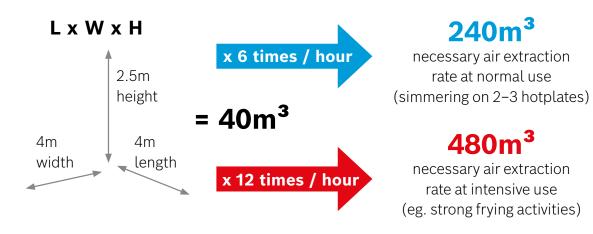


Bosch extraction rates are tested in line with EU standards. See pages 106-107 for more information.



# Features and functions for everyday use.







# Performance

#### Automatic power revert

When the intensive setting is selected, it can be set to automatically revert to a pre-defined setting after a short period of time.

# **LED** lighting

The LED lights offer a longer lifetime and use less energy than conventional halogen lighting. Additional convenience is offered with SoftLight which gently fades lighting in and out with dimmer function.

# Variable power settings

All Bosch rangehoods feature variable power settings which can be set to effectively remove odours, smoke and moisture caused by cooking. Many models also feature an intensive extraction setting which gives an extra boost to the performance when required.

## PerfectAir sensor

PerfectAir continuously monitors the air and automatically adapts the extraction rate to the amount of odour present. At the same time, it reduces the noise level because it only activates the lowest extraction rate necessary.

# Convenience

# Cook to Hood

Control your rangehood via your cooktop with cooktop-based hood control. If preferred, the rangehood can be controlled manually.

#### Electronic filter saturation indicator

For maximum extraction efficiency, an illuminated light indicates when the filter needs cleaning. For hassle-free cleaning, the one-piece filter can be loaded into your Bosch dishwasher.

## **Electronic control**

3 power levels + 2 additional intensive settings, automatic run-on, filter saturation indicator, automatic power revert and SoftLight with dimmer function; control at your fingertips.

## **Electronic button control**

This control provides you with 3 power levels + 1 intensive setting. There's also a push-button for turning the lights on and off. And to make operation even easier, the buttons are back-lit.

# Rocker switch control

It doesn't get any easier: one switch with 3 power levels and one for turning the lights on and off.

# Cleaning

# Dishwasher-safe metal grease filters

For easy cleaning, all Bosch metal grease filters can be safely loaded into any Bosch dishwasher for sparkling clean results. Metal grease filters are required for ducted and recirculating systems to filter grease and other solid particles out of the extracted air. To make sure these filters operate at maximum efficiency, they should be cleaned about twice a month.

# Stainless steel filter

The stainless steel filter provides an exceptionally high level of grease absorption. It is concealed behind an elegant stainless steel cover with a stainless steel handle.

# Rim ventilation filter

With its smooth uninterrupted surface and grease separation of 80-92%,\* the rim ventilation filter from Bosch has a multi-patented filter sealing system and flow-optimised filter system.

# **Extraction rates**

Air extraction is measured using room volume. This is calculated by multiplying Length x Width x Height. Bosch rangehoods offer powerful maximum extraction rates for when you are cooking up a storm in the kitchen, while the variable power settings allow you to navigate just the extraction power you need for each meal.

No space for a rangehood? See our 2-in-1 cooktops with integrated ventilation on pages 52–55.

# Wall-mounted rangehoods

Serie 8

Serie | 6

Serie | 2

Stainless steel







# DWB91PR50A 90cm Canopy Rangehood

# **Power functions**

- ▶ 964m³/h maximum extraction capacity\*
- ▶ 3 power settings + 2 intensive settings with automatic revert
- Automatic run-on time 10 mins
- ► EcoSilence Drive brushless motor

# Convenience

- ► Whisper quiet: 45dB at minimum level (150mm ducted)
- ► 3 x 1.5W LED SoftLights with dimmer function
- ► Electronic controls via TouchControl with lightline
- ► Sound insulation mats
- ► PerfectAir sensor: automatically detects cooking intensity and adjusts power
- ► Cooktop-based hood control ready

# Cleaning

- ► Dishwasher-safe metal grease filters
- ► Electronic filter saturation indicator

# **Optional Accessory**

► DWZ2CB1I4 Recirculation kit

# DWB97LM50A 90cm Canopy Rangehood

# **Power functions**

- ► 697m³/h maximum extraction capacity\*
- ▶ 3 power settings + 1 intensive setting with automatic revert
- ► EcoSilence Drive brushless motor

# Convenience

- ► Whisper quiet: 45dB at minimum level (150mm ducted)
- ► 3 x 1.5W LED lights
- ► Electronic controls via TouchControl with LED display
- ► Sound insulation mats

# DWB96BC50A 90cm Canopy Rangehood

# **Power functions**

- ► 619m³/h maximum extraction capacity\*
- ▶ 3 power settings
- ► EcoSilence Drive brushless motor

# Convenience

- ► Very quiet: 49dB at minimum level (150mm ducted)
- ► 2 x 1.5W LED lights
- ► Push button control

# Cleaning

► Dishwasher-safe metal grease filters

# **Optional Accessory**

► DWZ2CB1I4 Recirculation kit

# Dimensions (HxWxD)

614-954 x 898 x 500mm (ducted) or 614-1064 x 898 x 500mm (recirculating)

# Cleaning

► Dishwasher-safe metal grease filters

# **Optional Accessory**

► DWZ1DX1I4 Recirculation kit

## **Dimensions (HxWxD)**

635-965 x 900 x 500mm (ducted) or 635-1075 x 900 x 500mm (recirculating)

<sup>\*</sup>Boost position air extraction rate according to EN 61591 Ø 15cm.







# DWB65BC50A **60cm Canopy Rangehood**

# **Power functions**

- ► 612m³/h maximum extraction capacity\*
- ► 3 power settings

# DWP96BC50A 90cm Canopy Rangehood

# **Power functions**

- ► 626m³/h maximum extraction capacity\*
- ► 3 power settings

# DWP66BC50A **60cm Canopy Rangehood**

# **Power functions**

- ► 597m³/h maximum extraction capacity\*
- ► 3 power settings

# Convenience

- ► Very quiet: 49dB at minimum level (150mm ducted)
- ► 2 x 3W LED lights
- ► Push button control

# Convenience

- ► Very quiet: 51dB at minimum level (150mm ducted)
- ► 2 x 1.5W LED lights
- ► Push button control

# Convenience

- ► Very quiet: 49dB at minimum level (150mm ducted)
- ► 2 x 1.5W LED lights
- ► Push button control

# Cleaning

► Dishwasher-safe metal grease filters

# Cleaning

► Dishwasher-safe metal grease filters

# Cleaning

► Dishwasher-safe metal grease filters

# **Optional Accessory**

► DHZ5325 Recirculation kit

# **Dimensions (HxWxD)**

450-830 x 598 x 500mm (ducted) or 550-830 x 598 x 500mm (recirculating)

# **Optional Accessory**

► DHZ5275 Recirculation kit

# **Dimensions (HxWxD)**

799-975 x 900 x 500mm (ducted or recirculating)

# **Optional Accessory**

► DHZ5275 Recirculation kit

# **Dimensions (HxWxD)**

799-975 x 600 x 500mm (ducted or recirculating)

# Integrated rangehoods

Great performance in a tiny space. These neatly concealed rangehoods are housed underneath the kitchen unit and can only be seen if you look underneath the kitchen cabinetry.

Serie 8

Serie 6

Serie 4









# DHL895DAU 86cm Integrated Rangehood

# **Power functions**

- ▶ 800m³/h maximum extraction capacity with rim ventilation\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 30 mins
- EcoSilence Drive brushless motor

## DHL785BAU 70cm Integrated Rangehood

# Power functions

- ► 730m³/h maximum extraction capacity with rim ventilation\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting

# DHL575CAU 52cm Integrated Rangehood

# **Power functions**

- ► 610m³/h maximum extraction capacity with rim ventilation\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting

# DHL555BAU 53cm Integrated Rangehood

# **Power functions**

► 650m³/h maximum extraction capacity\*

+ 1 intensive setting

▶ 3 power settings

- Convenience
- ► Whisper quiet: 41dB at minimum level (150mm ducted)
- ► 2 x 1W LED lights with dimmer function
- Low-lift push button controls for power and light

# Convenience

- ► Very quiet: 53dB at minimum level (150mm ducted)
- ► 2 x 1W LED lights
- ► Low-lift push button controls for power and light

# Convenience

- ► Very quiet: 50dB at minimum level (150mm ducted)
- ▶ 2 x 1W LED lights
- ► Low-lift push button controls for power and light

# Convenience

- ► Whisper quiet: 41dB at minimum level (150mm ducted)
- ▶ 2 x 2W LED lights

Cleaning

► Slide controls for power and light

► Dishwasher-safe metal

## Cleaning

- ► Dishwasher-safe metal grease filters
- Electronic filter saturation indicator

## **Optional Accessory**

► DHZ5605 Recirculation kit

## **Dimensions (HxWxD)**

Product: 418 x 860 x 282mm Built-in: 418 x 836 x 264mm (ducted or recirculating)

# Cleaning

► Dishwasher-safe metal grease filters

► DHZ5605 Recirculation kit

## **Optional Accessory**

(ducted or recirculating)

# **Optional Accessory**

grease filters

Cleaning

► DHZ5605 Recirculation kit

► Dishwasher-safe metal

## Optional Accessory

grease filters

► DHZ7305 Charcoal filter

#### **Dimensions (HxWxD) Dimensions (HxWxD)**

Product: 418 x 700 x 282mm Product: 418 x 520 x 300mm Built-in: 418 x 496 x 264mm Built-in: 418 x 676 x 264mm (ducted or recirculating)

# **Dimensions (HxWxD)**

Product: 255 x 530 x 380mm Built-in: 255 x 500 x 350mm (ducted or recirculating)

<sup>\*</sup>Boost position air extraction rate according to EN 61591 Ø 15cm.

# Serie | 2



# DLN54AA70A 53cm Integrated Rangehood

# **Power functions**

- ► 420m³/h maximum extraction capacity\*
- ► 3 power settings

# Convenience

- ► Very quiet: 55dB at minimum level (150mm ducted)
- ► 2 x 3W LED lights
- ► Slide controls for power and light

# Cleaning

► Dishwasher-safe metal grease filters

# **Optional Accessory**

► DWZ0IN0T0 Recirculation kit

Dimensions (HxWxD)
Product: 208 x 534 x 300 mm
Built-in: 208 x 493 x 257 mm (ducted or recirculating)



# Integrated GlassVisor Rangehoods

With our new integrated design hood you can finally gain more room beside and on the hood – and not just for spices. The hood with the T-shaped body itself serves as storage space and can hold up to 10kg on each side. Thanks to its optimised design, additional shelving can be installed in the upper cabinet to the left and right of the chimney, providing you with even more storage space - for example, for cookbooks and cooking utensils.

# Serie 6





## DBB97AM60A 90cm Integrated GlassVisor Rangehood

#### **Power functions**

- ▶ 749m³/h maximum extraction capacity\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 6 mins

## Convenience

- ▶ Whisper quiet: 50dB at minimum level
- ▶ 3 x 2W LED lights
- Glass panel with integrated TouchSelect control
- ► Seamless integration is almost invisible in an upper cabinet.
- ► Fan and light automatically turn on and off by opening and closing the glass panel.

# Cleaning

▶ Dishwasher-safe metal grease filters

## DBB67AM60A 60cm Integrated GlassVisor Rangehood

# **Power functions**

- ▶ 749m³/h maximum extraction capacity\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 6 mins

- ▶ Whisper quiet: 50dB at minimum level
- ▶ 2 x 2W LED lights
- Glass panel with integrated TouchSelect control
- ► Seamless integration is almost invisible in an upper cabinet.
- ► Fan and light automatically turn on and off by opening and closing the glass panel.

# Cleaning

► Dishwasher-safe metal grease filters

## **Required Accessories**

► CleanAir Module (recirculation mode)

# **Optional Accessories**

- ► DWZ6IB1I4 Recirculation kit
- ► DWZ1IB6K1 Chimney extension kit (450-854mm)
- ► DWZ1IB6N1 Chimney extension kit (187-360mm)

# **Dimensions (HxWxD)**

Product: 340 x 897 x 298mm Built-in: 340 x 860 x 300mm (ducted or recirculating)

## **Required Accessories**

► CleanAir Module (recirculation mode)

# **Optional Accessories**

- ▶ DWZ6IB1I4 CleanAir Recirculation kit
- DWZ1IB6K1 Chimney extension kit (450-854mm)
- DWZ1IB6N1 Chimney extension kit (187-360mm)

# **Dimensions (HxWxD)**

Product: 340 x 597 x 298mm Built-in: 340 x 560 x 300mm (ducted or recirculating)

Descriptions & diagrams are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances.

<sup>\*</sup>Boost position air extraction rate according to EN 61591 Ø 15cm.



# Retractable slideout rangehoods

To operate, the slideout section is pulled out, enlarging the extraction surface. The pelmet front can be matched to your kitchen units, making this rangehood almost invisible in your kitchen.

# Serie | 4





Serie 2

#### DFS097A51A 90cm Silver Metallic Slideout Rangehood

#### **Power functions**

- ▶ 729m³/h maximum extraction capacity\*
- ▶ 3 power settings + 1 intensive setting with automatic revert to previous setting
- ► Automatic run-on time 1–10 mins
- ► EcoSilence Drive brushless motor

# Convenience

- ► Whisper quiet: 41dB at minimum level
- ► 3 x 1.5W LED lights
- ► Low-lift push button controls for power and light
- ► Easy installation system
- ► Automatic on/off operation with slide out and slide back

## Convenience

**DFS067A51A** 

60cm Silver Metallic

Slideout Rangehood

to previous setting

**Power functions** 

► Whisper quiet: 41dB at minimum level

▶ 728m³/h maximum extraction capacity\*

▶ 3 power settings + 1 intensive

setting with automatic revert

► Automatic run-on time 1–10 mins

► EcoSilence Drive brushless motor

- ► 2 x 1.5W LED lights
- ► Low-lift push button controls for power and light
- ► Easy installation system
- ► Automatic on/off operation with slide out and slide back

# Convenience

Cleaning

DFM064W54A

60cm Silver Metallic

Slideout Rangehood

➤ 389m³/h maximum extraction capacity\*

**Power functions** 

► 3 power settings

- ► 59dB at minimum level
- ► 2 x 1.5W LED lights
- ► Rocker switches for power and light
- ► Automatic on/off operation with slide out and slide back

# Cleaning

- ▶ Dishwasher-safe metal grease filters
- ► Dishwasher-safe stainless steel filter covers

# Cleaning

- Dishwasher-safe metal grease filters
- ► Dishwasher-safe stainless steel filter covers

- ► Dishwasher-safe metal grease filters
- ► Cassette with aluminium frame

# **Required Accessories**

► CleanAir Module (recirculation mode)

# **Required Accessories**

**Optional Accessories** 

▶ DW72IT1I4 Recirculation kit

► CleanAir Module (recirculation mode)

## **Optional Accessories**

- ► DWZ2IT1I4 Recirculation kit
- ► DSZ4920 Installation kit (90cm wide wall unit)

Product: 426 x 598 x 290mm Built-in: 385 x 524 x 290mm

# **Optional Accessory**

► DWZ1IT1I4 Recirculation kit

# **Dimensions (HxWxD)**

Product: 426 x 898 x 290mm Built-in: 385 x 524 x 290mm (ducted or recirculating)

# **Dimensions (HxWxD)**

(ducted or recirculating)

# **Dimensions (HxWxD)**

Product: 203 x 598 x 290mm Built-in: 162 x 526 x 290mm (ducted or recirculating)

For cabinetry match pelmet required from cabinet maker. Stainless Steel pelmet included, black and white available through spare parts. Contact Bosch spare parts team for more information

<sup>\*</sup>Boost position air extraction rate according to EN 61591 Ø 15cm.







# Reference guides



# Reference Guide Black Glass Ovens

Model		HSG656XB6A	HRG6769B2A	HRG6753B1A	HBG6753B1A
		Series 8	Series 8	Series 8	Series 8
Туре		EcoClean Direct Oven with FullSteam	Pyrolytic Oven with Added Steam	Pyrolytic Oven with Added Steam	Pyrolytic Oven
Dimensions	Width (cm)	60	60	60	60
	Appliance dimensions (HxWxD)	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	Built-in dimensions (HxWxD)	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm
Heating	Number of heating functions	17	17	15	13
unctions	4D HotAir	•	●*^#	•*	•*
	3D HotAir		-		
	Sous-vide Cooking	•			
	Pure Steaming	•			
	HotAir + Steam	•			
		•	•^		•
	HotAir Eco/Gentle	•		•	•
	Top and bottom heating	•	●*^#	•'	•
	Top and bottom heating Eco	•	•^	•	•
	Fan assisted top and bottom heating				
	Bottom heating	•	•	•	•
	Intensive heating		•		
	Hot air grilling	•	<b>•</b> *^	•	•
	Grill – large area	•	•	•	•
	Grill – small area	•	•	•	•
	Pizza setting	•	•^	•	•
	Slow cooking	•	•	•	•
		•	•*	•	•
	Keep warm	•	•	•	•
	Preheat ovenware		-	•	•
	Drying (after steam cooking)	•	-		
	Reheating (with added steam)	•	•^	•	
	Dough proving (with added steam)	•	•	•	
	Defrost	•	•	•	•
	Automatic rapid heat function	•	•	•	•
	Automatic temperature proposal	•	•	•	•
	Temperature display	•	•	•	•
	Electronic thermostat	•	•	•	•
Sensor &	Bosch Assist (Fully automated	•	•		
Sensor & Automatic	cooking)	_	•		
Functions	PerfectBake sensor	•	<b>●</b> 1		
	PerfectRoast meat probe	•	•1		
	AutoPilot (Automatic programs)			● (20)	● (10)
Canacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)
Capacity	Water tank				/ i titles (liet)
		1 litre (net)	1 litre (net)	1 litre (net)	DI 1 1
Design	Finish	Black glass	Black glass	Black glass	Black glass
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity	Anthracite enamel cavity
	Display	TFT Touch Graphic Display	TFT Touch Graphic Display	TFT Touch Symbol Display	TFT Touch Symbol Display
	Electronic clock/timer with	•	•	•	•
	end-time programming				
	Controls	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring	Bosch Control Ring
	0.614	with TFT Display	with TFT Display	with TFT Display	with TFT Display
	SoftMove door technology	•	•	•	•
	Interior light	LED	LED (ceiling) and Multi-level LED lighting (left and right side)	Halogen (ceiling)	Halogen (ceiling)
	N 6 1 16 W	-		-	-
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•	•	•
	Water tank empty indicator	•	•	•	
Home		•			
Connect					
Cleaning	Pyrolytic cleaning function compatible		•	•	•
	with accessories and shelving				
	EcoClean Direct cleaning system	<ul> <li>(ceiling, sides and rear wall)</li> </ul>			
	Catalytic cleaning system				
	Descaling	•	•	•	
Safety	Door	Triple-glazed door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door
	Residual heat indicator	•	•	•	•
	Automatic safety switch-off	•	•	•	•
	Child lock function	• (controls & door)	• (controls & door)	• (controls & door)	• (controls & door)
	Cooling fan	_ (00.1.10.10 & 0001)	• (controts & door)	• (controts & door)	•
Technical		250°C	300°C	300°C	300°C
requirements	Maximum temperature				
- Equinements	Total connected load	3.6kW	3.6kW	3.6kW	3.6kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
Supplied	Fully extendable telescopic rails	● (3-level)	<ul> <li>(3-level pyrolytic proof)</li> </ul>	<ul><li>● (2-level pyrolytic proof)</li></ul>	● (2-level pyrolytic proof)
accessories	No. wire racks	2	2	2	2
	No. split grill trays	1	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)
		1	1 (pyrolytic proof)	1 (pyrolytic proof)	1 (pyrolytic proof)
	No. universal pans	1	r (pyrotytic proor)	(pyrotytic proor)	(pyrotytic proof)
	No. universal pans No. baking trays		r (pyrotytic proor)	r (pyrotytic proor)	r (pyrotytic proor)

<sup>1</sup>Silicon based cookware and bakeware is not compatible for use. \*Compatible with Added steam function. ^Compatible with PerfectRoast meat probe. \*Compatible with Rapid heat. \*Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm	Series 8	HRA574EB0A	HBA574EB0A	HBA534BB0A	HBF134EB0A
60 595 x 594 x 548mm 585–595 x 560–568 x 550mm 357 x 480 x 415mm		Series 4	Series 4	Series 4	Series 2
60 595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm	EcoClean Direct Oven	Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven
595 x 594 x 548mm 585-595 x 560-568 x 550mm 357 x 480 x 415mm		with HotAir Steam			
585-595 x 560-568 x 550mm 357 x 480 x 415mm	60	60	60	60	60
357 x 480 x 415mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm	595 x 594 x 548mm
	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	575-597 x 560-568 x 550m
13	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	329 x 479 x 420mm
	10	8	7	7	5
•*	•*				
		•	•	•	•
		_			
	_	•	_	_	_
	•	•	•	•	•
•'	•'	•	•	•	
•	•				
_				_	
•	•	•	•	•	
_				_	_
•	•	•	•	•	•
•	•	•	•	•	<b>→</b>
•	•	•	•	•	
•	•	•	•	•	
•					
•					
•					
•	•				•
•	•				-
•	•				
•	•				
•	•				
_					
<b>●</b> (10)		● (10)	<b>●</b> (10)		
71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	71 litres (net)	66 litres (net)
		250ml (water bowl)			
Black glass	Black glass	Black glass	Black glass	Black glass	Black glass
	Anthracite enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
TFT Touch Symbol Display	TFT Touch Symbol Display	LED-display control (red)	LED-display control (red)	LED-display control (red)	LED-display control (red)
•	•	•	•	•	•
Bosch Control Ring	Bosch Control Ring	Retractable control knobs	Retractable control knobs	Retractable control knobs	Retractable control knobs
with TFT Display	with TFT Display				
•	•				
Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
-	5	5	5	5	5
	•	•	•	•	•
5			•	•	•
5 •	•				•
5	•	•		·	
5 •	•	•			
5 •	•	•			
5 •	•	•			
5					
5 •	• (rear wall)			• (rear wall)	● (rear wall)
5 •					• (rear wall)
5 •					• (rear wall)
5		Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door		• (rear wall)  Triple-glazed door
5  ■  Quadruple-glazed CoolTouch Door	● (rear wall)  Triple-glazed door			• (rear wall)	
5	• (rear wall)  Triple-glazed door			• (rear wall)	
5  ●  Quadruple-glazed CoolTouch Door  ●	● (rear wall)  Triple-glazed door	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	● (rear wall)  Triple-glazed door	
5  ●  •  •  Quadruple-glazed CoolTouch Door  •	● (rear wall)  Triple-glazed door  ●	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	● (rear wall)  Triple-glazed door	Triple-glazed door
Quadruple-glazed CoolTouch Door  (controls & door)	• (rear wall)  Triple-glazed door • • (controls)	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door	● (rear wall)  Triple-glazed door	Triple-glazed door
5  ■  Quadruple-glazed CoolTouch Door  ■  (controls & door)  300°C	• (rear wall)  Triple-glazed door • • (controls)	Quadruple-glazed CoolTouch Door  • (controls & door)	Quadruple-glazed CoolTouch Door  • (controls & door)	• (rear wall)  Triple-glazed door  • (controls)	Triple-glazed door  • (controls)
5  ■  Quadruple-glazed CoolTouch Door  ■  (controls & door)  300°C  3.6kW	• (rear wall)  Triple-glazed door • • (controls) • 300°C	Quadruple-glazed CoolTouch Door  (controls & door)  275°C	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C	• (rear wall)  Triple-glazed door  • (controls)  275°C	Triple-glazed door  • (controls)  270°C
5  ■  Quadruple-glazed CoolTouch Door  ■  (controls & door)  300°C  3.6kW	• (rear wall)  Triple-glazed door • • (controls) • 300°C 3.6kW	Quadruple-glazed CoolTouch Door  (controls & door)  275°C  3.6kW	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C 3.6kW	• (rear wall)  Triple-glazed door  • (controls)  275°C  3.4kW	Triple-glazed door  • (controls)  270°C  2.3kW
S  Ouadruple-glazed CoolTouch Door  (controls & door)  300°C  3.6kW  220-240V / 50-60Hz	• (rear wall)  Triple-glazed door • • (controls) • 300°C 3.6kW	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C  3.6kW  220-240V / 50-60Hz	• (rear wall)  Triple-glazed door  • (controls)  275°C  3.4kW	Triple-glazed door  • (controls)  270°C  2.3kW
Guadruple-glazed CoolTouch Door  (controls & door)  300°C  3.6kW 220-240V / 50-60Hz	• (rear wall)  Triple-glazed door • (controls) • 300°C 3.6kW 220-240V / 50-60Hz	Quadruple-glazed CoolTouch Door  ●  • (controls & door)  275°C  3.6kW  220-240V / 50-60Hz  • (1-level)	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C  3.6kW  220-240V / 50-60Hz  • (1-level)	● (rear wall)  Triple-glazed door  ● (controls)  275°C  3.4kW  220-240V/50-60Hz	Triple-glazed door  • (controls)  270°C  2.3kW  220–240V / 50Hz
Guadruple-glazed CoolTouch Door  (controls & door)  300°C  3.6kW  220-240V / 50-60Hz	• (rear wall)  Triple-glazed door • • (controls) • 300°C 3.6kW 220-240V / 50-60Hz	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C  3.6kW  220-240V / 50-60Hz  • (1-level)	● (rear wall)  Triple-glazed door  ● (controls)  275°C  3.4kW  220-240V/50-60Hz	Triple-glazed door  ● (controls)  270°C  2.3kW  220-240V / 50Hz
Guadruple-glazed CoolTouch Door  (controls & door)  300°C  3.6kW  220-240V / 50-60Hz  2  1 (pyrolytic proof)	• (rear wall)  Triple-glazed door • • (controls) • 300°C 3.6kW 220-240V / 50-60Hz	Quadruple-glazed CoolTouch Door	Quadruple-glazed CoolTouch Door  • (controls & door)  275°C  3.6kW  220-240V / 50-60Hz  • (1-level)  2	● (rear wall)  Triple-glazed door  ● (controls)  275°C  3.4kW  220-240V/50-60Hz	Triple-glazed door  ● (controls)  270°C  2.3kW  220-240V / 50Hz

# Reference Guide Black Glass Compact Appliances

Model		CSG656RB1A Series 8	CMG633BB1A Series 8	
Туре		Combination Steam Oven	Combination	
Dimensions	Width (cm)	60	Microwave Oven	
	Appliance dimensions (HxWxD)	455 x 594 x 548mm	455 x 594 x 548mm	
	Built-in dimensions (HxWxD)	450-455 x 560-568 x 550mm	450-455 x 560-568 x 550mm	
	Cavity dimensions (HxWxD)	235 x 480 x 415mm	237 x 480 x 392mm	
Heating	Number of heating functions	18	7	
Functions	4D HotAir	●*^*	●#2	
	3D HotAir			
	HotAir Eco/Gentle	•^	•	
	Top and bottom heating	•*^*		
	Top and bottom heating Eco	•^		
	Bottom heating	•		
	Intensive heating	•		
	Hot air grilling	•*^	<b>♠</b> 2	
		•	•2	
	Grill - large area	•	~	
	Grill – small area	•	●2	
	Pizza setting	•^		
	Slow cooking	•		
	Keep warm	•*		
	Preheat ovenware	•	•	
	Drying (after steam cooking)	•		
	Reheating (using steam)	•^		
	Dough proving (using steam)	•		
	Defrost (using steam)	•		
	Pure Steaming	•^		
	Automatic rapid heating	•	•	
	Automatic temperature proposal	•	•	
	Temperature display	•	•	
	Pure Microwave		•	
	Microwave with INNOWAVE inverter technology		● (5 power levels – 90, 180, 360, 600, 900W)	
	Electronic thermostat	•	•	
Sensor &	Bosch Assist (Fully automated	•		
Automatic Functions	cooking) PerfectBake sensor	<b>_</b> 1		
		<b>●</b> ¹		
	PerfectRoast meat probe	•	• (14)	
0	AutoPilot (Automatic programs)	47 litros (not)	• (14)	
Capacity	Volume (usable litres) Water tank	47 litres (net) 1 litre (net)	45 litres (net)	
Daniem	water tank	, ,	Dlook gloop	
Design	Coultry	Black glass	Black glass	
	Cavity	Anthracite enamel cavity	Anthracite enamel cavity	
	Display	TFT Touch Graphic Display	TFT Touch Symbol Display	
	Electronic clock/timer with end-time programming	•	•	
	Controls	Bosch Control Ring with TFT Display	Bosch Control Ring with TFT Display	
	SoftMove door technology	•	•	
	Interior light	LED (ceiling)	LED (ceiling)	
	No. of shelf positions	3	3	
	Full glass inner door	•		
	Removable door	•		
	Water tank empty indicator	•		
Cleaning	EcoClean Direct cleaning system	• (ceiling, sides		
Cleaning	Steam cleaning system	and rear wall)		
	Descaling program	•		
Cofety	Door	Triple-glazed door	Triple-glazed door	
Safety	Residual heat indicator	mpte-gtazed door	■ Inple-glazed door	
		•	•	
	Automatic safety switch-off		• ( ) ()	
	Child lock function	• (controls)	• (controls)	
Toological	Cooling fan	2E09C marries t	27E9C marrian t	
Technical requirements	Maximum temperature	250°C maximum top and bottom heating temperature; 30°C-100°C steam temperature	275°C maximum temperature; 900W maximum microwave power output with 5 power levels: 90/180/360/600/900W	
	Total connected load	3.3kW	3.6kW	
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	
Supplied	Fully extendable telescopic rails	• (1-level)	,	
accessories	No. wire racks	2	1	
	No. universal pans / Baking trays	1 pan	1 pan	
	No. non perforated steam trays	1 small	. pun	
	No. perforated steam trays	1 small, 1 extra large		
	- INV. DELIQUATED STEATH ITAVS	ı sınıatı, i extra targe		
Optional		Refer to pages 108 & 109	Refer to pages 108 & 109	

<sup>&</sup>lt;sup>1</sup>Silicon based cookware and bakeware is not compatible for use. <sup>2</sup>Compatible with Microwave function. <sup>^</sup>Compatible with single point meat probe. #Compatible with Rapid heat. <sup>†</sup>Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

# Reference Guide Stainless Steel Ovens

Model		HBT578FS2A	HBA574BS0A	HBA534ES0A	HBF133BS0A
		Series 6	Series 4	Series 4	Series 2
Гуре		Pyrolytic Oven	Pyrolytic Oven	EcoClean Direct Oven	EcoClean Direct Oven
Dimensions	Width (cm)	60	60	60	60
	Appliance dimensions (HxWxD)	595 x 594 x 548mm			
	Built-in dimensions (HxWxD)	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	585-595 x 560-568 x 550mm	575-597 x 560-568 x 550mm
	Cavity dimensions (HxWxD)	357 x 480 x 415mm	357 x 480 x 415mm	357 x 480 x 415mm	329 x 479 x 420mm
leating	Number of heating functions	10	7	7	5
unctions	4D HotAir	10	r	'	3
	3D HotAir	●^ <i>^</i> #	•*	<b>A</b> :	•
	HotAir Eco/Gentle	•^	•	•	•
	· ·	●^*	•	•	•
	Top and bottom heating Top and bottom heating Eco	•	•	•	•
	,				
	Fan assisted top and bottom heating				
	Bottom heating	•	•	•	
	Intensive heating				
	Hot air grilling	•^	•	•	•
	Grill – large area	•	•	•	•
	Grill – small area	•	•		_
	Pizza setting	•^	•	•	
		•	•	•	
	Slow cooking	•			
	Keep warm	•			
	Preheat ovenware				
	Drying (after steam cooking)				
	Reheating (with added steam)				
	Dough proving (with added steam)				
	Defrost	•			
	Rapid heat function	•	•	•	•
	Automatic temperature proposal	•			
	Temperature display	•	•		
	Electronic thermostat				
ensor &	Bosch Assist (Fully automated				
Automatic Functions	cooking)				
	PerfectBake sensor				
	PerfectRoast meat probe				
	Single point meat probe	•			
	AutoPilot (Automatic programs)	• (30)	<b>●</b> (10)		
apacity	Volume (usable litres)	71 litres (net)	71 litres (net)	71 litres (net)	66 litres (net)
		0.11	0.11	0.11	01.11
Design		Stainless steel with metal bar handle			
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LCD-display control (white)	LED-display control (red)	LED-display control (red)	LED-display control (red)
	Electronic clock/timer with	CD-display control (white)	CED-display control (red)	D-display control (red)	Ontrot (red)
	end-time programming	•	•	•	•
	Controls	Retractable rotary control	Retractable rotary	Retractable rotary	Retractable rotary
		knobs	control knobs	control knobs	control knobs
	SoftClose door	•			
	Interior light	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)	Halogen (ceiling)
	No. of shelf positions	5	5	5	5
	Full glass inner door	•	•	•	•
	Removable door	•	•	•	•
leaning	Pyrolytic cleaning function	•	•		
	EcoClean Direct cleaning system			• (rear wall)	• (rear wall)
	Catalytic cleaning system			- (	- ( man)
afety	Door	Quadruple-glazed	Quadruple-glazed	Triple-glazed door	Triple-glazed door
arety	D001	CoolTouch door	CoolTouch door	mpte-gtazed door	ITIPIE-glazed door
	Residual heat indicator	•			
	Automatic safety switch-off	•	•		
	Child lock function	• (controls & door)	• (controls & door)	• (controls)	• (controls)
	Cooling fan	•	•	• (controls)	• (controls)
echnical	Maximum temperature	30-275°C	50-275°C	50-275°C	50-275°C
equirements	Total connected load	3.6kW	3.6kW	3.4kW	3.3kW
	Power requirements	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
upplied		220 240V / 30-00HZ	220 240V / JU-0UEZ	220 240V / JU-0UFIZ	220 240V / 3U-0UHZ
upplied ccessories	ClipRail telescopic rails	♠ /1 lovel\		♠ /1 lov-!\	
	Partially extendable telescopic rails	• (1-level)		● (1-level)	
	No. wire racks	2	2	2	1
	No. split grill trays	1	1	1	
		1	1	1	1
	No. universal pans	I		I	
	No. baking trays	1 (consists of 2)			1
	No. of half trays (slimline universal pans)	1 (consists of 2 parts)			
	(current universatipans)	Refer to pages 108 & 109			
ptional					

# Reference Guide Microwave Ovens

Model		BEL554MS0A Series 6	BEL653MB3A Series 2	
Туре		Built-in Microwave	Built-in Microwave	
Dimensions	Width (cm)	60	60	
	Appliance dimensions (HxWxD)	382 x 594 x 388mm	382 x 595 x 375mm	
	Built-in dimensions (HxWxD)	382 x 560 x 550mm	380-382 x 560-568 x 550mm	
	Cavity dimensions (HxWxD)	208 x 328 x 369mm	205 x 310 x 334mm	
Heating Functions	Number of heating functions			
i unctions	4D HotAir			
	3D HotAir Hot Air			
	HotAir Eco/Gentle			
	Top and bottom heating			
	Top and bottom heating Eco			
	Bottom heating			
	Intensive heating			
	Hot air grilling			
	Grill – large area	●² (1200W)	●² (1000W)	
	Grill – small area			
	Pizza setting			
	Slow cooking			
	Keep warm			
	Preheat ovenware			
	Drying (after steam cooking)			
	Reheating (using steam)			
	Dough proving (using steam)			
	Defrost (using steam)			
	Pure Steaming			
	Automatic rapid heating			
	Automatic temperature proposal			
	Temperature display			
	Pure Microwave	• (5 power levels – 90, 180, 360, 600, 900W)	● (5 power levels – 90, 180, 360, 600, 800W)	
	Microwave with INNOWAVE inverter technology			
	Electronic thermostat			
	Bosch Assist (Fully automated cooking)			
Sensor & Automatic Functions	PerfectBake sensor			
	PerfectRoast meat probe AutoPilot (Automatic programs)	<b>●</b> (8)	● (8)	
Capacity	Volume (usable litres)	25 litres (net)	25 litres (net)	
Capacity	Water tank	25 titles (fiet)	20 titles (fiet)	
Design	Finish	Black glass with stainless steel trims	Black glass	
	Cavity	Stainless steel		
	Display	LED-display control (white)	LED-display control (red)	
	Electronic clock/timer with end-time programming	•	•	
	Controls	Retractable rotary control knobs	Rotary control knobs	
	SoftMove door technology			
	Interior light	LED (ceiling)	LED (ceiling)	
	No. of shelf positions			
	Full glass inner door			
	Water tank empty indicator			
Cleaning	EcoClean Direct cleaning system			
	Steam cleaning system			
	Descaling program			
Safety	Door	Single-glazed door	Single-glazed door	
	Residual heat indicator			
	Automatic safety switch-off	•	•	
	Child lock function		•	
	Cooling fan			
Technical requirements	Maximum temperature  Total connected load	4.451.00	4.07111	
requirements		1.45kW	1.27kW	
Committeed	Power requirements	220-230V / 50Hz	220-230V / 50Hz	
Supplied accessories	Fully extendable telescopic rails			
	Partially extendable telescopic rails  No. wire racks			
	No. universal pans / Baking trays			
	No. non perforated steam trays			
	No. perforated steam trays			
	Cleaning sponge			
	Grid high / Grid flat	1 high	1 high	
	Turntable	•	•	
	Plug-in grid / Glass pan / Steam container			
Optional	5 6 7, 222 55114	Refer to pages 108 & 109	Refer to pages 108 & 109	
accessories		· -	• -	

<sup>&</sup>lt;sup>1</sup>Silicon based cookware and bakeware is not compatible for use. <sup>2</sup>Compatible with Microwave function. <sup>^</sup>Compatible with single point meat probe. #Compatible with Rapid heat. <sup>†</sup>Available at selected retailers, please visit www.bosch-home.com.au for list of stockists.

FEL053MS2A
Series 2
Freestanding Microwave 49
290 x 495 x 370mm
205 x 310 x 334mm
●² (1000W)
- (5
• (5 power levels - 90, 180, 360, 600, 800W)
<b>●</b> (8)
25 litres (net)
Black glass with stainless steel trims
LED-display control (red)
•
Rotary control knobs
LED (ceiling)
Single-glazed door
•
•
1.27kW
1.27kW 220–230V / 50Hz
220 200V / 00H2
41:1
1 high
Refer to pages 108 & 109

# Reference Guide 90cm Ovens

Model		VBD578FB0 Series 6	VBD578FS0 Series 6	VBC578FS0 Series 6	VBD554FS0 Series 4	
Туре		Pyrolytic Oven	Pyrolytic Oven	Pyrolytic Oven	Catalytic Cleaning Oven	
Dimensions	Width (cm)	90	90	90	90	
Dilliensions	Appliance dimensions (HxWxD)	594 x 896 x 570mm	594 x 896 x 570mm	475 x 896 x 572mm	594 x 896 x 570mm	
	Built-in dimensions (HxWxD)	600-604 x 860-864 x 560mm	600-604 x 860-864 x 560mm	477-480 x 860-864 x 560mm	600-604 x 860-864 x 560mm	
	Cavity dimensions (HxWxD)	371 x 724 x 417mm	371 x 724 x 417mm	282 x 724 x 417mm	371 x 724 x 417mm	
Heating	Number of heating functions	10	10	10	8	
Functions	4D HotAir	10	10	10	o .	
	3D HotAir	•*	•*	•*	•	
	HotAir Eco/Gentle					
	Top and bottom heating	•*	•*	•*	•	
	Top and bottom heating Eco	•	•	•	•	
	Fan assisted top and bottom heating	●*	●*	•*		
	Bottom heating	•	•	•	•	
	Intensive heating					
	Hot air grilling	•	•	•	•	
	Grill – large area Grill – small area	•	•	•	•	
	Pizza setting	•*	•*	•*	•	
	Rotisserie	•	•	•	•	
	Slow cooking					
	Keep warm					
	Preheat ovenware					
	Drying (after steam cooking)					
	Reheating (with added steam)					
	Dough proving (with added steam)					
	Defrost	•	•	•		
	Rapid heat function	• (manual)	• (manual)	● (manual)	● (manual)	
	Automatic temperature proposal	•	•	•		
	Temperature display  Electronic thermostat	•	•	•		
Sensor &	Bosch Assist (Fully automated cooking)	•	•	•		
Automatic	PerfectBake sensor					
Functions	PerfectRoast meat probe					
	Single point meat probe					
	AutoPilot (Automatic programs)					
Capacity	Volume (usable litres)	112 litres (net)	112 litres (net)	85 litres (net)	112 litres (net)	
Design	Finish	Black Glass with	Stainless steel with	Stainless steel with	Stainless steel with	
		metal bar handle	metal bar handle	metal bar handle	metal bar handle	
	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	
	Display	LCD-display control (white)	LCD-display control (white)	LCD-display control (white)	LED-display control (red)	
	Electronic clock/timer with end-time programming	•	•	•	•	
	Controls	Retractable rotary control	Retractable rotary control	Retractable rotary control	Retractable rotary control	
	SoftClose door	knobs	knobs	knobs	knobs	
	Interior light	2 Halogen	2 Halogen	2 Halogen	2 Halogen	
	interior delic	(left and right side walls)				
	No. of shelf positions	5	5	4	5	
	Full glass inner door	•	•	•	•	
	Removable door	•	•	•	•	
Cleaning	Pyrolytic cleaning function	•	•	•		
	EcoClean Direct cleaning system				• (sides and rear wall)	
Safety	Catalytic cleaning system  Door	Quadruple-glazed	Quadruple-glazed	Quadruple-glazed	Triple-glazed door	
Salety	5001	CoolTouch door	CoolTouch door	CoolTouch door	mpte glazed door	
	Residual heat indicator	•	•	•		
	Automatic safety switch-off	•	•	•	•	
	Child lock function	• (controls & door)	• (controls & door)	• (controls & door)	● (controls)	
	Cooling fan	•	•	•	•	
Technical requirements	Maximum temperature	50-280°C	50-280°C	50-280°C	50-250°C	
- equilients	Total connected load	4.2kW 220-240V / 50-60Hz	4.2kW 220-240V / 50-60Hz	3.3kW 220-240V / 50-60Hz	3.3kW 220-240V / 50-60Hz	
Supplied	Power requirements ClipRail telescopic rails	1	220-240V / 50-60HZ	220-240V / 50-60HZ 1	220-240V / 50-60HZ	
accessories	Partially extendable telescopic rails		· 	,	·	
	No. wire racks	2	2	2	1	
	No. split grill trays	1 universal pan insert grid	1 universal pan insert grid	1 universal pan insert grid		
	No. universal pans	1	1	1	1	
	No. baking trays	1	1	1	1	
	No of rotary spit	1	1	1	1	
Optional		Refer to pages 108 & 109				
accessories						

<sup>\*</sup>Compatible with Rapid heat

Descriptions & diagrams are a guide only. Additional information, full dimensions & installation details are in the instruction & installation manuals supplied with the appliances.

# Reference Guide Double Ovens

	VBC5540S0	Model		MBG5787S0A	MBA534BB0A	MBA534BS0A
_	Series 4  Catalytic Cleaning Oven	Туре		Series 6 Pyrolytic Double Oven	Series 4  EcoClean Direct	Series 4  EcoClean Direct
	Caracy no oroning oroni	-71		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Double Oven	Double Oven
	90	Dimensions	Width (cm)	60	60	60
	475 x 896 x 572mm		Appliance dimensions (HxWxD)	888 x 594 x 550mm	888 x 594 x 550mm	888 x 594 x 550mm
	477-480 x 860-864 x 560mm		Built-in dimensions (HxWxD)	875-888 x 560-568 x 550mm	875-888 x 560-568 x 550mm	875-888 x 560-568 x 550mm
	282 x 724 x 417mm		Cavity dimensions (HxWxD)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)	166 x 480 x 426mm (top) 357 x 480 x 415mm (bottom)
	7	Heating	Number of heating functions	4 (top) and 10 (bottom)	3 (top) and 7 (bottom)	3 (top) and 7 (bottom)
		Functions	4D HotAir	r (top) and ro (bottom)	o (top) and r (bottom)	o (top) and r (bottom)
	•		3D HotAir	●* (bottom)	●* (bottom)	●* (bottom)
			HotAir Eco/Gentle	• (bottom)	• (bottom)	• (bottom)
	•		Top and bottom heating	• (top and bottom)	●* (top and bottom)	●* (top and bottom)
	•		Top and bottom heating Eco			
	_		Fan assisted top and bottom heating			
	•		Bottom heating	<ul><li>(top and bottom)</li></ul>	● (bottom)	• (bottom)
	•		Intensive heating			
			Hot air grilling	● (bottom)	● (bottom)	• (bottom)
			Grill – large area	• (top and bottom)	• (top and bottom)	• (top and bottom)
	•		Grill – small area	● (top)	● (top)	● (top)
			Pizza setting	• (bottom)	• (bottom)	• (bottom)
			Slow cooking	• (bottom)		
			Keep warm	• (bottom)		
			Preheat ovenware			
			Drying (after steam cooking)  Reheating (with added steam)			
			Dough proving (with added steam)			
			Defrost	• (bottom)		
			Automatic rapid heat function	•		
	● (manual)		Automatic temperature proposal	•		
			Temperature display	•		
			Electronic thermostat	•		
		Sensor &	Bosch Assist (Fully automated cooking)			
		Automatic Functions	PerfectBake sensor			
		Functions	PerfectRoast meat probe			
			Single point meat probe	•		
			AutoPilot (Automatic programs)	● (30)		
	85 litres (net)	Capacity	Volume (usable litres)	34 litres (net) top 71 litres (net) bottom	34 litres (net) top 71 litres (net) bottom	34 litres (net) top 71 litres (net) bottom
	oo titles (liet)	Design		Stainless steel with	Black glass with	Stainless steel with
	Stainless steel with	Design		metal bar handle	metal bar handle	metal bar handle
	metal bar handle		Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Grey enamel cavity		Display	LCD-display control (white)	LED-display control (red)	LED-display control (red)
	LED-display control (red)		Electronic clock/timer with	•	•	•
	•		end-time programming			
	Retractable rotary control		Controls	Retractable rotary control knobs	Retractable rotary control knobs	Retractable rotary control knobs
	knobs		SoftClose door	•		
			Interior light	Halogen	Halogen	Halogen
	2 Halogen (left and right side walls)			1 (top) and 1 (bottom)	1 (top) and 1 (bottom)	1 (top) and 1 (bottom)
	4		No. of shelf positions	3 (top) and 5 (bottom)	3 (top) and 5 (bottom)	3 (top) and 5 (bottom)
	•		Full glass inner door	•	•	•
	•	01	Removable door	•	•	•
		Cleaning	Pyrolytic cleaning function  EcoClean Direct cleaning system	•	• (rear wall) (bottom)	• (rear wall) (bottom)
			Catalytic cleaning system		(rear watt) (Dottolli)	(rear watt) (bottofff)
	• (sides and rear wall)	Safety	Door	Quadruple-glazed CoolTouch	Triple-glazed door	Triple-glazed door
	Triple-glazed door	Guicty	200.	door (top and bottom)	(top and bottom)	(top and bottom)
			Residual heat indicator			
			Automatic safety switch-off			
	• (controls)		Child lock function	● (controls & door)	● (controls)	• (controls)
	• (controts)		Cooling fan	•	•	•
	50-250°C	Technical requirements	Maximum temperature	30-275°C	50-275°C	50-275°C
	3.1kW	requirements	Total connected load	6.3kW	5.9kW	5.9kW
	220-240V / 50-60Hz	Cumulind	Power requirements	220-240V / 50-60Hz	220-240V / 50Hz	220-240V / 50-60Hz
	1	Supplied accessories	ClipRail telescopic rails	1 (1-level - hottom)		
			Partially extendable telescopic rails  No. wire racks	• (1-level – bottom)	2	2
	1		No. split grill trays	1	1	1
			No. universal pans	1	1	1
	1		No. baking trays			
	1		No. of half trays (slimline universal			
			pans)			
	Refer to pages 108 & 109	Optional		Refer to pages 108 & 109	Refer to pages 108 & 109	Refer to pages 108 & 109
		accessories	l			

# Reference Guide Freestanding Cookers

Model		HSB838357A	HSB738357A	HXR39KI50A	HXU09AH50A
		Series 8	Series 6	Series 4	Series 4
Туре		Dual Fuel Pyrolytic Cooker	Dual Fuel Cooker	Dual Fuel Cooker	Dual Fuel Cooker
Dimensions	Width (cm)	90cm	90cm	60cm	60
	Appliance dimensions (HxWxD)	900 x 898 x 600mm	900 x 898 x 600mm	850 x 600 x 600mm	850 x 600 x 600mm
Heating	Oven				
Functions	Number of heating functions	10	8	7	8
	HotAir	•	•	•	•
	Hot Air Eco / Gentle			•	•
	Top and bottom Heating	•	•	•	•
	Top and bottom Heating Eco	•	•		
	Fan assisted top and bottom Heating	•	•		
	Hot Air and bottom heat	•	•		
	Bottom heat			•	•
	Bottom heating and fan				
	Pizza setting			•	•
	Automatic rapid heat function			•	
	Hot Air grilling	•	•	•	•
	Grill – large area	•	•	•	•
	Rotisserie	•	•		
	Defrost				•
Capacity	Volume (usable litres)	112	112	66	66
Design	Cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity	Grey enamel cavity
	Display	LED-display control (red)	LED-display control (red)	LED-display control (red)	
	Electronic clock/timer	•	•	•	
	Controls	Sword control knobs	Sword control knobs	Retractable rotary control	Retractable rotary control
	SoftClose door			knobs	knobs
	Interior light	2 Halogen lights (left and right)	2 Halogen lights (left and right)	1 Halogen light	1 Halogen light
	No. of shelf positions	5	5	5	i natogen tignt
	Full glass inner door	•	•	•	•
	Removable door	•	•		•
	21cm utensil drawer	•	•		
	Height adjustable legs (50mm)	•	•	•	•
Cleaning	Pyrolytic cleaning function	•	•		•
oteaning	EcoClean Direct cleaning system	•		• (ceiling, sides and rear wall)	•
	Catalytic liners		• (sides and rear wall)	(ceiting, sides and real watt)	•
Safety	Door	Quadruple-glazed	Triple-glazed door	Triple-glazed door	
	300.	CoolTouch door	pto Bazea doo.	mpte Stazed door	
	Residual heat indicator	•	•		
	Automatic safety switch-off	•	•		
	Child lock function	● (controls & door)	● (controls)	• (controls)	
	Cooling fan	•	•	•	
Burner /	Cooktop				
Zone Output (Size)		6 burners including:	6 burners including:	4 burners including:	4 burners including:
(3126)	Front left	Wok burner 14 MJ/h	Wok burner 14 MJ/h	Wok burner 13.5 MJ/h	Wok burner 13.6 MJ/h
	Rear left	Standard burner 7 MJ/h	Standard burner 7 MJ/h	Standard burner 6.5 MJ/h	Standard burner 6.85 MJ/h
	Front centre	High-speed burner 12 MJ/h	High-speed burner 12 MJ/h		
	Middle centre				
	Rear centre	Economy burner 4 MJ/h	Economy burner 4 MJ/h		
	Front right	Economy burner 4 MJ/h	Economy burner 4 MJ/h	Economy burner 4 MJ/h	Economy burner 4 MJ/h
	Rear right	Standard burner 7 MJ/h	Standard burner 7 MJ/h	Standard burner 6.5 MJ/h	Standard burner 6.85 MJ/h
Convenience	Continuous enamelled cast-iron trivets	•	•	•	
	with rubber feet				
	with rubber feet  Flame failure fitted to each burner	•	•	•	•
Safety	Flame failure fitted to each burner	•	•	•	•
Safety Controls	Flame failure fitted to each burner Sword knob controls	•	•	-	•
Safety Controls Technical	Flame failure fitted to each burner Sword knob controls Maximum temperature	● 260°C	• 260°C	50-275°C	
Safety Controls Technical	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load	• 260°C 4.2kW	● 260°C 3.2kW	50-275°C 3.3kW	3.3kW
Safety Controls Technical requirements	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements	● 260°C 4.2kW 220-240V / 50-60Hz	260°C 3.2kW 220-240V / 50-60Hz	50-275°C 3.3kW 220-240V / 50-60Hz	
Safety Controls Technical	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails	• 260°C 4.2kW 220-240V / 50-60Hz	● 260°C 3.2kW	50-275°C 3.3kW 220-240V / 50-60Hz 2	3.3kW 220-240V / 50-60Hz
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks	• 260°C 4.2kW 220-240V / 50-60Hz 1	260°C 3.2kW 220-240V / 50-60Hz	50-275°C 3.3kW 220-240V / 50-60Hz 2	3.3kW
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays	• 260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid	260°C 3.2kW 220-240V / 50-60Hz 1 universal pan insert grid	50-275°C 3.3kW 220-240V / 50-60Hz 2 2	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1	260°C 3.2kW 220-240V / 50-60Hz 1 universal pan insert grid 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1	3.3kW 220-240V / 50-60Hz
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1 1	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied accessories	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support LPG conversion kit	260°C 4.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1	3.3kW 220-240V / 50-60Hz 2
Safety Controls Technical requirements Supplied	Flame failure fitted to each burner Sword knob controls Maximum temperature Total connected load Power requirements Partially extendable telescopic rails No. of wire racks No. of split grill trays No. of universal pans No of baking trays No. of rotary spit Wok ring support Espresso cross support	• 260°C 4.2kW 220-240V / 50-60Hz 1 1 1 universal pan insert grid 1 1 1 1 1 1 1	260°C 3.2kW 220-240V / 50-60Hz 1 1 universal pan insert grid 1 1	50-275°C 3.3kW 220-240V / 50-60Hz 2 2 1 1	3.3kW 220-240V / 50-60Hz 2

		HLS79R351A	HKS79R250A	
		Series 6	Series 6	
Туре		Induction/Pyrolytic Cooker	Ceramic/Pyrolytic Cooker	
Dimensions	Width (cm)	60cm	60cm	
	Appliance dimensions (HxWxD)	850 x 600 x 600mm	850 x 600 x 600mm	
Heating Functions	Oven	8	8	
	Number of heating functions	8	8	
	3D HotAir	•	<u> </u>	
	Hot Air Eco / Gentle	•	•	
	Top and bottom Heating	•	•	
	Bottom Heating	•	•	
	Hot air grilling	•	•	
	Grill – large area	•	•	
	Pizza setting	•	•	
	Slow cooking	•	•	
	Automatic rapid heat function	•	•	
	Automatic temperature proposal	•		
	Temperature display	•	•	
	Electronic thermostat	•	•	
	AutoPilot (Automatic programs)	• (30)	• (30)	
Capacity	Volume (usable litres)	66	63	
Design	Cavity	Grey enamel cavity	Grey enamel cavity	
	Display	LCD-display control (white)	LCD-display control (white)	
	Electronic clock/timer	•	•	
	Controls	Retractable rotary control knobs	Retractable rotary control knobs	
	SoftClose door	•	•	
	Interior light	1 Halogen light	1 Halogen light	
	No. of shelf positions	5	5	
	Full glass inner door	•	•	
	Removable door	•	•	
	21cm utensil drawer	•	•	
	Height adjustable legs (50mm)	•	•	
Cleaning	Pyrolytic cleaning function	•	•	
Safety	Door	Quadruple-glazed	Quadruple-glazed	
		CoolTouch door	CoolTouch door	
	Automatic safety switch-off	•	•	
	Child lock function	● (controls & door)	● (controls & door)	
	Cooling fan	•	•	
Burner /	Cooktop			
Zone Output		4 zones including:	4 zones including:	
(Size)	Front left	CombiZone:	Standard zone:	
		1.8kW (180mm)	1.8kW (180mm)	
		CombiZone:	Dual circuit zone:	
	Rear left			
		1.8kW (180mm)	2.4kW (170 / 260mm)	
	Rear left Front right	1.8kW (180mm) Standard zone:	2.4kW (170 / 260mm) Dual circuit zone:	
	Front right	1.8kW (180mm) Standard zone: 2.2kW (210mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm)	
		1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Performance	Front right Rear right	1.8kW (180mm) Standard zone: 2.2kW (210mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm)	
Performance	Front right  Rear right  17-stage power setting	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Performance	Front right  Rear right  17-stage power setting 9-stage power setting	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Performance	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Performance	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone:	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Convenience	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Convenience	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone:	
Convenience	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone: 1.2kW (145mm)	
Convenience Safety Technical	Front right  Rear right  17-stage power setting  9-stage power setting  PowerBoost  MoveMode  CombiZone  WipeProtection  QuickStart  ReStart  Energy consumption display  Dual function timer with automatic switch-off  Automatic pot detection  Child lock  2-stage residual heat indicator  Maximum temperature	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone: 1.2kW (145mm)	
Convenience Safety Technical	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone: 1.2kW (145mm)	
Convenience Safety Technical requirements	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm)  Dual circuit zone: 2.2kW (120 / 210mm)  Standard zone: 1.2kW (145mm)	
Convenience  Safety  Technical requirements  Supplied	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)  •  30-300°C 10.85kW 220-240V / 50-60Hz	
Convenience  Safety  Technical requirements  Supplied	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks No. of split grill trays	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)	
Convenience  Safety  Technical requirements  Supplied	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)  •  30-300°C 10.85kW 220-240V / 50-60Hz	
Convenience  Safety  Technical requirements  Supplied	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks No. of split grill trays	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)	
Performance  Convenience  Safety  Technical requirements  Supplied accessories	Front right  Rear right  17-stage power setting 9-stage power setting PowerBoost MoveMode CombiZone WipeProtection QuickStart ReStart Energy consumption display Dual function timer with automatic switch-off Automatic pot detection Child lock 2-stage residual heat indicator Maximum temperature Total connected load Power requirements No. of wire racks No. of split grill trays No. of universal pans	1.8kW (180mm) Standard zone: 2.2kW (210mm) Standard zone: 1.4kW (145mm)	2.4kW (170 / 260mm) Dual circuit zone: 2.2kW (120 / 210mm) Standard zone: 1.2kW (145mm)	

# Reference Guide Coffee Machine

Model		CTL636EB6 Series 8
Туре		Built-in fully-automatic coffee machine
Dimensions	Appliance dimensions (HxWxD)	455 x 594 x 375mm
	Built-in dimensions (HxWxD)	449 x 558 x 354mm
Design	Stainless steel and black glass	
Hama .	Black glass	•
Home Connect		•
Flavour	SensoFlow System: Heating system for maximum	•
	and constant brewing temperature  AromaPro Concept: Optimal aroma extraction	•
	One-touch preparation: Ristretto, Espresso,	•
	Espresso Macchiato, Coffee, Cappuccino, Latte Macchiato, Caffè Latte at the touch of a button	
	AromaDouble Shot: Extra-strong coffee with less bitterness thanks to two grinding and brewing processes	•
	Beverage temperature adjustable individually: coffee 3 levels, hot water 4 levels	•
	Including BRITA Intenza water filter: Reduces the lime content of water and filters substances affecting smell and taste	•
Convenience	TFT Touch Graphic Display with interactive menu	•
	MyCoffee: Save 8 favourite beverages with individual names and adjustable mixing ratio of milk and espresso	•
	IndividualCup Volume: Cup sizes adjustable individually, to ensure your cup gets filled just as far as you would like	•
	Coffee outlet and milk frother height-adjustable: Up to 15cm high Latte Macchiato glasses fit underneath	•
	OneTouch DoubleCup: Prepare two cups simultaneously for all coffee and milk specialities	•
	Water tank removable for easy refilling	• (2.4 litre volume)
	Early warning if water tank almost empty or bean	•
	container almost empty  Flexible milk solution: Decide for yourself if you prefer connecting the provided milk container or	•
	using any other container, eg. a milk carton Short user manual always at hand inside appliance	•
Performance	SilentCeram Drive: Quiet, premium grinder made from non-wearing ceramic	•
	CoffeeSensor Pro: Automatically adjusts grinding unit to bean variety	•
	One-touch coffee milk specialities with especially fine-pored milk froth thanks to an innovative milk frother	•
	In addition to beverages also available separately: milk foam, warm milk, hot water	•
	Reduced heat-up time: Fastest first cup	•
	Water pump with 19 bar pressure Separate chute for ground coffee	•
	15,000 cup warranty: Consistently high appliance quality from the first cup to the 15,000th (valid for non-commercial use within 24 months)	•
Hygiene	Removable brewing unit: Easy and hygienic cleaning under running water	•
	AutoMilk Clean: Automatically steam cleans the milk system after every beverage	•
	Milk frother removable and dishwasher-proof SinglePortion Cleaning: Complete emptying of all pipes after each brewing process	•
Technical	Electrical connection rating	1600W
requirements	Current	10A
	Voltage	220-240V / 50-60Hz
Supplied accessories	1 BRITA water filter cartridge	•
	measuring spoon     milk container (insulated), connection hose     and pipe	•
	1 test strip	•
	1 set assembly screws	<ul><li>● (9)</li></ul>

# Reference Guide Warming Drawer

Model		BIC630NB1A
		Series 8
Туре		60cm Built-in Warming Drawer
Dimensions	Appliance dimensions	140 x 594 x 548mm
(HxWxD)	Built-in dimensions	140 x 560-568 x 550mm
	Internal dimensions	92 x 468 x 458mm
Heating functions	Base element and fan heating with 4 power levels	•
Suitable for	Slow cooking	•
	Proving yeast dough	•
	Defrosting	•
	Keeping food warm	•
	Pre-warming cups, plates and ovenware	•
Temperature range	From approx. 40-80°C	•
Design		Black glass
	Cavity	20 litre interior drawer volume
	Electronic rotary temperature control	•
	Inner compartment ceramic glass base	•
Technical	Max. weight load	25kg
requirements	Total connected load	0.81kW
	Voltage	220-240V / 50-60Hz



# Reference Guide 2-in-1 Cooktops with integrated ventilation

Model		Model PVQ731F15E Series 6	Model PVQ811F15E Series 6
Туре		70cm Induction cooktop with integrated ventilation	80cm Induction cooktop with integrated ventilation
Dimensions	Width (cm)	70	80
	Appliance dimensions (WxD)	223 x 710 x 522mm	223 x 802 x 522mm
	Built-in dimensions (WxD)	223 x 560 x 490mm	223 x 750 x 490mm
		(installation dimensions)	(installation dimensions)
Design		Black ceramic glass Bevelled front	Black ceramic glass Frameless
Burner /	4 zones including:		
Zone Output (Size)	Front left	CombiZone 2.2kW	CombiZone 2.2kW
	Rear left	CombiZone 2.2kW	CombiZone 2.2kW
	Front right	2.2kW	2.2kW
	Rear right	2.2kW	2.2kW
Performance	17-stage power setting	•	•
	PowerBoost	•	•
	CombiZone	•	•
	MoveMode	2 Auto Power Levels	2 Auto Power Levels
Convenience	WipeProtection	•	•
	QuickStart	•	•
	ReStart	•	•
	Energy consumption display	•	•
	Timer with automatic switch-off	•	•
	Automatic pot detection	•	•
Safety	Child lock	•	•
Salety	2-stage residual heat indicators	•	•
	Automatic safety shut-off	•	•
Electronic touch-controls	DirectSelect 1.0	•	•
	Maximum normal use	500m³/h	500m³/h
Extraction rate according to EN 61591 (ducted)	Intensive	622m³/h	622m³/h
Extraction rate according to		500m³/h	500m³/h
EN 61591 (recirculated)	Maximum normal use	615m³/h	615m³/h
Vantilation monfaumones	Intensive	•	613111 /11
Ventilation performance	Suitable for ducted or recirculated extraction (accessory may be required)	•	•
	Starter kit for Ducted extraction	HEZ9VDKE1	HEZ9VDKE1
	Partly ducted recirculation kit	HEZ9VDKR0	HEZ9VDKR0
	Power level	9 + 2 intensive	9 + 2 intensive
	Intensive setting with automatic switch back to previous setting	•	•
	Automatic residual shutdown	•	•
	AutoOn	•	•
	EcoSilence Drive brushless motor	•	•
Noise* level (ducted)	Noise levels (min/max)	42/69dB	42/69dB
	Intensive	74dB	74dB
Noise* level (recirculated)	Noise levels (min/max)	41/68dB	41/68dB
	Intensive	72dB	72dB
Cleaning	Saturation indicator	•	•
	Ventilation module cassette - heat resistant, dishwasher safe	•	•
	Dishwasher safe 12 layer stainless steel grease filters	•	•
	200ml dishwasher safe liquid collector unit	•	•
	700ml dishwasher safe liquid reservoir	•	•
Technical requirements	Total connected load	7.4 KW	7.4 KW
	Power requirements	220-240V / 380-415V / 50-60Hz	220-240V / 380-415V / 50-60Hz
	Minimum worktop thickness	16mm	16mm
Optional accessories	Griddle plate HEZ390522	•	•
	Teppan Yaki Large (40 x 20cm) HEZ390512	•	•
	Stainless steel roasting pan with lid HEZ390011	•	•
	Stainless steel wok HEZ390090	•	•
	Set of 2 pots and 1 pan HEZ9SE030	•	•


# Reference Guide Electric Cooktops

Model		PXV975DV1E Series 8	PIV975DC1E Series 8	PXE875DC1E Series 8	PVS875FB5E Series 6	PVS675FB5E Series 6	PXE651FC1E Series 6	
Туре		FlexInduction	Induction	FlexInduction	Combilnduction	Combilnduction	FlexInduction	
Dimensions	Width (cm)	90	90	80	80	60	60	
	Appliance dimensions (WxD)	916 x 527mm	916 x 527mm	816 x 527mm	816 x 527mm	606 x 527mm	592 x 522mm	
	Cut-out dimensions (WxD)	880 x 490-500mm	880 x 490-500mm	750-780 x 490-500mm	750–780 x 490–500mm	560 x 490-500mm	560 x 490-500mm	
Design		Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, stainless steel slimline side profile, beveled front and rear	Black ceramic glass, beveled front, sides and back with stainless steel trim	Black ceramic glass, beveled front and back with stainless steel trim	Black ceramic glass, frameless with beveled front and sides	
Home Connect		•						
Burner /		5 zones including:	5 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	
Zone Output (Size)	Front left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	FlexZone: 2.2kW / 3.7kW Boost (200 x 240mm)	CombiZone: 2.2kW / 3.7kW Boost (190 x 210mm)	CombiZone: 2.2kW / 3.7kW Boost (190 x 210mm)	FlexZone: 2.2kW / 3.7kW Boost (240 x 200mm)	
	Rear left	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.8kW / 3.1kW Boost (180mm)	FlexZone:	CombiZone:	CombiZone:	FlexZone:	
	Front centre	(200 X 23011111)	(10011111)	(200 x 240IIIII)	(130 X 2 1011111)	(130 x 2 1011111)	(240 X 20011111)	
	Rear centre	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)	Triple circuit zone: 2.2kW, 2.6kW, 3.3kW / 4.4kW, 5.5kW, 3.7kW Boost (210 / 260 / 320mm)					
	Front right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 2.2kW / 3.7kW Boost (210mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.2kW / 3.7kW (210mm)	
	Rear right	FlexZone: 2.2kW / 3.7kW Boost (200 x 230mm)	Standard zone: 1.4kW / 2.2kW Boost (145mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)	
		*Total FlexZone: 3.3kW / 3.7kW Boost (400 x 230mm)		*Total FlexZone: 3.3kW / 3.6kW Boost (400 x 240mm)	*Total CombiZone: 3.6kW (380 x 210mm)	*Total CombiZone: 3.6kW (380 x 210mm)		
Performance	17-stage power setting	•	•	•	•	•	•	
	9-stage power setting							
	PerfectFry Sensor	•	•	•			● (4 levels)	
	PowerBoost	•	•	•	•	•	•	
	ShortBoost	•	•	•				
	FlexZone	•		•			•	
	CombiZone				•	•		
	MoveMode	3 Auto Power Levels		3 Auto Power Levels	2 Auto Power Levels	2 Auto Power Levels		
Convenience	WipeProtection	•	•	•	•	•	•	
	Keep Warm	•	•	•				
	QuickStart	•	•	•	•	•	•	
	ReStart	•	•	•	•	•	•	
	Energy consumption	•	•	•	•	•	•	
	display  Dual function timer with automatic switch-off	•	•	•	•	•	•	
	Automatic pot detection	•	•	•	•	•	•	
	Automatic boil start							
Safety	Child lock	•	•	•	•	•	•	
	2-stage residual heat indicators	•	•	•	•	•	•	
	Residual heat indicator							
	Automatic safety	•	•	•	•	•	•	
Electronic touch-	switch-off DirectSelect Premium DirectSelect 1.0	•	•	•		_	_	
controls	TouchSelect				•	•	•	
	Sword control knobs							
Technical		11.1kW	11.1kW	7.4kW	7.4kW	6.9kW	7.4kW	
requirements	Total connected load  Power requirements	220-240V / 50-60Hz		220-240V / 50-60Hz				
	Minimum worktop	30mm (see space	30mm (see space	30mm (see space	30mm (see space	30mm (see space	30mm (see space	
Optional	thickness Griddle plate	requirements for oven)			requirements for oven)			
accessories	HEZ390522 Teppan Yaki Large							
	(40 x 20cm) HEZ390512 4 piece cookware set	•	•	•	•	•	•	
	HEZ3900042			_	-	_	-	
	Stainless steel roasting pan with lid HEZ390011			•	•	•	•	
	Stainless steel wok HEZ390090	•	•	•	•	•	•	
	PerfectFry Sensor induction pan 21cm	•	•	•			•	
	HEZ390230							

PUE611BB5E	PUJ611BB5E	PKM875DP1A	PKG775DB1A	PKN675DB1A	PKE611BA2A	PKE611CA2A
Series 4	Series 4	Series 8	Series 8	Series 8	Series 4	Series 2
Induction	Induction	Ceramic	Ceramic	Ceramic	Ceramic	Ceramic
60	60	80	70	60	60	60
592 x 522mm	592 x 522mm	816 x 527mm	710 x 527mm	606 x 527mm	592 x 522mm	583 x 513mm
560 x 490-500mm	560 x 490-500mm	780 x 500mm	560-640 x 490-500mm	560 x 500mm	560 x 490-500mm	560 x 490-500mm
Black ceramic	Black ceramic	Black ceramic glass,	(fits cut-out for 60cm) Black ceramic glass,	Black ceramic glass,	Black ceramic	Black ceramic
frameless glass	frameless glass	stainless steel slimline side profile, beveled front and rear	stainless steel slimline side profile, beveled front and rear	stainless steel slimline side profile, beveled front and rear	frameless glass	frameless glass
Ai-alvalia-	O mana in dividing	A nonne includion	4 instruding	A in alludia -	A annual includion	4 in altradian
4 zones including:	3 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:	4 zones including:
Standard zone: 1.8kW / 3.1kW (180mm)		Dual circuit zone: 1.2kW / 2.1kW (145 / 210mm)	Standard zone: 1.2kW (145mm)	Standard zone: 2kW (180mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
Standard zone: 1.8kW / 3.1kW (180mm)	Standard zone: 2.6kW / 3.7kW (280mm)	Standard zone: 1.2kW (145mm)	Dual circuit zone: 0.8kW / 2.0kW (120 / 180mm)	Standard/roaster zone: 1.8kW / 2.6kW (170 / 265mm)	Standard zone: 2.0kW (180mm)	Standard zone: 2.2kW (210mm)
		Dual circuit zone:				
		1.7kW / 2.4kW (180 / 230mm)				
Standard zone: 2.2kW / 3.7kW (210mm)	Standard zone: 2.2kW / 3.7kW (210mm)	Dual circuit/roaster zone: 1kW / 2kW / 3.4kW / 4.6kW (120 / 180 / 270 / 370mm)	Dual circuit zone: 0.75kW / 2.2kW (120 / 210mm)	Dual circuit zone: 1kW / 2.2kW (145 / 210mm)	Standard zone: 2.2kW (210mm)	Standard zone: 2.0kW (180mm)
Standard zone: 1.4kW / 2.2kW (145mm)	Standard zone: 1.4kW / 2.2kW (145mm)		Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)	Standard zone: 1.2kW (145mm)
•	•	•	•	•	•	
						•
•	•	•				
		•	•	•		
		•	•	•		
•	•					
•	•	•	•	•	•	
		•	•	•		
•	•	•	•	•		
•	•					
•	•	•	•	•		
•	•	•	•	•	•	
•	•	•	•	•	•	
•		•	•		•	
						•
•	•	•	•	•	•	
		•	•	•		
•	•				•	
						•
4.6kW	4.6kW	11.2kW	6.6kW	7.5kW	6.6kW	6.6kW
220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz	220-240V / 50-60Hz
16mm (see space	16mm (see space	20mm (see space	20mm (see space	20mm (see space	20mm (see space	20mm (see space
requirements for oven)	requirements for oven)	requirements for oven)	requirements for oven)	requirements for oven)	requirements for oven)	requirements for oven
•	•	•	•	•	•	
•	•	•	•	•	•	•
•	•	•	•	•	•	•

# Reference Guide Gas Cooktops

Model		PRS9A6D70A	РСТ9А5В90А	PCR9A5B90A	PCR7A5B90A	PCI6A5B90A	
		Series 8	Series 6	Series 6	Series 6	Series 6	
Туре		Gas	Gas	Gas	Gas	Gas	
Dimensions	Width (cm)	90	90	90	75	60	
	Appliance dimensions (WxD)	916 x 527mm	915 x 520mm	915 x 520mm	750 x 520mm	582 x 520mm	
	Cut-out dimensions (WxD)	850-852 x 490-502mm	850-852 x 490-502mm	850-852 x 490-502mm	560-562 x 480-492mm	560-562 x 480-492mm	
Design		Black ceramic frameless glass	Stainless Steel	Stainless Steel	Stainless steel	Stainless steel	
Burner /		5 burners including:	6 burners including:	5 burners including:	5 burners including:	4 burners including:	
Zone Output	Front left		Dual flame wok burner 19.5 MJ/h	Economy burner 4 MJ/h	Economy burner 4 MJ/h		
	Centre left	Wok burner 22 MJ/h				Wok burner 15 MJ/h	
	Rear left		Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h		
	Front centre	Standard burner 8.1 MJ/h	Economy burner 4 MJ/h			Economy burner 4 MJ/h	
	Middle centre			Dual flame wok burner 19.5 MJ/h	Dual flame wok burner 19.5 MJ/h		
	Rear centre	Economy burner 4.8 MJ/h	Standard burner 6.85 MJ/h			Standard burner 6.85 MJ/h	
	Front right	Standard burner 8.1 MJ/h	Dual flame wok burner 19.5 MJ/h	Standard burner 6.85 MJ/h	Standard burner 6.85 MJ/h		
	Centre right					High-speed burner 11 MJ/h	
	Rear right	High-speed burner 11.6 MJ/h	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h	High-speed burner 11 MJ/h		
Convenience	FlameSelect valve technology (precise control in 9 steps)	•	•	•	•	•	
	Individual cast-iron trivets with rubber feet						
	3 piece cast-iron trivets with rubber feet	•	•	•	•		
	2 piece cast-iron trivets with rubber feet					•	
	Steel trivets with cast iron finish and rubber feet						
	Steel trivets with rubber feet						
	Enamelled cast-iron burner caps	•	•	•	•	•	
Safety	Flame failure fitted to each burner	•	•	•	•	•	
Controls	Sword knob controls	•	•	•	•	•	
Technical	Total connected load	54.6MJ/h	67.7 MJ/h	48.2 MJ/h	48.2 MJ/h	36.85 MJ/h	
requirements	Power requirements	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	240V / 50Hz	
	Minimum worktop thickness	30mm	30mm	30mm	30mm	30mm	
Supplied	Wok ring support	•	•	•	•	•	
accessories	Espresso cross support	•	•	•	•	•	
	LPG conversion kit	•	•	•	•	•	
Optional <sub>.</sub>	4 piece cookware set HEZ390042	•	•	•	•	•	
accessories	Stainless steel wok HEZ390090	•	•	•	•	•	
Other	Suitable for NG or LPG	•	•	•	•	•	







PBH6B5B90A	PBH6B5B80A
Series 2	Series 2
Gas	Gas
60	60
580 x 510mm	580 x 510mm
560 x 480-490mm	560 x 480-490mm
Stainless steel	Stainless steel
4 burners including:	4 burners including:
Wok burner 15 MJ/h	Wok burner 13 MJ/h
Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h
Economy burner 4 MJ/h	Economy burner 4 MJ/h
Standard burner 6.5 MJ/h	Standard burner 6.5 MJ/h
•	
	•
•	•
•	•
•	•
32 MJ/h	32 MJ/h
240V / 50Hz	240V / 50Hz
30mm	30mm
•	•
•	•
•	•
•	•
•	-

# Reference Guide Rangehoods


Model		DWB91PR50A Series 8	DWB97LM50A Series 6	DWB96BC50A Series 2	DWP96BC50A Series 2	DWP66BC50A Series 2	DWB65BC50A Series 2	DHL895DAU Series 8
Туре		Canopy	Canopy	Canopy	Canopy	Canopy	Canopy	Integrated
Dimensions	Width (cm)	90	90	90	90	60	60	86
	Appliance dimensions (HxWxD)	614-954 x 898 x 500mm (ducted) or 614-1064 x 898 x 500mm (recirculating)	614–954 x 898 x 500mm (ducted) or 614–1064 x 898 x 500mm (recirculating)	635–965 x 900 x 500mm (ducted) or 635–1075 x 900 x 500mm (recirculating)	799–975 x 900 x 500mm (ducted or recirculating)	799–975 x 600 x 500mm (ducted or recirculating)	450–830 x 598 x 500mm (ducted) or 550–830 x 598 x 500mm (recirculating)	418 x 860 x 282mm
	Built-in Dimensions (HxWxD)							418 x 836 x 264mm
Design		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
	TouchControls	•	•					
	Lightline	•						
	LED-display On/Off main switch	•	•	•	•	•	•	•
	control Electronic controls for	•	•					
	power and light  Push button controls for			•	•	•	•	•
	power and light  Slide controls for power and light							
	Rocker switches for power and light							
	Concealed power and light controls							
	Lighting	3 x 1.5W LED SoftLights with	3 x 1.5W LED lights	2 x 1.5W LED lights	2 x 1.5W LED lights	2 x 1.5W LED lights	2 x 3W LED lights	2 x 1W LED lights with dimmer
Home		dimmer function  •						function
Connect	Maniana antonation anto	0043/6	CO73/b	C103/L	COC3/L	F073/h	5003/b	0003/1-
Power functions	Maximum extraction rate 3 power levels plus 2 intensive settings	964m³/h ●	697m³/h	619m³/h	626m³/h	597m³/h	580m³/h	800m³/h
	3 power levels plus 1 intensive setting		•					•
	3 power levels			•	•	•	•	
	Intensive setting with automatic switch back to previous setting 6 min	•	•					•
	Residual shutdown with automatic run-on time 1–10 min	•						● (30 mins)
	Rim ventilation system	-						•
	EcoSilence Drive brushless motor	•	•		_			•
	Powerful single motor with twin fan			•	•	•	•	
	Powerful twin motor							
	Powerful single motor	45 10 / 04 10	45 10 / 55 10	40 10 / 70 10	54 ID / 00 ID	40 ID (00 ID	40 ID / 60 ID	44 10 / 04 10
Noise*	Noise min. / max. Noise max.	45dB / 64dB 73dB	45dB / 55dB 66dB	49dB / 70dB	51dB / 69dB	49dB / 69dB	48dB / 69dB	41dB / 64dB 70dB
	(intensive setting) Sound insulation mats	•	•					
Convenience	PerfectAir sensor	•						
	Cooktop-based hood control ready	•						
	Dual layer metal grease filters	•	•					•
	Dishwasher-safe metal grease filter	• (3)	• (3)	• (3)	• (3)	● (2)	● (2)	• (2)
	Saturation indicator for filters	•						•
	Back-pressure flap (one-way)	•	•	•	•	•	•	
Technical requirements	Total connected load	265W	145W	220W	220W	220W	216W	172W
requirements	Power requirements  Ducting connection	220-240V / 50Hz 120 and 150mm	220-240V / 50Hz 120 and 150mm	220-240V / 50Hz 120 and 150mm	220-240V / 50-60Hz 120 and 150mm	220-240V / 50-60Hz 120 and 150mm	220-240V / 50Hz 120 and 150mm	220-240V / 50Hz 120 and 150mm
Included accessories	diameter							
Required accessory								
Optional	Recirculation kit	DWZ2CB1I4	DWZ2CB1I4	DWZ1DX1I4	DHZ5275	DHZ5275	DHZ5325	DHZ5605
accessory	Charcoal filter for recirculation							
	Chimney extension kits							
	Installation kit for 90cm cupboard			_	_		_	
Other	Ducted and recirculated air operation	•	•	•	•	•	•	•


DHL785BAU Series 6	DHL575CAU Series 6	DHL555BAU Series 4	DLN54AA70A Series 2	DBB97AM60A Series 6	DBB67AM60A Series 6	DFS097A51A Series 4	DFS067A51A Series 4	DFM064W54A Series 2
Integrated	Integrated	Integrated	Integrated	Integrated GlassVisor	Integrated GlassVisor	Slideout	Slideout	Slideout
70	52	53	53	90	60	90	60	60
418 x 700 x 282mm	418 x 520 x 300mm	255 x 530 x 380mm	208 x 534 x 300mm	340 x 897 x 298mm	340 x 597 x 298mm	426 x 898 x 290mm	426 x 598 x 290mm	203 x 598 x 290mn
418 x 676 x 264mm	418 x 496 x 264mm	255 x 500 x 350mm	208 x 493 x 257mm	340 x 860 x 300mm	340 x 560 x 300mm	385 x 524 x 290mm	385 x 524 x 290mm	162 x 526 x 290mn
Stainless steel	Stainless steel	Steel body with	Stainless Steel	Lacquered	Lacquered	Silver metallic	Silver metallic	Silver metallic
		metallic finish		black finish	black finish			
				•	•			
				•	•	•	•	
•	•			•	•	•	•	
•	•			•	•			
						•	•	
		•	•					
								•
				•	•	•	•	•
2 x 1W I FD lights	2 x 1W LED lights	2 x 2W I FD lights	2 x 3W LED lights	3 x 2W LED lights	2 x 2W LED lights	3 x 1 5W I FD lights	2 x 1.5W LED lights	2 x 1 5W I FD lights
2 / 111 223 48.113	Z X TT ELD UGINO	2 / 2 / 1 2 2 3 3 3 3 3	2 x 0 11 22 0 0 0 0	0 X 2 11 2 2 2 4 6 11 6	2 × 2 11 2 2 3 3 11 5	0 X 1.011 EED ag.100	2 x 1.5 11 225 48.165	2 / 1.011 225 48.160
730m³/h	610m³/h	650m³/h	420m³/h	749m³/h	749m³/h	729m³/h	728m³/h	389m³/h
	,	,	,,				,.	
•	•	•		•	•	•	•	
			_					_
•	•		•	•	•	•	•	•
	•			•	•	•	•	
						• (10 mins)	• (10 mins)	
•	•					_	_	
						•	•	
•	•			•	•			
		•						
			•					•
53dB / 66dB 69dB	50dB / 67dB 70dB	41dB / 59dB 69dB	55dB / 67dB	50dB / 63dB 73dB	50dB / 63dB 73dB	41dB / 53dB 69dB	41dB / 53dB 68dB	59dB / 67dB
•	•	•						
	- 45)		- 40	- (-)	- (-)	- 4-1	- (-)	- (-)
• (2)	• (2)	• (2)	• (1)	• (2)	• (2)	• (3)	• (2)	• (2)
			•					
315W	252W	240W	121W	259W	259W	146W	144W	108W
220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz	220-240V / 50Hz		220-240V / 50/60Hz	
120 and 150mm	120 and 150mm	120 and 150mm	120mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm	120 and 150mm
				CleanAir Module	CleanAir Module	CleanAir Module	CleanAir Module	
				(recirculation mode)	(recirculation mode)	(recirculation mode)	(recirculation mode)	
DHZ5605	DHZ5605		DWZ0IN0T0	DWZ6IB1I4	DWZ6IB1I4	DWZ2IT1I4	DWZ2IT1I4	DWZ1IT1I4
		DHZ7305						
				DWZ1IB6K1 (450-854mm)	DWZ1IB6K1 (450-854mm)			
				DWZ11B6N1 (187-360mm)	DWZ1IB6N1 (187-360mm)	DSZ4920		
	•	•					•	•
•	•	•	•			•	•	•

 $<sup>^{\</sup>star}$ The dB(A) value plus approx. 10–14 units is equivalent to a dB(A) re1pW value.  $^{\diamond}$ Please ask your retailer at point of purchase.

# Rangehood extraction options

There are two ways to clean the air in your kitchen: ducting or recirculation. Both methods remove odours effectively. Choose the best extraction option for your kitchen:

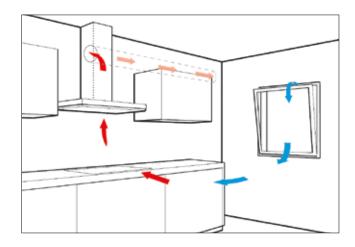



#### **Ducted extraction**



Ducting is the most effective way to clear the air in your kitchen.



A ducted rangehood directs air from the kitchen to the outside through a metal duct.



The rangehood needs to be situated on or close to an outside wall, so the outside can be reached via ducting.

## Recirculation kit



Odours are extracted and filtered through a carbon filter, then purified air is returned to the room.



Can be installed anywhere – without the need to install a duct pipe through the wall or ceiling.



To maintain performance, the carbon filter needs to be replaced on a regular basis.



# Calculate the extraction power you need

When choosing a rangehood, always match its air extraction power to the size of your kitchen. An effective rangehood should be able to replace the air in your kitchen up to 12 times per hour.




# Accessories


Look online at www.bosch-home.com.au/store to purchase Bosch accessories and spare parts:

Oven and Cooker Accessories			Lid for Professional pan	HEZ633001
	Wire rack for universal pan Fits into the universal pan for all grilling applications. Universal pan and wire rack can be removed together. To suit all Bosch Series 8 60cm ovens.	HEZ324000	To suit Bosch Series 8 60cm ovens.	
	Pizza stone Pizza baking stone with wooden bread paddle. Baking stone is pyrolytic proof. To suit all Bosch 60cm ovens.	HEZ327000	Professional pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens.	HEZ633073
	Stainless steel roasting pan Stainless steel roasting pan with glass lid, induction suitable. To suit all Bosch 60cm ovens.	HEZ390011	Wire rack (standard) To suit all Bosch Series 8 60cm ovens.	HEZ634000
	Split grill tray, enamelled - pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens.	HEZ625071	<b>Glass pan</b> To suit all Bosch Series 8 60cm ovens and 60cm combination steam and microwave ovens.	HEZ636000
	Enamelled baking tray – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens.	HEZ631070	2-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens.	HEZ638270
	Universal pan, enamelled – pyrolytic proof To suit Bosch Series 8 60cm ovens, 60cm combination steam and microwave ovens.	HEZ632070	3-level telescopic rails, full extension – pyrolytic proof To suit Bosch Series 8 60cm ovens.	HEZ638370
	Universal pan with ceramic non-stick coating To suit all Bosch Series 6 and 4 60cm ovens.	HEZ532010	ClipRail telescopic rails To suit all Bosch Series 6 and 4 60cm ovens.	HEZ538000
	Baking tray with ceramic non-stick coating To suit all Bosch Series 6 and 4 60cm ovens.	HEZ531010	<b>2-level telescopic extension rails</b> To suit all Bosch Series 6 and 4 60cm ovens.	HEZ538200
	Half trays (slimline universal pan) Slim sized trays are perfect when cooking smaller quantities of food. To suit all Bosch Series 6 and 4 60cm ovens. Consists of 2 parts and fits perfectly in Bosch dishwashers	HEZ530000	Wire rack (microwave) To suit Bosch Series 8 60cm microwave ovens.	HEZ634080
	and Bosch integrated fridges.		Heat resistant and dishwasher safe glass dish To suit Bosch Series 8 60cm ovens.	HEZ864000


Cooktop Accessories			Rangehood Accessories		
COOKID ACCESSIVES	Griddle plate  For use on two combined cooking zones. Evens heat to perfectly grill your favourite meats, fish or vegetables.  To suit Bosch FlexInduction	HEZ390522		Recirculation kit For Bosch DFM064W50A.	DWZ1IT1I4
	and Combilnduction cooktops PXV975DV1E, PXE875DC1E, PXE651FC1E, PVS875FB5E, PVS675FB5E. Teppan Yaki (Large)	HEZ390512	<b>M</b> 3	Recirculation kit For Bosch DWB65BC50A.	DHZ5325
	Enjoy induction the Japanese way! Try beef, prawns, scallops, lobster, chicken and chopped vegetables. Also great for steamers and available in 40 x 20cm size.  To suit Bosch FlexInduction and Combilinduction cooktops PXV975DV1E, PXE875DC1E,	1122030012		Recirculation kit For Bosch DWB91PR50A, DWB97LM50A.	DWZ2CB1I4
d has	PVS875FB5E, PVS675FB5E.  Stainless steel roasting pan (optional with steamer inset) Cook large dishes without hot spots for results you'll be delighted with. A high performance roasting pan	HEZ390011	00	Recirculation kit For Bosch DWP66BC50A, DWP96BC50A.	DHZ5275
	that no induction kitchen should be without. For use on two combined cooking zones.  To suit all Bosch 60cm ovens.  PerfectFry sensor induction pan 21cm  To suit Bosch PerfectFry	HEZ390230		Recirculation kit Consisting of 2 charcoal filters, charcoal filter support, deflector, flexible hose 150mm and 1500mm long, 2 clamps and mounting material. To suit DHL895DAU, DHL785BAU, DHL575CAU.	DHZ5605
	sensor induction cooktops PXV975DV1E, PXE875DC1E, PXE651FC1E, PIV995DC1E, PIV975DC1E. 28cm ProInduction nonstick pan	HEZ9FE280	Recirculation kit For Bosch DWB96BC50A.	DWZ1DX1I4	
	Suitable for all electric cooktops, including induction. Ideal for the preparation of meat and roasted potato dishes.			Recirculation kit For Bosch DLN54AA70A.	DWZ0IN0T0
	4 Piece Cookware Set 4 piece induction cookware set consisting of 2 pots, 1 casserole and 1 fry pan.	HEZ390042			
	6 Piece ProInduction Cookware Set	HEZ9SE060		Charcoal filter For Bosch DHL555BAU.	DHZ7305
	Electric and induction cooktop cookware consisting of 4 pots and 2 fry pans.			Stainless steel pelmet for vario control Fits Bosch DFS097E50A.	DSZ4965
	Stainless steel wok Stainless steel wok for induction and ceramic cooktops. Includes glass lid and draining grid.	HEZ390090		Mounting kit for 90cm cupboard Fits Bosch DFS097A50A, DFS097E50A.	DSZ4920


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

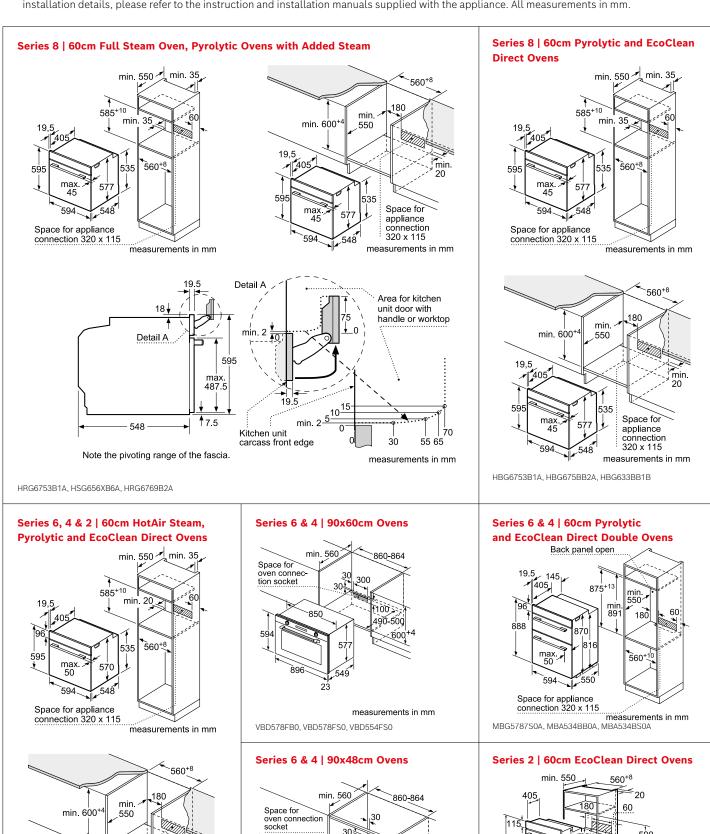




HRA574FB0A, HBT578FS2A, HBA574BS0A, HBA534FS0A





All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

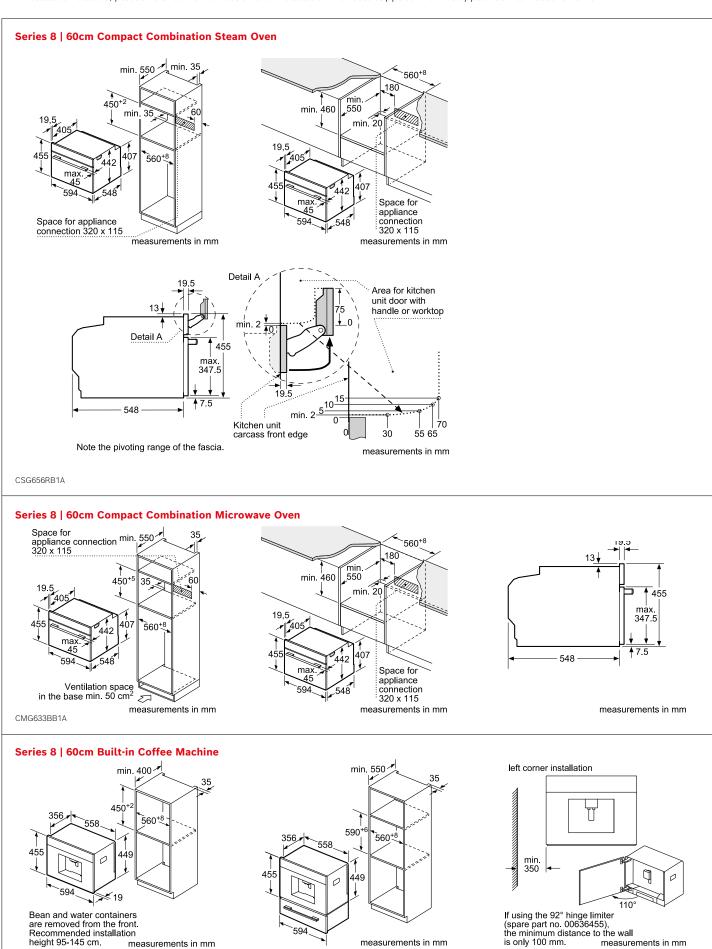



measurements in mm


measurements in mm


measurements in mm

CTI 636FB6

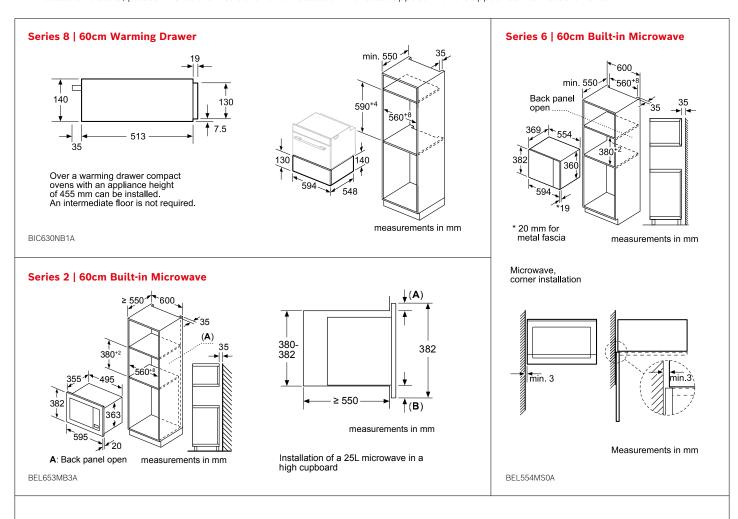

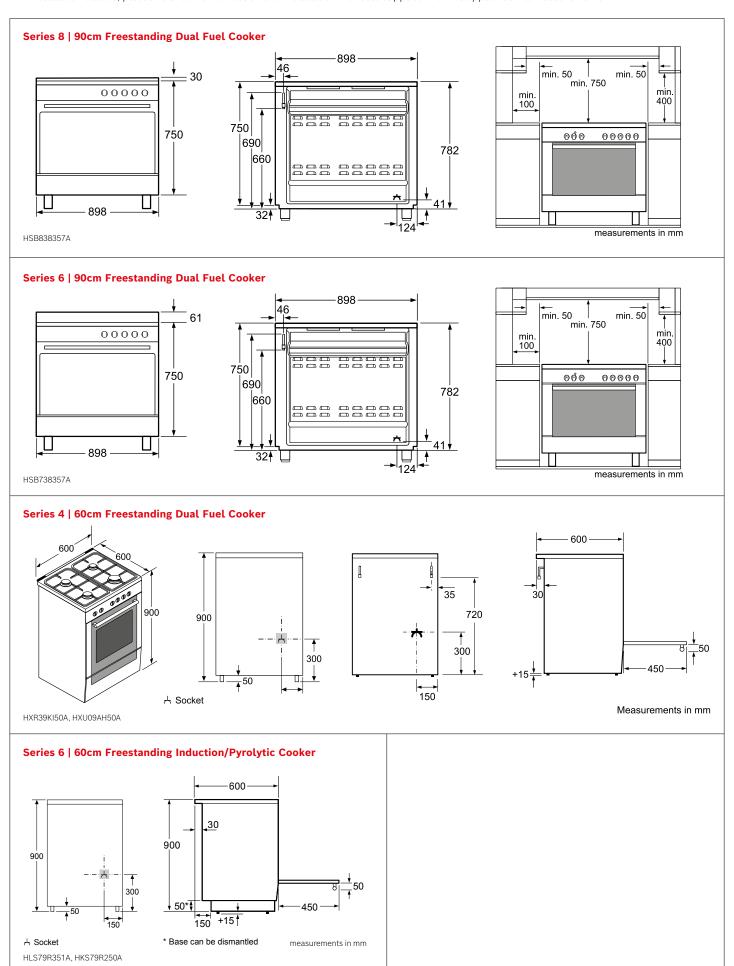

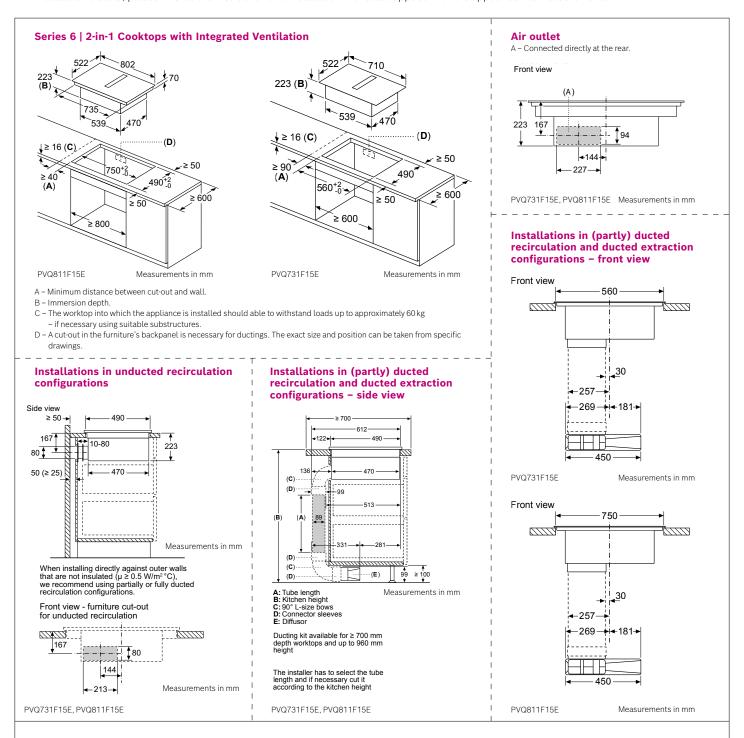

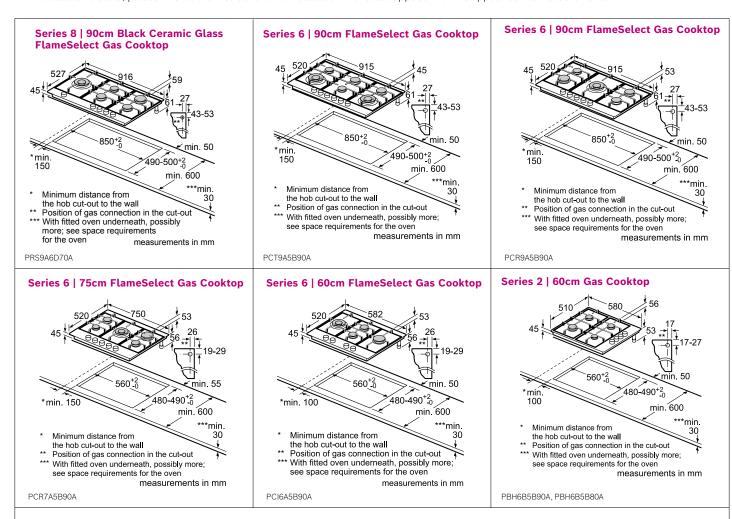


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.


#### Important note: **Cookware for Induction Cooktops**

Induction heating relies on creating a controlled electromagnetic field which requires magnetic-based cookware. This includes stainless steel cookware with a magnetic base, enamelled steel or cast-iron. Glass, aluminium, copper or ceran pots are not suitable for use. If you are unsure, hold a magnet to the base of the cookware. If it attracts and holds, then the cookware is most probably suitable.


## Series 8 | 90cm FlexInduction Cooktop




#### **Installation Requirements for Induction Cooktops Only**




Measurements in mm



be present All measurements in mm




For 80cm and 60cm Induction cooktops



For 90cm Induction cooktops

# Series 8 | 80cm FlexInduction Cooktop




PXE875DC1E

PXE651FC1E


PXV975DV1E

# Series 8 | 90cm Induction Cooktops




PIV975DC1E

# Series 6 | 80cm Combilnduction Cooktop




PVS875FB5E

#### Series 6 | 60cm FlexInduction Cooktop



measurements in mm


#### Series 6 | 60cm Combilnduction Cooktop



measurements in mm

PVS675FB5E

#### Series 4 | 60cm Induction Cooktop




possibly more; see space requirements for the oven measurements in mm

PUE611BB5E, PUJ611BB5E

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

# Series 8 | 80cm Ceramic Cooktop min 50 \*min. 90 min. min. 600 Minimum distance from the hob cut-out to the wall Recessed depth With fitted oven underneath possibly more; see space requirements for the oven measurements in mm


# Series 8 | 70cm Ceramic Cooktop



# Series 8 | 60cm Ceramic Cooktop min 50 560+2 500+2 \*min. 90 min. min. 600 Minimum distance from the hob cut-out to the wall Recessed depth With fitted oven underneath, possibly more; see space requirements for the oven measurements in mm

PKN675DB1A

#### Series 4 | 60cm Ceramic Cooktop




- A: Minimum distance from the hob cut-out to the wall.
   B: Recessed depth
- C: With fitted oven underneath min. 20, possibly more; see space requirements for the oven.

PKE611BA2A

PKM875DP1A

measurements in mm

#### Series 2 | 60cm Ceramic Cooktop




- A: Minimum distance from the hob cut-out
- to the wall. Recessed depth
- With fitted oven underneath min. 20. ossibly more; see space requirements for the oven.

PKF611CA2A

PKG775DB1A


measurements in mm


# Series 6 | 90cm Wall-Mounted Canopy Rangehood



exhaust air slot facing downwards

dia. 150 438 max. 20 measurements in mm







\*Circulated air dimensions do not apply to CleanAir recirculation kit


DWB91PR50A


measurements in mm

#### Series 4 | 90cm Wall-Mounted Canopy Rangehood










\*Circulated air dimensions do not apply to CleanAir recirculation kit

DWB97LM50A

measurements in mm


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

#### Series 2 | 60cm Wall-Mounted Canopy Rangehood




- A: Exhaust air B: Circulated air C: Air outlet slots for exhaust air to be mounted facing down

DWB65BC50A




If a back panel is used, the design of the appliance must be considered.




A: from upper edge of pan support B: Socket

measurements in mm


# Series 4 | 90cm Wall-Mounted Canopy Rangehood




DFS097A51A




If a back panel is used, the design of the appliance must be considered.




# Series 2 | 90cm Wall-Mounted Canopy Rangehood



DFS067A51A



If a back panel is used, the design of the appliance must be considered.




**A:** Socket **B:** Exhaust air: ≥ 280; circulated air: ≥ 490

C: electric

D: Gas, from upper edge of pan support


measurements in mm

# Series 2 | 60cm Wall-Mounted Canopy Rangehood



319 246 20 -

If a back panel is used, the design of the appliance must be considered.




**A:** Socket **B:** Exhaust air: ≥ 280; circulated air: ≥ 490

C: electric
D: Gas, from upper edge of pan support

measurements in mm


All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

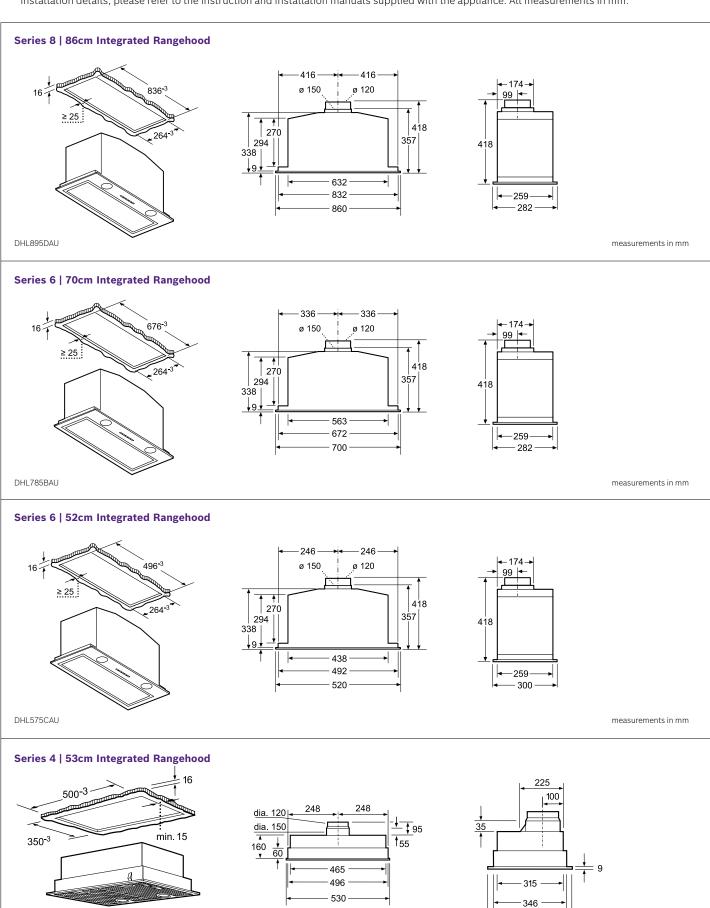


DHL555BAU measurements in mm


380

All descriptions and technical diagrams are intended as a guide only. For additional technical information, full dimensional and installation details, please refer to the instruction and installation manuals supplied with the appliance. All measurements in mm.

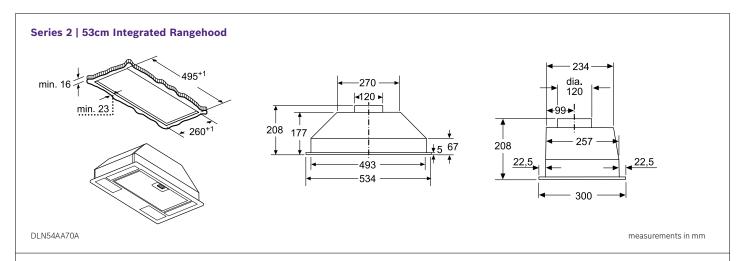









measurements in mm


Series 6 | 60cm Integrated GlassVisor Rangehood





measurements in mm

DBB67AM60A

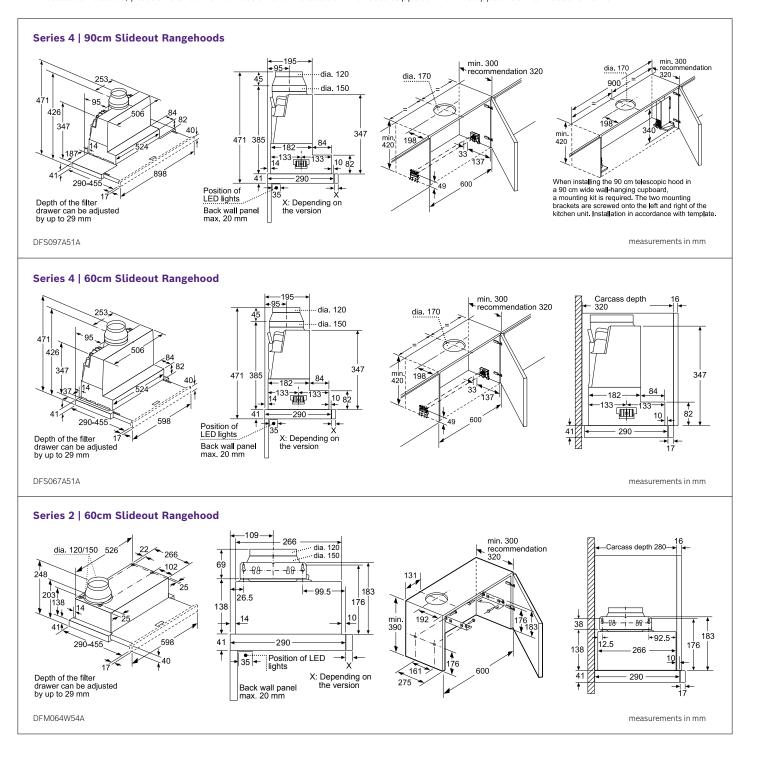

# This much is for sure: you can trust our service.

Reliable, experienced, fast. The customer service of Bosch - before and after purchase.

## Quality service straight from the manufacturer. Original Bosch.

We are committed to quality even when it comes to after-sales service because no one knows Bosch appliances better than our highly trained service engineers. Working with the latest equipment for measuring, diagnostics and repairs, Bosch service engineers only use original Bosch spare parts.

#### Reliability guaranteed. No compromises.

All Bosch home appliances are produced with maximum care using high-quality materials. We promise it in our two year manufacturer's warranty on all appliances.

# Original accessories. Effective care products.

Take a look at our extensive range of accessories for some inspiration: discover additional uses, replace old materials for optimum operation or simply give a trusty home appliance a good work-over. With the right care, you will be able to enjoy your high-quality appliance for many years to come. To help you do so, we offer a wide range of Bosch certified cleaning and care products.

## Extensive customer service network. Just a call away.

#### **Customer Care**

Our friendly Bosch Customer Care team is on-hand to provide competent, reliable assistance. Before or after purchase, the Bosch team will be happy to advise you on products, their use and special functions.

#### Service & Repairs

Our team is there to provide the right advice on faults, arranging a visit of a service engineer and ordering the right accessories or spare parts.

#### Customer care, service and repairs: 1300 369 744

24 hour phone support Monday to Friday.\*

\*Phone lines open 7am Monday until midnight on Friday.







@BoschHomeAU





# **BSH Home Appliances Pty Ltd**

1555 Centre Road Clayton VIC 3168

#### **Postal Address**

Locked Bag 66, Clayton South VIC 3169

**Customer Line** Phone: 1300 369 744

www.bosch-home.com.au

Certain appliances shown in this catalogue are not available in your country. Model numbers and specifications are for reference only and subject to change without  $% \left( 1\right) =\left( 1\right) \left( 1\right) \left$  $prior\ notice.\ Please\ contact\ your\ local\ Bosch\ retailer\ for\ the\ latest\ information.$ 

Whilst every care has been taken in the preparation of this publication,  $\ensuremath{\mathsf{BSH}}$  does not warrant the accuracy or completeness of the information in this publication and BSH reserves the right to alter specifications without notice. To the extent permitted by law, BSH excludes all liability, including negligence, for any loss incurred in reliance on the contents of this publication.

Printed in Australia. KRD 03/2023 - BH 6011 B





