

Delfield®

GURP-D

Undercounter/Worktable

Coolscares™ Undercounter/Worktable refrigerator with drawers

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Models

- GUR24P-D Undercounter/Worktable Refrigerator, 24" L x 31.5" D x 36" H, Drawers
- GUR27P-D Undercounter/Worktable Refrigerator, 27" L x 31.5" D x 36" H, Drawers
- GUR32P-D Undercounter/Worktable Refrigerator, 32" L x 31.5" D x 36" H, Drawers
- GUR48P-D Undercounter/Worktable Refrigerator, 48" L x 31.5" D x 36" H, Drawers
- GUR60P-D Undercounter/Worktable Refrigerator, 60" L x 31.5" D x 36" H, Drawers
- GUR72P-D Undercounter/Worktable Refrigerator, 72" L x 31.5" D x 36" H, Drawers



GUR60P-D

Standard Features

- Durable, rugged stainless steel top and front
- Environmentally friendly R290 refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Integral door/drawer handle
- 5" (two locking, two non-locking) casters shipped loose for field installation
- 8" cord and plug supplied
- Electronic temperature control
- Energy-efficient drawer gasket removable without tools
- Adapter bars - 4 per drawer
- Three year parts and labor warranty and an additional two year compressor parts warranty
- 10 year warranty on drawer track parts
- 100% front breathing-clearance not required on top/sides
- Cutting boards (composite or poly)
- 18" wide single or double tier overshef

Options & Accessories

- Stainless steel finish on back
- Laminate
- Exterior thermometer
- Lower height casters
- 6" black legs
- 6" flanged feet
- Stacking collar on single sections
- 18-gauge heavy duty top
- Condenser filter
- Stainless steel door
- Stainless steel ends
- On/Off master switch
- Glass doors

Specifications

Exterior top is one-piece, stainless steel with integral 2.12" (5.4cm) square nosing on the front.

Exterior back and bottom is galvanized steel. Exterior ends are mill finish aluminum.

Interior sides are gray coated aluminum. Interior bottoms are anodized aluminum. Base is fully insulated with high-density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

Refrigeration system uses R290 refrigerant. Compressor is 1/5 H.P., with condenser coil and hot gas condensate evaporator mounted on rear of the cabinet. Evaporator coil is located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a capillary tube. Cabinet maintains an interior cabinet temperature of 33°F to 40°F (2°C to 4°C).

System is controlled using an electronic temperature control which provides improved pull-down times,

reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy-efficient hot gas system.

Digital exterior temperature display is located on the back of the cabinet.

Electrical connection is 115 volt, 60 Hertz, single phase. Unit has a 8' (2.4m) long electrical cord and NEMA 5-15P plug.

Casters: 5" (13cm) diameter plate casters shipped loose with front two locking. Equipment clearance above the floor is 6.2" (15.7cm).

Drawers have stainless steel exterior with thermoformed ABS plastic interior liner. Drawer frames are stainless steel. Drawer slides are stainless steel with Delrin bearings. Pans are supplied by others.



*Some exceptions









GURP-D Undercounter/Worktable

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948
Fax: 800-669-0619





WWW.delfield.com
6143B_DEL_GURP-D
01/23

Delfield®




GUR24P-D, GUR27P-D, GUR32P-D

GUR48P-D, GUR60P-D



GUR72P-D

Drawer configurations.

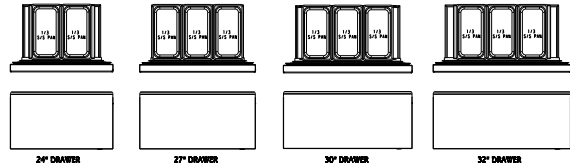

UNIT DIMENSIONS					
UNIT	LENGTH	DEPTH	2"	3"	5"
			CASTER HEIGHT	CASTER HEIGHT	CASTER HEIGHT
			Optional		Standard
24	24"	31.59"	32"	34"	36"
27	27"	31.59"	32"	34"	36"
32	32"	31.59"	32"	34"	36"
48	48"	31.59"	32"	34"	36"
60	60"	31.59"	32"	34"	36"
72	72"	31.59"	32"	34"	36"

Specifications									
Model	1/6 size pans 6" deep	HP	V	Hz	A	Nema Plug	Vol (ft3)	Energy kWh	Ship Weight
GUR24P-D	8	0.2	115	60	3.2	5-15p	4.1	.73	162 lbs. (73kg)
GUR27P-D	12	0.2	115	60	3.2	5-15p	4.8	1.1228*	168 lbs. (76kg)
GUR32P-D	12	0.2	115	60	3.2	5-15p	5.8	.76	185 lbs. (84kg)
GUR48P-D	16	0.2	115	60	3.2	5-15p	9.2	.85	252 lbs. (114kg)
GUR60P-D	24	0.2	115	60	3.2	5-15p	11.7	1.8239*	284 lbs. (129kg)
GUR72P-D	24	0.2	115	60	3.2	5-15p	14.2	1.21	330 lbs. (150kg)

Welbilt reserves the right to make changes to the design or specifications without prior notice.