

Report Number: 22025 DLS Project: 8277

Code of Federal Regulations 47 Part 15 – Radio Frequency Devices

Subpart F – Ultra-Wideband Operation Section 15.519 Technical Requirements for hand held UWB systems

Class II Permissive Change (Antenna Change)

THE FOLLOWING MEETS THE ABOVE TEST SPECIFICATION

Formal Name: Ultra-Wide-Band WUSB host dongle

Kind of Equipment: Transceiver

FCC ID Number: YYJ-5390144

Frequency Range: 3168 - 4752 MHz, 6336 – 7920 MHz

Test Configuration: Hand-held transceiver tested table-top in worst case configuration of three

orthogonal planes.

Model Number(s): 5390144-3 Rev.1, Rev.2, Rev.3, Rev.4, Rev.5, Rev.6

Model(s) Tested: 5390144-3 Rev. 2

Serial Number(s): 11V07067

Date of Tests: July 19 - 20, 2016

Test Conducted For: GE Healthcare

9900 W Innovation Drive Wauwatosa, WI 53226

NOTICE: "This test report relates only to the items tested and must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Description of Test Sample" page listed inside of this report.

© Copyright 1983 - 2016 D.L.S. Electronic Systems, Inc. - FCC Registration #90531

COPYRIGHT NOTICE

This report must not be reproduced (except in full), without the approval of D.L.S. Electronic Systems, Inc.



Report Number: 22025 DLS Project: 8277

SIGNATURE PAGE

Tested By:

Craig Brandt

Senior Test Engineer

Craig Brandt

Reviewed By:

William Stumpf OATS Manager

Approved By:

Brian Mattson
General Manager



Company: GE He Model Tested: 539014 Report Number: 22025

GE Healthcare 5390144-3 Rev. 2

8277

Table of Contents

DLS Project:

i.	Cover Page	1
ii.	Signature Page	2
iii.	Table of Contents	3
iv.	NVLAP Certificate of Accreditation	4
1.0	Summary of Test Report	5
2.0	Introduction	5
3.0	Test Facilities	5
4.0	Description of Test Sample	6
5.0	Test Equipment	7
6.0	Test Arrangements	8
7.0	Test Conditions	8
8.0	Modifications Made To EUT For Compliance	8
9.0	Additional Descriptions	9
10.0	Results	10
11.0	Conclusion	10
Apper	endix A – Test Photos	11
Apper	endix B – Measurement Data	18
1.0	Fundamental Emission Bandwidth – 10 dB	18
2.0	Radiated Spurious Emissions below 960 MHz	25
3.0	Radiated Spurious Emissions above 960 MHz	26
4.0	Radiated Fundamental Emissions in band 3100 to 10600 MHz	34
5.0	Radiated Spurious Emissions in GPS Band	37
Apper	endix C - Measurement Uncertainty	40



Report Number: 22025 DLS Project: 8277

United States Department of Commerce National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.

Wheeling, IL

is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:

Electromagnetic Compatibility & Telecommunications

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.

This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).

2015-09-25 through 2016-09-30

Effective Dates



For the National Voluntary Laboratory Accreditation Program

ELECTROMAGNETIC COMPATIBILITY & TELECOMMUNICATIONS

NVLAP LAB CODE 100276-0

Emissions

Designation

Description

Off-site test location

D.L.S. Electronics performs radiated emissions testing at an additional location, 166 South Carter Street, Genoa City, WI 53128.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

1.0 Summary of Test Report

It was determined that the GE Healthcare Ultra-Wide-Band WUSB host dongle, Model 5390144-3 Rev. 2, complies with the requirements of CFR 47 Part 15 Subpart F Section 15.519.

Subpart F Applicable Technical Requirements Tested:

Section	Description	Procedure	Note	Compliant?
15.519 (b) Fundamental Emission Bandwidth – 10dB		ANSI C63.10:2013	1	Yes
15.519 (c) / Radiated Spurious Emissions below 960 MHz		ANSI C63.10:2013	1	Yes
15.519 (c)	Radiated / RF Conducted Spurious Emissions above 960 MHz	ANSI C63.10:2013	1	Yes
15.519 (c) & (e)	Radiated Fundamental Emissions in band 3100 to 10600 MHz	ANSI C63.10:2013	1	Yes
15.519 (d)	Radiated Spurious Emissions in GPS band	ANSI C63.10:2013	1	Yes

Note 1: Radiated emission measurement tested in 3 orthogonal planes.

2.0 Introduction

On July 19 - 20, 2016 the Ultra-Wide-Band WUSB host dongle, Model 5390144-3 Rev. 2, as provided from GE Healthcare was tested to the requirements of CFR 47 Part 15 Subpart C Section 15.519. To meet these requirements, the procedures contained within this report were performed by personnel of D.L.S Electronic Systems, Inc.

3.0 Test Facilities

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at http://www.dlsemc.com/certificate. Our facilities are registered with the FCC, Industry Canada, and VCCI.

Wisconsin Test Facility:

D.L.S. Electronic Systems, Inc. 166 S. Carter Street Genoa City, Wisconsin 53128

Wheeling Test Facility:

D.L.S. Electronic Systems, Inc. 1250 Peterson Drive Wheeling, IL 60090

FCC Registration #90531



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

4.0 Description of Test Sample

Description:

The sample under test is a wireless transceiver module working with Ultra-Wide-Band (UWB) technologies. It is used in X-ray systems for transferring images.

Type of Equipment / Frequency Range:

Handheld / MHz

Band	Band ID	Lower	Center	Upper
Group	Danu ID	Frequency	Frequency	Frequency
	1	3168	3432	3696
1	2	3696	3960	4224
	3	4224	4488	4752
	7	6336	6600	6864
3	8	6864	7128	7392
	9	7392	7656	7920

Physical Dimensions of Equipment Under Test:

Length: 5 in. x Width: 2 in. x Height: 1 in.

Power Source:

USB powered (5 VDC)

Internal Frequencies:

12 MHz

Type of Modulation(s) / Antenna Type:

Multiband OFDM with QPSK, Dual Carrier Modulation, Modified DCM / External UWB Antenna: Ethertronics Part No. 1003656, 3.1 to 10.6 GHz, Peak Gain: 3.1 dBi

Description of Circuit Board(s) / Part Number:

UWB WUSB host dongle	5390144-3, Rev.1			
UWB WUSB host dongle	5390144-3, Rev.2			
UWB WUSB host dongle	5390144-3, Rev.3			
UWB WUSB host dongle	5390144-3, Rev.4			
UWB WUSB host dongle	5390144-3, Rev.5			
UWB WUSB host dongle	5390144-3, Rev.6			



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

5.0 Test Equipment

A list of the equipment used can be found in the table below. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.

D.L.S. Wisconsin -Site 2 / G1

Description	Manufacturer	Model	Serial	Frequency Range	Cal	Cal Due
•		Number	Number	1 7 8	Dates	Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	6-23-16	6-23-17
Preamplifier	Rohde & Schwarz	TS-PR10	032001/003	9 kHz – 1 GHz	12-3-15	12-3-16
Antenna	EMCO	3104C	9810-4849	20 MHz – 200 MHz	5-31-16	5-31-18
Antenna	Electro-Metrics	LPA-25	1114	200 MHz – 1 GHz	8-21-15	8-21-17
Test Software	Rohde & Schwarz	ESK-1	V1.7.1	N/A	N/A	N/A
Preamp	Ciao	CA118-4010	101	1GHz-18GHz	1-20-16	1-20-17
Horn Antenna	EMCO	3115	9502-4451	1-18GHz	6-1-15	6-1-17
Signal Generator	Rhode & Schwarz	SMR40	100092	1-40 GHz	6-23-16	6-23-17
Horn Antenna	EMCO	3115	9903-5731	1-18GHz	9-24-15	9-24-17
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	6-23-16	6-23-17
Preamp	Miteq	AMF-7D- 01001800-22- 10P	17779900	1GHz-18GHz	1-22-16	1-22-17
Preamp	Miteq	AMF-8B- 180265-40-	438727	18GHz-26GHz	6-6-16	6-6-17
Horn Antenna	EMCO	3116	2549	18 – 40GHz	9-2-14	9-2-16
Preamp	Rohde & Schwarz	TS-PR40	052002/025	26GHz-40GHz	5-11-16	5-11-17



Report Number: 22025 DLS Project: 8277

6.0 Test Arrangements

Emissions Measurement Arrangement:

All emissions measurements were performed at D.L.S. Electronic Systems, Inc. and set up according to ANSI C63.10:2013, unless otherwise noted. Description of procedures and measurements can be found in Appendix B – Measurement Data. See Appendix A for additional photos of the test set up.

Unless otherwise noted, the bandwidth of the measuring receiver / analyzer used during testing is shown below.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

7.0 Test Conditions

Test Conditions recorded during test:

Temperature and Humidity:

75 °F at 47% RH

8.0 Modifications Made To EUT For Compliance

None noted at time of test.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

9.0 Additional Descriptions

There are multiple revisions for the part 5390144-3 (EUT). The model tested was Rev 2. The table below lists the differences between the revisions. All the revisions use the exact same radio design.

Part	Rev	DATE	ECO NUMBER	BRIEF DESCRIPTION OF CHANGE	ENGINEERING JUSTIFICATION
5390144-3	6	20-Aug-15	2196330	 Design change to update the part 5415263-3 quantity is 0.02 in 5390144-3's BOM. Update the drawing notes 6, the glue type refer to Mark Number 16 in 5390144-3's BOM 	Fixed typo in BOM, fixed typo in part drawing. No hardware and firmware change on this part, so there's no impact on the radio circuitry design can performance.
5390144-3	5	27-Jul-15	2194847	Design change to update dongle board 5390144-3's BOM, replace part 5411693 with 5398807.	The changed part is a memory chip. The purpose is to align the design to the URP radio (5436008-3) to share the same memory chip which needs LTB. Since this memory chip is not on the radio path, there's no impact on the radio circuitry design and performance.
5390144-3	4	13-Jul-15	2193172	Replace the old part 46- 170684P3 with new part 5415263-3	This change is to replace the EoL screw glue (Loctite 271) with the new one (Loctite 263). There's no impact on the radio circuitry design and performance.
5390144-3	3	15-May-15	2191036	Correct typing errors in 5390144-3ADW and 5390144-3TST. subsystem is UWB dongle	Fixed typos in drawing and TST, no hardware or firmware change. There's no impact on the radio circuitry design and performance.
5390144-3	2	14-Jul-13	2143812	Change Essential Classification of 5390145-3 from "Safety" to "Minor". Update the ADW of 5390144-3 by adding PWA/PWB labels since the REV of 5390144-3/5390145-3 are updated.	Essential Classification and labeling update, no hardware or firmware change. There's no impact on the radio circuitry design and performance.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

9.0 Additional Descriptions (continued)

The client has been informed of the operational limits defined in FCC 47 CFR Section 15.519 (a).

AC Mains Line conducted was not performed because the UWB radio is powered by a PC USB port.

Using a PC with proprietary software, the UWB radio was connected through a USB cable and configured for continuous transmit. The software allowed the user to configure the radio settings to achieve compliant levels and determine worst case data rate settings.

TX Rate: 53 TX Payload: 4095

TX I ayload: 40 TX IFS: 10 us

Final Transmitter Power Settings:

Band Group 1					
TFC 5 TFC 6 TFC 7					
TPC	7	9	9		
C1	77	77	77		
C2	07	07	02		

Band Group 3					
	TFC 5 TFC 6 TFC 7				
TPC	12 9 11				
D1	67				
D2	03	03	03		

10.0 Results

Measurements were performed in accordance with ANSI C63.10:2013. Graphical and tabular data can be found in Appendix B at the end of this report.

11.0 Conclusion

The Ultra-Wide-Band WUSB host dongle, Model 5390144-3 Rev. 2, as provided from GE Healthcare tested on July 19 - 20, 2016 meets the requirements of CFR 47 Part 15 Subpart F Section 15.519.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Appendix A - Test Photos

Photo Information and Test Setup:


Items: Ultra-Wide-Band WUSB host dongle 5390144-3 Rev. 2

External UWB Antenna: Ethertronics Part No. 1003656

3.1 to 10.6 GHz Peak Gain: 3.1 dBi

20 meter USB cable with ferrite

Radiated Emissions

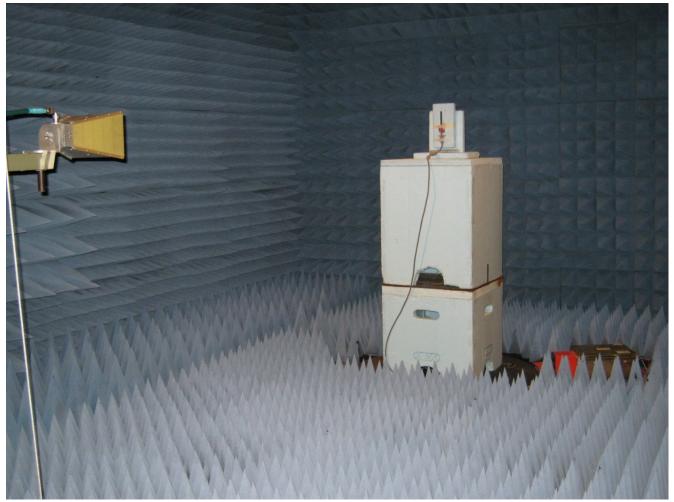



Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 1






Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 2

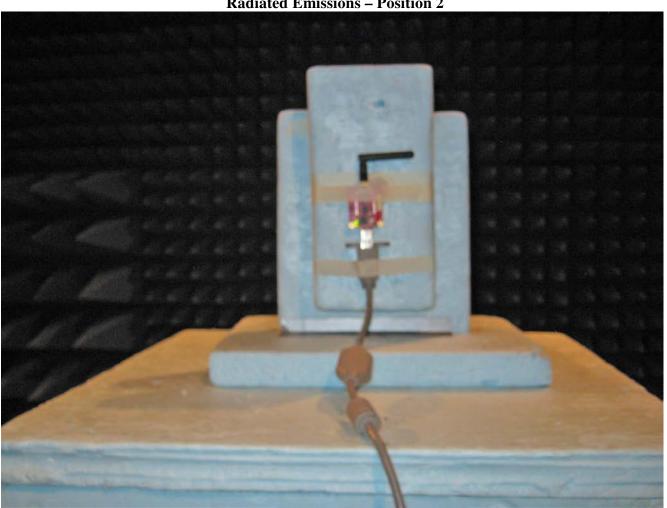



Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 3






Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 4

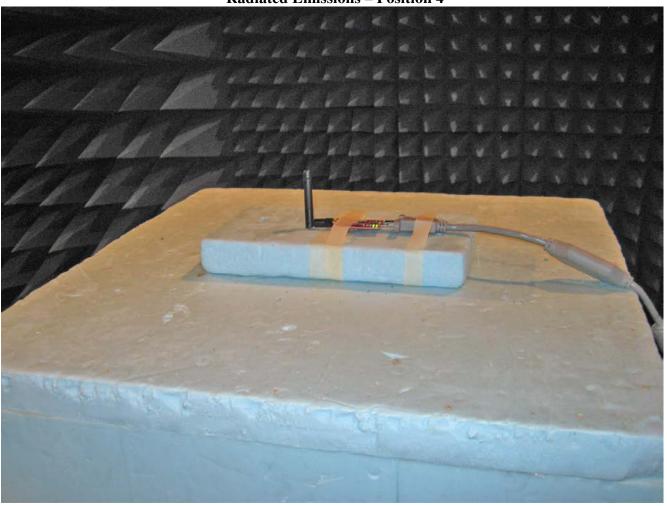




Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 5

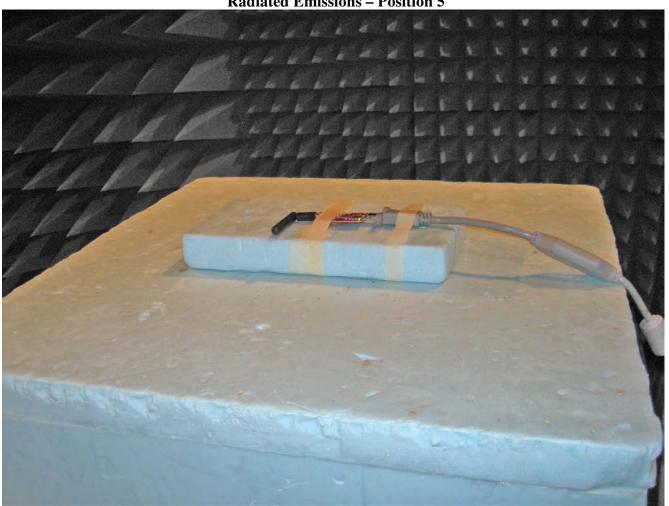



Report Number: 22025 DLS Project: 8277

Appendix A

Radiated Emissions – Position 6





Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Appendix B – Measurement Data

1.0 Fundamental Emission Bandwidth - 10 dB

Rule Part:

Section 15.519 (b)

Test Procedure:

ANSI C63.10:2013

Limit:

Contained between 3100 MHz and 10,600 MHz

Results:

Compliant:

Band ID	10 dB bandwidth
1	509.2 MHz
2	508.1 MHz
3	509.2 MHz
7	509.2 MHz
8	510.3 MHz
9	511.4 MHz

Sample Equation(s):

None

Notes:

This was a radiated emissions measurement. The maximum field strength of the emission was determined and the bandwidth was measured from the points at 10 dB down from the highest radiated emission, as based on the complete transmission system including the antenna.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 1 Band # 1




Date: 19.JUL.2016 14:14:38



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 1 Band # 2

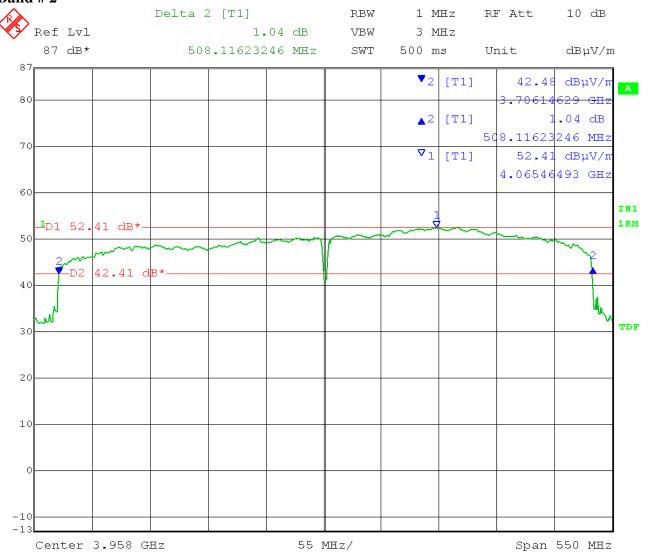


Date: 19.JUL.2016 14:21:56



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 1 Band # 3

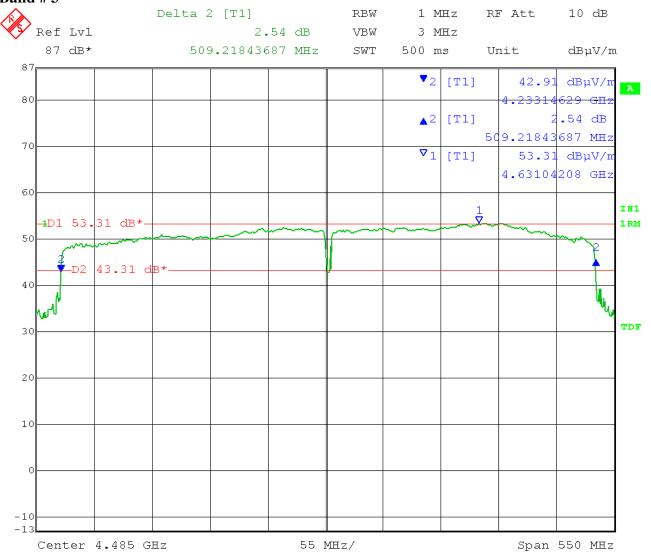


Date: 19.JUL.2016 14:31:55



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 3 Band # 7

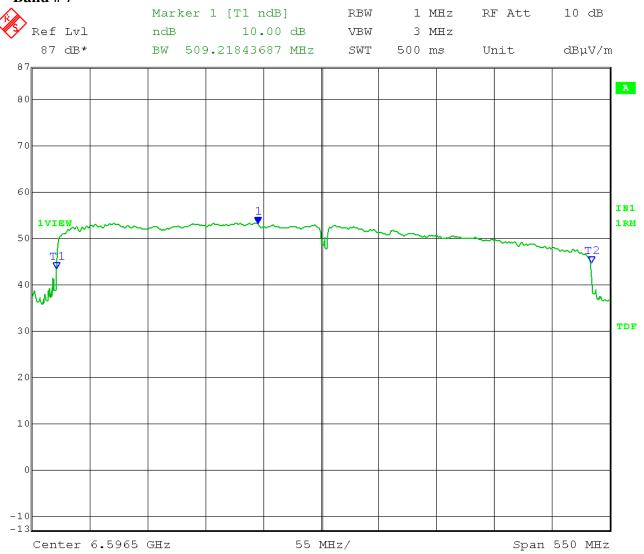


Date: 19.JUL.2016 14:37:42



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 3 Band # 8

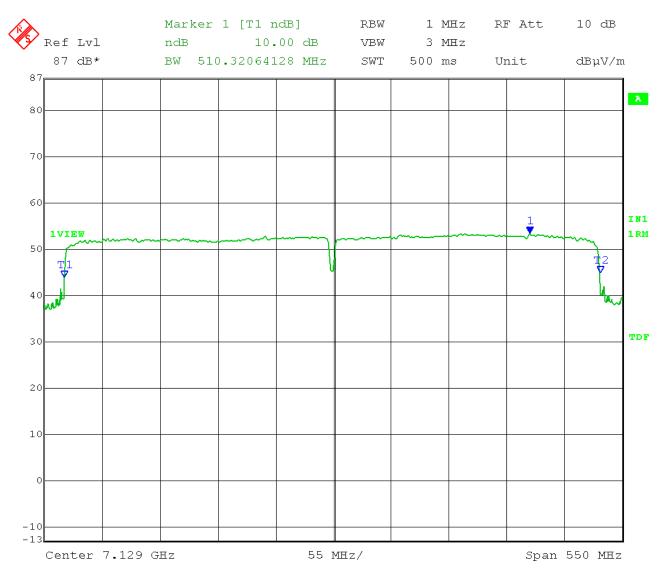

Date: 19.JUL.2016 14:42:57



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Band Group 3 Band # 9



Date: 19.JUL.2016 14:47:45



Report Number: 22025 DLS Project: 8277

Appendix B

2.0 Radiated Spurious Emissions below 960 MHz

Rule Part:
15.519 (c)
Test Procedure:
ANSI C63.10:2013
Limit:
15.209
Results:
Compliant
Sample Equation(s):
None
Notes:
Test distance 3 meter. No emissions detected within 20 dB of limit associated with UWB transmission.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Appendix B

3.0 Radiated Spurious Emissions above 960 MHz

Rule Part:

15.519 (c)

Test Procedure:

ANSI C63.10:2013

Limit:

Average limit with resolution bandwidth of 1 MHz

Frequency (MHz)	EIRP in dBm	E in dBµV/m	D in meters
960 – 1610	-75.3	19.95	3
1610 – 1990	-63.3	31.95	3
1990 – 3100	-61.3	33.95	3
3100 - 10600	-41.3	53.95	3
Above 10600	-61.3	43.50	1
Above 10600	-61.3	49.52	0.5

Results:

Compliant

Sample Equation(s):

Field Strength limit calculated using equation:

 $E = EIRP - 20 \log (D) + 104.8$

Where:

 $E = Field Strength in dB\mu V/m$

EIRP = Effective Isotropic Radiated Power in dBm

D = test distance in meters

Notes:

Radiated emissions tested at 3 meter distance 1-10 GHz, 1 meter distance 10-18 GHz and 0.5 meter distance 18-40 GHz maximized in vertical and horizontal polarizations.



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious


960 MHz – 10.6 GHz @ 3 meter – Maximized in vertical and horizontal polarizations

Bands 1,7,8, and 9: no emissions associated with UWB transmission found

Bands 2 and 3: emission is identical in frequency and amplitude

Horizontal:

Receive antenna height: 1.41 m EUT table rotation: 345 degrees

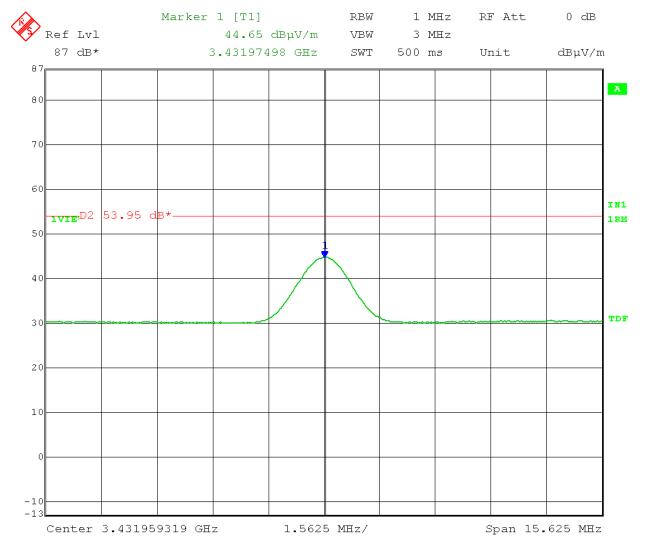

Date: 19.JUL.2016 15:22:43



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious


960 MHz – 10.6 GHz @ 3 meter – Maximized in vertical and horizontal polarizations

Bands 1,7,8, and 9: no emissions associated with UWB transmission found

Bands 2 and 3: emission is identical in frequency and amplitude

Vertical:

Receive antenna height: 1.73 m EUT table rotation: 350 degrees

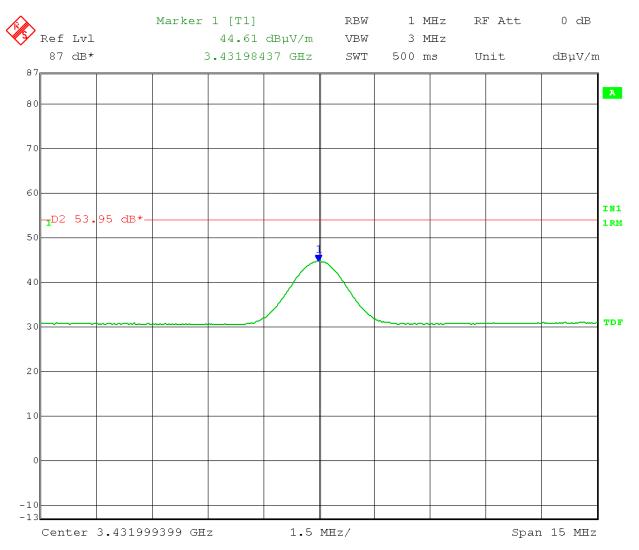

Date: 20.JUL.2016 08:02:28



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious


960 MHz – 10.6 GHz @ 3 meter – Maximized in vertical and horizontal polarizations

Bands 1,3,7,8, and 9: no emissions associated with UWB transmission found

Band 2:

Horizontal:

Receive antenna height: 1.61 m EUT table rotation: 5 degrees

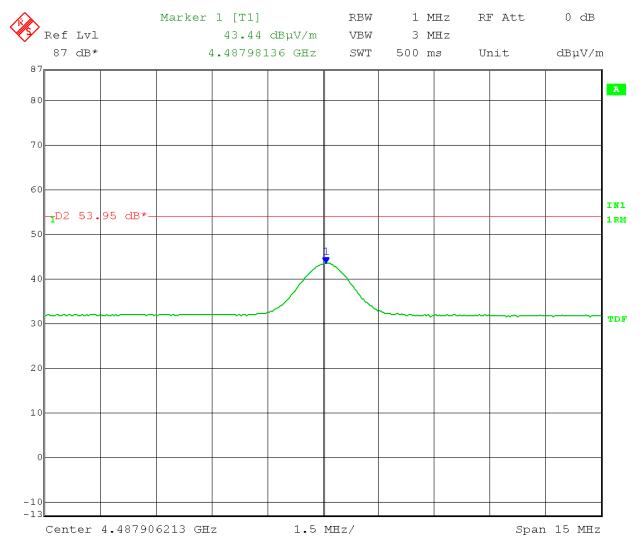

Date: 20.JUL.2016 08:23:27



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious


960 MHz – 10.6 GHz @ 3 meter – Maximized in vertical and horizontal polarizations

Bands 1,3,7,8, and 9: no emissions associated with UWB transmission found

Band 2:

Vertical:

Receive antenna height: 1 m EUT table rotation: 355 degrees

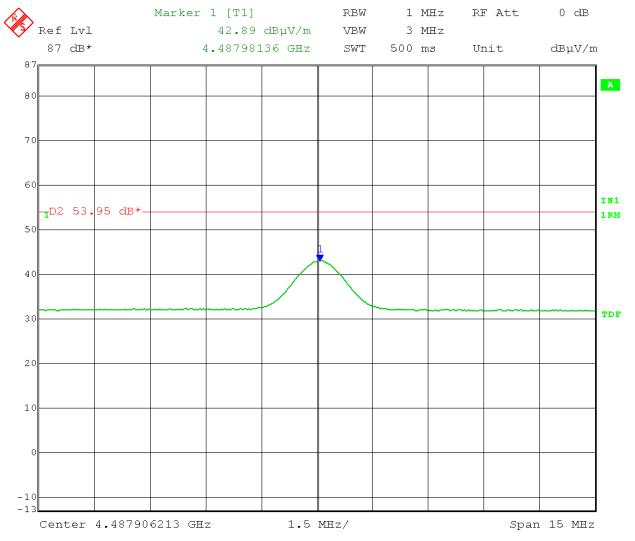

Date: 20.JUL.2016 08:20:19




Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious

 $10-18\ \mathrm{GHz}$ @ 1 meter – Maximized in vertical and horizontal polarizations – no emissions found

Noise Floor:

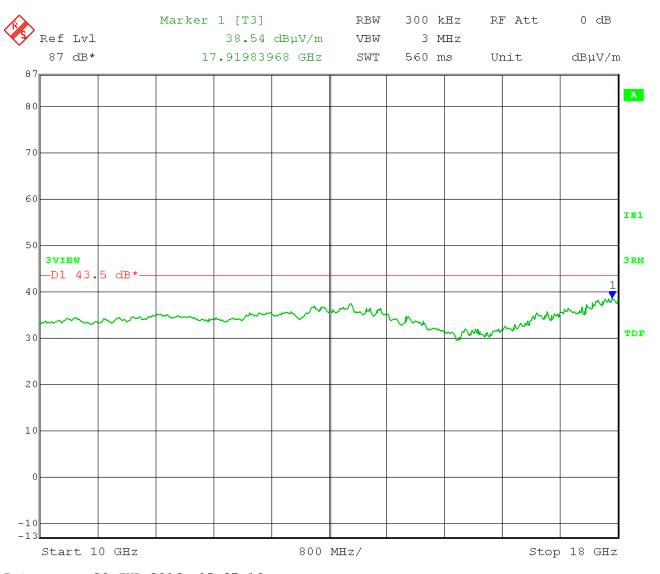

Date: 20.JUL.2016 15:07:16




Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious

 $18-26.5~\mathrm{GHz}$ @ $0.5~\mathrm{meter}-\mathrm{Maximized}$ in vertical and horizontal polarizations – no emissions found

Noise Floor:

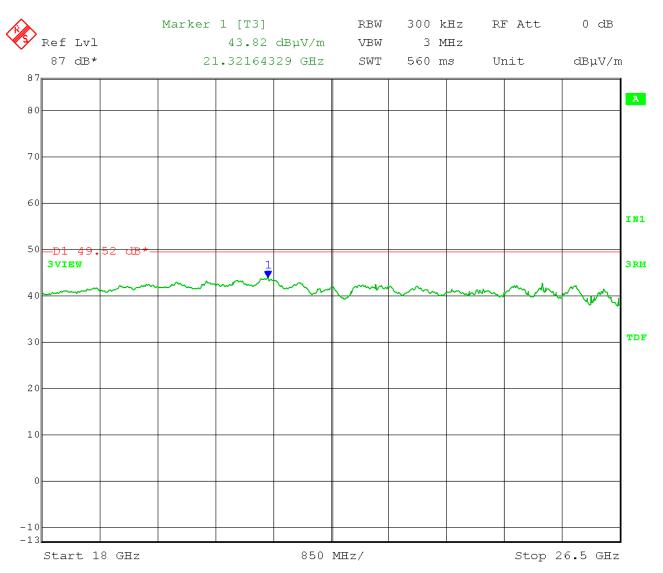

Date: 20.JUL.2016 16:00:54




Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Radiated Spurious

 $26.5-40~\mathrm{GHz}$ @ $0.5~\mathrm{meter}-\mathrm{Maximized}$ in vertical and horizontal polarizations – no emissions found

Noise Floor:

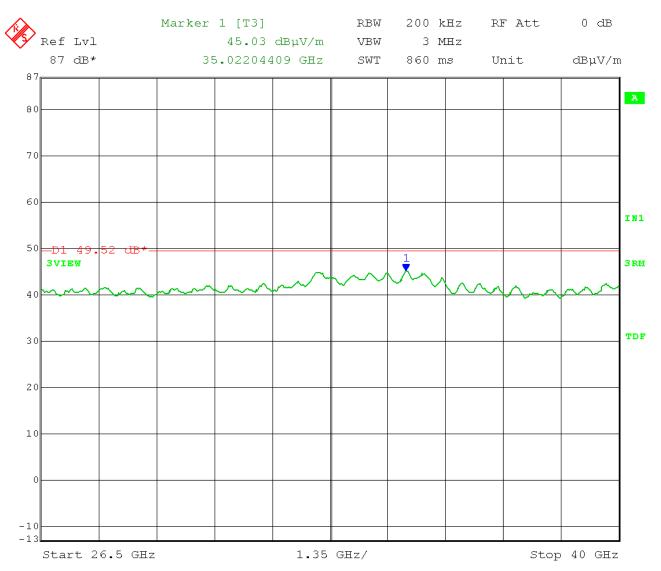

Date: 20.JUL.2016 16:27:45



Report Number: 22025 DLS Project: 8277

Appendix B

4.0 Radiated Fundamental Emissions in band 3100 to 10600 MHz

Rule Part:					
15.519 (c) & (e)					
Test Procedure:					

Limit:

EIRP in dBm Average: -41.3 Peak: -24.4*

ANSI C63.10:2013

Results:

Compliant

Sample Equation(s):

See data

Notes:

*As per 15.521(g), limit adjusted by 20log (RBW/50) dBm where RBW is the resolution bandwidth in MHz that is employed.

EUT investigated for worst case orientation and maximized in vertical and horizontal polarization. The maximum emission was then recorded. The EUT was replaced by an antenna connected to a signal generator. The level of the signal generator was set to match the maximum emission recorded from the EUT. Once corrected for antenna gain and cable loss the EIRP was compared to the limit.



Company: GE Healthcare Operator: Craig B Date of test: 07-19-16 Temperature: 76 deg. F Humidity: 49% R.H. Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Detector RMS (linear) Peak

PRIVE 1 MHz 2 MHz

RBW 1 MHz 3 MHz VBW 3 MHz 3MHz

Sweep 500 ms (1 ms per point)

Span 550 MHz

EIRP = Signal generator output + cable loss + antenna gain

Model: 5390144-3 Rev. 2 (Band Groups 1 and 3)

Antenna to EUT Distance: 3 m

Floor to EUT Height: 1.5 m
Antenna Scan Height*: 1 - 4 m

* EUT to remain in antenna 3dB

beamwidth

Level of Cable

-37.11

RF Absorber lined floor

	Band #	Frequency (GHz)	Measurement Antenna Polarization	Limit Type	Field Strength of EUT (dBµV/m)	Antenna Height (m)	Table Azimuth (deg)	Gen. when field strength equals that of EUT (dBm)	loss between Gen. and Subst. Antenna (dB)	Gain of subst. Antenna (dBi)	Strength of emission [EIRP] (dBm)	Limit (dBm)	Margin (dB)		
	1	3.628	Vertical	Average	53.50	1.82	158	-48.72	-3.66	9.98	-42.40	-24.4 6. -41.3 1.	1.10		
	1	3.028	verticai	Peak	65.71	1.62	138	-37.01	-3.00	9.98	-30.69	-24.4	6.29		
Ī	2	4.065	Vertical	Average	52.41	1.43	154	-48.86	-3.90	9.77	-42.99	-41.3 -24.4 -41.3 -24.4 -41.3 -24.4 -41.3 -24.4 -41.3 -24.4 -41.3 -24.4 -41.3	1.69		
	2	4.003	Vertical	Peak	64.67	1.43	134	-36.60	-3.90	9.11	-30.73	-24.4	6.33		
Ī	3	4.631	Horizontal	Average	53.31	1.79	10	-49.32	-4.20	11.10	-42.42	-41.3	1.12		
	3	4.031	Horizontai	Peak	65.47	1.79	10	-37.27	-4.20	11.10	-30.73 -24.4 -42.42 -41.3 -30.37 -24.4 -41.98 -41.3	5.97			
	7	6.526	Horizontal	Average	53.23	1.65	1.65	1 65	28	-48.93	5 15	12.10	-41.98	-41.3	0.68
/	/	6.536	Horizoniai	Peak	66.76	1.03	28	-37.41	-5.15	12.10	-30.46	-24.4	6.06		
	8	7.316	Horizontal	Average	53.28	1.51	31	-48.01	5 52	11.20	-42.33	-41.3	1.03		
8	o	7.310	HOHZOIIIAI	Peak	65.03	1.51	31	-36.26	-5.52	11.20	-30.58	-24.4	6.18		
	9 7.447	7.447	Horizonts ¹	Average	53.56	1.20	21	-48.22	5.61 11.21	11.21	-42.62	-41.3	1.32		
9		Horizontal	D = =1-	66.17	1.39	31	27 11	-5.61	11.21	21 51	24.4	7 1 1			

66.47

Peak

35 of 40 Report #22025

-31.51

-24.4

7.11



Report Number: 22025 DLS Project: 8277

Appendix B

5.0 Radiated Spurious Emissions in GPS Band

Rule Part:

15.519 (d)

Test Procedure:

ANSI C63.4-2009 and ANSI C63.10-2009

Limit:

Average limit with resolution bandwidth of no less than 1 kHz

Frequency (MHz)	EIRP in dBm
1164 – 1240	-85.3
1559 – 1610	-85.3

Results:

Compliant

Sample Equation(s):

15.519 (e) limit @ 1 meter: $-85.3 + 95.2 + 20\log(3/1) = 19.44 \, dB\mu V/m$

15.209 limit @ 1 meter: 63.54 dBµV/m

Notes:

EUT tested at 1 meter distance.

EUT was set in standby mode with no UWB transmission. The EUT was then placed in transmit mode to observe emissions related to the function of the UWB transmission.




Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

GPS BAND 1.164 – 1.240 GHz

Worst-case of Vertical and Horizontal Emissions same for Bands 1,2,3,7,8, and 9

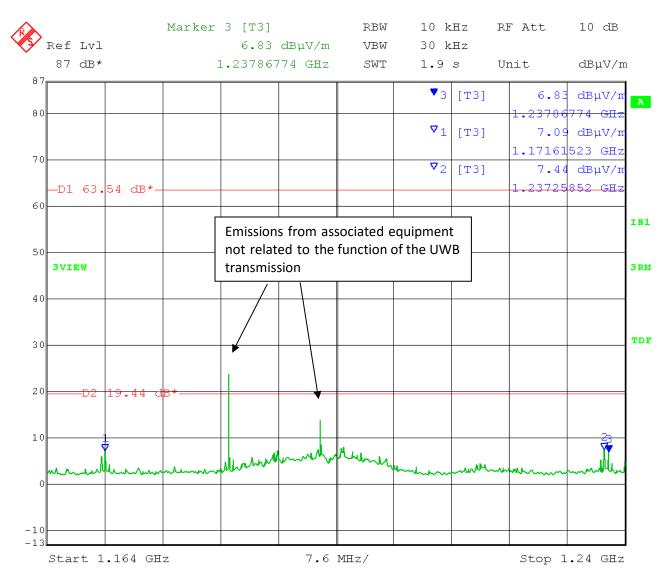

Date: 20.JUL.2016 14:53:12




Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

GPS BAND 1.559 – 1.61 GHz

Worst-case of Vertical and Horizontal Emissions same for Bands 1,2,3,7,8, and 9

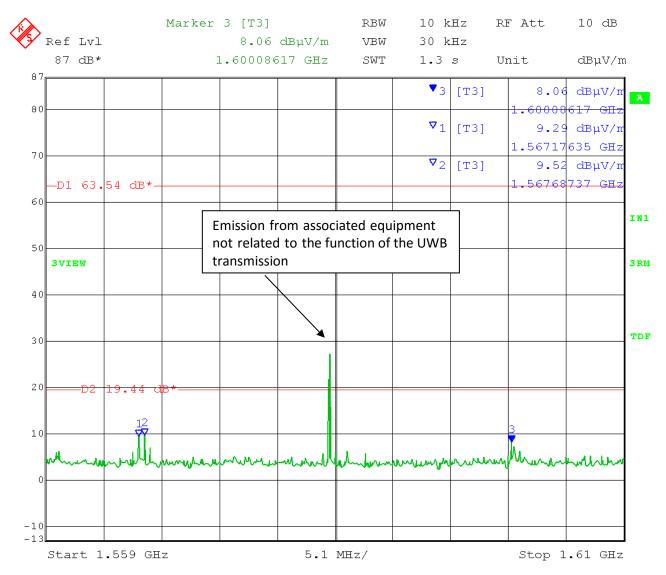

Date: 20.JUL.2016 14:49:37



Company: GE Healthcare Model Tested: 5390144-3 Rev. 2

Report Number: 22025 DLS Project: 8277

Appendix C - Measurement Uncertainty

Compliance with the limits in this standard are based on the results of the compliance measurement. Our calculated measurement uncertainty including the measurement instrumentation, associated connections between the various instruments in the measurement chain, and other contributions, are provided in this section of the test report.

Radiated	Uncertainty (±dB)			
Contribution	Probability Distribution	below 30 MHz		
Combined Standard Uncertainty	Normal	1.60		
Expanded Uncertainty	Normal (k=2)	3.19		

Radiated Emission Uncertainty above 30MHz										
		(± dB)	(± dB)	(± dB)	(± dB)	(± dB)	(± dB)	(± dB)	(± dB)	(± dB)
Contribution	Probability Distribution	3M	3M	3M	3M	3M	3M	10M	10M	10M
		30-100 MHz	100-700 MHz	700-1000 MHz	1- 4.5 GHz	4.5 – 7 GHz	7 – 18 GHz	30-100 MHz	100-700 MHz	700-1000 MHz
Combined Standard Uncertainty	Normal	1.70	1.62	1.66	2.13	2.48	2.85	1.64	1.58	1.66
Expanded Uncertainty	Normal (k=2)	3.40	3.23	3.33	4.26	4.95	5.69	3.29	3.16	3.31

	Uncertainty (± dB)	
Contribution	Probability Distribution	150 kHz - 30 MHz
Combined Standard Uncertainty	Normal	1.05
Expanded Uncertainty	Normal (k=2)	2.10



Report Number: 22025 DLS Project: 8277

END OF REPORT

Revision #	Date	Comments	By
1.0	07-21-2016	Preliminary Release	CB
1.1	08-10-2016	Updated with information from Part A form	CB
1.2 08-16-2016		Added explanation for the different board revisions	CB