



# Greenled I 189/190/191/192/193/ 194/195 downlight

## DN194B LED15S-3000 PSU WH S1

GreenLed I family is general purpose High performance Led downlight family suitable for use in a series of lighting applications in Office, Retail and General Area Lighting . Available in a wide variety of lumen packs & color temp.

### Product data

<b>General Information</b>		<b>Color</b>	
Light source color	830 warm white	White	
Luminaire light beam spread	110°		
Control interface	-		
Protection class IEC	Safety class I (I)		
Material	Aluminum		
<b>Operating and Electrical</b>		<b>Approval and Application</b>	
Input Voltage	220-240 V	Ingress protection code	IP20 [ Finger-protected]
Input Frequency	50 Hz	Mech. impact protection code	IK02 [ 0.2 J standard]
Power Factor (Min)	0.9	Surge Protection (Common/Differential)	2.5 kV
<b>Controls and Dimming</b>		<b>Initial Performance (IEC Compliant)</b>	
Dimmable	No	Init. Corr. Color Temperature	3000 K
<b>Mechanical and Housing</b>		Init. Color Rendering Index	>80
Housing Material	Aluminum die-cast	Initial input power	15 W
Overall height	100 mm	Power consumption tolerance	+/-10%
Overall diameter	185 mm	<b>Over Time Performance (IEC Compliant)</b>	
		Median useful life L70B50	30000 h
		<b>Application Conditions</b>	
		Ambient temperature range	0 to +45 °C

Greenled I 189/190/191/192/193/194/195 downlight

Product Data	
Order product name	DN194B LED15S-3000 PSU WH S1
Order code	919515810384
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8

Material Nr. (12NC)	919515810384
Net Weight (Piece)	0.813 kg




Warnings and Safety

- Meant for use in Indoor environment only

Dimensional drawing

Product: GreenLED I  
Type: DN189B/ DN 190B/ DN 191B/ DN 192B/ DN193B/ DN 194B/ DN195B  
Application: Indoor

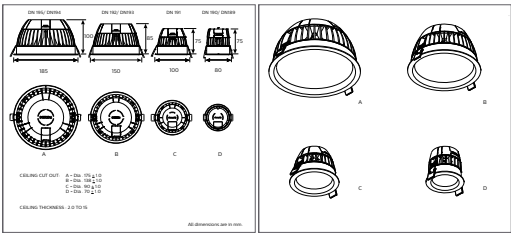

IN9002RDL - Downlights and spots

