

FCC Test Report

Report No.: RF160705C03A

FCC ID: K7SF8J201

Test Model: F8J201

Received Date: May 17, 2018

Test Date: May 24 ~ May 28, 2018

Issued Date: Jun. 05, 2018

Applicant: Belkin International, Inc.

Address: 12045 East Waterfront Drive, Playa Vista, CA 90094

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan, R.O.C.

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number:



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

| | |
|--|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT | 6 |
| 3.2 Description of Test Modes | 6 |
| 3.2.1 Test Mode Applicability and Tested Channel Detail | 7 |
| 3.3 Description of Support Units | 8 |
| 3.3.1 Configuration of System under Test | 8 |
| 3.4 General Description of Applied Standards | 9 |
| 4 Test Types and Results | 10 |
| 4.1 Radiated Emission and Bandedge Measurement..... | 10 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 10 |
| 4.1.2 Test Instruments | 11 |
| 4.1.3 Test Procedures..... | 12 |
| 4.1.4 Deviation from Test Standard | 12 |
| 4.1.5 Test Set Up | 13 |
| 4.1.6 EUT Operating Conditions..... | 13 |
| 4.1.7 Test Results | 14 |
| 4.2 Conducted Emission Measurement | 18 |
| 4.2.1 Limits of Conducted Emission Measurement | 18 |
| 4.2.2 Test Instruments | 18 |
| 4.2.3 Test Procedures..... | 19 |
| 4.2.4 Deviation from Test Standard | 19 |
| 4.2.5 Test Setup..... | 19 |
| 4.2.6 EUT Operating Conditions..... | 19 |
| 4.2.7 Test Results | 20 |
| 5 Pictures of Test Arrangements | 22 |
| Appendix – Information on the Testing Laboratories | 23 |

Release Control Record

| Issue No. | Description | Date Issued |
|--------------|------------------|---------------|
| RF160705C03A | Original release | Jun. 05, 2018 |

1 Certificate of Conformity

Product: Valet Charger™ Power Pack 6700 mAh for Apple Watch + iPhone

Brand: belkin

Model No.: F8J201

Sample Status: Engineering sample

Applicant: Belkin International, Inc.

Test Date: May 24 ~ May 28, 2018

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.209)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.


Prepared by :


Polly Chien / Specialist

Date:

Jun. 05, 2018

Approved by :


Bruce Chen / Project Engineer

Date:

Jun. 05, 2018

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (Section 15.209) | | | |
|--|-----------------------------|--------|---|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 | AC Power Conducted Emission | Pass | Meet the requirement of limit. Minimum passing margin is -19.49dB at 0.16569MHz. |
| 15.209 | Radiated Emission Test | Pass | Meet the requirement of limit. Minimum passing margin is -12.5dB at 57.07MHz. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expanded Uncertainty (k=2) (±) |
|------------------------------------|------------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.94 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 200MHz | 3.86 dB |
| | 200MHz ~ 1000MHz | 3.87 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|---|---|
| Product | Valet Charger™ Power Pack 6700 mAh for Apple Watch + iPhone |
| Test Model | F8J201 |
| Sample Status | Engineering sample |
| Power Supply Rating | I/P: 5Vdc, 2.4A O/P: USB port with load 1A and wireless output with Apple watch 3.63Vdc (Battery) |
| Modulation Type | FSK |
| Operating Frequency | 326.5 kHz |
| Antenna Type | Coil antenna |
| Field Strength | 69.4dBuV/m |
| Dimensions | 7.95cm ² (diameter = 31.82mm) |
| Accessory Device | Battery |
| Data Cable Supplied | 1m shielded USB cable without core |
| Maximum Power Output from the Charging Coil | Less than 5W. |

Note:

1. The EUT uses following battery.

| | |
|---------|------------------|
| Battery | |
| Brand | LG CHEM, LTD. |
| Model | INR18650F1L |
| Rating | 3.63Vdc, 3350mAh |

2. The EUT has a wireless inductive charging coil for charging Apple watch.

3.2 Description of Test Modes

1 channel is provided to this EUT

| Channel | Freq. (kHz) |
|---------|-------------|
| 1 | 326.5 |

3.2.1 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | DESCRIPTION |
|--------------------|---------------|-----|---------------|
| | RE<1G | PLC | |
| A | √ | - | Charging Mode |
| B | √ | √ | Standby Mode |

Where **RE<1G**: Radiated Emission below 1GHz **PLC**: Power Line Conducted Emission

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel |
|--------------------|-------------------|----------------|
| A, B | 1 | 1 |

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| EUT Configure Mode | Available Channel | Tested Channel |
|--------------------|-------------------|----------------|
| B | 1 | 1 |

Test Condition:

| Applicable To | Environmental Conditions | Input Power | Tested by |
|-----------------|--------------------------|--------------|-------------|
| RE<1G | 25 deg. C, 68% RH | 120Vac, 60Hz | Willy Cheng |
| PLC | 25 deg. C, 75% RH | 120Vac, 60Hz | Willy Cheng |

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|-------------|-------|-----------|------------|--------|--------------------|
| A. | Apple Watch | Apple | A1553 | NA | NA | Provided by client |
| B. | Adapter | Apple | A1401 | NA | NA | - |
| C. | iPhone X | Apple | A1901 | NA | NA | - |

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|------------------|
| 1. | USB cable | 1 | 1 | Y | 0 | Accessory of EUT |
| 2. | USB cable | 1 | 1.8 | Y | 0 | - |

3.3.1 Configuration of System under Test

Conducted Emission test


Test Mode B

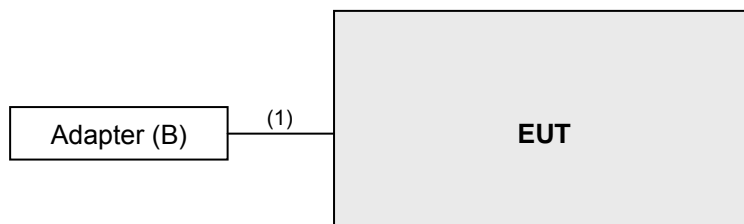

Radiated Emission test


Charging Mode

Test Mode A

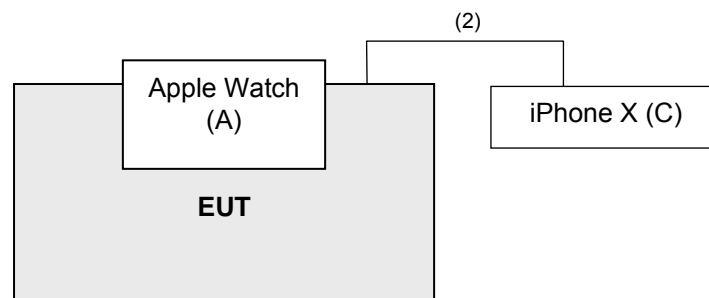

Standby Mode

Test Mode B

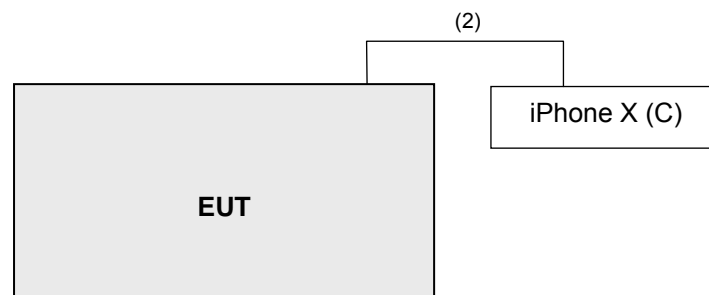

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

FOR FREQUENCY BELOW 30MHz

| Frequency (MHz) | Field Strength (dBuV/m) | | Measurement Distance (meters) |
|--------------------|-------------------------|-------------|----------------------------------|
| | uV/m | dBuV/m | |
| 0.009 – 0.490 | 2400 / F (kHz) | 48.52-13.80 | 300 |
| 0.490 – 1.705 | 24000 / F (kHz) | 33.80-22.97 | 30 |
| 1.705 – 30.0 | 30 | 29.54 | 30 |

FOR FREQUENCY BETWEEN 30-1000MHz

| Frequency (MHz) | Class A (at 10m) | | Class B (at 3m) | |
|--------------------|------------------|--------|-----------------|--------|
| | uV/m | dBuV/m | uV/m | dBuV/m |
| 30-88 | 90 | 39.1 | 100 | 40.0 |
| 88-216 | 150 | 43.5 | 150 | 43.5 |
| 216-960 | 210 | 46.4 | 200 | 46.0 |
| Above 960 | 300 | 49.5 | 500 | 54.0 |

4.1.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|--|---------------------------------------|---------------------------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100424 | Oct. 17, 2017 | Oct. 16, 2018 |
| Spectrum Analyzer ROHDE & SCHWARZ | FSP40 | 100041 | Dec. 12, 2017 | Dec. 11, 2018 |
| BILOG Antenna SCHWARZBECK | VULB9168 | 9168-171 | Dec. 11, 2017 | Dec. 10, 2018 |
| HORN Antenna SCHWARZBECK | 9120D | 209 | Dec. 13, 2017 | Dec. 12, 2018 |
| HORN Antenna SCHWARZBECK | BBHA 9170 | BBHA9170241 | Dec. 01, 2017 | Nov. 30, 2018 |
| Loop Antenna EMCI | EM-6879 | 269 | Aug. 11, 2017 | Aug. 10, 2018 |
| Preamplifier Agilent (Below 1GHz) | 8447D | 2944A10738 | Aug. 21, 2017 | Aug. 20, 2018 |
| Preamplifier Agilent (Above 1GHz) | 8449B | 3008A02465 | Apr. 03, 2018 | Apr. 02, 2019 |
| RF signal cable HUBER+SUHNER | SUCOFLEX 104 | Cable-CH3-03 (223653/4) | Aug. 21, 2017 | Aug. 20, 2018 |
| RF signal cable HUBER+SUHNER& EMCI | SUCOFLEX 104&EMC104-SM-SM-8 000 | Cable-CH3-03 (309224+170907) | Sep.11, 2017 | Sep. 10, 2018 |
| Software BV ADT | ADT_Radiated_ V7.6.15.9.5 | NA | NA | NA |
| Antenna Tower inn-co GmbH | MA 4000 | 013303 | NA | NA |
| Antenna Tower Controller BV ADT | AT100 | AT93021702 | NA | NA |
| Turn Table BV ADT | TT100 | TT93021702 | NA | NA |
| Turn Table Controller BV ADT | SC100 | SC93021702 | NA | NA |
| Boresight Antenna Fixture | FBA-01 | FBA-SIP01 | NA | NA |

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 3.
3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
5. The IC Site Registration No. is IC 7450F-3.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

For Radiated emission below 30MHz

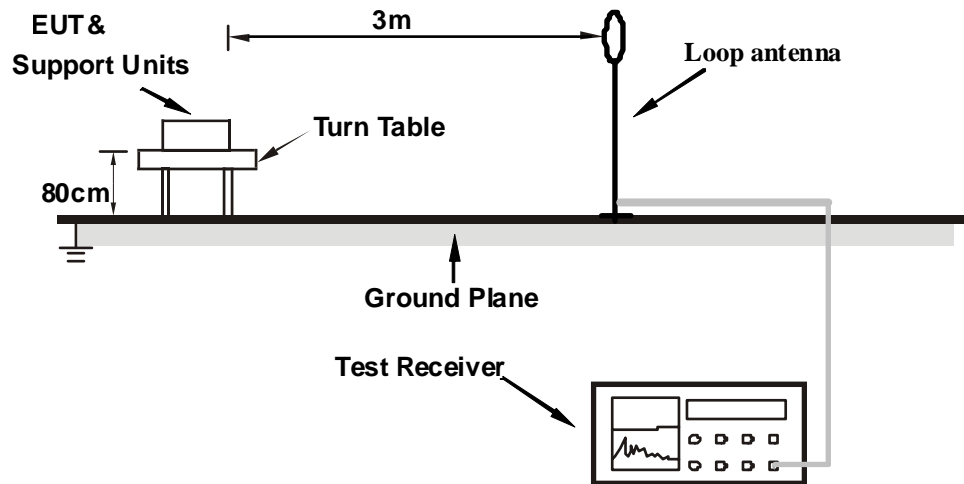

For Radiated emission 30MHz to 1GHz

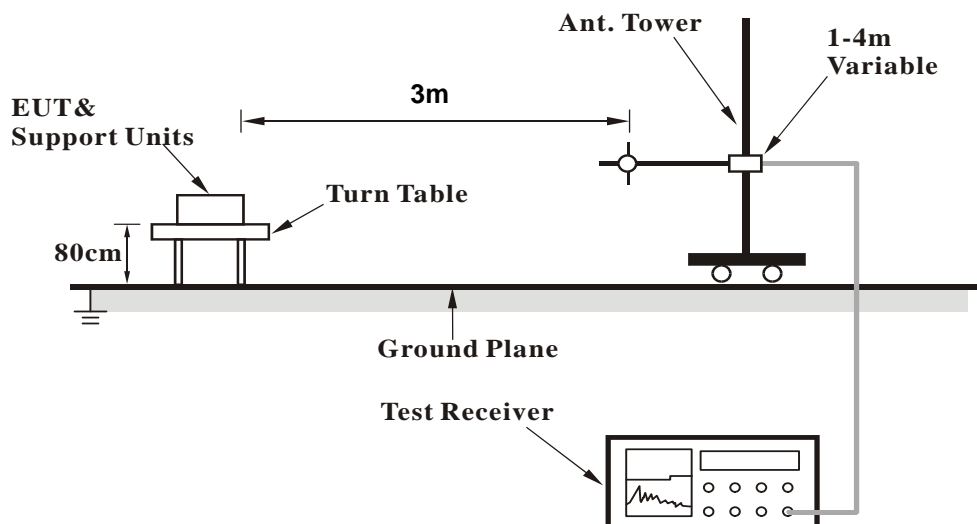

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Test Mode A

- The EUT powered by battery.
- Placed the Apple Watch on the EUT (wireless charging) during the test.
- The iPhone was charging by EUT via USB cable.

Test Mode B

- The EUT powered by battery.
- The iPhone was connected with EUT via USB cable.

4.1.7 Test Results

Below 30MHz Data:

Charging Mode

| | | | |
|-----------------|----------------|-------------------|------------|
| Channel | TX Channel 1 | Detector Function | Quasi-Peak |
| Frequency Range | 9 kHz ~ 30 MHz | | |
| Test Mode | A | | |

| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3m | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *0.3265 | 69.4 | 97.3 | -27.9 | 1.00 | 89 | 49.1 | 20.3 |
| 2 | 1.329 | 45.9 | 65.1 | -19.2 | 1.00 | 354 | 25.6 | 20.3 |
| 3 | 3.548 | 40.1 | 69.5 | -29.4 | 1.00 | 157 | 19.7 | 20.4 |
| 4 | 4.448 | 39.0 | 69.5 | -30.5 | 1.00 | 170 | 18.5 | 20.5 |
| 5 | 6.487 | 38.3 | 69.5 | -31.2 | 1.00 | 326 | 17.8 | 20.5 |
| 6 | 18.963 | 36.8 | 69.5 | -32.7 | 1.00 | 34 | 16.3 | 20.5 |
| 7 | 25.081 | 36.1 | 69.5 | -33.4 | 1.00 | 9 | 15.5 | 20.6 |
| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3m | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *0.3265 | 64.6 | 97.3 | -32.7 | 1.00 | 359 | 44.3 | 20.3 |
| 2 | 2.348 | 41.2 | 69.5 | -28.3 | 1.00 | 323 | 20.9 | 20.3 |
| 3 | 3.728 | 39.7 | 69.5 | -29.8 | 1.00 | 142 | 19.3 | 20.4 |
| 4 | 5.347 | 36.8 | 69.5 | -32.7 | 1.00 | 245 | 16.3 | 20.5 |
| 5 | 11.825 | 35.7 | 69.5 | -33.8 | 1.00 | 163 | 15.2 | 20.5 |
| 6 | 18.483 | 36.0 | 69.5 | -33.5 | 1.00 | 58 | 15.5 | 20.5 |
| 7 | 23.642 | 37.0 | 69.5 | -32.5 | 1.00 | 200 | 16.5 | 20.5 |
| ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | *0.3265 | 58.5 | 97.3 | -38.8 | 1.00 | 276 | 38.2 | 20.3 |
| 2 | 1.509 | 45.2 | 64.0 | -18.8 | 1.00 | 19 | 24.9 | 20.3 |
| 3 | 3.728 | 40.1 | 69.5 | -29.4 | 1.00 | 7 | 19.7 | 20.4 |
| 4 | 5.647 | 37.2 | 69.5 | -32.3 | 1.00 | 36 | 16.7 | 20.5 |
| 5 | 11.106 | 35.9 | 69.5 | -33.6 | 1.00 | 7 | 15.4 | 20.5 |
| 6 | 18.783 | 36.5 | 69.5 | -33.0 | 1.00 | 13 | 16.0 | 20.5 |
| 7 | 25.861 | 35.4 | 69.5 | -34.1 | 1.00 | 30 | 14.7 | 20.7 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

Standby Mode

| | | | |
|-----------------|----------------|-------------------|------------|
| Channel | TX Channel 1 | Detector Function | Quasi-Peak |
| Frequency Range | 9 kHz ~ 30 MHz | | |
| Test Mode | B | | |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA OPEN AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *0.3265 | 28.4 | 97.3 | -68.9 | 1.00 | 282 | 8.1 | 20.3 |
| 2 | 0.653 | 47.7 | 71.3 | -23.6 | 1.00 | 289 | 27.4 | 20.3 |
| 3 | 2.168 | 41.3 | 69.5 | -28.2 | 1.00 | 251 | 21.0 | 20.3 |
| 4 | 5.887 | 38.0 | 69.5 | -31.5 | 1.00 | 337 | 17.5 | 20.5 |
| 5 | 11.046 | 36.1 | 69.5 | -33.4 | 1.00 | 281 | 15.6 | 20.5 |
| 6 | 15.544 | 36.3 | 69.5 | -33.2 | 1.00 | 342 | 15.7 | 20.6 |
| 7 | 22.142 | 36.6 | 69.5 | -32.9 | 1.00 | 60 | 16.1 | 20.5 |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA CLOSE AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *0.3265 | 24.8 | 97.3 | -72.5 | 1.00 | 171 | 4.5 | 20.3 |
| 2 | 0.653 | 45.9 | 71.3 | -25.4 | 1.00 | 184 | 25.6 | 20.3 |
| 3 | 1.748 | 44.9 | 69.5 | -24.6 | 1.00 | 118 | 24.6 | 20.3 |
| 4 | 4.388 | 38.1 | 69.5 | -31.4 | 1.00 | 3 | 17.6 | 20.5 |
| 5 | 8.586 | 37.1 | 69.5 | -32.4 | 1.00 | 103 | 16.7 | 20.4 |
| 6 | 16.324 | 36.4 | 69.5 | -33.1 | 1.00 | 27 | 15.8 | 20.6 |
| 7 | 25.441 | 36.0 | 69.5 | -33.5 | 1.00 | 45 | 15.3 | 20.7 |

ANTENNA POLARITY & TEST DISTANCE: LOOP ANTENNA GROUND-PARALLEL AT 3m

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| 1 | *0.3265 | 32.4 | 97.3 | -64.9 | 1.00 | 278 | 12.1 | 20.3 |
| 2 | 0.653 | 45.4 | 71.3 | -25.9 | 1.00 | 139 | 25.1 | 20.3 |
| 3 | 1.509 | 45.2 | 64.0 | -18.8 | 1.00 | 19 | 24.9 | 20.3 |
| 4 | 7.027 | 35.7 | 69.5 | -33.8 | 1.00 | 30 | 15.3 | 20.4 |
| 5 | 13.745 | 35.7 | 69.5 | -33.8 | 1.00 | 7 | 15.2 | 20.5 |
| 6 | 15.484 | 37.1 | 69.5 | -32.4 | 1.00 | 30 | 16.6 | 20.5 |
| 7 | 23.162 | 36.0 | 69.5 | -33.5 | 1.00 | 15 | 15.5 | 20.5 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. Limit @3m=Limit@300m+40log(300 / 3)=Limit@300m+80
8. Limit @3m=Limit@30m+40log(30 / 3)=Limit@30m+40

Below 1GHz Data:

Charging Mode

| | | | |
|-----------------|---------------|-------------------|------------|
| Channel | TX Channel 1 | Detector Function | Quasi-Peak |
| Frequency Range | 30 MHz ~ 1GHz | | |
| Test Mode | A | | |

| Antenna Polarity & Test Distance: Horizontal At 3m | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 57.07 | 27.5 QP | 40.0 | -12.5 | 2.00 H | 262 | 41.9 | -14.4 |
| 2 | 70.65 | 24.8 QP | 40.0 | -15.2 | 2.00 H | 86 | 40.9 | -16.1 |
| 3 | 86.17 | 19.9 QP | 40.0 | -20.1 | 2.00 H | 214 | 39.3 | -19.4 |
| 4 | 365.59 | 23.4 QP | 46.0 | -22.6 | 1.01 H | 7 | 35.1 | -11.7 |
| 5 | 449.03 | 27.6 QP | 46.0 | -18.4 | 1.50 H | 5 | 37.7 | -10.1 |
| 6 | 798.30 | 27.4 QP | 46.0 | -18.6 | 1.50 H | 5 | 31.8 | -4.4 |
| Antenna Polarity & Test Distance: Vertical At 3m | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 39.60 | 24.8 QP | 40.0 | -15.2 | 1.00 V | 2 | 39.8 | -15.0 |
| 2 | 128.86 | 19.2 QP | 43.5 | -24.3 | 1.00 V | 9 | 34.7 | -15.5 |
| 3 | 322.90 | 25.3 QP | 46.0 | -20.7 | 1.00 V | 48 | 37.5 | -12.2 |
| 4 | 439.32 | 22.6 QP | 46.0 | -23.4 | 1.00 V | 236 | 32.8 | -10.2 |
| 5 | 633.36 | 27.2 QP | 46.0 | -18.8 | 1.00 V | 43 | 33.8 | -6.6 |
| 6 | 796.36 | 29.2 QP | 46.0 | -16.8 | 1.49 V | 163 | 33.6 | -4.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Standby Mode

| | | | |
|-----------------|---------------|-------------------|------------|
| Channel | TX Channel 1 | Detector Function | Quasi-Peak |
| Frequency Range | 30 MHz ~ 1GHz | | |
| Test Mode | B | | |

| Antenna Polarity & Test Distance: Horizontal At 3m | | | | | | | | |
|--|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 57.07 | 23.6 QP | 40.0 | -16.4 | 1.00 H | 10 | 38.0 | -14.4 |
| 2 | 70.65 | 20.0 QP | 40.0 | -20.0 | 1.99 H | 289 | 36.1 | -16.1 |
| 3 | 130.80 | 15.2 QP | 43.5 | -28.3 | 1.00 H | 8 | 30.5 | -15.3 |
| 4 | 243.34 | 16.1 QP | 46.0 | -29.9 | 1.00 H | 334 | 30.9 | -14.8 |
| 5 | 421.86 | 20.2 QP | 46.0 | -25.8 | 1.50 H | 177 | 30.9 | -10.7 |
| 6 | 633.36 | 22.7 QP | 46.0 | -23.3 | 1.99 H | 23 | 29.3 | -6.6 |
| Antenna Polarity & Test Distance: Vertical At 3m | | | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Correction Factor (dB/m) |
| 1 | 57.07 | 23.2 QP | 40.0 | -16.8 | 1.00 V | 238 | 37.6 | -14.4 |
| 2 | 70.65 | 18.4 QP | 40.0 | -21.6 | 1.49 V | 224 | 34.5 | -16.1 |
| 3 | 243.34 | 15.3 QP | 46.0 | -30.7 | 1.00 V | 346 | 30.1 | -14.8 |
| 4 | 404.40 | 19.9 QP | 46.0 | -26.1 | 1.49 V | 6 | 31.0 | -11.1 |
| 5 | 482.01 | 20.3 QP | 46.0 | -25.7 | 1.00 V | 224 | 30.0 | -9.7 |
| 6 | 796.36 | 26.9 QP | 46.0 | -19.1 | 2.00 V | 274 | 31.3 | -4.4 |

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| Description & Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Due |
|--|--------------------------|----------------|---------------|---------------|
| Test Receiver ROHDE & SCHWARZ | ESCI | 100613 | Nov. 23, 2017 | Nov. 22, 2018 |
| RF signal cable (with 10dB PAD) Woken | 5D-FB | Cable-cond1-01 | Sep. 05, 2017 | Sep. 04, 2018 |
| LISN ROHDE & SCHWARZ (EUT) | ESH3-Z5 | 835239/001 | Mar. 06, 2018 | Mar. 05, 2019 |
| LISN ROHDE & SCHWARZ (Peripheral) | ESH3-Z5 | 100311 | Aug. 15, 2017 | Aug. 14, 2018 |
| Software ADT | BV ADT_Cond_ V7.3.7.4 | NA | NA | NA |

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

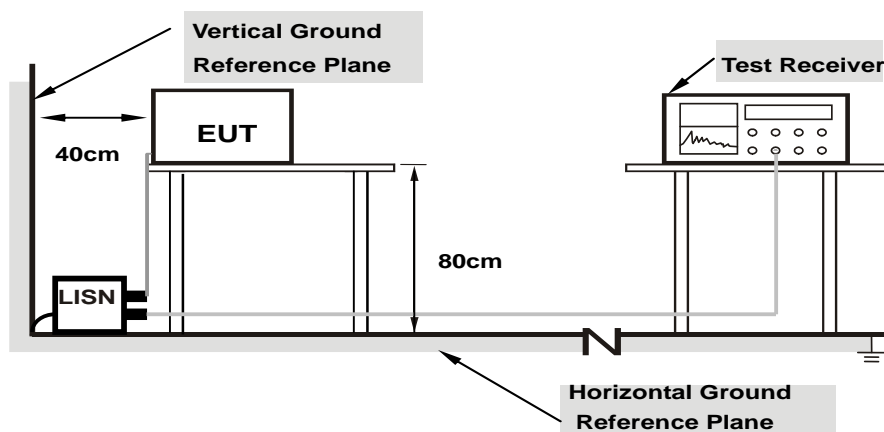

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

- The EUT powered by adapter.

4.2.7 Test Results


Standby Mode

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-----------|----------|-------------------|-----------------------------------|
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|-------------------------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.16569 | 10.16 | 35.52 | 21.91 | 45.68 | 32.07 | 65.17 | 55.17 | -19.49 | -23.10 |
| 2 | 0.25166 | 10.17 | 26.89 | 9.20 | 37.06 | 19.37 | 61.70 | 51.70 | -24.64 | -32.33 |
| 3 | 0.41979 | 10.20 | 24.70 | 3.80 | 34.90 | 14.00 | 57.45 | 47.45 | -22.55 | -33.45 |
| 4 | 0.81470 | 10.18 | 24.95 | 15.26 | 35.13 | 25.44 | 56.00 | 46.00 | -20.87 | -20.56 |
| 5 | 3.84104 | 10.34 | 20.51 | 11.75 | 30.85 | 22.09 | 56.00 | 46.00 | -25.15 | -23.91 |
| 6 | 9.04134 | 10.60 | 19.31 | 11.53 | 29.91 | 22.13 | 60.00 | 50.00 | -30.09 | -27.87 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

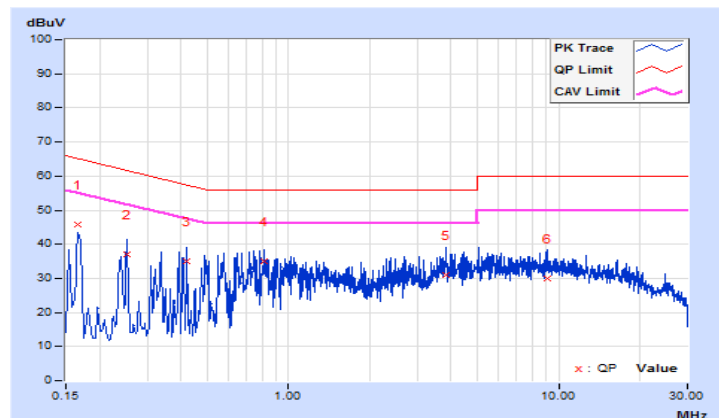


| | | | |
|-----------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
| Test Mode | B | | |

| No | Freq. [MHz] | Corr. Factor (dB) | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | | | | | | | | | |
| | | | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15802 | 10.15 | 35.46 | 20.90 | 45.61 | 31.05 | 65.57 | 55.57 | -19.96 | -24.52 |
| 2 | 0.24384 | 10.17 | 27.42 | 15.63 | 37.59 | 25.80 | 61.96 | 51.96 | -24.37 | -26.16 |
| 3 | 0.58010 | 10.20 | 24.72 | 8.19 | 34.92 | 18.39 | 56.00 | 46.00 | -21.08 | -27.61 |
| 4 | 1.05712 | 10.20 | 23.29 | 12.61 | 33.49 | 22.81 | 56.00 | 46.00 | -22.51 | -23.19 |
| 5 | 2.73060 | 10.27 | 20.30 | 12.51 | 30.57 | 22.78 | 56.00 | 46.00 | -25.43 | -23.22 |
| 6 | 7.96218 | 10.49 | 19.13 | 11.93 | 29.62 | 22.42 | 60.00 | 50.00 | -30.38 | -27.58 |

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

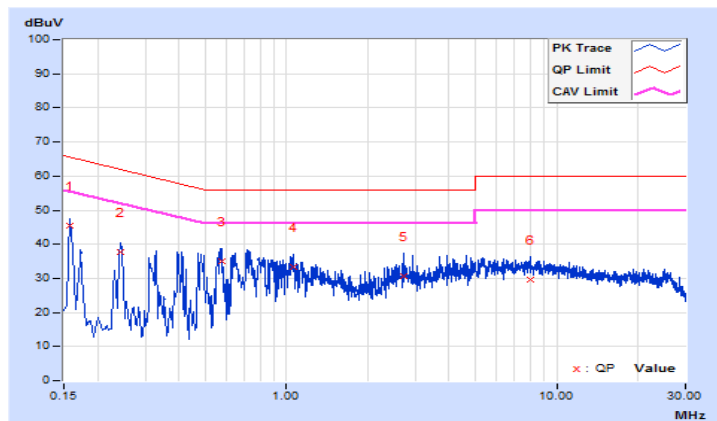

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---