



TEST REPORT

Test Report No. : UL-RPT-RP12505086JD10A V2.0

Customer : Apple Inc.
Model No. : A2116
FCC ID : BCGA2116
Technology : WLAN
Test Standard(s) : FCC Parts 15.209(a) & 15.407

Test Laboratory : UL VS LTD, Basingstoke, Hampshire, RG24 8AH, United Kingdom

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 2.0 supersedes all previous versions.

Date of Issue: 14 February 2019

Checked by:

Sarah Williams
Senior Test Engineer, Radio Laboratory

Company Signatory:

Ben Mercer
Senior Test Engineer, Radio Laboratory
UL VS LTD



UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

Customer Information

Company Name:	Apple Inc.
Address:	One Apple Park Way Cupertino, California 95014 U.S.A.
Contact Name:	Stuart Thomas

Report Revision History

Version Number	Issue Date	Revision Details	Revised By
1.0	07/01/2019	Initial Version	Sarah Williams
2.0	14/02/2019	Admin update	Sarah Williams

Table of Contents

Customer Information.....	2
Report Revision History	2
1. Attestation of Test Results.....	5
1.1. Description of EUT	5
1.2. General Information	5
1.3. Summary of Test Results	6
1.4. Deviations from the Test Specification	6
2. Summary of Testing.....	7
2.1. Facilities and Accreditation	7
2.2. Methods and Procedures	7
2.3. Calibration and Uncertainty	8
2.4. Test and Measurement Equipment	9
3. Equipment Under Test (EUT)	11
3.1. Identification of Equipment Under Test (EUT)	11
3.2. Modifications Incorporated in the EUT	11
3.3. Additional Information Related to Testing	12
3.4. Description of Available Antennas	16
3.5. Description of Test Setup	17
4. Antenna Port Test Results	25
4.1. Transmitter Duty Cycle	25
4.2. Transmitter 26 dB Emission Bandwidth	35
4.2.1. 5.15-5.25 GHz band	36
4.2.2. 5.25-5.35 GHz band	79
4.2.3. 5.47-5.725 GHz band	122
4.2.4. Channels that straddle the U-NII-2C and U-NII-3 bands	171
4.2.5. 5.725-5.85 GHz band	220
4.3. Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	263
4.3.1. Channels that straddle the U-NII-2C and the U-NII-3 bands at 5.725 GHz	264
4.3.2. 5.725-5.85 GHz band	293
4.4. Transmitter Maximum Conducted Output Power	336
4.4.1. 5.15-5.25 GHz band	336
4.4.2. 5.25-5.35 GHz band	382
4.4.3. 5.47-5.725 GHz band	428
4.4.4. Channels that straddle the U-NII-2C and U-NII-3 bands	486
4.4.5. 5.725-5.85 GHz band	516
4.5. Transmitter Maximum Power Spectral Density	561
4.5.1. 5.15-5.25 GHz band	561
4.5.2. 5.25-5.35 GHz band	571
4.5.3. 5.47-5.725 GHz band	581
4.5.4. Channels that straddle the U-NII-2C and U-NII-3 bands	592
4.5.5. 5.725-5.85 GHz band	601
5. Radiated Test Results.....	612
5.1. Transmitter Out of Band Radiated Emissions <1 GHz	612
5.2. Transmitter Out of Band Radiated Emissions >1 GHz	614
5.2.1. 5.15-5.25 GHz band	614
5.2.2. 5.25-5.35 GHz band	616
5.2.3. 5.47-5.725 GHz band	618
5.2.4. Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz	620
5.2.5. 5.725-5.85 GHz band	622
5.3. Transmitter Band Edge Radiated Emissions	626

5.3.1. 5.15-5.25 GHz band	626
5.3.2. 5.25-5.35 GHz band	650
5.3.3. 5.47-5.725 GHz band	674
5.3.4. 5.725-5.85 GHz band	720

Appendix 1	744
-------------------------	------------

1. Attestation of Test Results

1.1. Description of EUT

The equipment under test was a desktop computer with WLAN and BT radios.

1.2. General Information

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.209
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	19 October 2018 to 30 November 2018

1.3. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	Compiled
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	Compiled
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Compiled
Part 15.407(a)(1)(iv)	Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band)	Compiled
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Compiled
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Compiled
Part 15.407(a)(3)	Transmitter Maximum Conducted Output Power (5.725-5.85 GHz band)	Compiled
Part 15.407(a)(1)(iv)	Transmitter Maximum Power Spectral Density (5.15-5.25 GHz band)	Compiled
Part 15.407(a)(2)	Transmitter Maximum Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Compiled
Part 15.407(a)(2)	Transmitter Maximum Power Spectral Density (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Compiled
Part 15.407(a)(3)	Transmitter Maximum Power Spectral Density (5.725-5.85 GHz band)	Compiled
Part 15.407(b)/15.209(a)	Transmitter Out of Band Radiated Emissions	Compiled
Part 15.407(b)/15.209(a)	Transmitter Band Edge Radiated Emissions	Compiled
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Note 2
Part 15.407(h)(1)	Transmitter Power Control	Note 3

Note(s):

1. The measurement was performed to assist in the calculation of the level of average output power, power spectral density and emissions as the EUT employs pulsed operation.
2. Frequency stability is better than 20 ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.
3. Transmit Power Control was not tested as the maximum EIRP is less than 500 mW (27 dBm).

1.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specifications identified above.

2. Summary of Testing

2.1. Facilities and Accreditation

The test site and measurement facilities used to collect data are located at Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom. The following table identifies which facilities were utilised for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

Site 1	X
Site 2	-
Site 17	-

UL VS LTD is accredited by UKAS. The tests reported herein have been performed in accordance with its terms of accreditation.

2.2. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 December 14, 2017
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices (Part 15, Subpart E)
Reference:	KDB662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitter with Multiple Outputs in the Same Band

2.3. Calibration and Uncertainty

Measuring Instrument Calibration

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value measured (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Duty Cycle	5.15 GHz to 5.850 GHz	95%	±1.14 %
26 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	±4.59 %
Minimum 6 dB Emission Bandwidth	5.15 GHz to 5.850 GHz	95%	±4.59 %
Maximum Conducted Output Power	5.15 GHz to 5.850 GHz	95%	±1.13 dB
Maximum Power Spectral Density	5.15 GHz to 5.850 GHz	95%	±1.13 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±4.65 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

2.4. Test and Measurement Equipment

Test Equipment Used for Transmitter Conducted Tests (non-TxBF)

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2042	Thermohygrometer	Testo	608-H1	458046425	26 Feb 2019	12
M2033	Signal Analyser	Rohde & Schwarz	FSV13	101667	31 May 2019	12
A3004	RF Switch	Pickering Interfaces	64-102-002	XZ363230	Calibrated before use	-
A3027	Attenuator	Broadwave Technologies	351-311-006	#1	Calibrated before use	-
A3028	Attenuator	Broadwave Technologies	351-311-006	#2	Calibrated before use	-
A3029	Attenuator	Broadwave Technologies	351-311-006	#3	Calibrated before use	-
G0607	Signal Generator	Rohde & Schwarz	SMU2001	100943	10 May 2019	36
A3005	RePlay Test Rack	N/A	N/A	N/A	Calibration not required	-

Test Equipment Used for Transmitter Conducted Tests (TxBF)

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2042	Thermohygrometer	Testo	608-H1	458046425	26 Feb 2019	12
M1996	Signal Analyser	Rohde & Schwarz	FSV13	100975	27 Nov 2018	12
M1835	Signal Analyser	Rohde & Schwarz	FSV30	103050	19 Mar 2019	12
A1535	Variable Attenuators	Hewlett Packard	8495B/ 8494B	00007	Calibrated before use	-
A2097	Power Splitter	Mini Circuits	ZN4PD1- 63W-S+	SUU98701205	Calibrated before use	-
A2952	RF Switch	Pickering Interfaces	64-102-002	XZ361012	Calibrated before use	-
A3160	RF Switch	Pickering Interfaces	60-102B-001	XZ370188	Calibrated before use	-
A2098	Power Splitter	Mini Circuits	ZN4PD1-63- S+	SF210501205	Calibrated before use	-
A2536	Directional Coupler	AtlanTecRF	CDC-003060- 20	14041701720	Calibrated before use	-
A2505	Directional Coupler	AtlanTecRF	CDC-003060- 20	1101230	Calibrated before use	-
A2534	Directional Coupler	AtlanTecRF	CDC-003060- 20	14041701718	Calibrated before use	-
G0628	Signal Generator	Rohde & Schwarz	SMBV100A	261847	01 Sep 2020	36

Test and Measurement Equipment (continued)**Test Equipment Used for Transmitter Radiated Emissions**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	Testo	608-H1	45124934	27 Mar 2019	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	17 Apr 2019	12
M1630	Test Receiver	Rohde & Schwarz	ESU40	100233	20 Sep 2019	12
A3154	Pre Amplifier	Com-Power Corp	PAM-103	18020012	14 Sep 2019	12
A3155	Pre Amplifier	Com-Power Corp	PAM-118A	18040037	14 Sep 2019	12
A2893	Amplifier	Schwarzbeck	BBV 9721	9721-021	26 Apr 2019	12
A553	Antenna	Chase	CBL6111A	1593	08 Oct 2019	12
A2892	Antenna	Schwarzbeck	BBHA 9170	9170-727	21 Feb 2019	12
A3138	Antenna	Schwarzbeck	BBHA 9120B	00702	03 Oct 2019	12
A3139	Antenna	Schwarzbeck	HWRD750	00027	04 Oct 2019	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	832825#1	23 Feb 2019	12
A3083	Low Pass Filter	AtlanTecRF	AFL-01000	18010900076	29 Jun 2019	12
A3085	Low Pass Filter	AtlanTecRF	AFL-02000	18051600014	29 Jun 2019	12
A3095	High Pass Filter	AtlanTecRF	AFH-07000	18051600012	29 Jun 2019	12

Test Equipment Used for Transmitter Band Edge Radiated Emissions

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2040	Thermohygrometer	JM Handelpunkt	608-H1	45124934	27 Mar 2019	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	04 Oct 2019	12
A3155	Pre Amplifier	Com-Power Corp	PAM-118A	18040037	14 Sep 2019	12
M2044	Test Receiver	Rohde & Schwarz	ESU26	100122	17 Apr 2019	12
A3138	Antenna	Schwarzbeck	BBHA 9120B	00702	03 Oct 2019	12
A2523	Attenuator	AtlanTecRF	AN18W5-10	8328727#1	23 Feb 2019	12

Test Measurement Software/Firmware Used

Name	Version	Release Date
UL VS LTD Replay	v.9	29 Oct 2018
UL VS LTD Replay	v.10	22 Nov 2018
iPerf	2.0.9	01 Jun 2016

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A2116
Test Sample Serial Number:	C02X2007KFLX (<i>Conducted sample #1</i>)
Hardware Version:	EVT
Software Version:	18A334
FCC ID:	BCGA2116

Brand Name:	Apple
Model Name or Number:	A2116
Test Sample Serial Number:	C02WW00WKFMM (<i>Conducted sample #2</i>)
Hardware Version:	EVT
Software Version:	18A334
FCC ID:	BCGA2116

Brand Name:	Apple
Model Name or Number:	A2116
Test Sample Serial Number:	C02WW00PKFMM (<i>Radiated sample #1</i>)
Hardware Version:	EVT
Software Version:	18E110z
FCC ID:	BCGA2116

3.2. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.3. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11a,n,ac) / U-NII	
Type of Unit:	Transceiver	
Modulation:	BPSK, QPSK, 16QAM, 64QAM & 256QAM	
Data rates:	802.11a	6, 9, 12, 18, 24, 36, 48 & 54 Mbit/s (SISO, or MIMO with CDD)
	802.11n HT20	MCS0 to MCS7 (1 spatial stream), (SISO, or MIMO with CDD/STBC/SDM) with or without TxBF MCS8 to MCS15 (2 spatial streams) (MIMO SDM) with or without TxBF MCS16 to MCS23 (3 spatial streams) (MIMO SDM) with or without TxBF
	802.11n HT40	MCS0 to MCS7 (1 spatial stream), (SISO, or MIMO with CDD/STBC/SDM) with or without TxBF MCS8 to MCS15 (2 spatial streams) (MIMO SDM) with or without TxBF MCS16 to MCS23 (3 spatial streams) (MIMO SDM) with or without TxBF
	802.11ac VHT20	MCS0 to MCS8 (1, 2 or 3 spatial streams) (SISO, or MIMO with CDD/STBC/SDM) with or without TxBF
	802.11ac VHT40	MCS0 to MCS9 (1, 2 or 3 spatial streams) (SISO, or MIMO with CDD/STBC/SDM) with or without TxBF
	802.11ac VHT80	MCS0 to MCS9 (1, 2 or 3 spatial streams) (SISO, or MIMO with CDD/STBC/SDM) with or without TxBF
	Power Supply Requirement(s):	Nominal
Maximum Conducted Output Power:	20 MHz	26.6 dBm
	40 MHz	25.8 dBm
	80 MHz	22.7 dBm

Additional Information Related to Testing (continued)

Channel Spacing:	20 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Middle	40	5200
	Top	48	5240
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	52	5260
	Middle	56	5280
	Top	64	5320
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	100	5500
	Middle	116	5580
	Top	140	5700
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	144	5720
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	149	5745
	Middle	157	5785
	Top	165	5825

Additional Information Related to Testing (continued)

Channel Spacing:	40 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	38	5190
	Top	46	5230
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	54	5270
	Top	62	5310
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	102	5510
	Middle	118	5590
	Top	134	5670
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	142	5710
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	151	5755
	Top	159	5795

Additional Information Related to Testing (continued)

Channel Spacing:	80 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	42	5210
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	58	5290
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	106	5530
	Top	122	5610
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	138	5690
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	155	5775

3.4. Description of Available Antennas

The radio utilizes three integrated antennas, with the following maximum gains:

Frequency Band (MHz)	G _{Antenna Core 0} (dBi)	G _{Antenna Core 1} (dBi)	G _{Antenna Core 2} (dBi)
5150 to 5250	1.2	2.8	4.8
5250 to 5350	1.5	3.2	4.5
5470 to 5725	2.9	2.1	4.7
5725 to 5850	3.1	2.0	4.9

Directional Antenna Gain for Correlated Signals (CDD) / Output Power Measurements:

Frequency Band (MHz)	G _{Antennas Core 0 & Core 2} (dBi)	G _{Antennas Core 1 & Core 2} (dBi)	G _{Antennas Core 1, Core 0, Core 2} (dBi)
5150 to 5250	-	4.8	4.8
5250 to 5350	-	4.5	4.5
5470 to 5725	4.7	-	4.7
5725 to 5850	4.9	-	4.9

Directional Antenna Gain for Correlated Signals (CDD) / PSD Measurements:

Frequency Band (MHz)	G _{Antennas Core 0 & Core 2} (dBi)	G _{Antennas Core 1 & Core 2} (dBi)	G _{Antennas Core 1, Core 0, Core 2} (dBi)
5150 to 5250	-	6.9	7.8
5250 to 5350	-	6.9	7.9
5470 to 5725	6.9	-	8.1
5725 to 5850	7.1	-	8.2

Directional Antenna Gain for Uncorrelated Signals (SDM):

Frequency Band (MHz)	G _{Antennas Core 0 & Core 2} (dBi)	G _{Antennas Core 1 & Core 2} (dBi)	G _{Antennas Core 1, Core 0, Core 2} (dBi)
5150 to 5250	-	3.9	3.2
5250 to 5350	-	3.9	3.2
5470 to 5725	3.9	-	3.4
5725 to 5850	4.1	-	3.5

Directional Antenna Gain for Correlated Signals (TxBF):

Frequency Band (MHz)	G _{Antennas Core 0 & Core 2} (dBi)	G _{Antennas Core 1 & Core 2} (dBi)	G _{Antennas Core 1, Core 0, Core 2} (dBi)
5150 to 5250	-	6.9	7.8
5250 to 5350	-	6.9	7.9
5470 to 5725	6.9	-	8.1
5725 to 5850	7.1	-	8.2

Refer to Appendix 1 of this test report for directional antenna gain calculations.

3.5. Description of Test Setup

Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Test Laptop
Brand Name:	Apple
Model Name or Number:	MacBook Pro
Serial Number:	C025200CHH5Q

Description:	USB-C Adapter
Brand Name:	Apple
Model Name or Number:	A1632
Serial Number:	Not marked or stated

Description:	PHF
Brand Name:	Apple
Model Name or Number:	Apple EarPods
Serial Number:	Not marked or stated

Description:	USB Mouse
Brand Name:	Apple
Model Name or Number:	A1152
Serial Number:	CC2446203PNDNYPAJ

Description:	USB Keyboard
Brand Name:	Apple
Model Name or Number:	A1243
Serial Number:	CC2438202G4DQW0AC

Description:	USB Hub
Brand Name:	Hama
Model Name or Number:	00078498
Serial Number:	09825891600

Description:	Ethernet Router
Brand Name:	Netgear
Model Name or Number:	DG834G
Serial Number:	1JX167B008C4A

Support Equipment (continued)

Description:	Ethernet cable. Length 1.0 metres
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Description:	Type A USB Cable. Length 3.0 metres. Quantity 4
Brand Name:	Not marked or stated
Model Name or Number:	Not marked or stated
Serial Number:	Not marked or stated

Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting with a modulated carrier at maximum power on the bottom, middle and top channels as required using the supported data rates/modulation types.

Configuration and Peripherals

The EUT was tested in the following configuration(s):

- Controlled in test mode using a software application on the EUT supplied by the customer. The application was used to enable a continuous transmission and to select the test channels as required.
- For TxBF modes, the EUT was communicating via a conducted RF link with an equivalent device. The EUT ran iPerf bandwidth testing application in client mode to produce maximum throughput. The customer supplied a document containing the setup instructions 'EUT_TXBF_operating_procedures_v1.2.pdf'.
- The customer supplied U.FL RF cables with the EUT in order to perform conducted measurements. The measured additional path loss was included in any path loss calculations.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of 802.11n HT20 / MCS0 / MIMO 3Tx CDD.
- Transmitter radiated spurious emissions tests were performed with the USB Keyboard, USB Mouse and PHF connected to the EUT. The remaining USB ports were connected with a USB cable to a hub. The USB-C ports were connected via a USB C-A adaptor and USB cable to a hub. The ethernet port was terminated into a router. The router and hub were placed under the floor inside the chamber.
- The EUT was powered from a 120 VAC 60 Hz single phase mains supply.

Configuration and Peripherals (continued)


The EUT was tested in the following configuration(s):

- The customer requested the following data rates to be used for all measurements.
 - 802.11a SISO - BPSK / 6 Mbps / Core 2
 - 802.11n HT20 / SISO – BPSK / MCS0 / Core 2
 - 802.11n HT40 / SISO – BPSK / MCS0 / Core 2
 - 802.11ac VHT80 / SISO – BPSK / MCS0 / Core 2
 - 802.11n HT20 / MIMO / 2Tx CDD – BPSK / MCS0 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT20 / MIMO / 2Tx CDD – BPSK / MCS0 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT40 / MIMO / 2Tx CDD – BPSK / MCS0 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT40 / MIMO / 2Tx CDD – BPSK / MCS0 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11ac VHT80 / MIMO / 2Tx CDD – BPSK / MCS0x1 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11ac VHT80 / MIMO / 2Tx CDD – BPSK / MCS0x1 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT20 / MIMO / 2Tx SDM – BPSK / MCS8 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT20 / MIMO / 2Tx SDM – BPSK / MCS8 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT40 / MIMO / 2Tx SDM – BPSK / MCS8 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT40 / MIMO / 2Tx SDM – BPSK / MCS8 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11ac VHT80 / MIMO / 2Tx SDM – BPSK / MCS0x2 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11ac VHT80 / MIMO / 2Tx SDM – BPSK / MCS0x2 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT20 / MIMO / 2Tx TxBF – BPSK / MCS0 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT20 / MIMO / 2Tx TxBF – BPSK / MCS0 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT40 / MIMO / 2Tx TxBF – BPSK / MCS0 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11n HT40 / MIMO / 2Tx TxBF – BPSK / MCS0 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11ac VHT80 / MIMO / 2Tx TxBF – BPSK / MCS0x1 / Core 1 & Core 2 / UNII-1 & UNII-2A
 - 802.11ac VHT80 / MIMO / 2Tx TxBF – BPSK / MCS0x1 / Core 0 & Core 2 / UNII-2C & UNII-3
 - 802.11n HT20 / MIMO / 3Tx CDD – BPSK / MCS0 / Core 0, Core 1 & Core 2
 - 802.11n HT40 / MIMO / 3Tx CDD – BPSK / MCS0 / Core 0, Core 1 & Core 2
 - 802.11ac VHT80 / MIMO / 3Tx CDD – BPSK / MCS0x1 / Core 0, Core 1 & Core 2
 - 802.11n HT20 / MIMO / 3Tx SDM – BPSK / MCS16 / Core 0, Core 1 & Core 2
 - 802.11n HT40 / MIMO / 3Tx SDM – BPSK / MCS16 / Core 0, Core 1 & Core 2
 - 802.11ac VHT80 / MIMO / 3Tx SDM – BPSK / MCS0x3 / Core 0, Core 1 & Core 2
 - 802.11n HT20 / MIMO / 3Tx TxBF – BPSK / MCS0 / Core 0, Core 1 & Core 2
 - 802.11n HT40 / MIMO / 3Tx TxBF – BPSK / MCS0 / Core 0, Core 1 & Core 2
 - 802.11ac VHT80 / MIMO / 3Tx TxBF – BPSK / MCS0x1 / Core 0, Core 1 & Core 2
- The EUT has three separate antennas which correspond to three separate antenna ports. Core 0, Core 1 and Core 2 correspond to antenna 1, antenna 2 and antenna 3 respectively.


Test Setup Diagrams

Conducted Tests:

Test Setup for Transmitter Conducted Tests (non-TxBF)

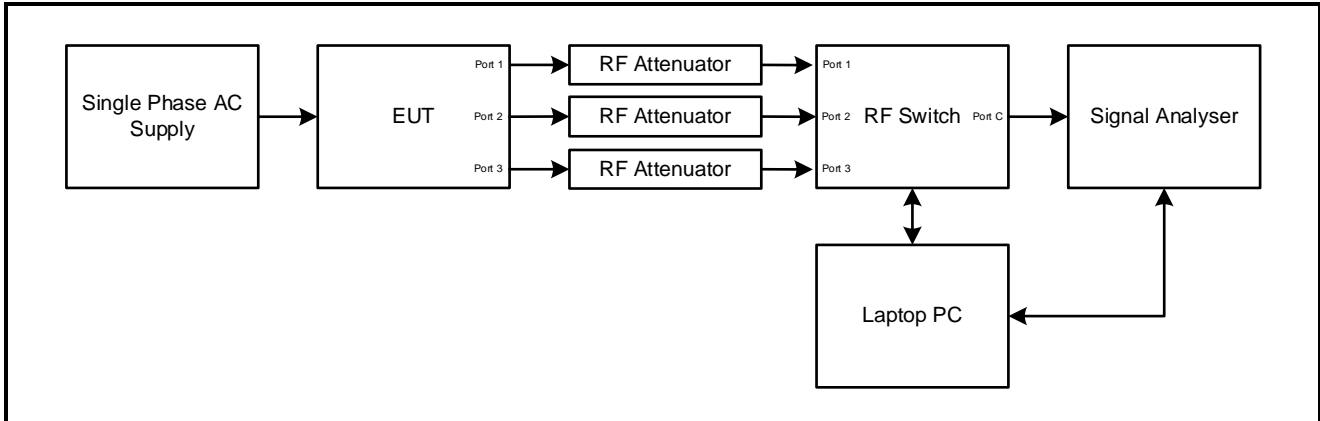


Test Setup for Transmitter Conducted Tests (TxBF)

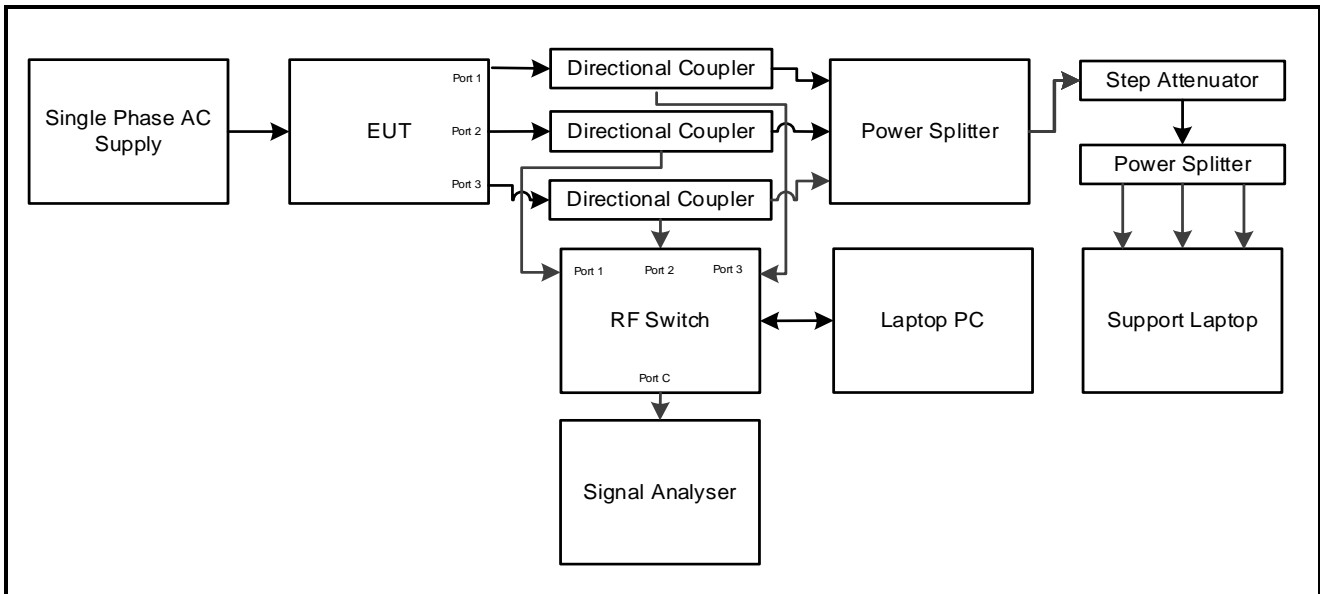

Test Setup Diagrams (continued)


Radiated Tests:

Test Setup for Transmitter Radiated Emissions (non-TxBF)

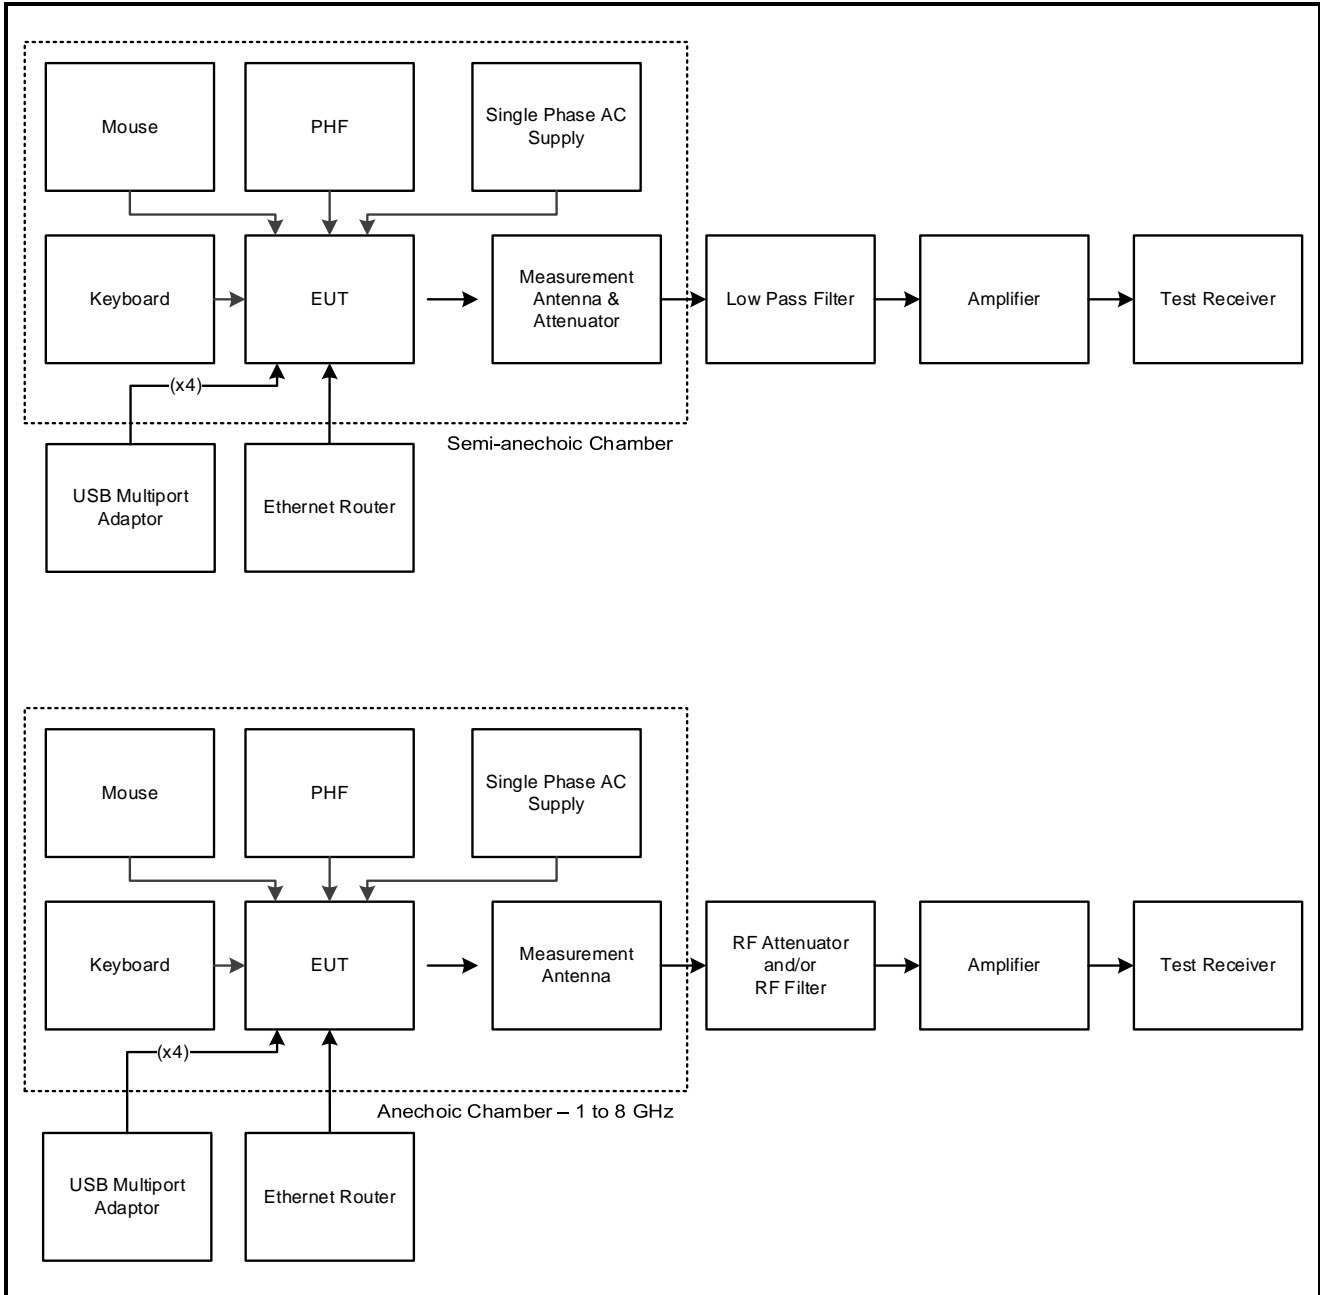

Test Setup Diagrams (continued)


Test Setup for Transmitter Radiated Emissions (non-TxBF) (continued)

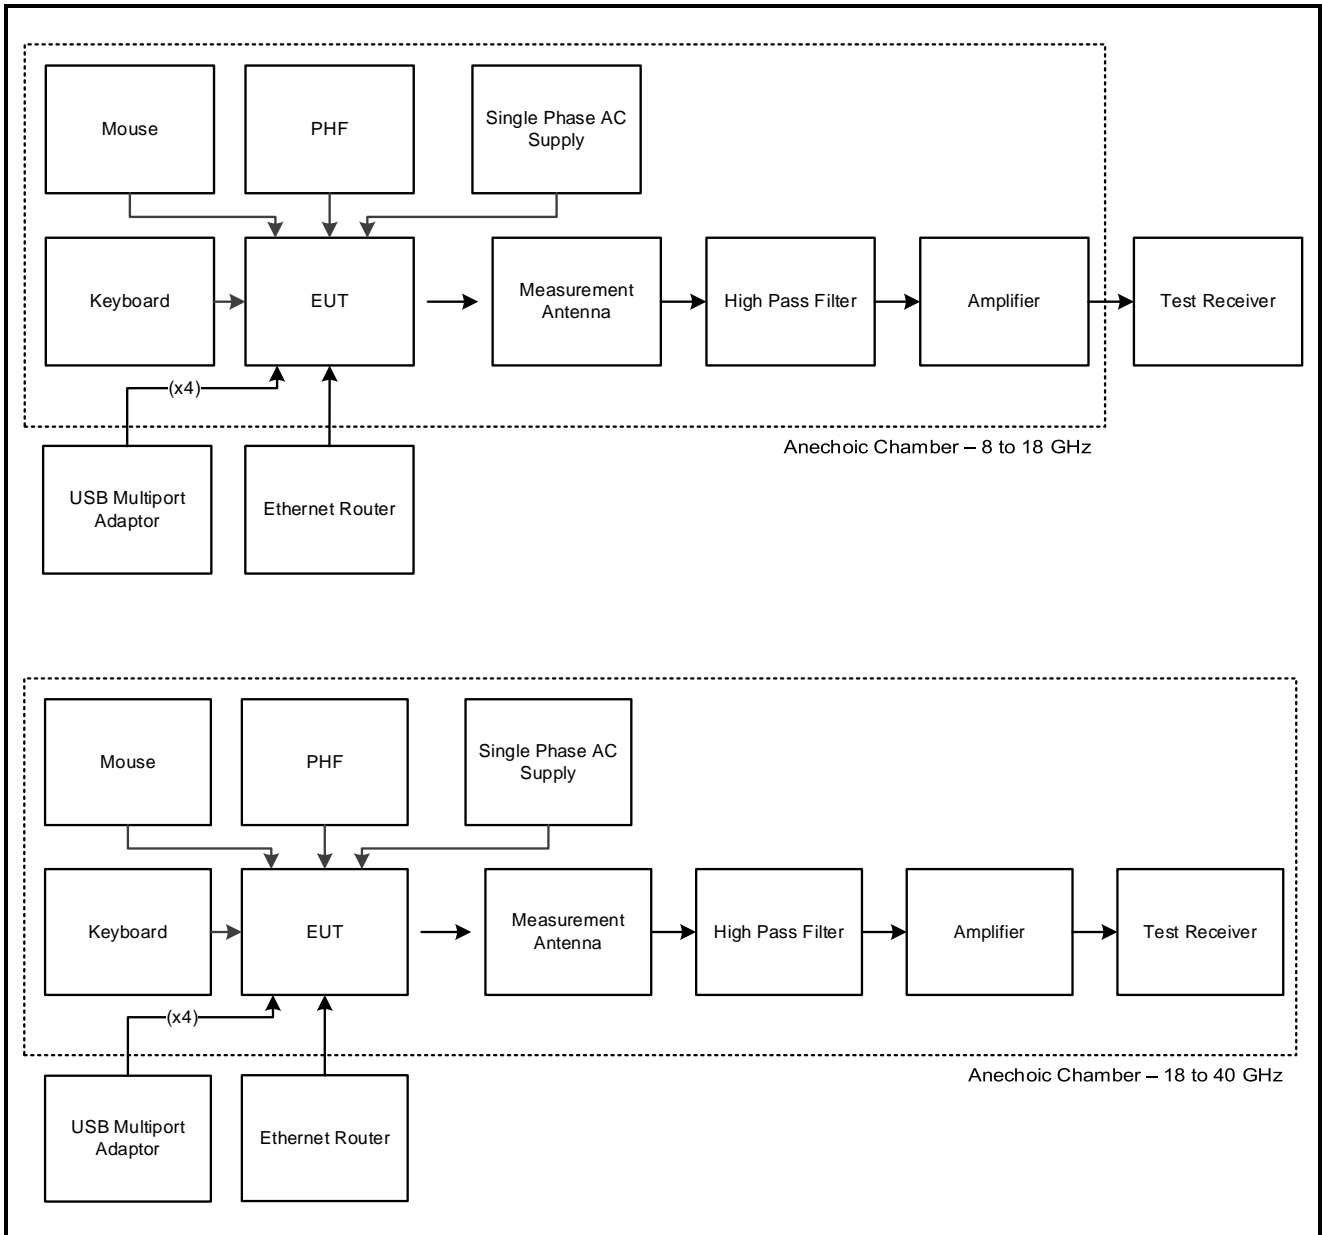

Test Setup Diagrams (continued)


Radiated Tests (continued):

Test Setup for Transmitter Radiated Emissions (TxBF)

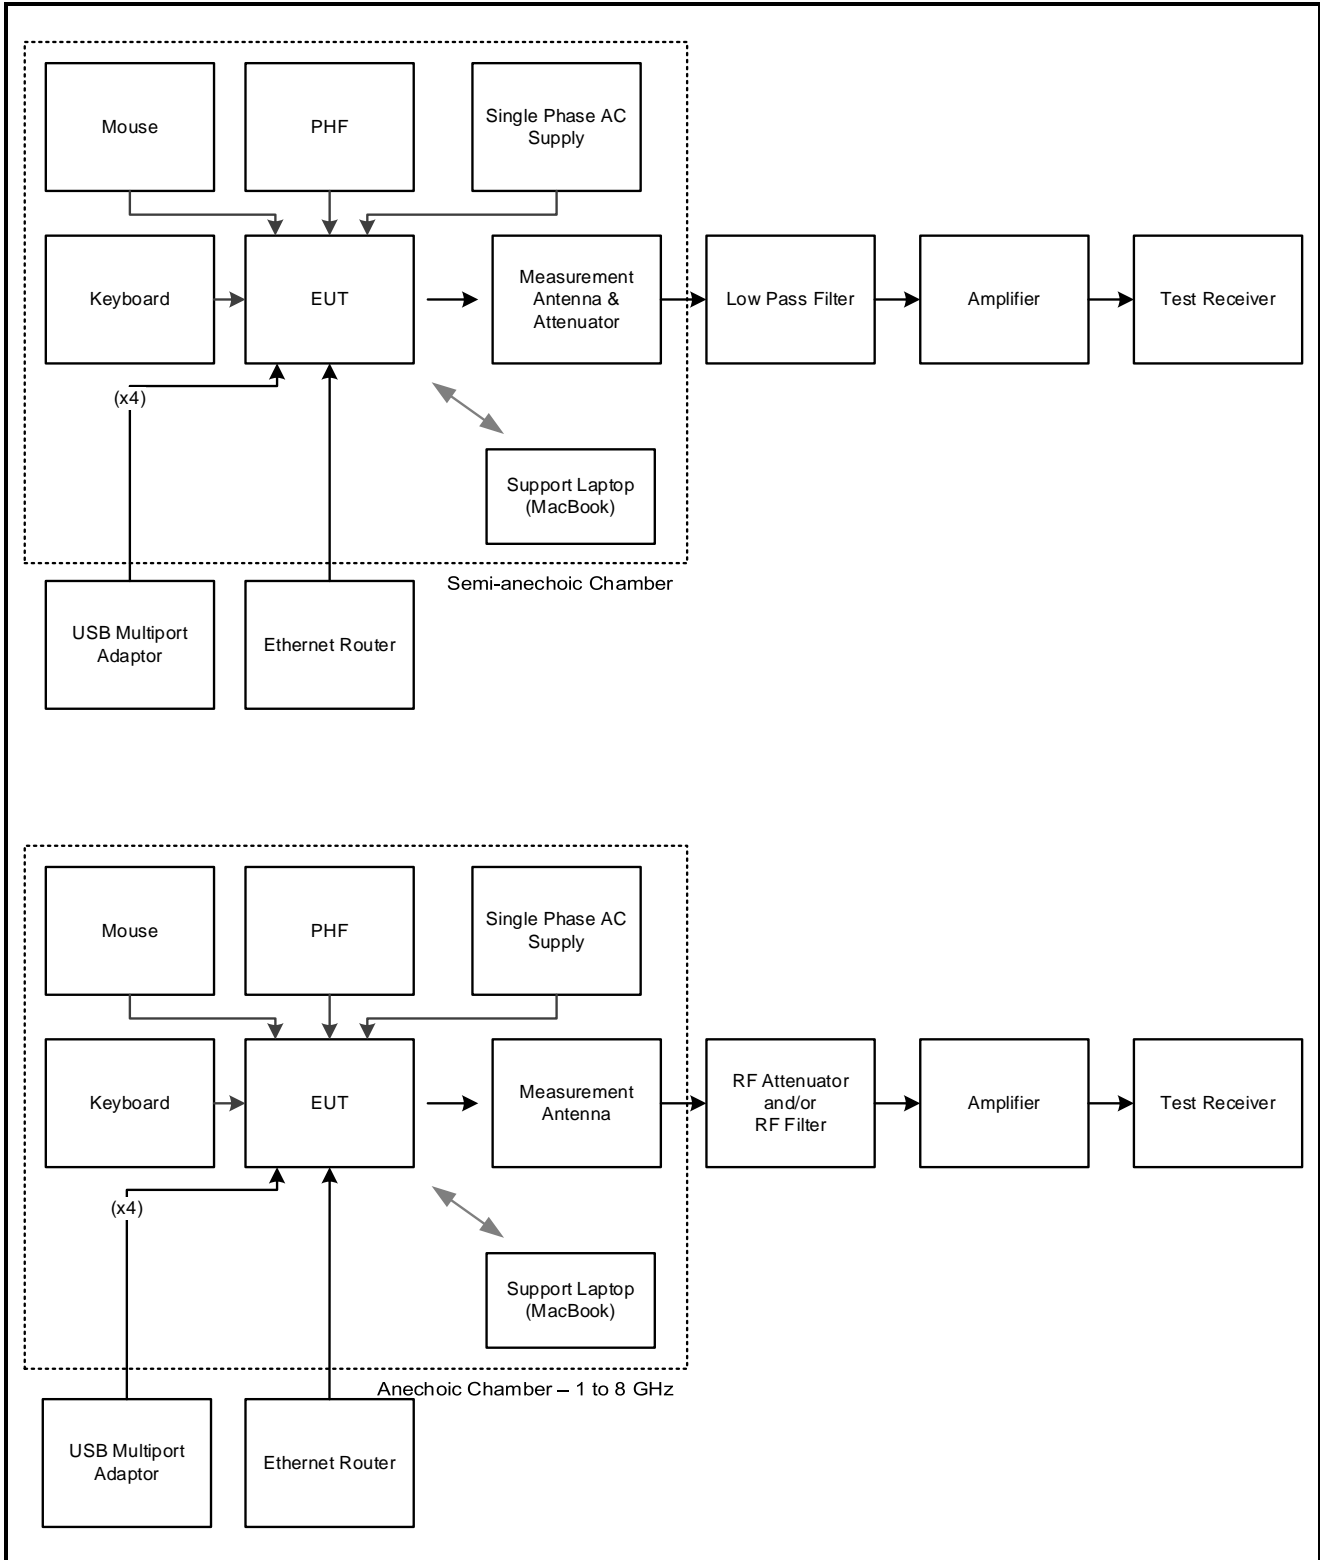

Test Setup Diagrams (continued)

Test Setup for Transmitter Radiated Emissions (TxBF) (continued)

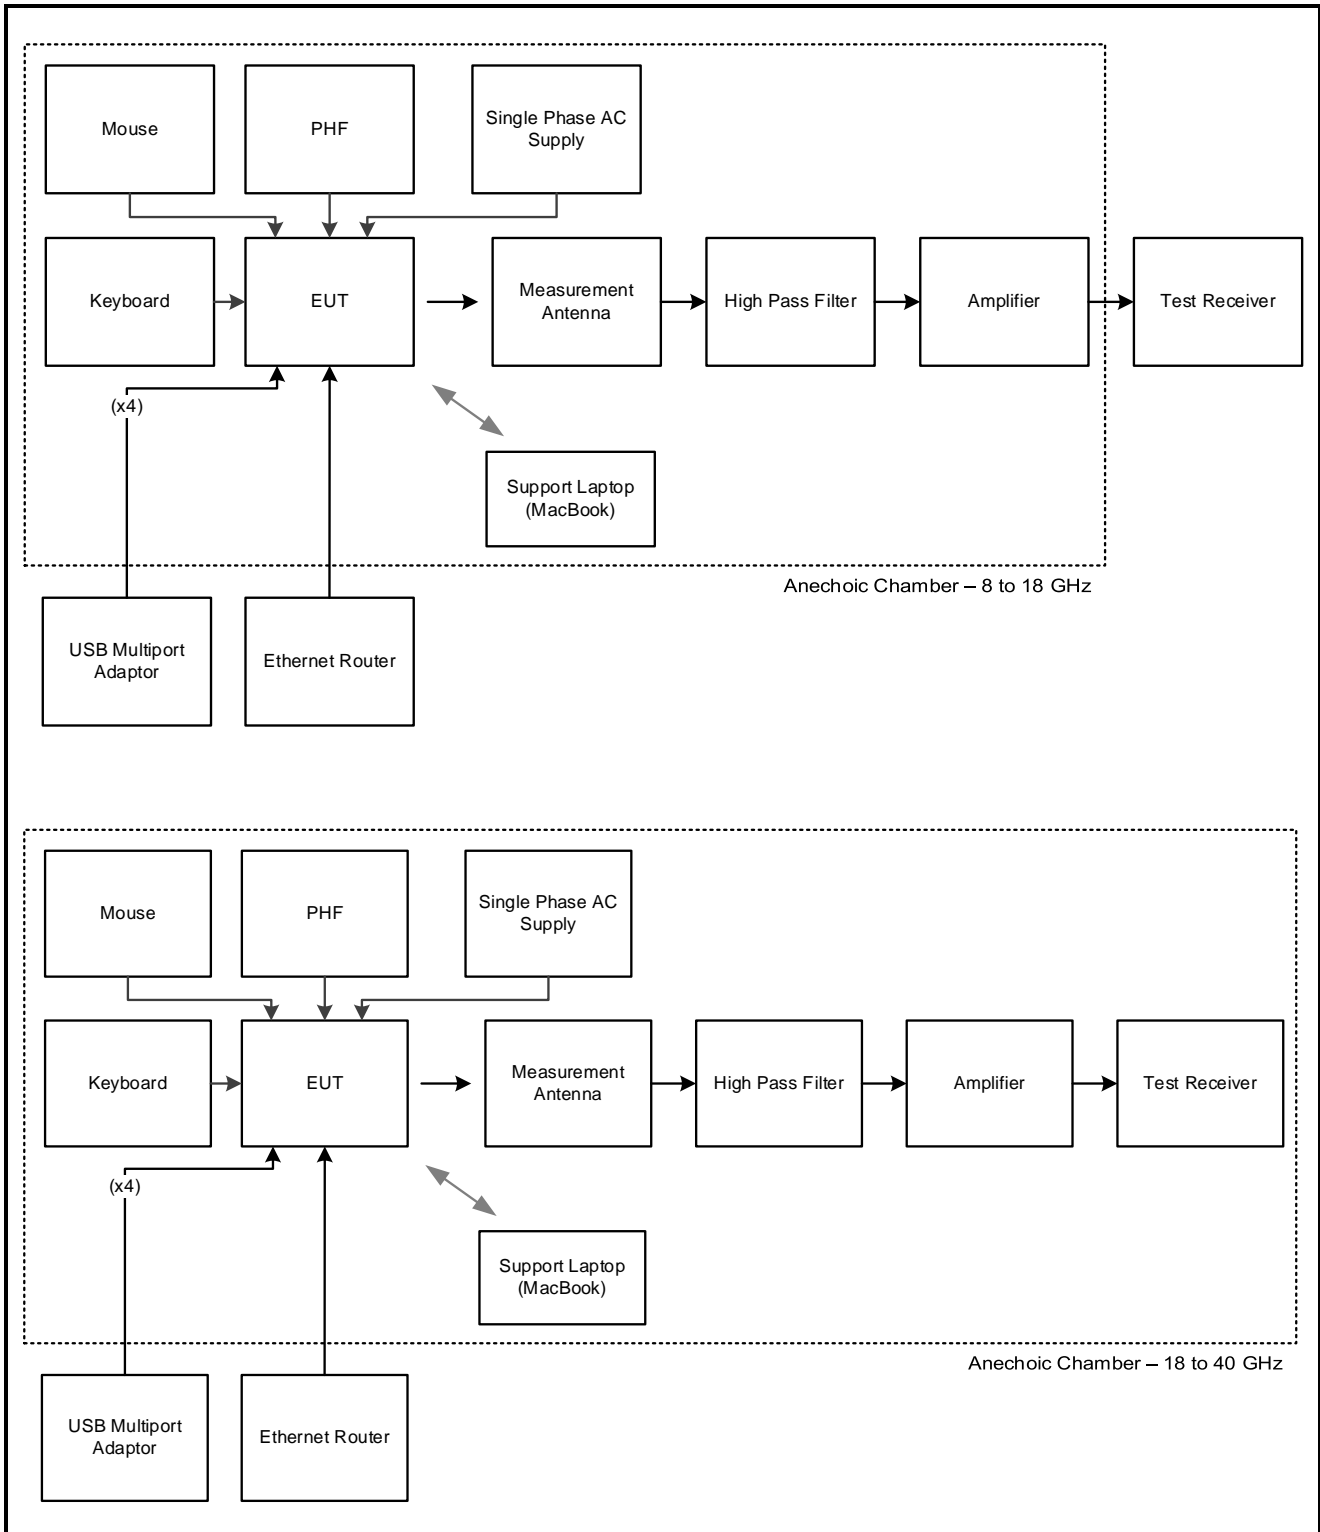

4. Antenna Port Test Results

4.1. Transmitter Duty Cycle

Test Summary:

Test Engineers:	Max Passell, Victor Carmon & Matthew Botfield	Test Dates:	07 November 2018 to 19 November 2018
Test Sample Serial Number:	C02X2007KFLX		

FCC Reference:	Part 15.35(c)
Test Method Used:	KDB 789033 D02 Section II.B.2.b)

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	48 to 52

Note(s):

- In order to assist with the determination of the average level of fundamental and spurious emissions field strength, measurements were made of duty cycle to determine the transmission duration and the silent period time of the transmitter. The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$$10 \log 1 / (\text{On Time} / [\text{Period or } 100\text{ms whichever is the lesser}]).$$

$$802.11n \text{ HT40} / \text{SISO} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (0.9363/0.9592)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{SISO} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (0.4590/0.4812)) = 0.2$$

$$802.11n \text{ HT40} / \text{MIMO} / 2\text{Tx CDD} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (0.9363/0.9604)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{MIMO} / 2\text{Tx CDD} / \text{MCS0x1} \text{ duty cycle: } 10 \log (1 / (0.4592/0.4812)) = 0.2$$

$$802.11n \text{ HT40} / \text{MIMO} / 2\text{Tx SDM} / \text{MCS8} \text{ duty cycle: } 10 \log (1 / (0.9363/0.9604)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{MIMO} / 2\text{Tx SDM} / \text{MCS0x2} \text{ duty cycle: } 10 \log (1 / (0.4590/0.4812)) = 0.2$$

$$802.11n \text{ HT20} / \text{MIMO} / 2\text{Tx TXBF} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (4.770/4.890)) = 0.1$$

$$802.11n \text{ HT40} / \text{MIMO} / 2\text{Tx TXBF} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (5.020/5.150)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{MIMO} / 2\text{Tx TXBF} / \text{MCS0x1} \text{ duty cycle: } 10 \log (1 / (5.300/5.410)) = 0.1$$

$$802.11n \text{ HT40} / \text{MIMO} / 3\text{Tx CDD} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (0.9363/0.9604)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{MIMO} / 3\text{Tx CDD} / \text{MCS0x1} \text{ duty cycle: } 10 \log (1 / (0.4590/0.4812)) = 0.2$$

$$802.11n \text{ HT40} / \text{MIMO} / 3\text{Tx SDM} / \text{MCS16} \text{ duty cycle: } 10 \log (1 / (0.9375/0.9604)) = 0.1$$

$$802.11ac \text{ VHT80} / \text{MIMO} / 3\text{Tx SDM} / \text{MCS0x3} \text{ duty cycle: } 10 \log (1 / (0.4590/0.4812)) = 0.2$$

$$802.11n \text{ HT20} / \text{MIMO} / 3\text{Tx TXBF} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (3.810/3.930)) = 0.1$$

$$802.11n \text{ HT40} / \text{MIMO} / 3\text{Tx TXBF} / \text{MCS0} \text{ duty cycle: } 10 \log (1 / (4.600/4.710)) = 0.1$$


$$802.11ac \text{ VHT80} / \text{MIMO} / 3\text{Tx TXBF} / \text{MCS0x1} \text{ duty cycle: } 10 \log (1 / (5.070/5.190)) = 0.1$$

- Plots below are for data rates with a duty cycle less than 98%. Results for all other modes having a duty cycle >98% are archived on the UL VS LTD IT server and available for inspection if required.
- The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuators and RF cables.

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / SISO / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9363	0.9592	0.1

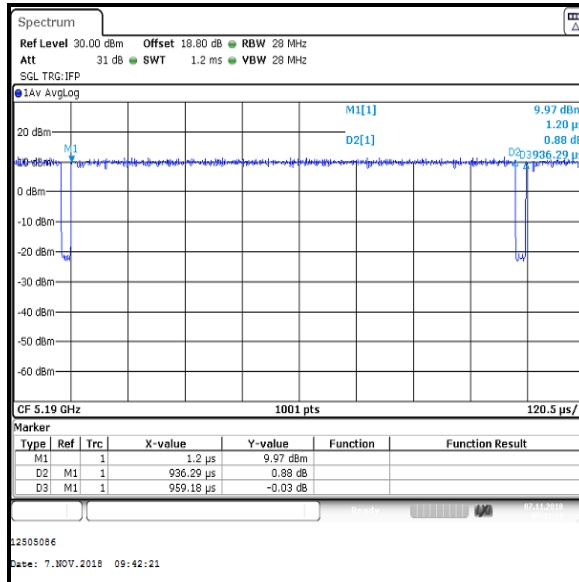

Results: 802.11ac / 80 MHz / SISO / MCS0x1


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4590	0.4812	0.2

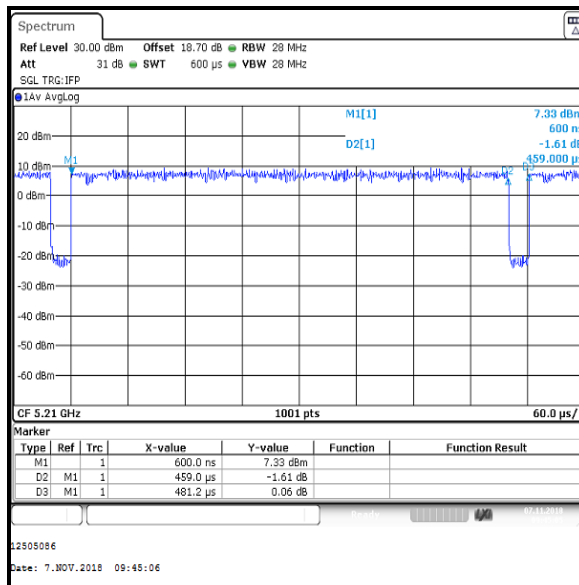

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9363	0.9604	0.1

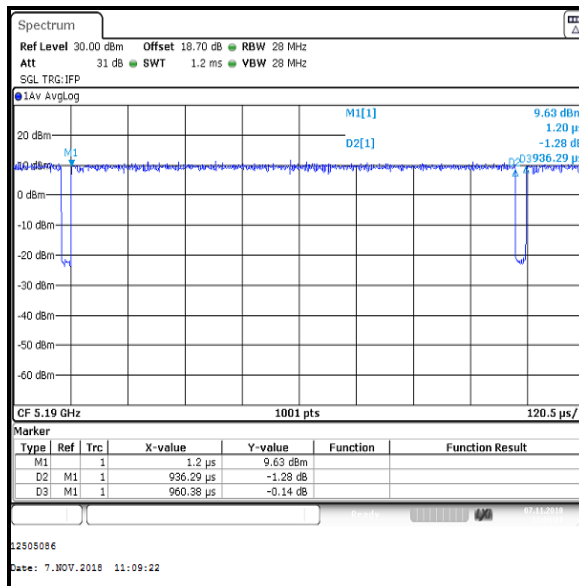

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / MCS0


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4590	0.4812	0.2

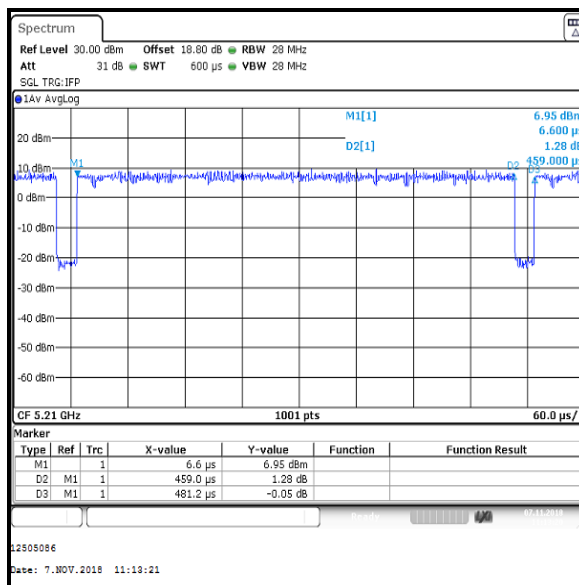

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / MIMO / 2Tx SDM / MCS8

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9363	0.9604	0.1

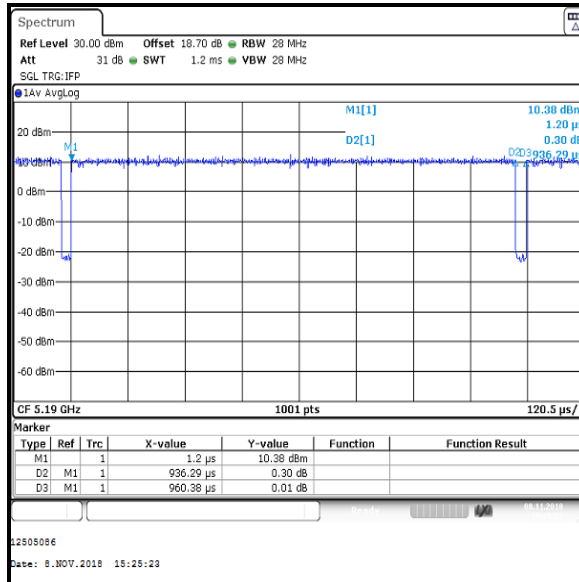

Results: 802.11ac / 80 MHz / MIMO / 2Tx SDM / MCS0x2


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4590	0.4812	0.2

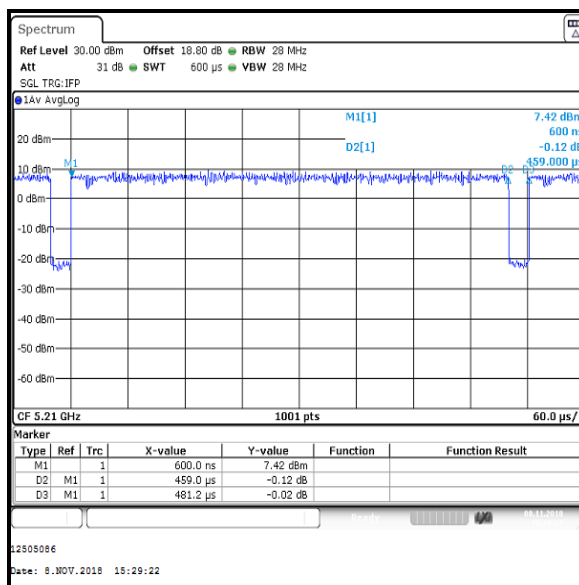

Transmitter Duty Cycle (continued)


Results: 802.11n / 20 MHz / MIMO / 2Tx TXBF / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
4.770	4.890	0.1

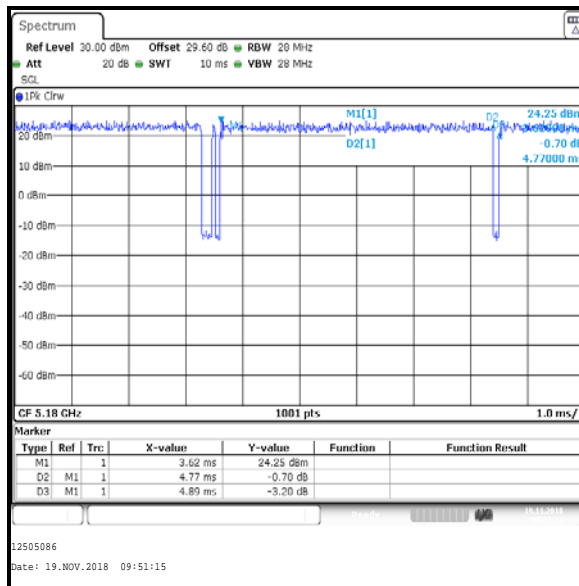

Results: 802.11n / 40 MHz / MIMO / 2Tx TXBF / MCS0


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
5.020	5.150	0.1

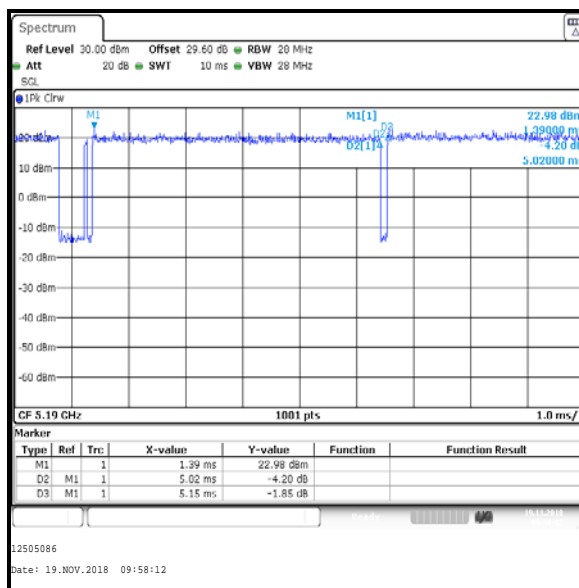

Transmitter Duty Cycle (continued)

Results: 802.11ac / 80 MHz / MIMO / 2Tx TXBF / MCS0


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
5.300	5.410	0.1

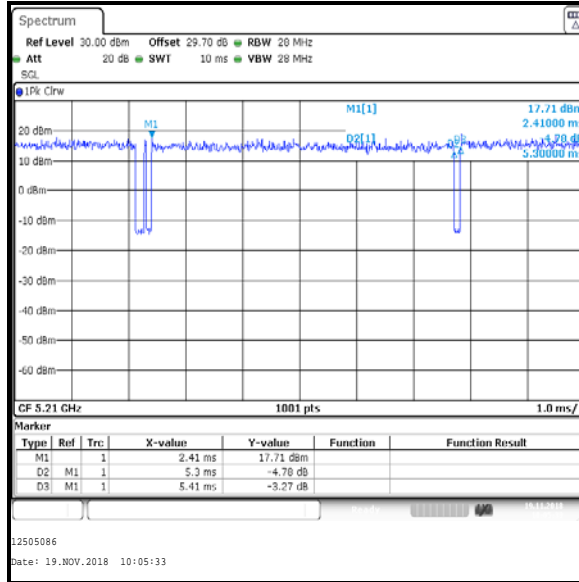

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9363	0.9604	0.1

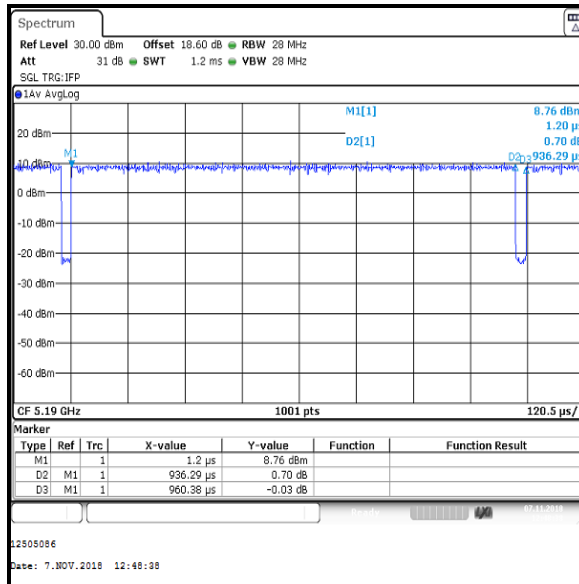

Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / MCS0


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4590	0.4812	0.2

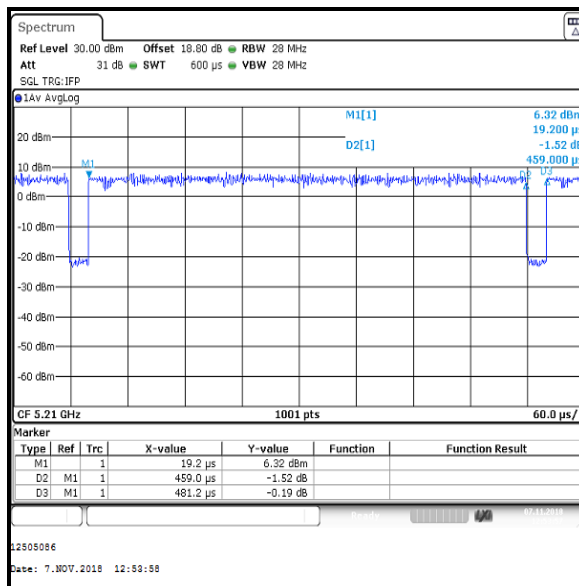

Transmitter Duty Cycle (continued)


Results: 802.11n / 40 MHz / MIMO / 3Tx SDM / MCS16

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.9375	0.9604	0.1

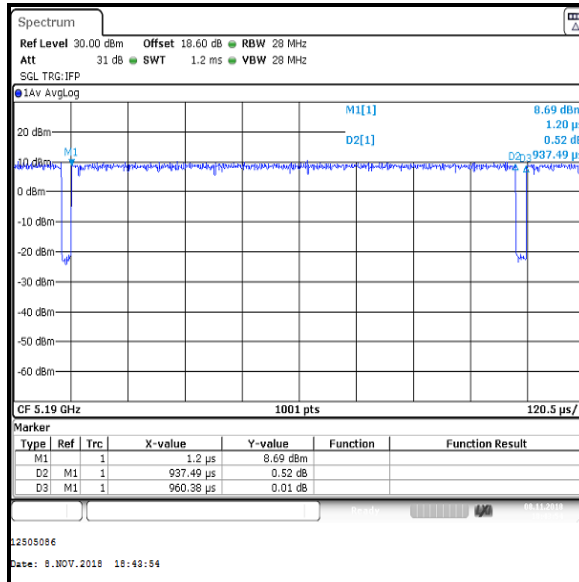

Results: 802.11ac / 80 MHz / MIMO / 3Tx SDM / MCS0x3


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
0.4590	0.4812	0.2

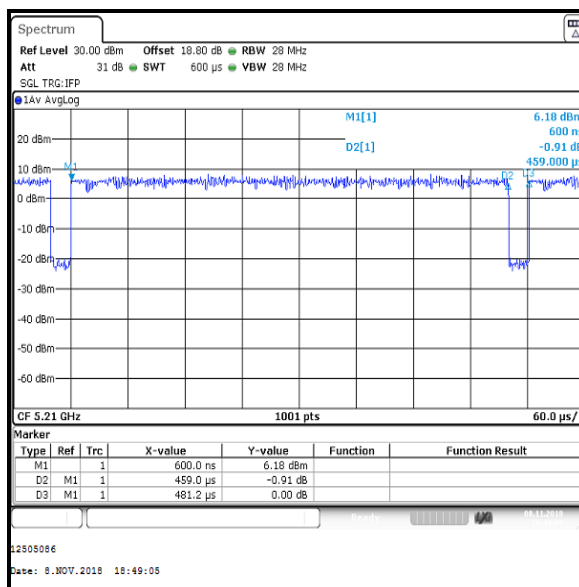

Transmitter Duty Cycle (continued)


Results: 802.11n / 20 MHz / MIMO / 3Tx TXBF / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
3.810	3.930	0.1

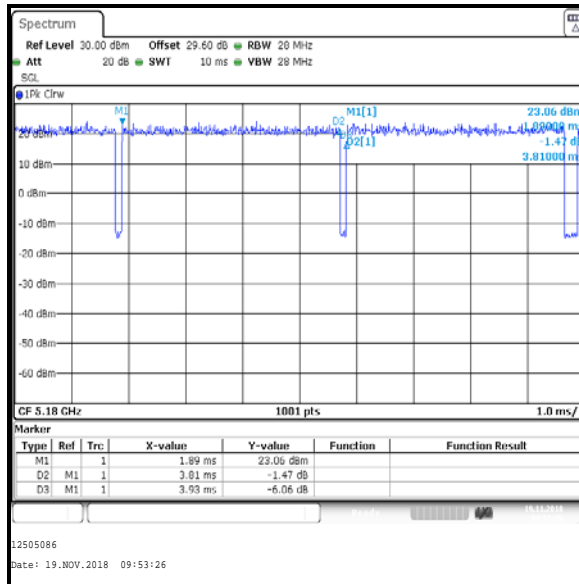

Results: 802.11n / 40 MHz / MIMO / 3Tx TXBF / MCS0


Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
4.600	4.710	0.1

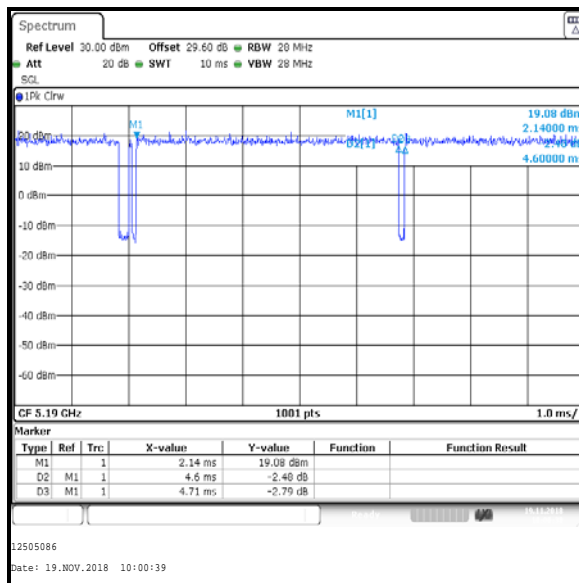

Transmitter Duty Cycle (continued)

Results: 802.11ac / 80 MHz / MIMO / 3Tx TXBF / MCS0

Pulse Duration (ms)	Period (ms)	Duty Cycle (dB)
5.070	5.190	0.1

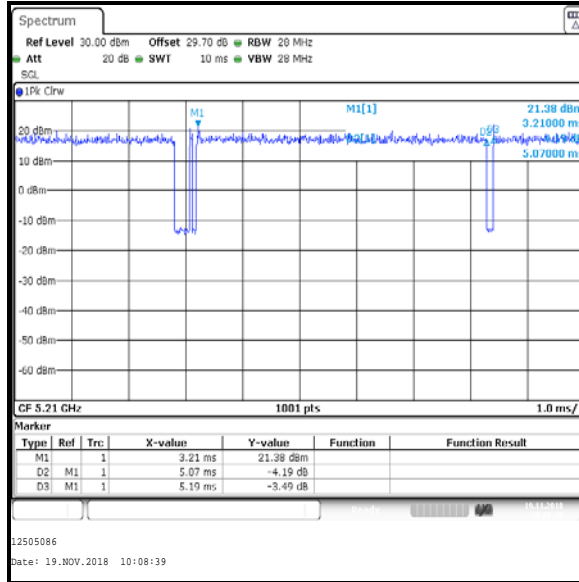

4.2. Transmitter 26 dB Emission Bandwidth

Test Summary:

Test Engineers:	Max Passell, Victor Carmon & Matthew Botfield	Test Dates:	07 November 2018 to 30 November 2018
Test Sample Serial Numbers:	C02X2007KFLX & C02WW00WKFMM		

FCC Reference:	Part 15.403(i)
Test Method Used:	KDB 789033 D02 Section II.C.1.

Environmental Conditions:

Temperatures (°C):	22 to 24
Relative Humidity (%):	42 to 52

Note(s):


1. Measurements were performed on data rates detailed in Section 3.5 on the relevant channels.
2. The signal analyser's resolution bandwidth was set to approximately 1% of the measured 26 dB emission bandwidth.
3. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuators and RF cables.
4. For channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz, emission bandwidth measurements were performed twice. Measurements of the entire 26 dB emission bandwidth that is contained on both U-NII-2C and U-NII-3 bands, were used for power measurements. Measurements on the emission's portion that is contained only within the U-NII-2C band, were used to calculate the conducted power limit on U-NII-2C tests. These are labelled as 'Reference plots'.
5. The EUT with serial number C02X2007KFLX was used for non-Tx BF tests, the EUT with serial C02WW00WKFMM number was used for Tx BF tests.

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)


4.2.1. 5.15-5.25 GHz band

Results: 802.11a / 20 MHz / SISO / BPSK / 6 Mbps / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	21.758
Middle	5200	42.917
Top	5240	42.977

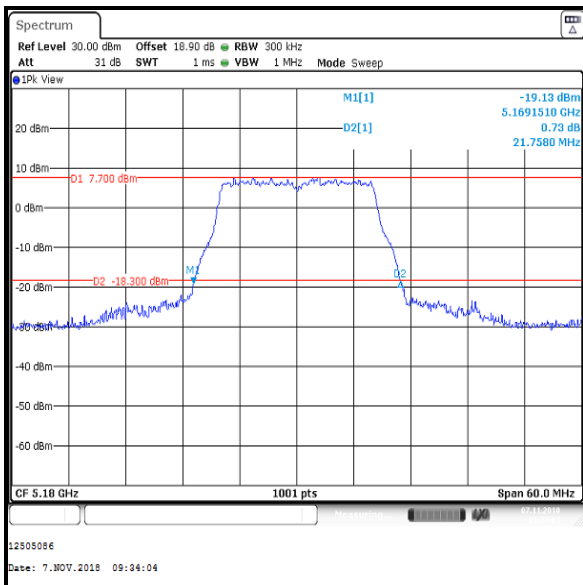

Bottom Channel

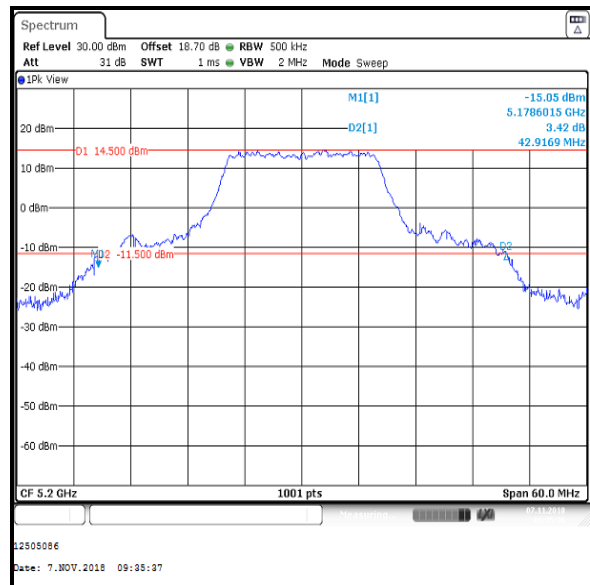

Middle Channel

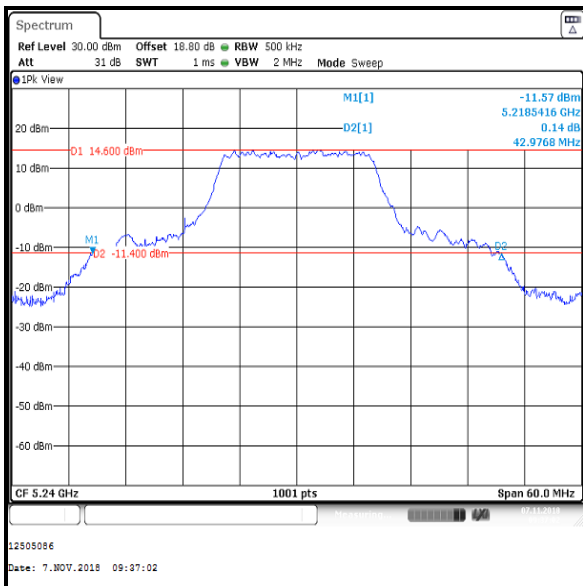


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / SISO / BPSK / MCS0 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	23.377
Middle	5200	42.737
Top	5240	42.677

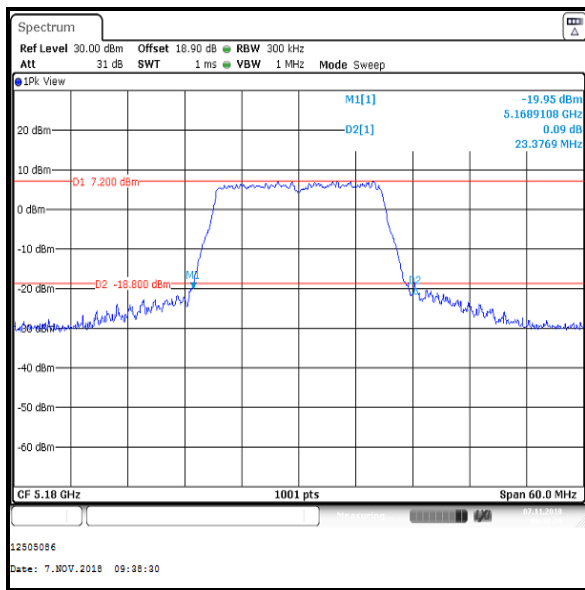

Bottom Channel

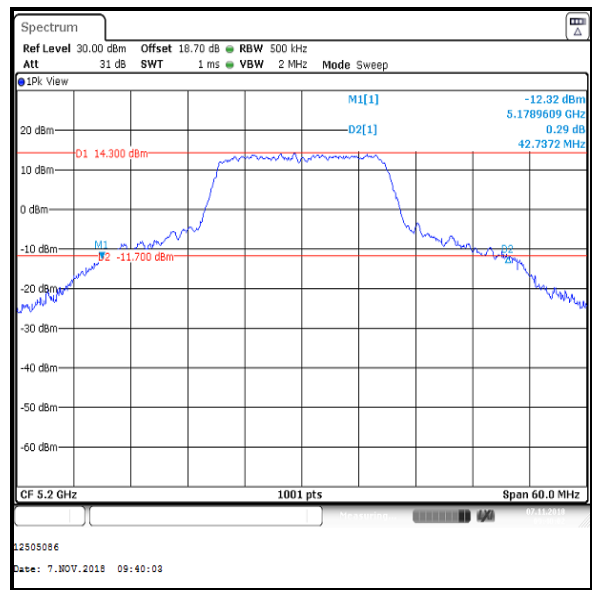

Middle Channel

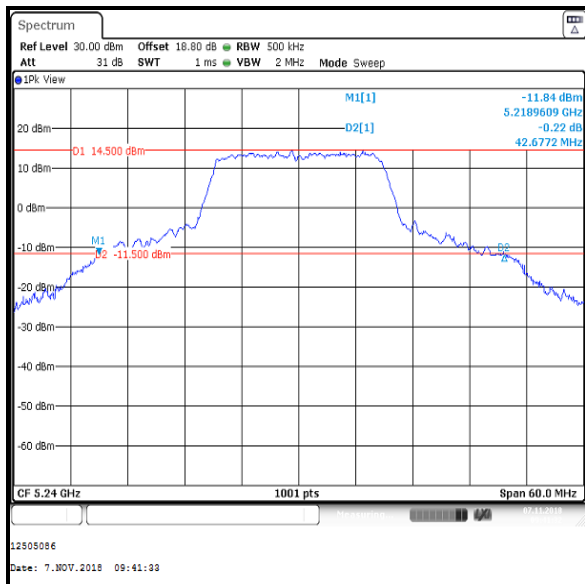


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / SISO / BPSK / MCS0 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.966
Top	5230	72.840

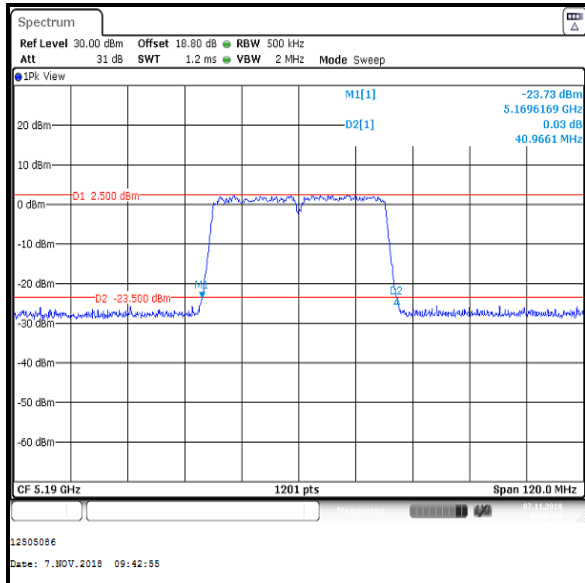

Bottom Channel

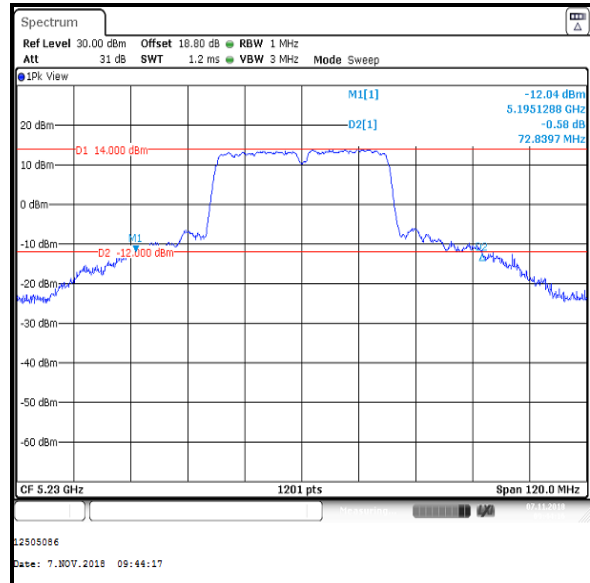


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / SISO / BPSK / MCS0 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	84.165

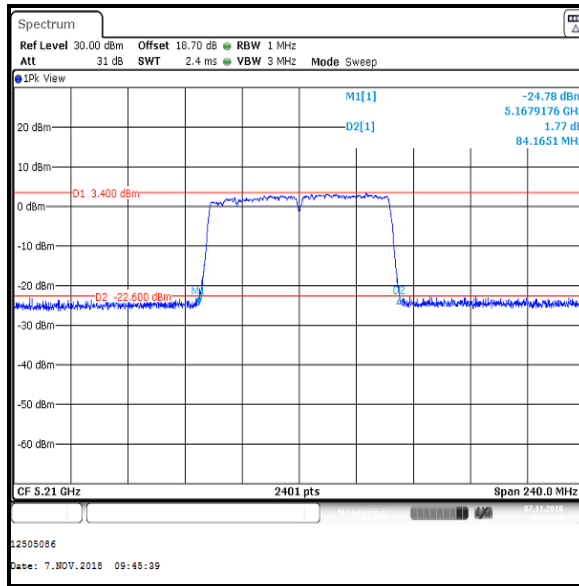


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.238
Middle	5200	24.995
Top	5240	23.856

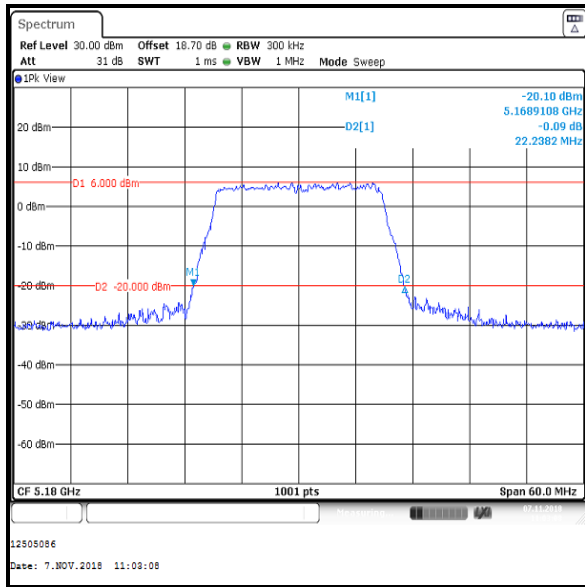

Bottom Channel

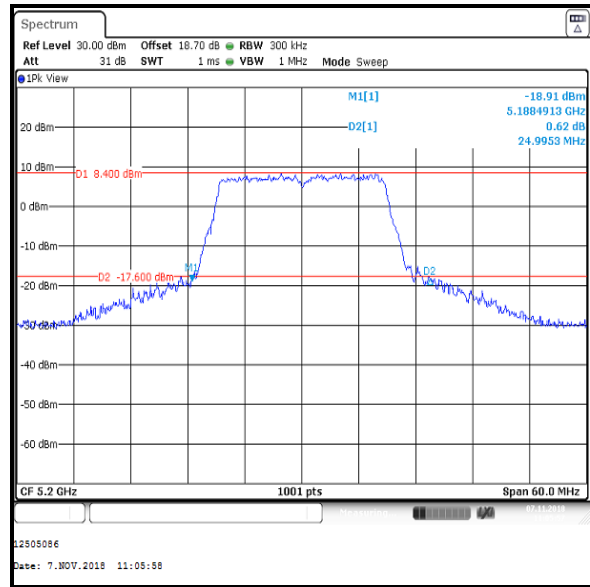

Middle Channel

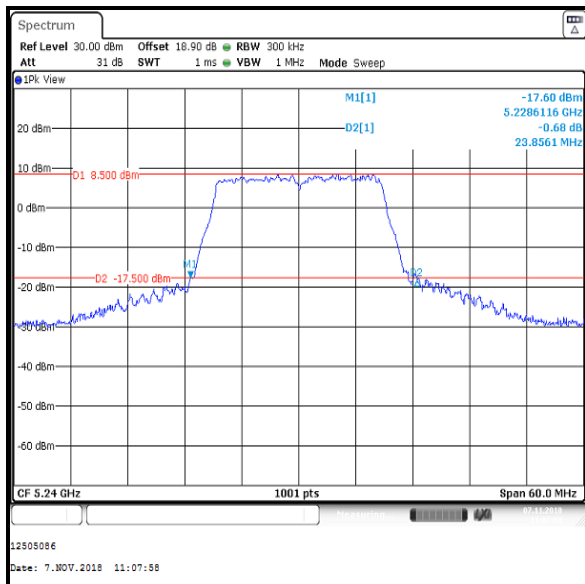


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.178
Middle	5200	22.538
Top	5240	22.598

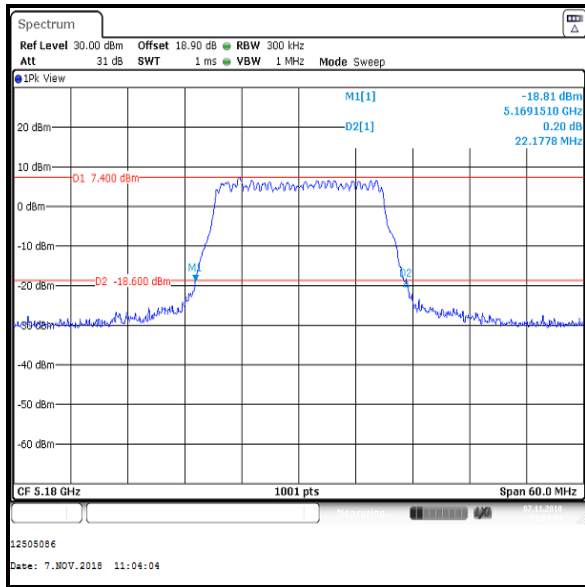

Bottom Channel

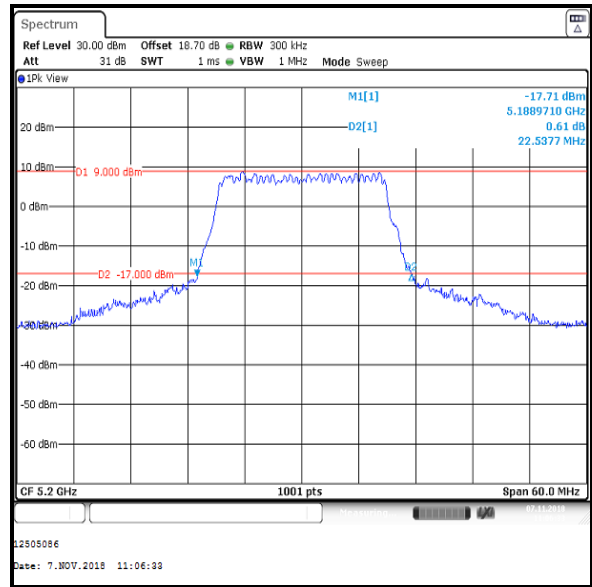

Middle Channel

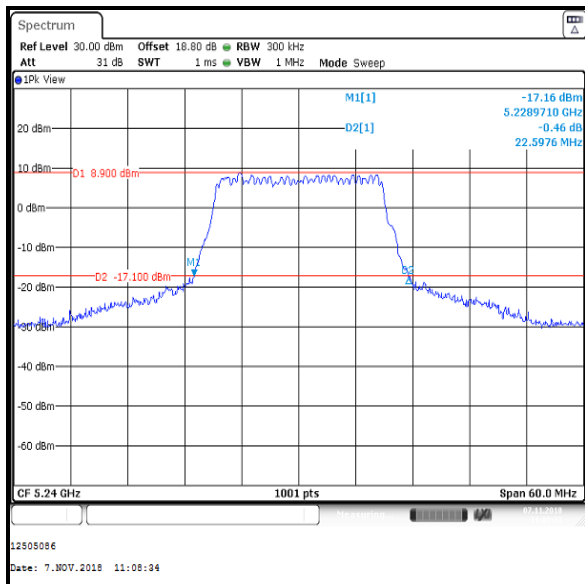


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	41.266
Top	5230	69.642

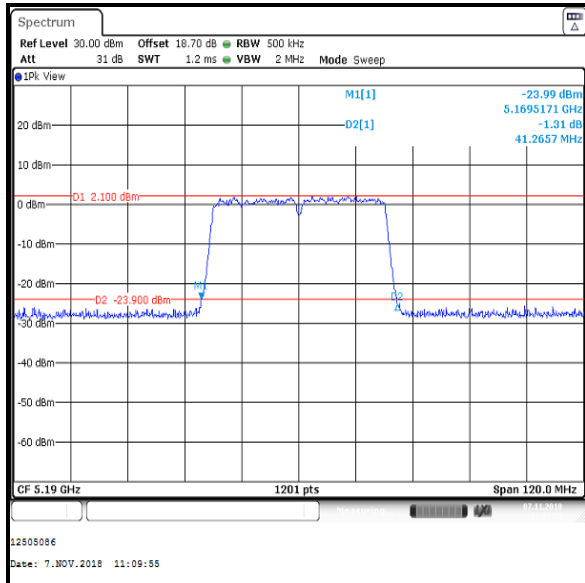

Bottom Channel

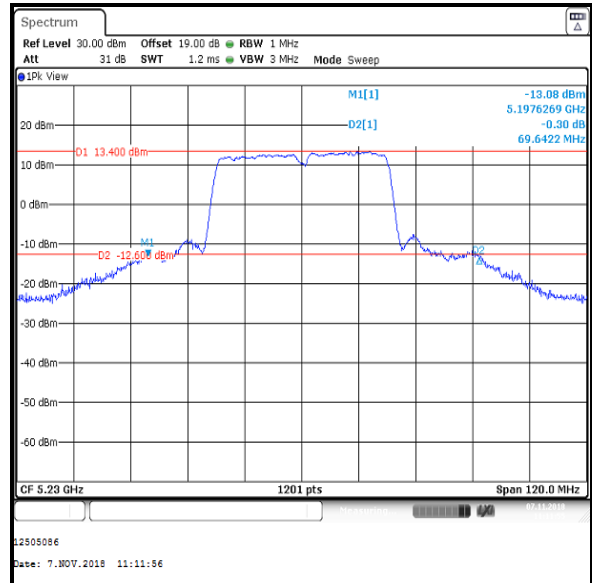


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx CDD / BPSK / MCS0 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.166
Top	5230	53.156

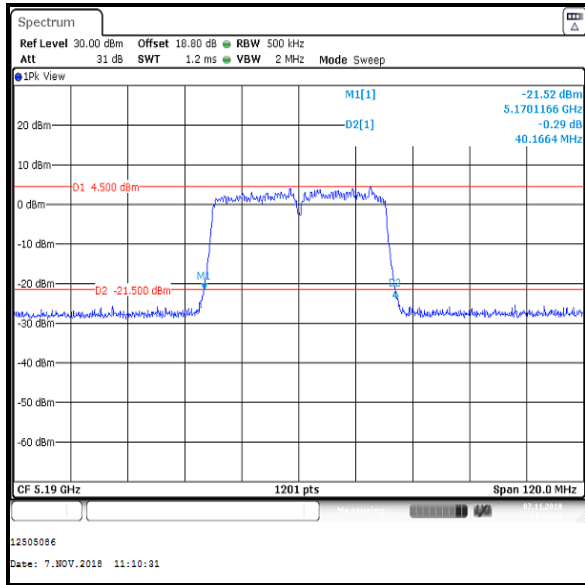

Bottom Channel

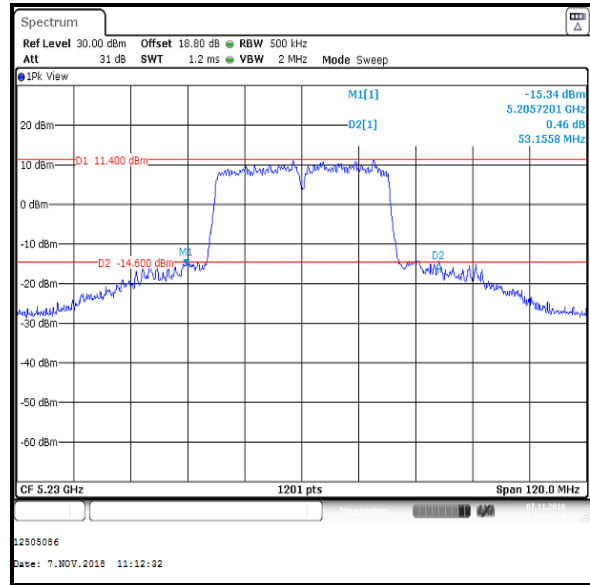


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / BPSK / MCS0x1 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.866

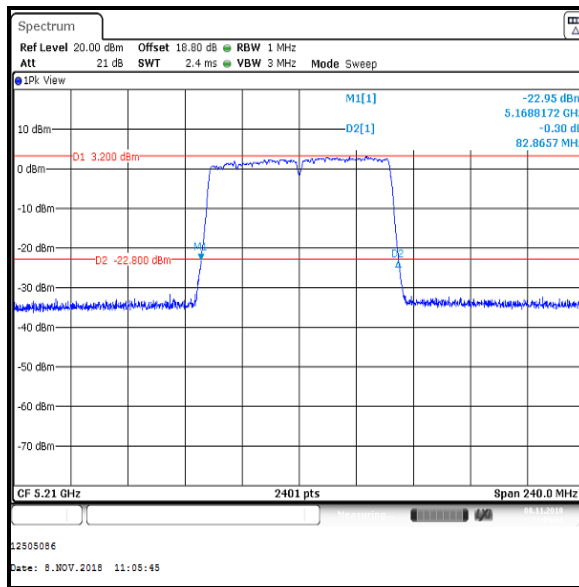

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 2Tx CDD / BPSK / MCS0x1 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.465

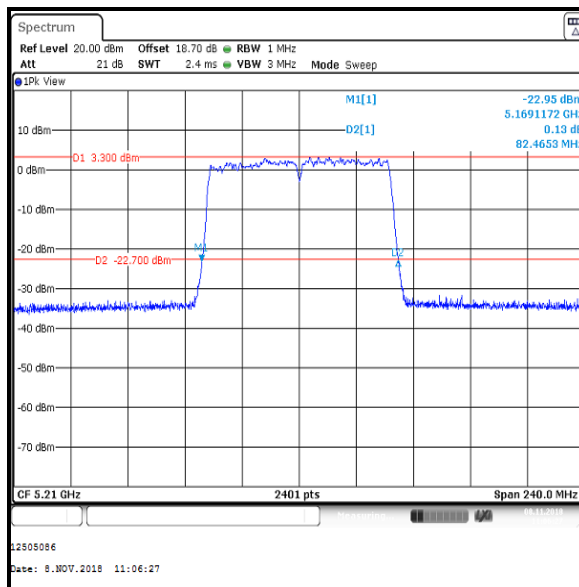


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx SDM / BPSK / MCS8 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.298
Middle	5200	27.093
Top	5240	27.512

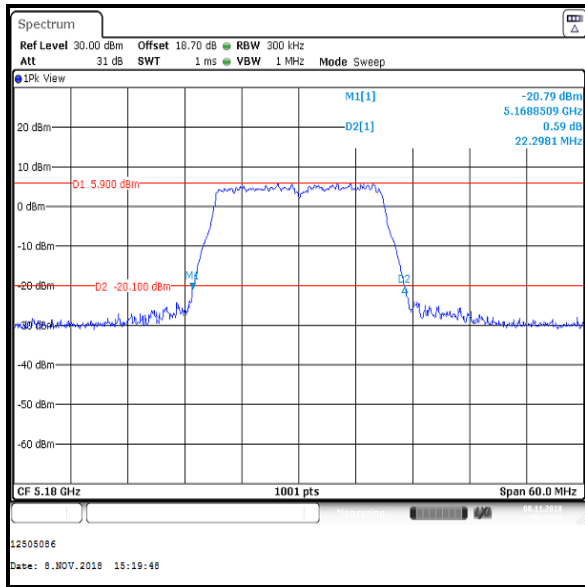

Bottom Channel

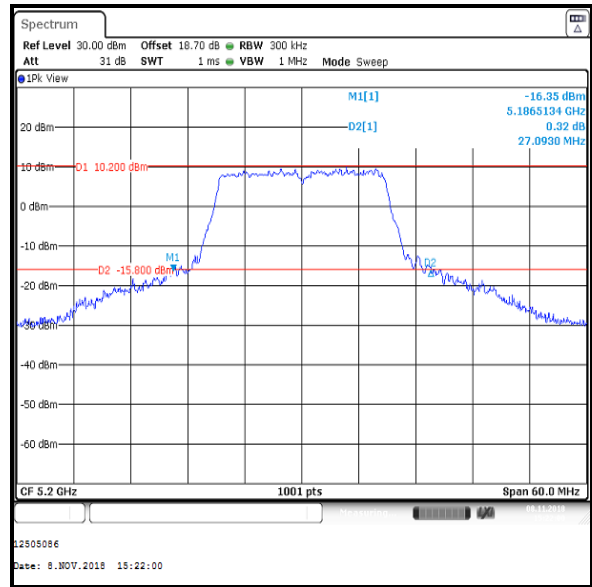

Middle Channel

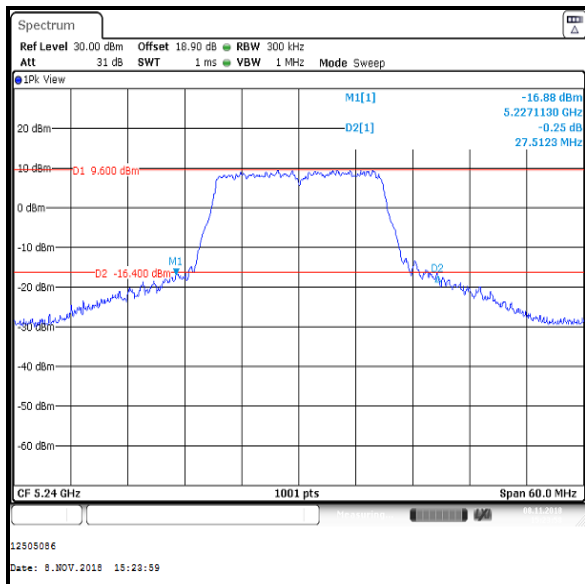


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx SDM / BPSK / MCS8 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.178
Middle	5200	25.235
Top	5240	25.115

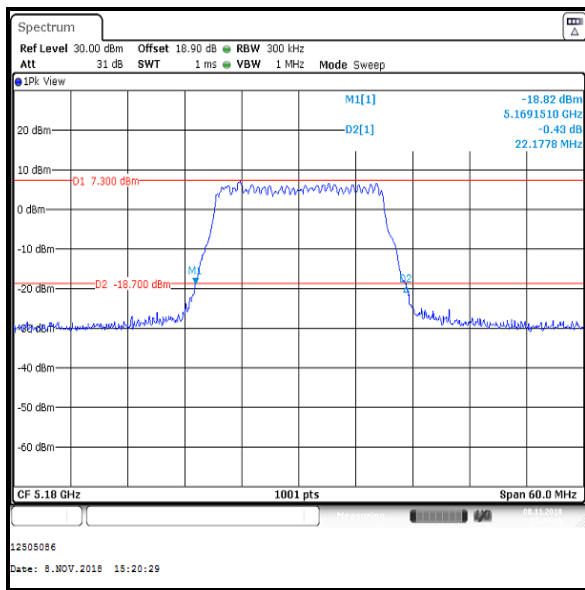

Bottom Channel

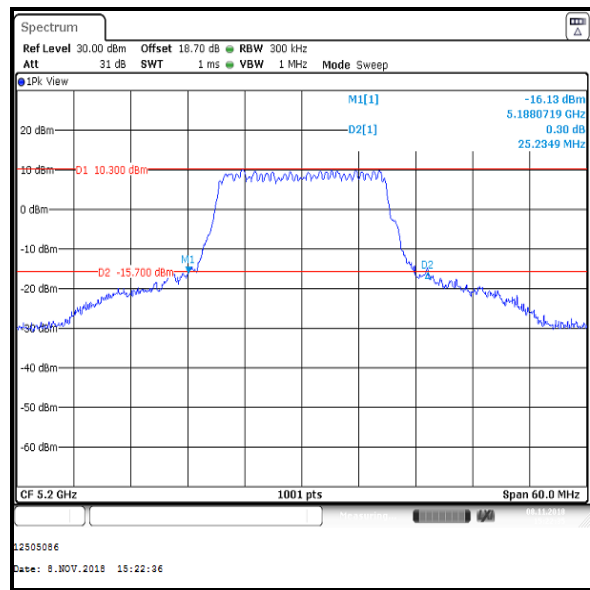

Middle Channel

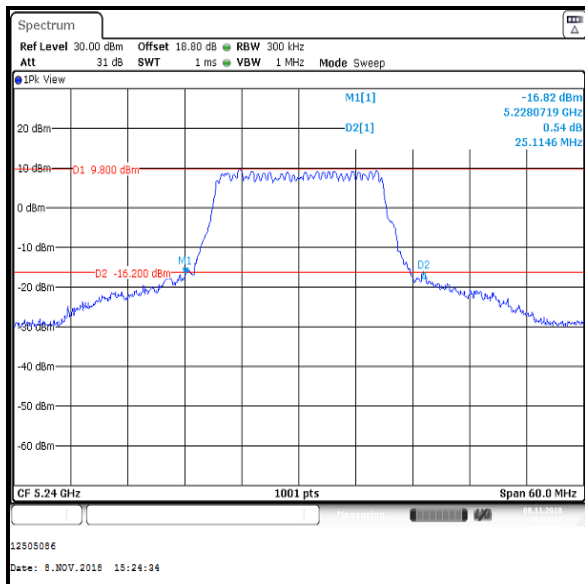


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx SDM / BPSK / MCS8 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.666
Top	5230	69.842

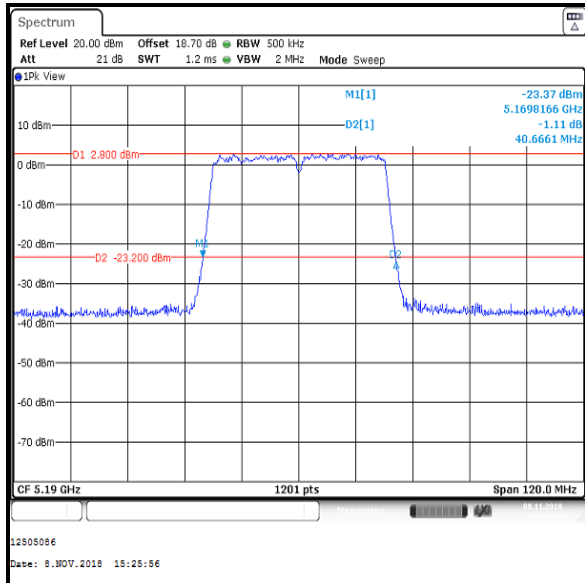

Bottom Channel

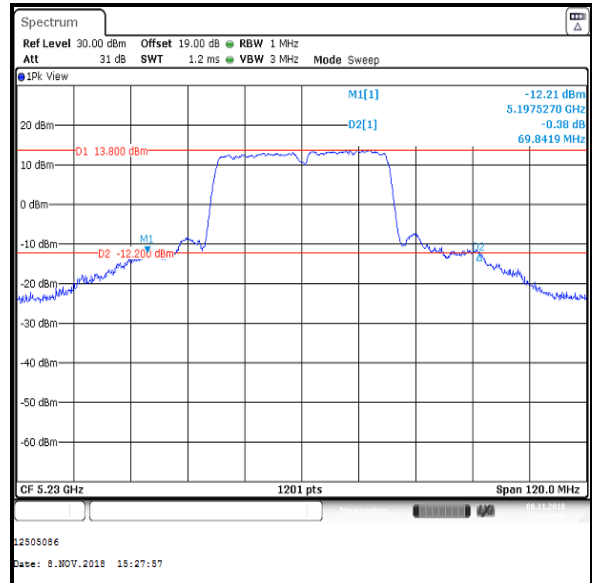


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx SDM / BPSK / MCS8 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.067
Top	5230	70.042

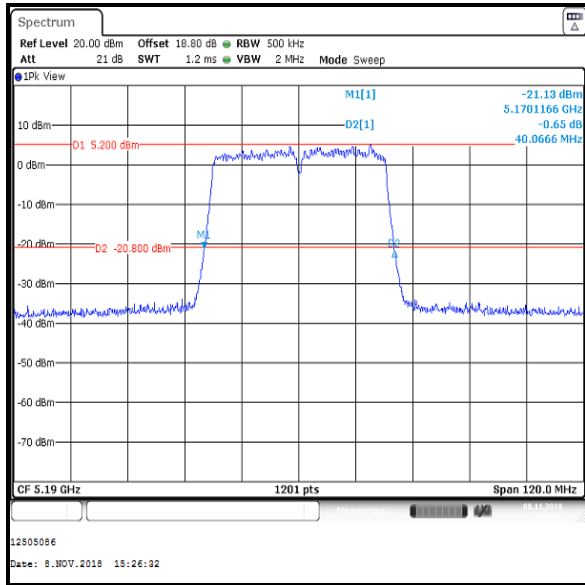

Bottom Channel

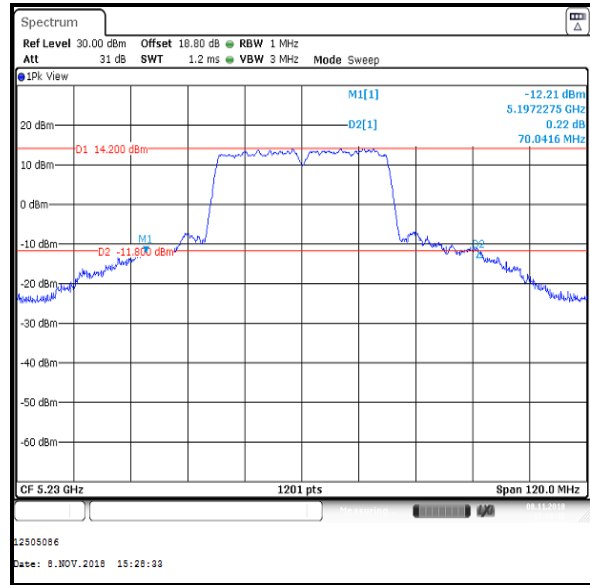


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 2Tx SDM / BPSK / MCS0x2 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.265

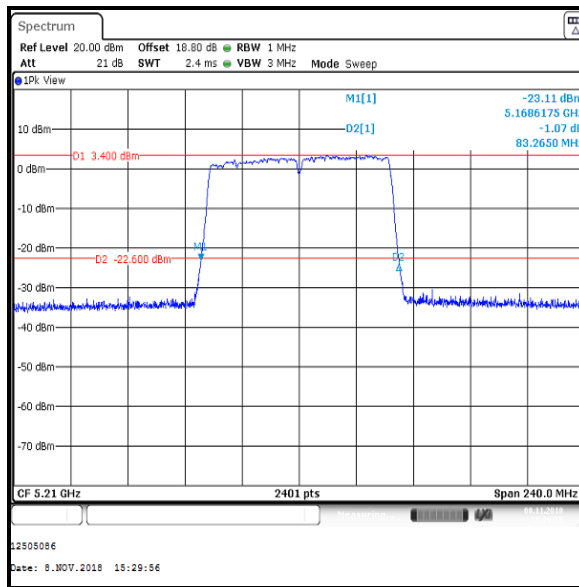

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 2Tx SDM / BPSK / MCS0x2 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.365

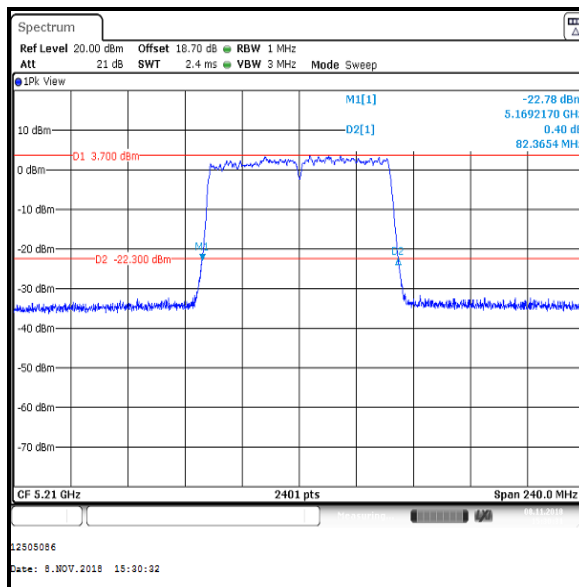


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx TXBF / BPSK / MCS0 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.939
Middle	5200	20.779
Top	5240	20.859

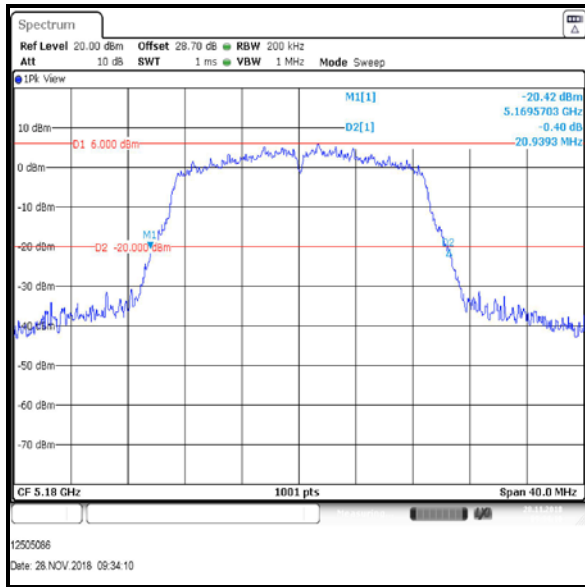

Bottom Channel

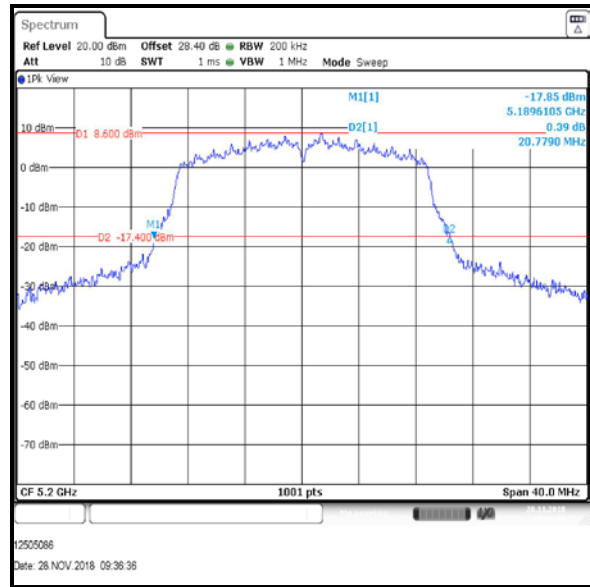

Middle Channel

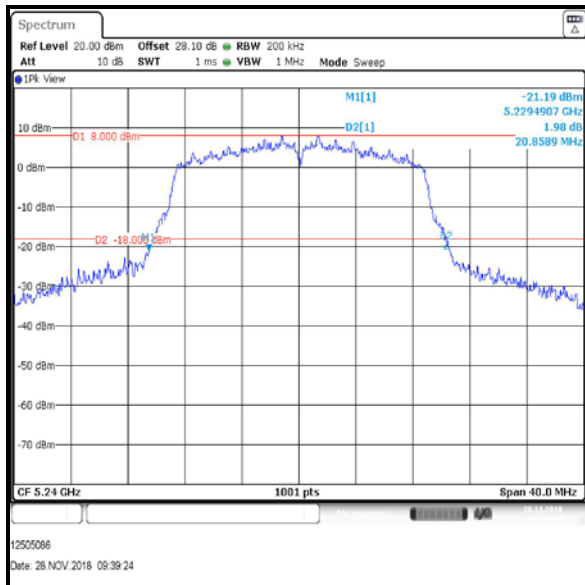


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 2Tx TXBF / BPSK / MCS0 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.579
Middle	5200	20.340
Top	5240	20.579

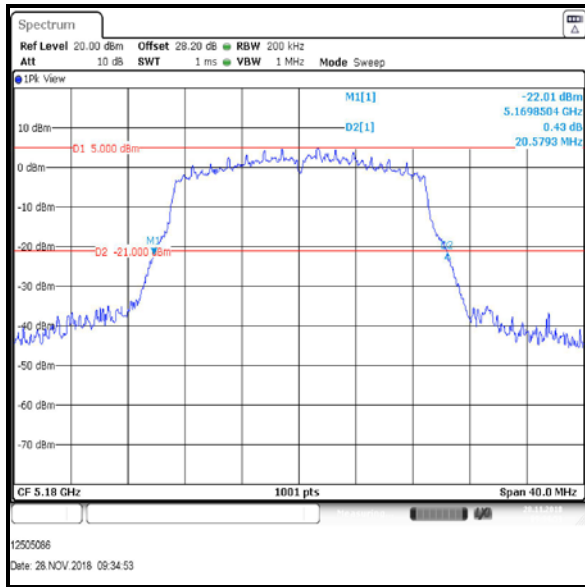

Bottom Channel

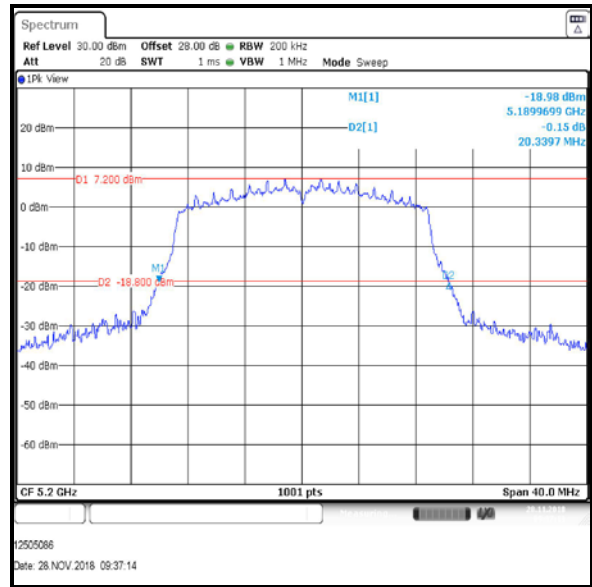

Middle Channel

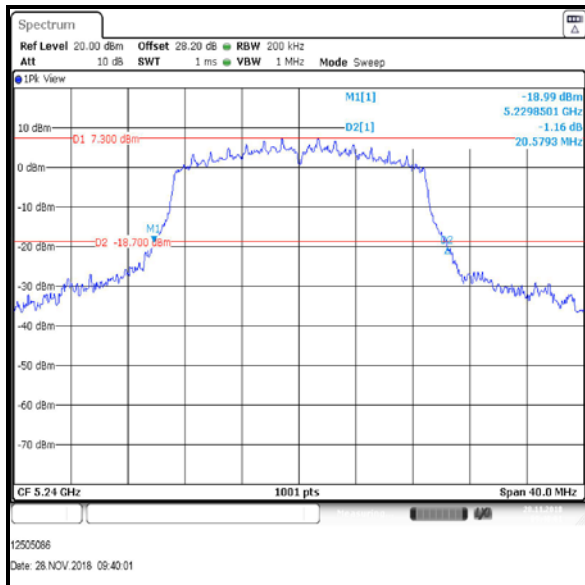


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx TXBF / BPSK / MCS0 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.520
Top	5230	84.030

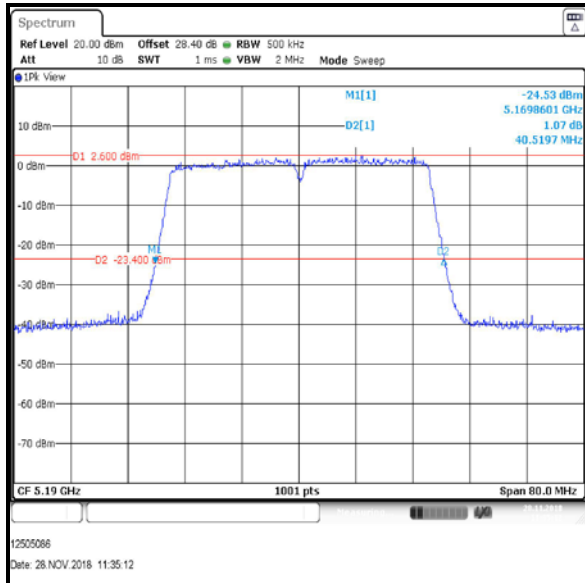

Bottom Channel

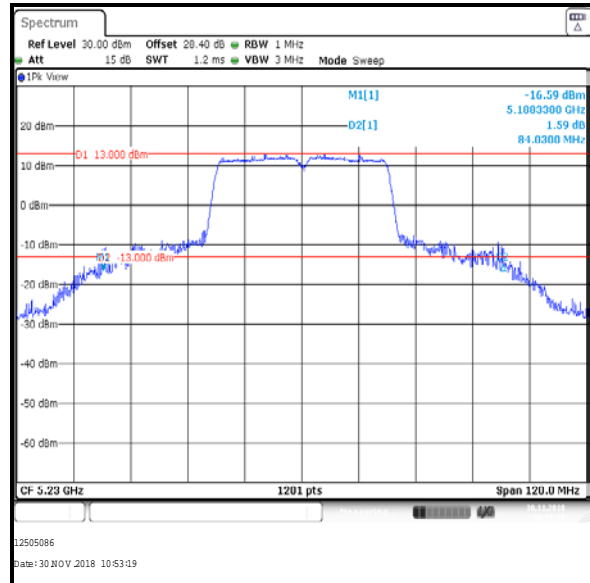


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 2Tx TXBF / BPSK / MCS0 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.120
Top	5230	48.959

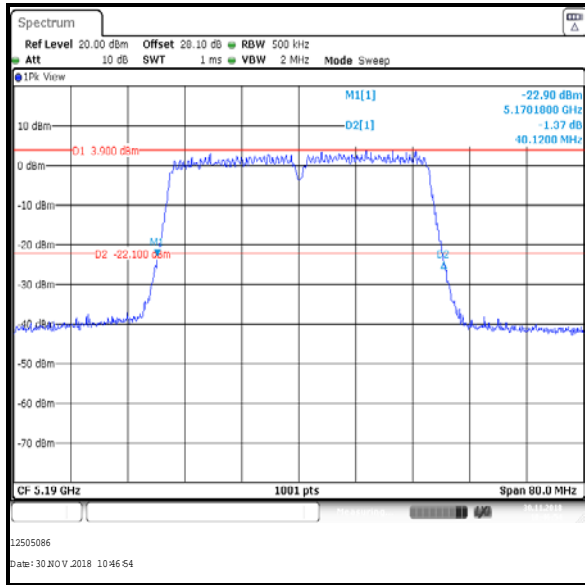

Bottom Channel

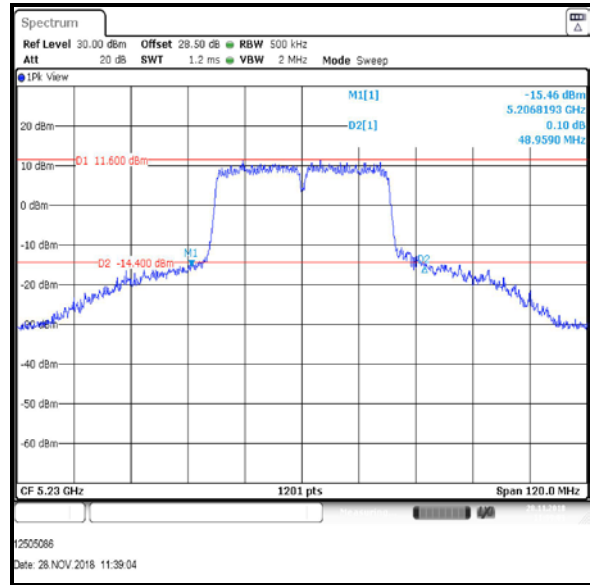


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 2Tx TXBF / BPSK / MCS0x1 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.049

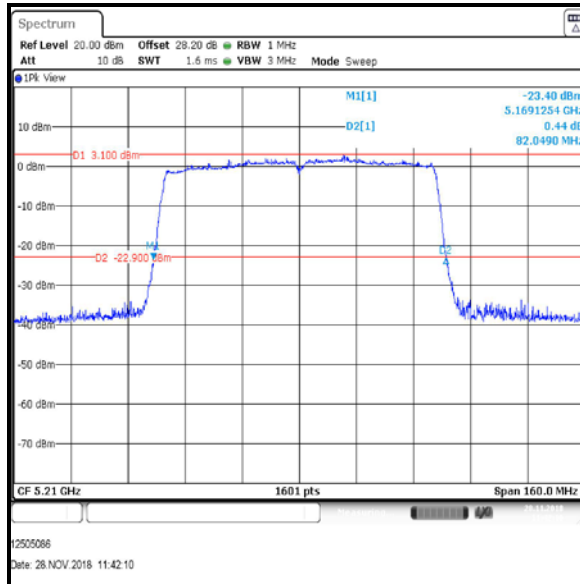

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 2Tx TXBF / BPSK / MCS0x1 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	81.749

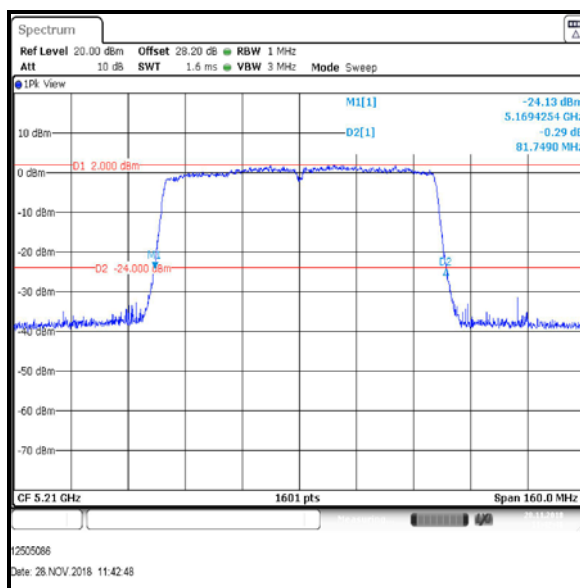


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 0


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.358
Middle	5200	22.298
Top	5240	22.298

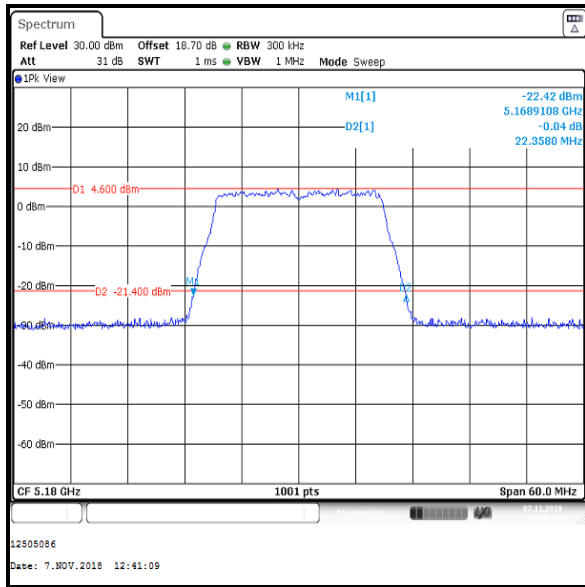

Bottom Channel

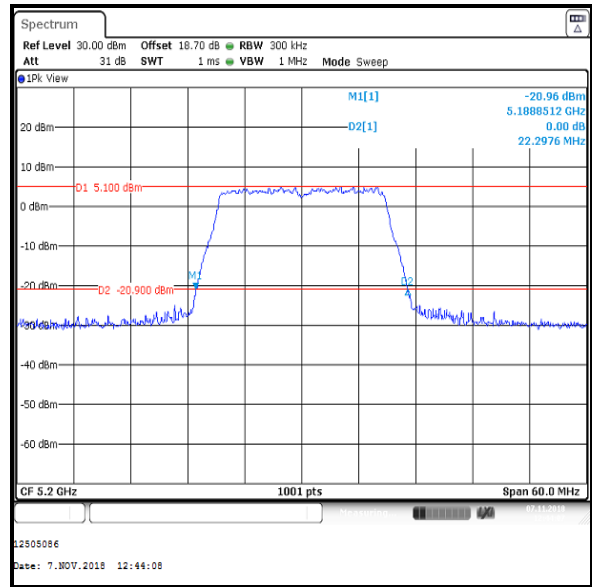

Middle Channel

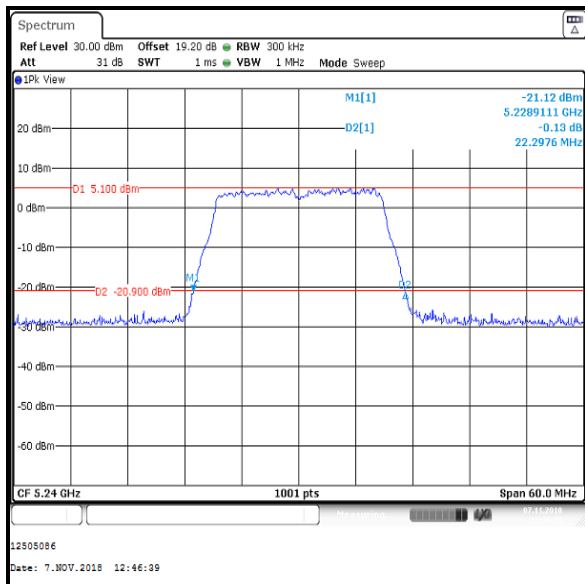


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	21.938
Middle	5200	21.938
Top	5240	22.058

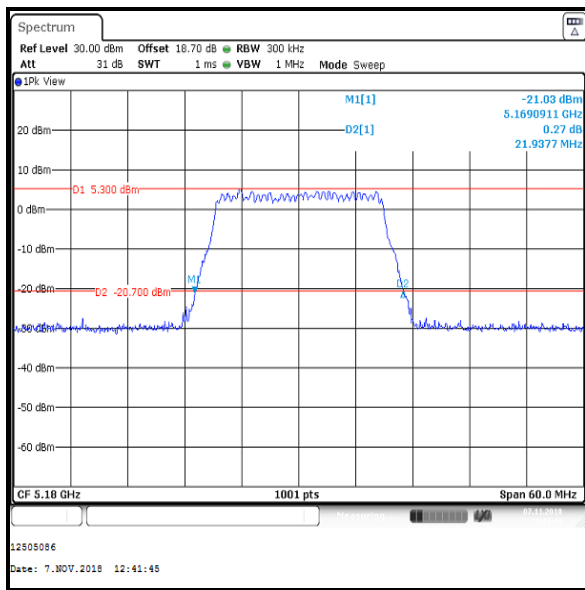

Bottom Channel

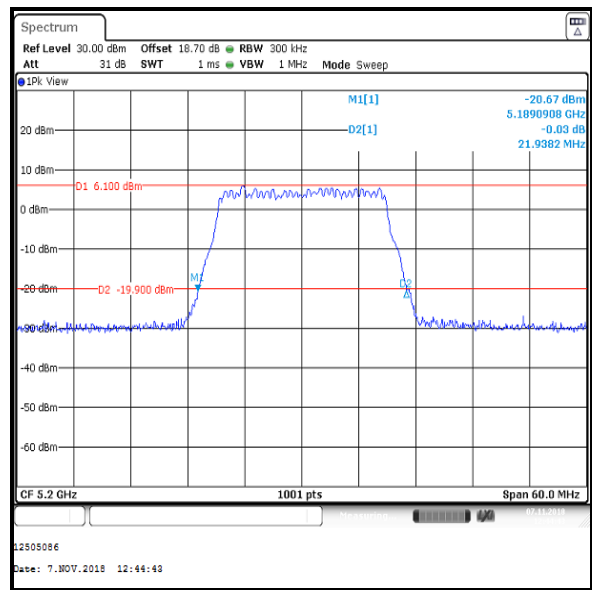

Middle Channel

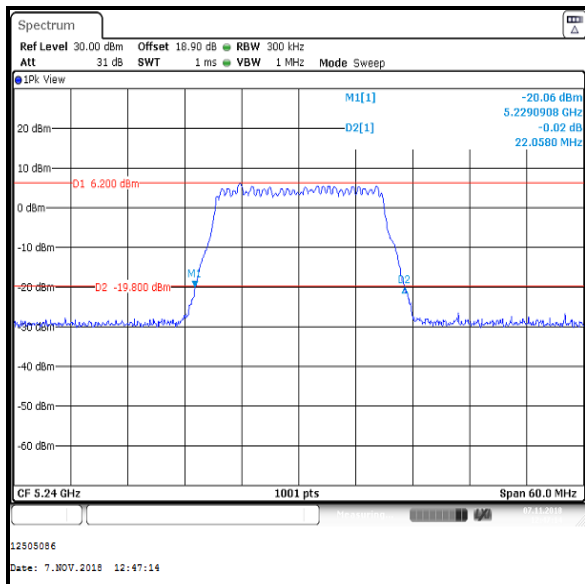


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	21.998
Middle	5200	21.878
Top	5240	21.878

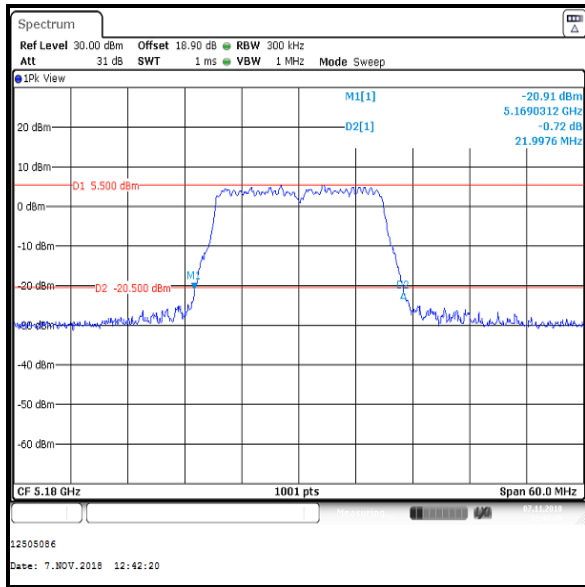

Bottom Channel

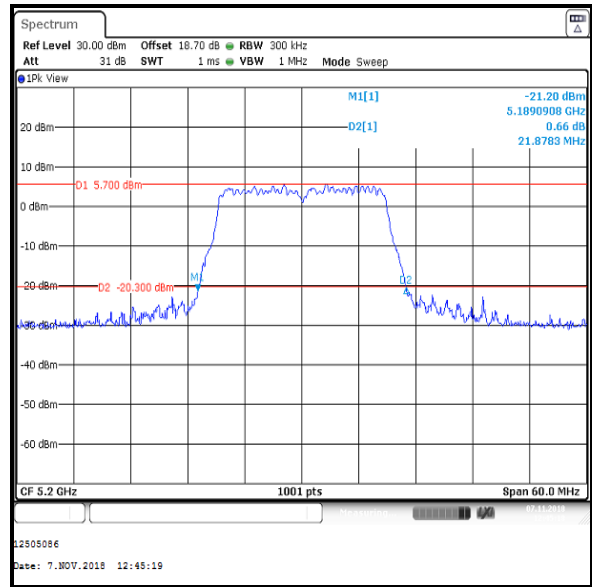

Middle Channel

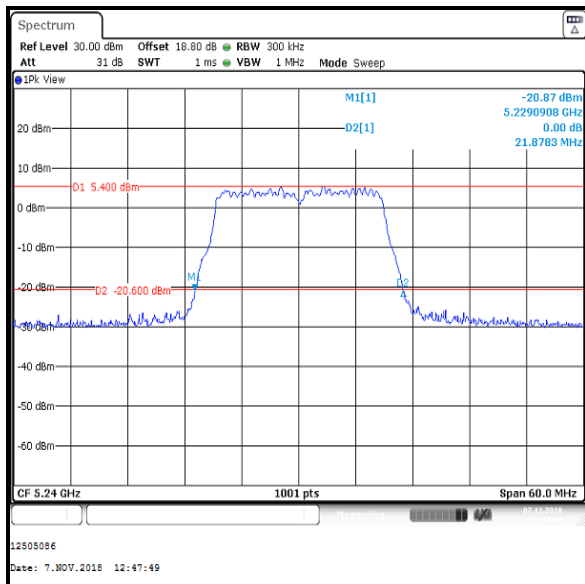


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 0

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	41.665
Top	5230	40.866

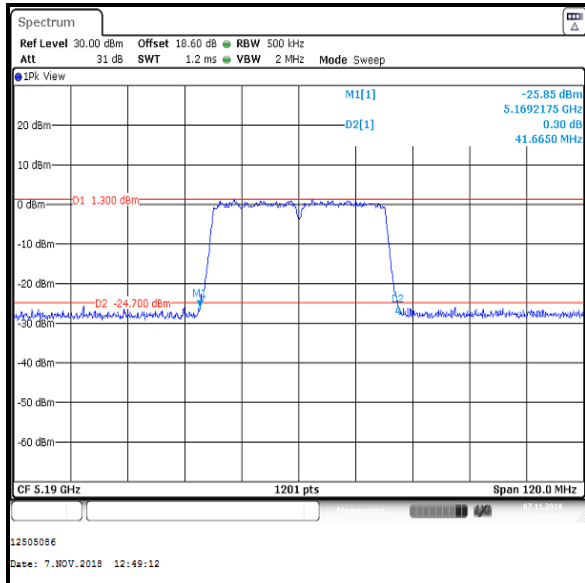

Bottom Channel

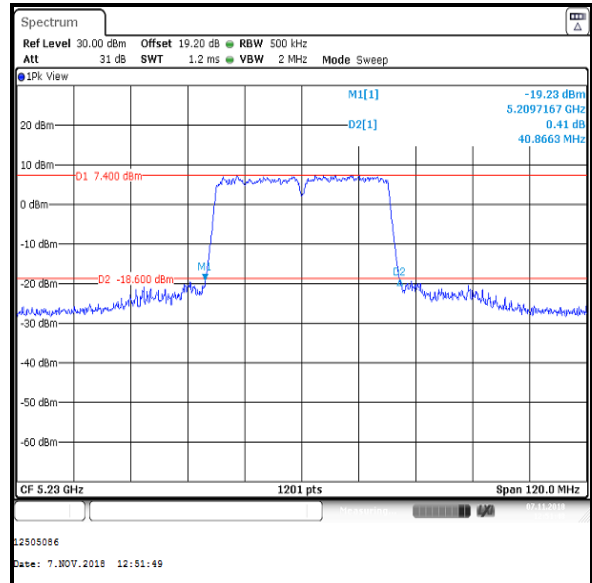


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.366
Top	5230	40.166

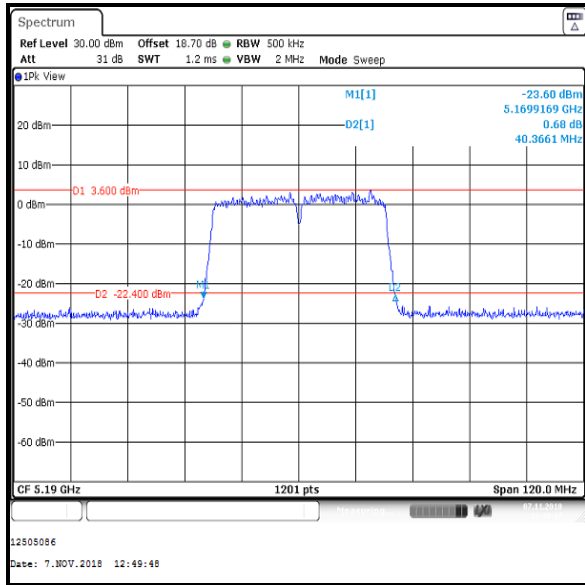

Bottom Channel

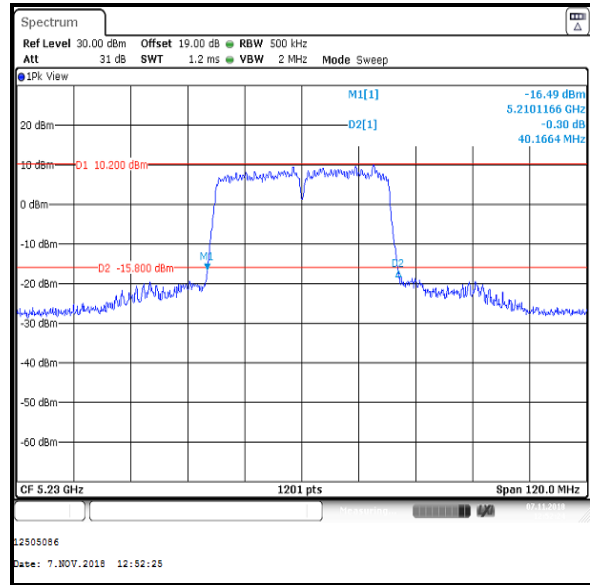


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx CDD / BPSK / MCS0 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.366
Top	5230	40.366

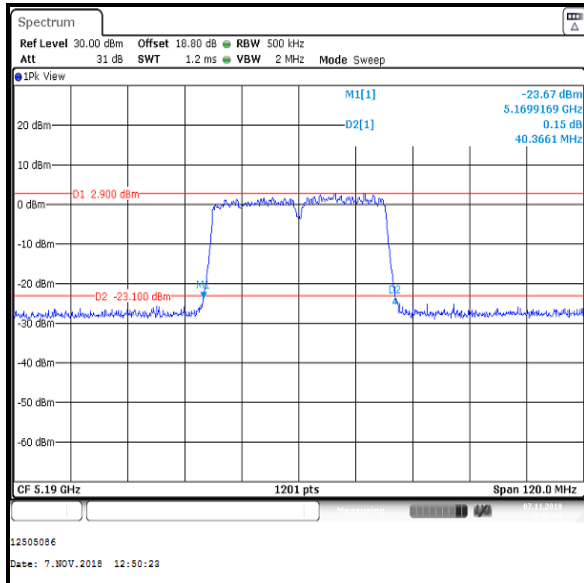

Bottom Channel

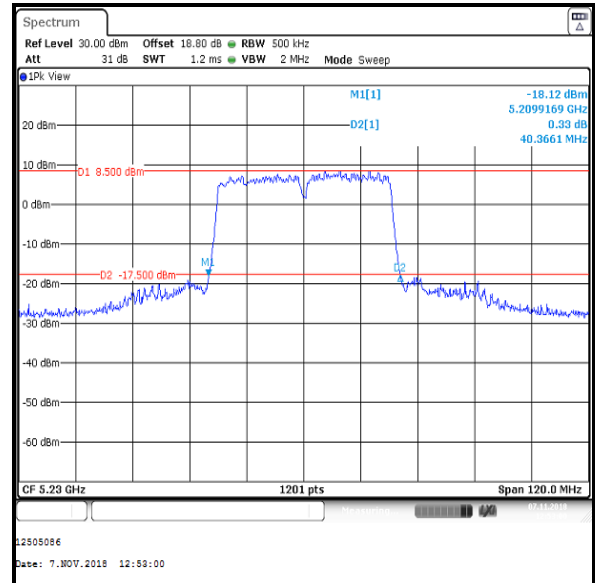


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / BPSK / MCS0x1 / Core 0


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.265

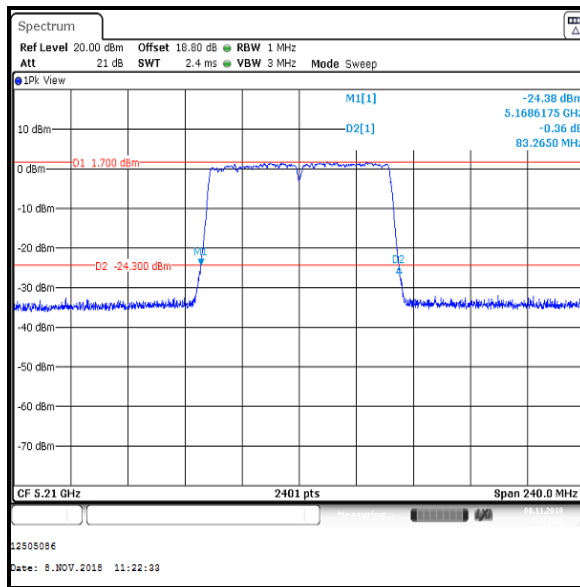

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / BPSK / MCS0x1 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.566

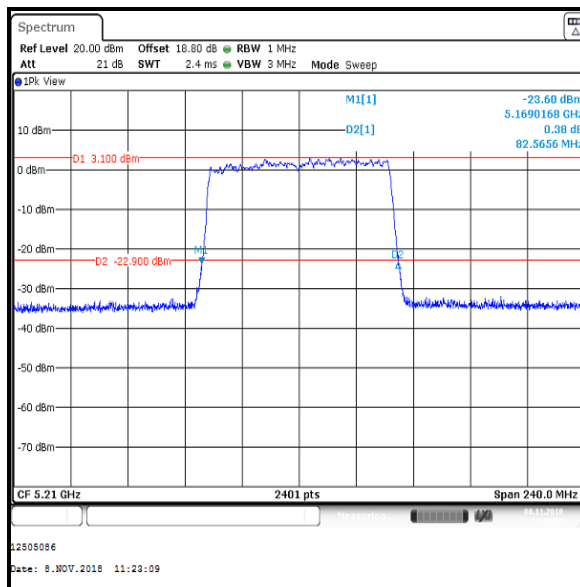


Single Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 3Tx CDD / BPSK / MCS0x1 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	81.566

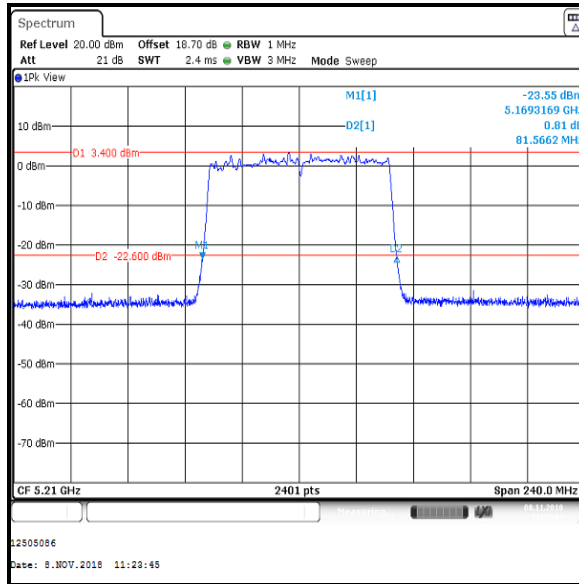


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 0


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	22.238
Middle	5200	22.238
Top	5240	22.298

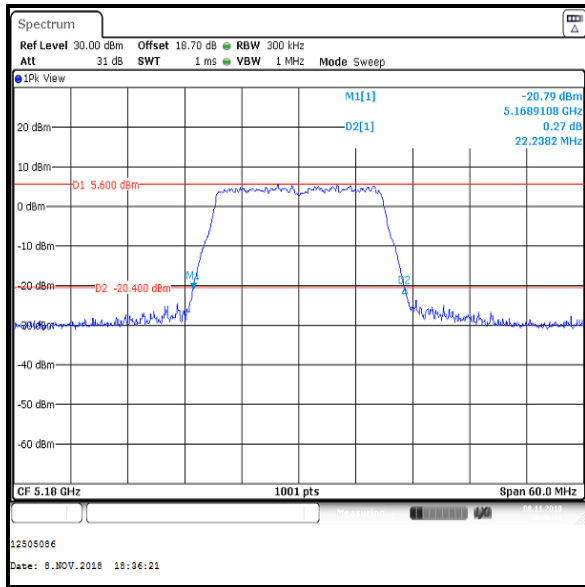

Bottom Channel

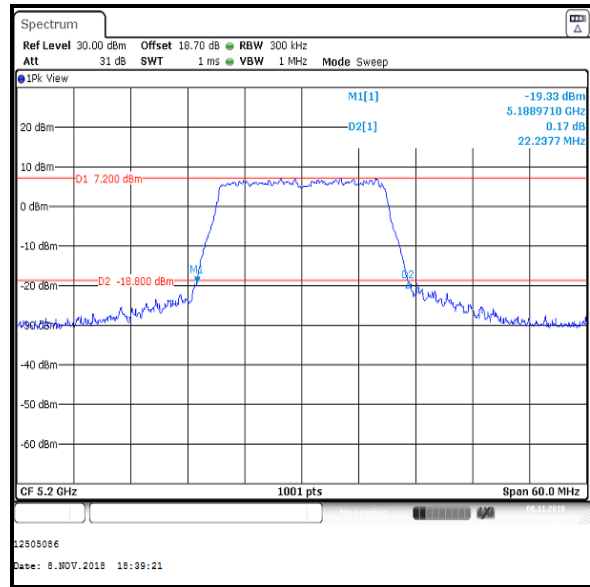

Middle Channel

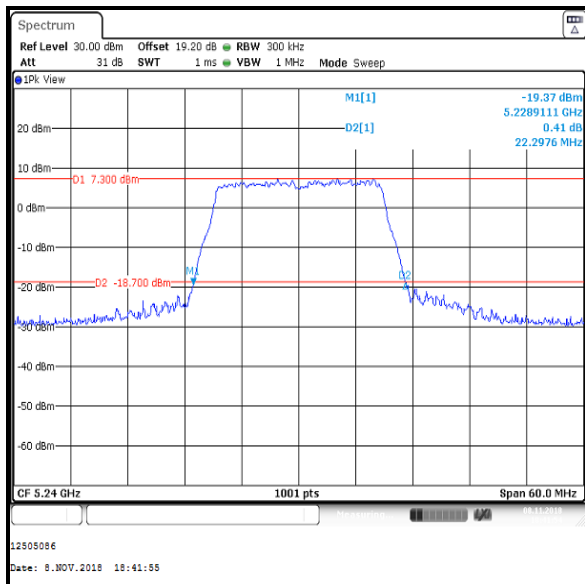


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 1


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	21.998
Middle	5200	22.417
Top	5240	22.358

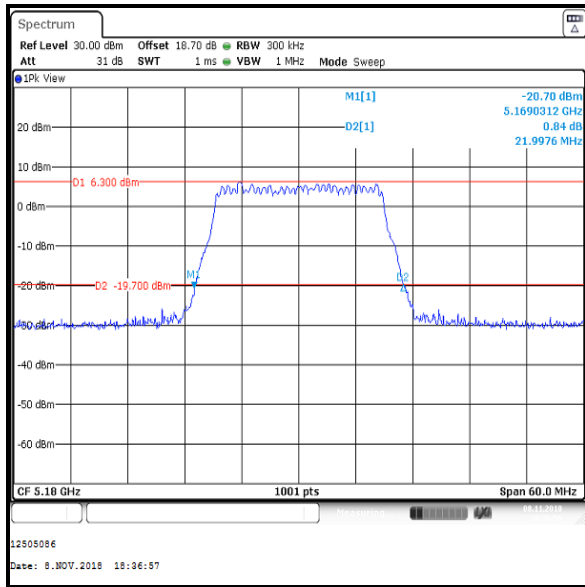

Bottom Channel

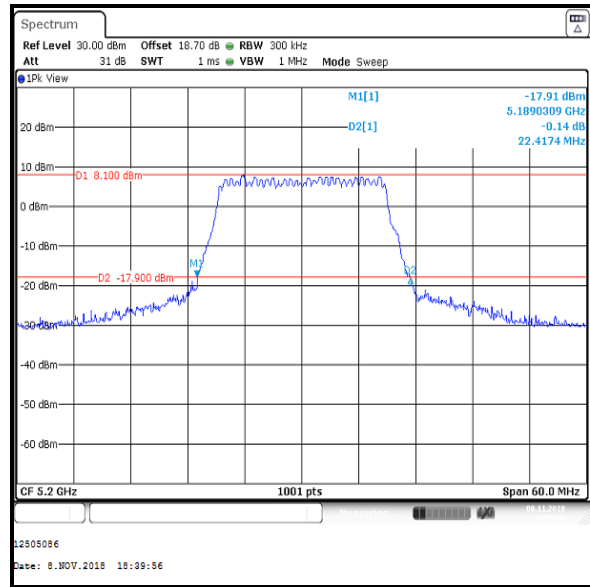

Middle Channel

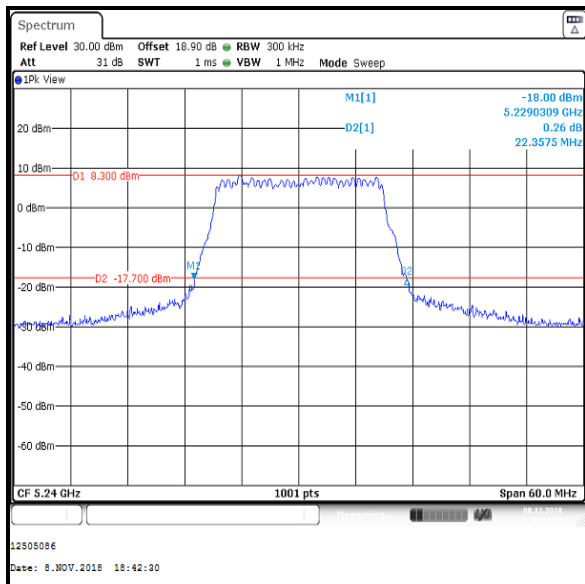


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 2


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	21.818
Middle	5200	22.418
Top	5240	22.418

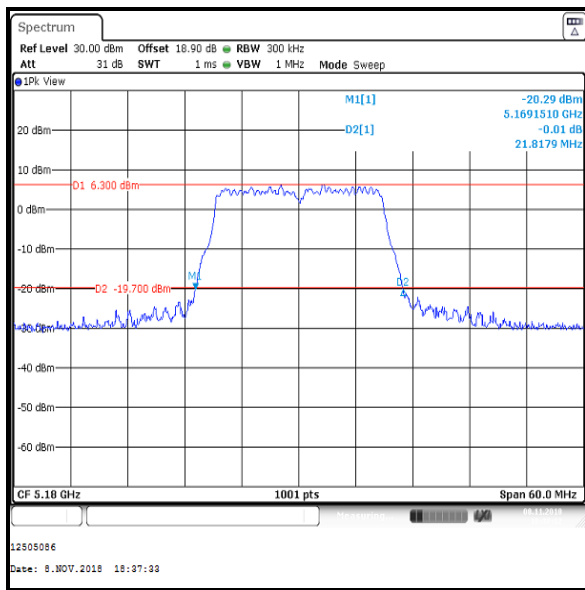

Bottom Channel

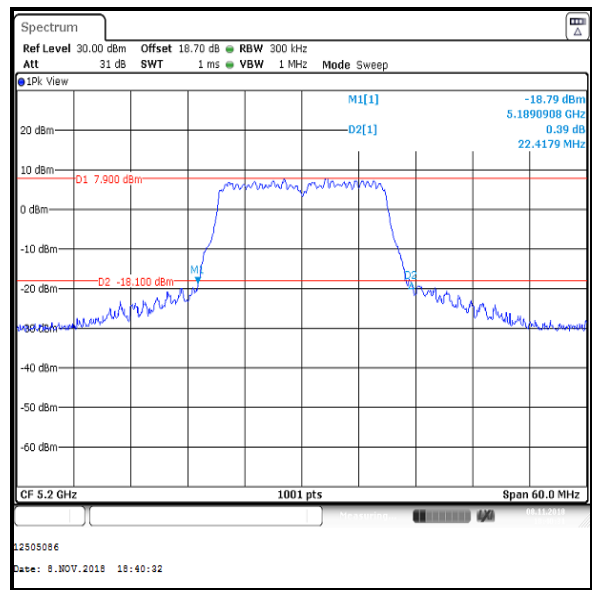

Middle Channel

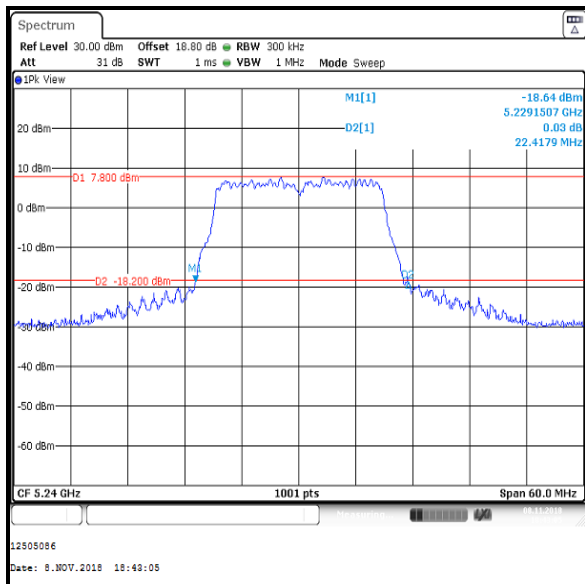


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 0

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.566
Top	5230	45.362

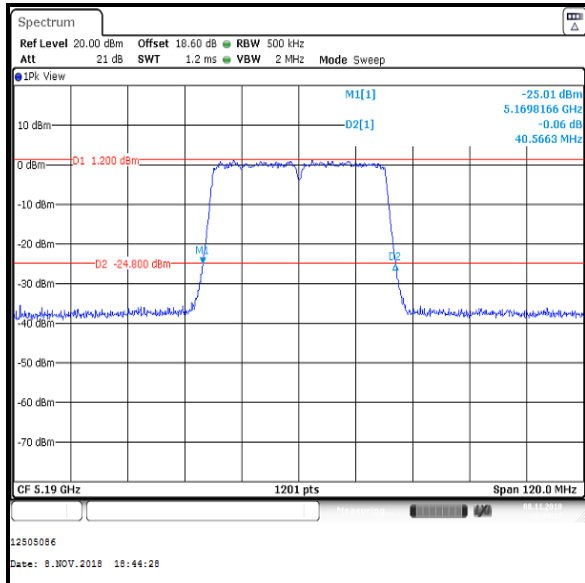

Bottom Channel

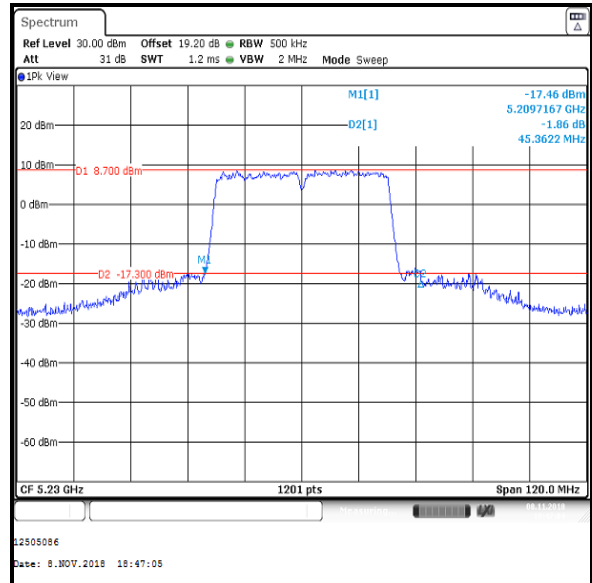


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.166
Top	5230	43.763

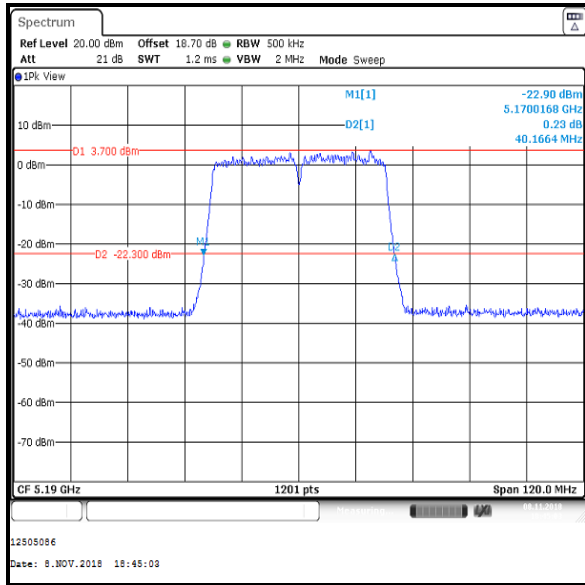

Bottom Channel

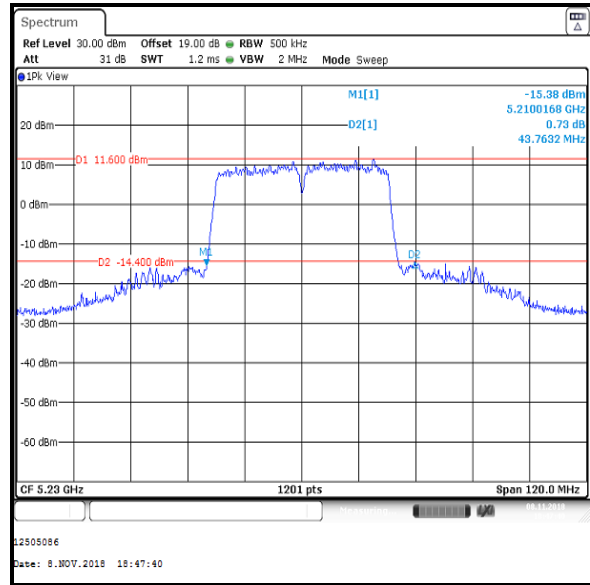


Top Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 40 MHz / MIMO / 3Tx SDM / BPSK / MCS16 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5190	40.166
Top	5230	49.759

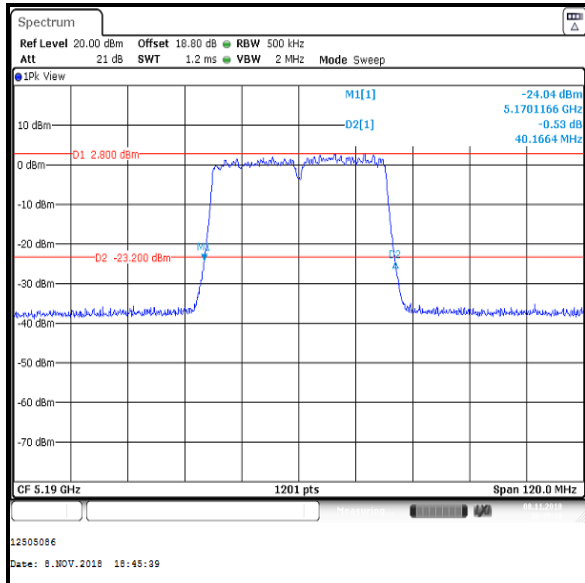

Bottom Channel

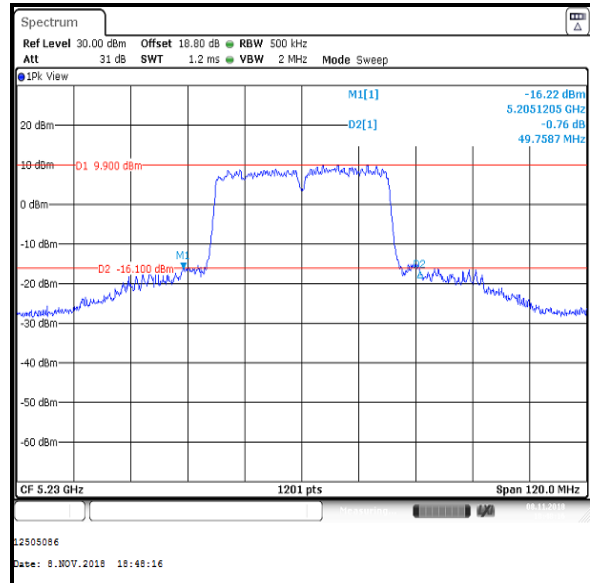


Top Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 3Tx SDM / BPSK / MCS0x3 / Core 0


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	83.265

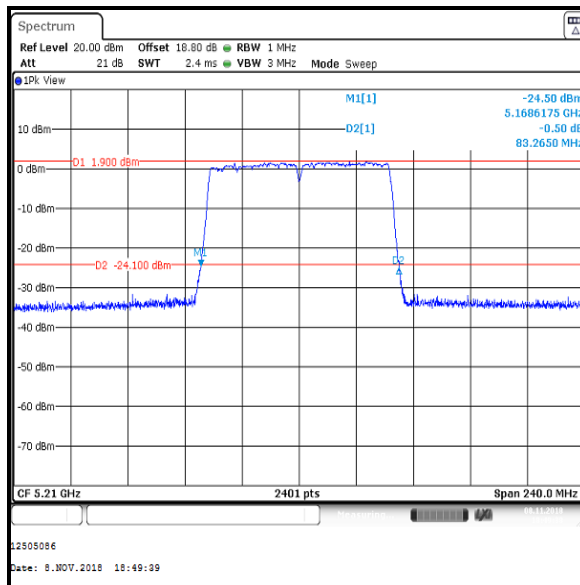

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 3Tx SDM / BPSK / MCS0x3 / Core 1

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	82.466

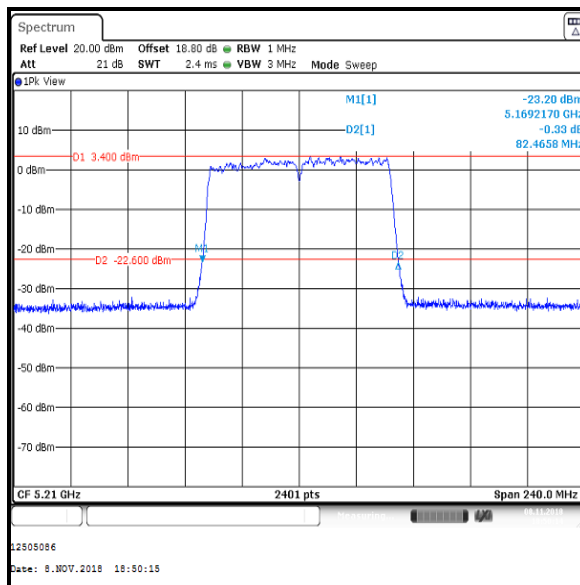


Single Channel

Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11ac / 80 MHz / MIMO / 3Tx SDM / BPSK / MCS0x3 / Core 2

Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Single	5210	81.566

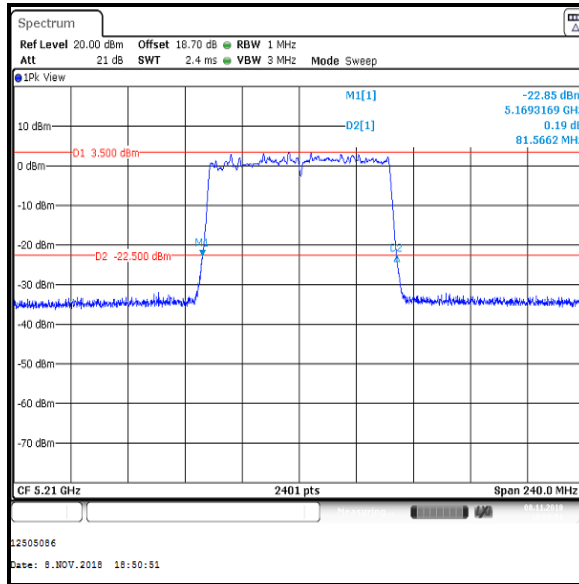


Single Channel


Transmitter 26 dB Emission Bandwidth (5.15-5.25 GHz band) (continued)

Results: 802.11n / 20 MHz / MIMO / 3Tx TXBF / BPSK / MCS0 / Core 0


Channel	Frequency (MHz)	26 dB Emission Bandwidth (MHz)
Bottom	5180	20.380
Middle	5200	20.460
Top	5240	20.380

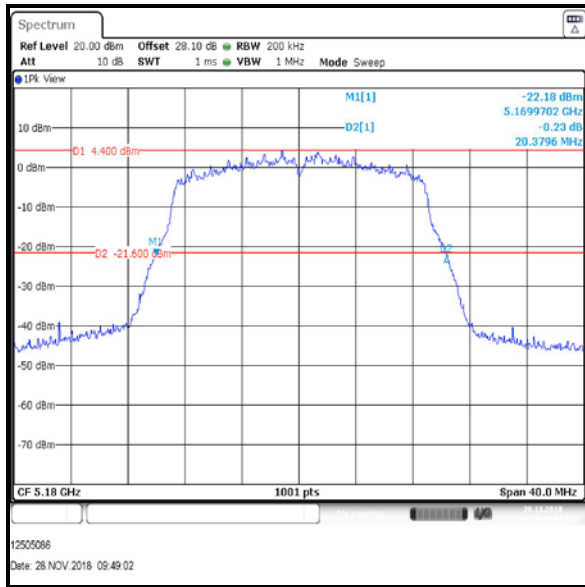

Bottom Channel

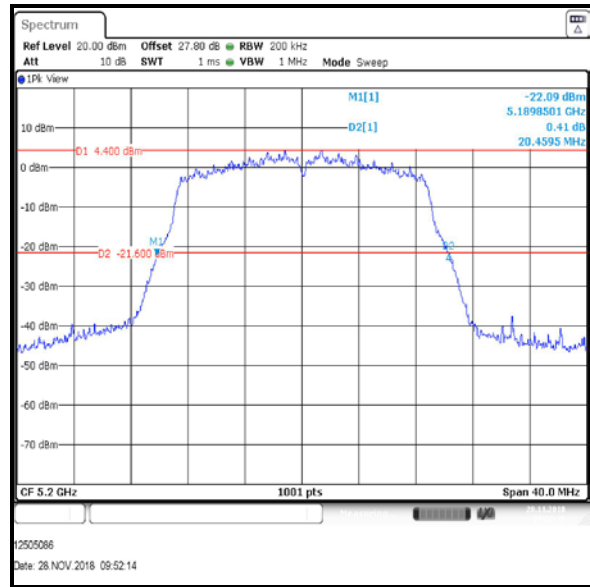

Middle Channel

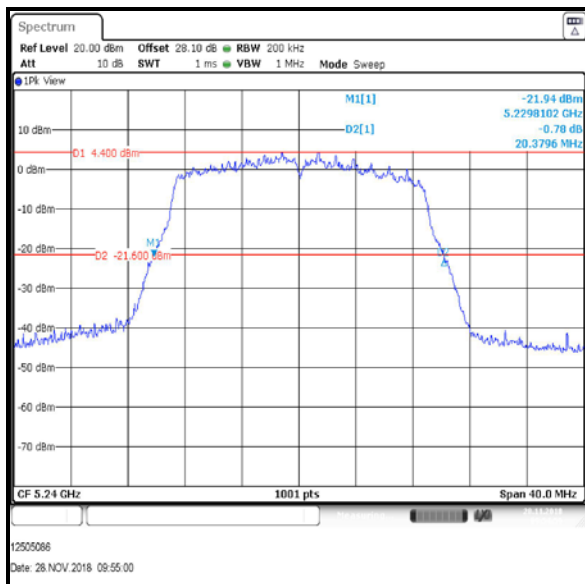

Top Channel