



**FCC 47 CFR PART 15 SUBPART E**

**ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**Videoconferencing Endpoint**

**MODEL: HUAWEI Box 900, HUAWEI Box 700, HUAWEI Box 500**

**FCC ID: QIS-BOX**

**IC: 6369A-BOX**

**REPORT NUMBER: 4788680510-4**

**ISSUE DATE: October 29, 2018**

*Prepared for*

**HUAWEI TECHNOLOGIES CO., LTD.**

**Administration Building, Huawei Technologies Co., Ltd. Bantian, Longgang District,  
Shenzhen, P.R. China, 518129**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch  
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake**

**Hi-Tech Development Zone**

**Dongguan, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: www.ul.com**



Revision History

Rev.	Issue Date	Revisions	Revised By
	10/29/2018	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6/26db Bandwidth	FCC 15.407 (a)&(e) RSS-247 Clause 6.2	PASS
2	99% Bandwidth	RSS-Gen Clause 6.6	PASS
3	Maximum Conducted Output Power	FCC 15.407 (a) RSS-247 Clause 6.2	PASS
4	Power Spectral Density	FCC 15.407 (a) RSS-247 Clause 6.2	PASS
5	Antenna Conducted Spurious Emission	FCC 15.407 (b) RSS-247 Clause 6.2	PASS
6	Radiated Bandedge and Spurious Emission	FCC 15.407 (a) FCC 15.209 FCC 15.205 RSS-247 Clause 6.2 RSS-GEN Clause 8.9	PASS
7	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	PASS
8	Antenna Requirement	FCC 15.203 RSS-GEN Clause 8.3	PASS



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>6</b>
<b>2. TEST METHODOLOGY.....</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATIO .....</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION.....	8
4.2. MEASUREMENT UNCERTAINTY.....	8
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>9</b>
5.1. DESCRIPTION OF EUT .....	9
5.2. CHANNEL LIST .....	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	11
5.4. WORST-CASE CONFIGURATIONS .....	13
5.5. TEST ENVIRONMENT .....	14
5.6. WORST-CASE CONFIGURATIONS .....	15
5.7. DESCRIPTION OF TEST SETUP .....	16
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED .....</b>	<b>17</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>19</b>
7.1. ON TIME AND DUTY CYCLE.....	19
7.1. 26 dB BANDWIDTH &99% OCCUPIED BANDWIDTH.....	24
7.1.1. 802.11a MODE .....	25
7.1.2. 802.11n HT20 MODE .....	28
7.1.3. 802.11n HT40 MODE .....	30
7.1.4. 802.11ac HT20 MODE.....	32
7.1.5. 802.11ac HT40 MODE.....	34
7.1.6. 802.11ac HT80 MODE.....	36
7.2. MAXIMUM CONDUCTED OUTPUT POWER.....	38
7.3. POWER SPECTRAL DENSITY .....	40
<b>8. RADIATED TEST RESULTS .....</b>	<b>57</b>
8.1. 802.11a MODE .....	63
8.1.1. UNII-1 BAND.....	63
8.2. 802.11n HT20 MODE.....	95
8.2.1. UNII-1 BAND.....	95
8.3. 802.11n HT40 MODE.....	111



8.3.1.	UNII-1 BAND.....	111
8.4.	802.11ac HT20 MODE.....	123
8.4.1.	UNII-1 BAND.....	123
8.5.	802.11ac HT40 MODE.....	139
8.5.1.	UNII-1 BAND.....	139
8.6.	802.11ac HT80 MODE.....	151
8.6.1.	UNII-1 BAND.....	151
8.7.	SPURIOUS EMISSIONS 26~40GHz .....	159
8.7.1.	802.11a MODE .....	159
8.8.	SPURIOUS EMISSIONS 18~26GHz .....	161
8.8.1.	802.11a MODE .....	161
8.9.	SPURIOUS EMISSIONS 30M ~ 1 GHz .....	163
8.9.1.	802.11a MODE .....	163
8.10.	SPURIOUS EMISSIONS BELOW 30M.....	165
8.10.1.	802.11a MODE.....	165
9.	AC POWER LINE CONDUCTED EMISSIONS .....	169
10.	ANTENNA REQUIREMENTS .....	172



## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

**Company Name:** HUAWEI TECHNOLOGIES CO., LTD.  
**Address:** Administration Building, Huawei Technologies Co., Ltd.  
Bantian, Longgang District, Shenzhen, P.R. China, 518129

### Manufacturer Information

**Company Name:** HUAWEI TECHNOLOGIES CO., LTD.  
**Address:** Administration Building, Huawei Technologies Co., Ltd.  
Bantian, Longgang District, Shenzhen, P.R. China, 518129

**EUT Name:** Videoconferencing Endpoint  
**Model:** HUAWEI Box 900, HUAWEI Box 700, HUAWEI Box 500  
**Sample Status:** Normal  
**Brand:** HUAWEI  
**Sample Received:** Sep. 18, 2018  
**Date of Tested:** Sep. 19, 2018 ~ Oct. 29, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

*Miller Ma*

Miller Ma  
Engineer Project Associate

Checked By:

*Shawn Wen*

Shawn Wen  
Operations Leader

Approved By:

*Stephen Guo*

Stephen Guo  
Operations Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 789033 D02, KDB 662911 D01 v02r01, RSS-GEN Issue 4, RSS-247 Issue 2 and KDB414788 D01 Radiated Test Site v01.

## 3. FACILITIES AND ACCREDITATIO

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>IC(Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OATS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 40GHz)( include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
	5.64dB (26GHz-40Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Videoconferencing Endpoint
Model Name	HUAWEI Box 900
Band Name	HUAWEI
Series Model	HUAWEI Box 700, HUAWEI Box 500
Radio Technology	IEEE802.11a/n HT20/n HT40/802.11ac HT20/802.11ac HT40/ 802.11ac HT80
Model Difference	HUAWEI Box 500 use a PCB board, HUAWEI Box 700 and HUAWEI Box 900 share another PCB boards. HUAWEI Box 500 and HUAWEI Box 700 and HUAWEI Box 900 share components such as structural parts, power supplies and fans, Box 900 has two more DVI interfaces and one HDMI interface than Box 700 and three interface chips corresponding to these three interfaces. Box 900 has two more DVI interfaces and one HDMI interface and two SDI interfaces than Box 500 and five interface chips corresponding to these five interfaces.
Power Rate (AC/DC Power Supply)	Manufacturer :VAPEL Input: 100-240Vac,50/60 Hz,3A MAX Output: 12Vdc, 35W MAX; -53.5Vdc, 130W MAX
	Manufacturer : ASTEC Input: 100-240Vac,50/60 Hz,3A MAX Output: 12Vdc, 4.17A; -53.5Vdc, 2.43A



## 5.2. CHANNEL LIST

20 MHz Bandwidth Channel frequencies		
Band	Channel	Frequency (MHz)
UNII-1	36	5180
	40	5200
	44	5220
	48	5240

40 MHz Bandwidth Channel frequencies		
Band	Channel	Frequency (MHz)
UNII-1	38	5190
	46	5230

80 MHz Bandwidth Channel frequencies		
Band	Channel	Frequency (MHz)
UNII-1	42	5210



### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna manufacturer: Sheng Lu

Chain Ant.	Frequency (MHz)	Max Antenna Gain (dBi)	Antenna Type
0	5150-5250	5.1	PIFA
1	5150-5250	4.8	PIFA

Antenna manufacturer: PCTEL

Chain1 Ant.	Frequency (MHz)	Max Antenna Gain (dBi)	Antenna Type
0	5150-5250	4.41	PIFA
1	5150-5250	4.47	PIFA

Test Mode	Transmit and Receive Mode	Description
802.11a	1TX, 1RX	Chain 0 or Chain 1 can be used as transmitting/receiving antenna.
802.11n HT20	2TX, 2RX	Chain 0 and Chain 1 can be used as transmitting/receiving antenna.
802.11n HT40	2TX, 2RX	Chain 0 and Chain 1 can be used as transmitting/receiving antenna.
802.11ac HT20	2TX, 2RX	Chain 0 and Chain 1 can be used as transmitting/receiving antenna.
802.11ac HT40	2TX, 2RX	Chain 0 and Chain 1 can be used as transmitting/receiving antenna.
802.11ac HT80	2TX, 2RX	Chain 0 and Chain 1 can be used as transmitting/receiving antenna.



Directional gain				
Mode	Frequency (MHz)	Max Antenna Gain (dBi)	For power measurements Directional gain Gain (dBi)	For power spectral density (PSD) measurements Directional gain Gain (dBi)
SISO	5150-5250	5.1	5.1	5.1
CDD 2TX	5150-5250	5.1	5.1	8.1
<p>Note : Directional gain = GANT + Array Gain</p> <p>For power spectral density (PSD) measurements on all devices, Array Gain = <math>10 \log(N_{\text{ANT}}/N_{\text{SS}})</math> dB.</p> <p>For power measurements on IEEE 802.11 devices, 1,2</p> <p>Array Gain = 0 dB (i.e., no array gain) for <math>N_{\text{ANT}} \leq 4</math>;</p> <p>Array Gain = 0 dB (i.e., no array gain) for channel widths <math>\geq 40</math> MHz for any <math>N_{\text{ANT}}</math>;</p> <p>Array Gain = <math>5 \log(N_{\text{ANT}}/N_{\text{SS}})</math> dB or 3 dB, whichever is less, for 20-MHz channel widths with <math>N_{\text{ANT}} \geq 5</math>.</p>				

**Note:**

The antenna of the EUT is provided by two manufacturers. The antenna types of the two manufacturers are the same, Sheng lu antenna gain is greater, So the Sheng Lu antenna is selected for the test.



#### 5.4. WORST-CASE CONFIGURATIONS

The Worse Case Power Setting Parameter under 5150 ~ 5250MHz Band							
Test Software		adb					
Modulation Mode	Transmit Chain	Test Channel					
		BW: 20MHz					
		CH 36	CH 40	CH 48	\	\	\
802.11a	0&1	14	13.5	13.5	\	\	\
802.11n HT20	0&1	8	8	8	\	\	\
802.11ac HT20	0&1	8	8	8	\	\	\

The Worse Case Power Setting Parameter under 5150 ~ 5250MHz Band							
Test Software		adb					
Modulation Mode	Transmit Chain	Test Channel					
		BW: 40MHz					
		CH 38	CH 46	\	\	\	\
802.11n HT40	0&1	10	10	\	\	\	\
802.11ac HT40	0&1	10	10	\	\	\	\

The Worse Case Power Setting Parameter under 5150 ~ 5250MHz Band							
Test Software		adb					
Modulation Mode	Transmit Chain	Test Channel					
		BW: 80MHz					
		CH 42	\	\	\	\	\
802.11ac HT80	0&1	9.5	\	\	\	\	\

Remarks: EUT support for SISO and CDD MIMO Transmission, only 802.11a not supports CDD MIMO Mode, SISO mode sets the same power level as MIMO mode, so MIMO mode is the worst case.



## 5.5. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	AC 120V/60Hz
	VH	N/A

Note: VL= Lower Extreme Test Voltage  
VN= Nominal Voltage  
VH= Upper Extreme Test Voltage  
TN= Normal Temperature



## 5.6. WORST-CASE CONFIGURATIONS

IEE Std. 802.11	Modulation Technology	Modulation Type	Data Rate (Mbps)	Worst Case (Mbps)
a	OFDM	BPSK,QPSK,16QAM, 64QAM	54/48/36/24/18/12/9/6	6

IEE Std. 802.11	Modulation Technology	Modulation Type	Data Rate (Mbps)	Worst Case (Mbps)
n HT20	OFDM	BPSK, QPSK, 16QAM, 64QAM	(MCS0~MCS15)	MCS0
n HT40	OFDM	BPSK, QPSK, 16QAM, 64QAM	(MCS0~MCS15)	MCS0

IEE Std. 802.11	Modulation Technology	Modulation Type	Data Rate (Mbps)	Worst Case (Mbps)
ac HT20	OFDM	BPSK, QPSK, 16QAM, 64QAM	(MCS0~MCS9)	MCS0
ac HT40	OFDM	BPSK, QPSK, 16QAM, 64QAM	(MCS0~MCS9)	MCS0
ac HT80	OFDM	BPSK, QPSK, 16QAM, 64QAM	(MCS0~MCS9)	MCS0

Remarks: EUT support for SISO and CDD MIMO Transmission, only 802.11a not supports CDD MIMO Mode, SISO mode sets the same power level as MIMO mode, so MIMO mode is the worst case.



## 5.7. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	High Pass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4
3	Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2

### I/O CABLES

Cable No	Port	Connector Type	Shield	Cable Length(m)	Remarks
1	RJ45	RJ45	Yes	5	/


### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### TEST SETUP

The EUT can work in engineering mode with the inside software.

### SETUP DIAGRAM FOR TESTS

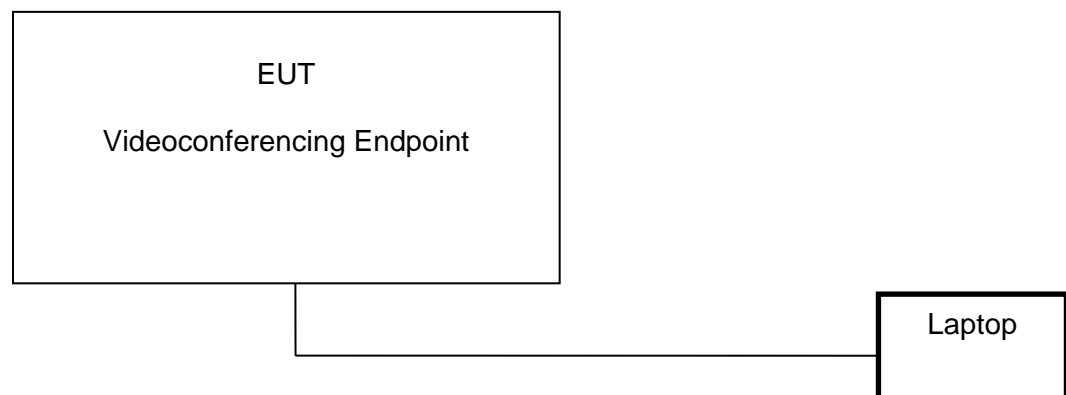





## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.12,2017	Dec.11,2018
Software						
Used	Description		Manufacturer	Name		Version
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		UL	Antenna port		Ver. 7.2
Radiated Emissions						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400 036	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A090 99	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00066	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 26, 2019
Software						
Used	Description		Manufacturer	Name		Version
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410 512	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Power Meter	Keysight	N9031A	MY55416 024	Dec.12,2017	Dec.11,2018
	Power Sensor	Keysight	N9323A	MY55440 013	Dec.12,2017	Dec.11,2018



<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY57030 004	Dec.12,2017	Dec.11,2018
-------------------------------------	--------------	----------	---------	----------------	-------------	-------------



## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP




#### TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V



#### RESULTS



Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (KHz)	Final setting For VBW (KHz)
11a	1.424	1.528	0.9319	93.19	0.31	0.70	1
11n HT20	1.330	1.437	0.9255	92.55	0.34	0.75	1
11n HT40	0.659	0.765	0.8614	86.14	0.65	1.52	2
11ac HT20	0.692	0.798	0.8672	86.72	0.62	1.45	2
11ac HT40	0.355	0.461	0.7700	77.00	1.13	2.82	3
11ac HT80	0.185	0.291	0.6357	63.57	1.97	5.41	6




Chain 0 and Chain 1 has the same duty cycle, only Chain 0 data show here.



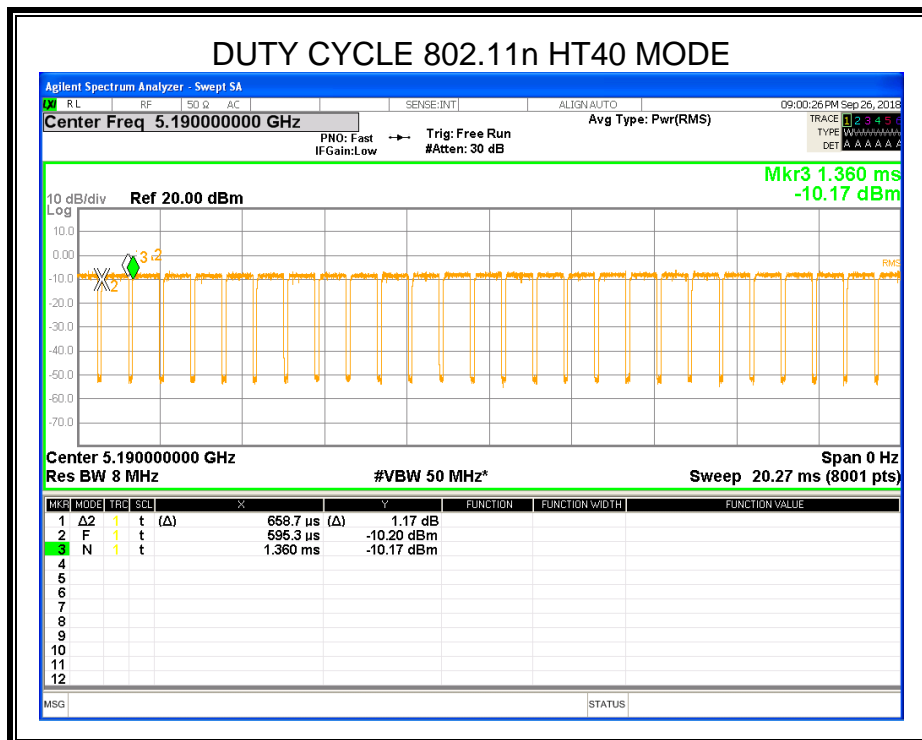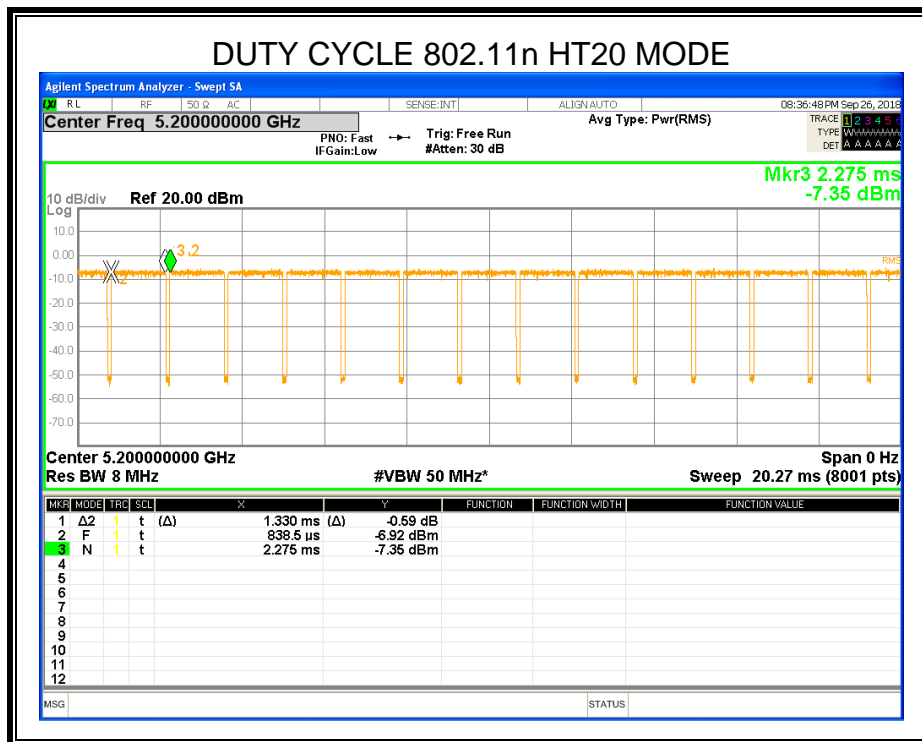

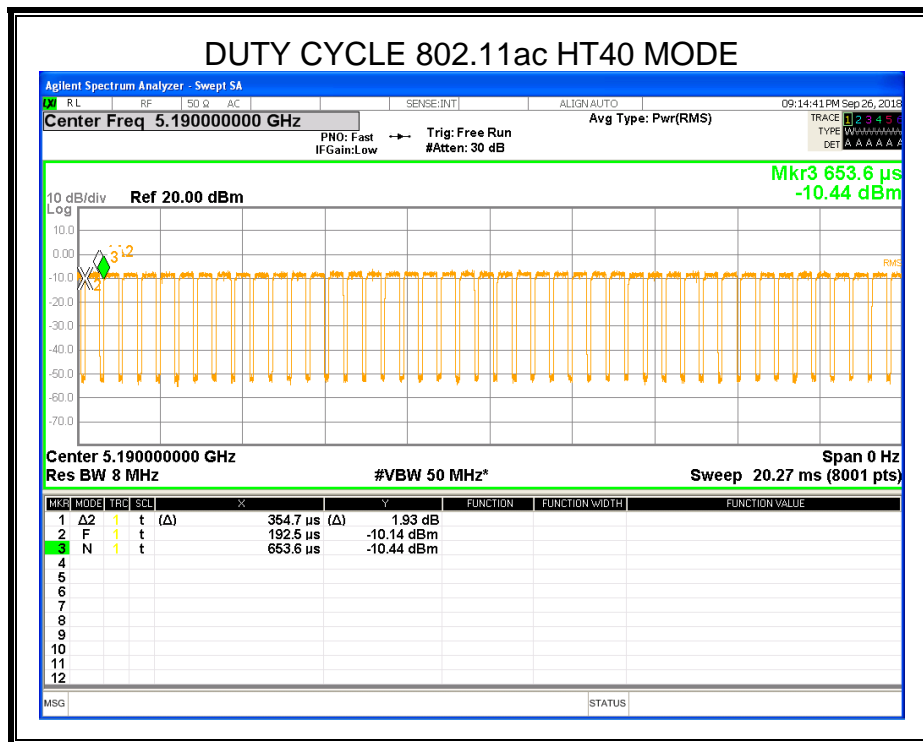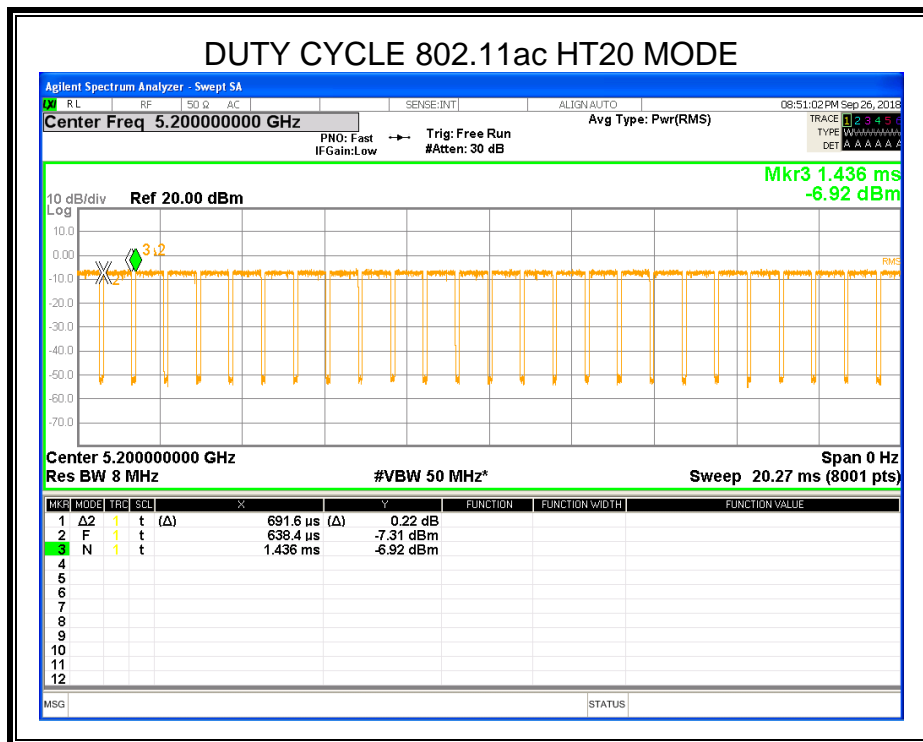

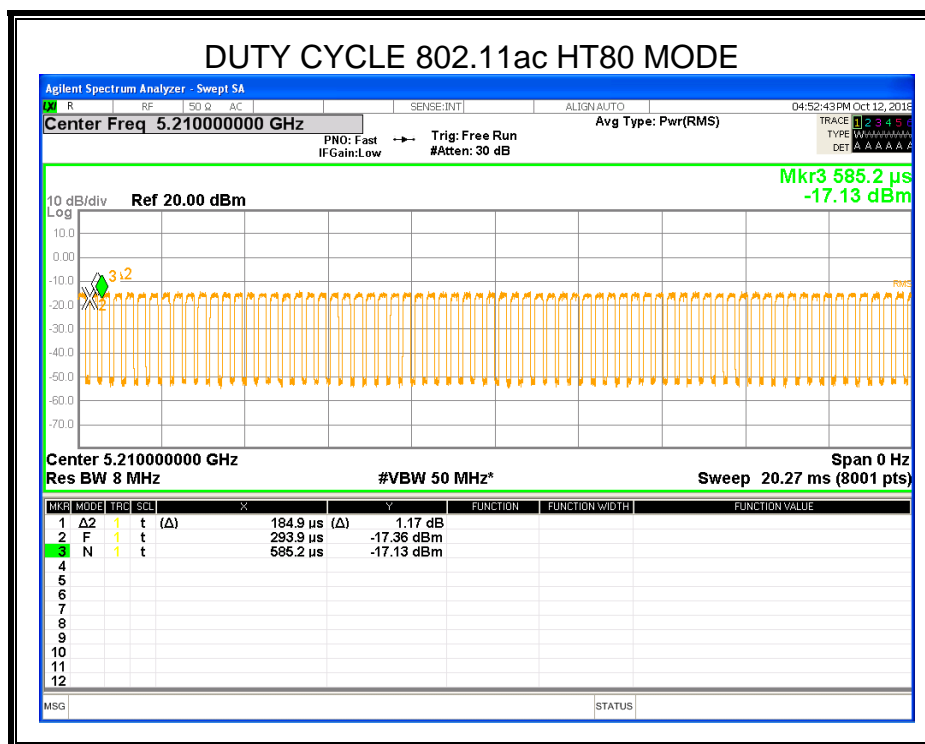



## 7.1. 26 dB BANDWIDTH & 99% OCCUPIED BANDWIDTH

### LIMITS

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Bandwidth	26 dB Bandwidth	5150-5250
	26 dB Bandwidth	5250-5350
	26 dB Bandwidth	For FCC:5470-5725 For IC:5470-5600 5650-5725
	Minimum 500kHz 6dB Bandwidth	5725-5850


### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth: RBW=100kHz For 26dB Bandwidth: approximately 1% of the emission bandwidth. For 99 % Occupied Bandwidth: approximately 1%~5% of the emission bandwidth.
VBW	For 6dB Bandwidth : VBW=300kHz For 26dB Bandwidth : >3RBW For 99% Occupied Bandwidth : >3RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26/& 99% Occupied Bandwidth dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP







## TEST ENVIRONMENT


Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V


## RESULTS

### 7.1.1. 802.11a MODE

#### Chain 0

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.26	16.760
Mid	5200	20.95	16.689
High	5240	21.06	16.661

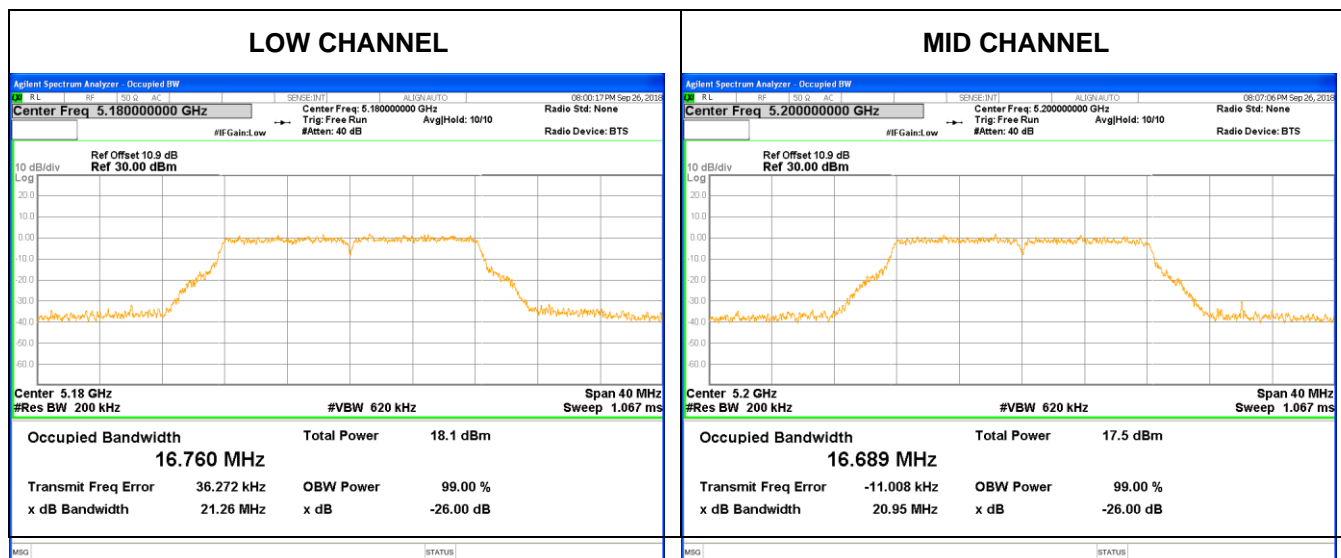


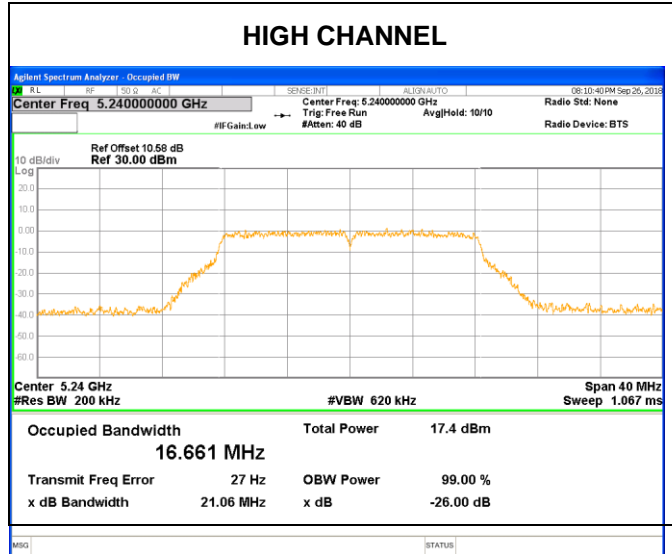



### Chain 1

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.27	16.787
Mid	5200	21.23	16.634
High	5240	20.83	16.684

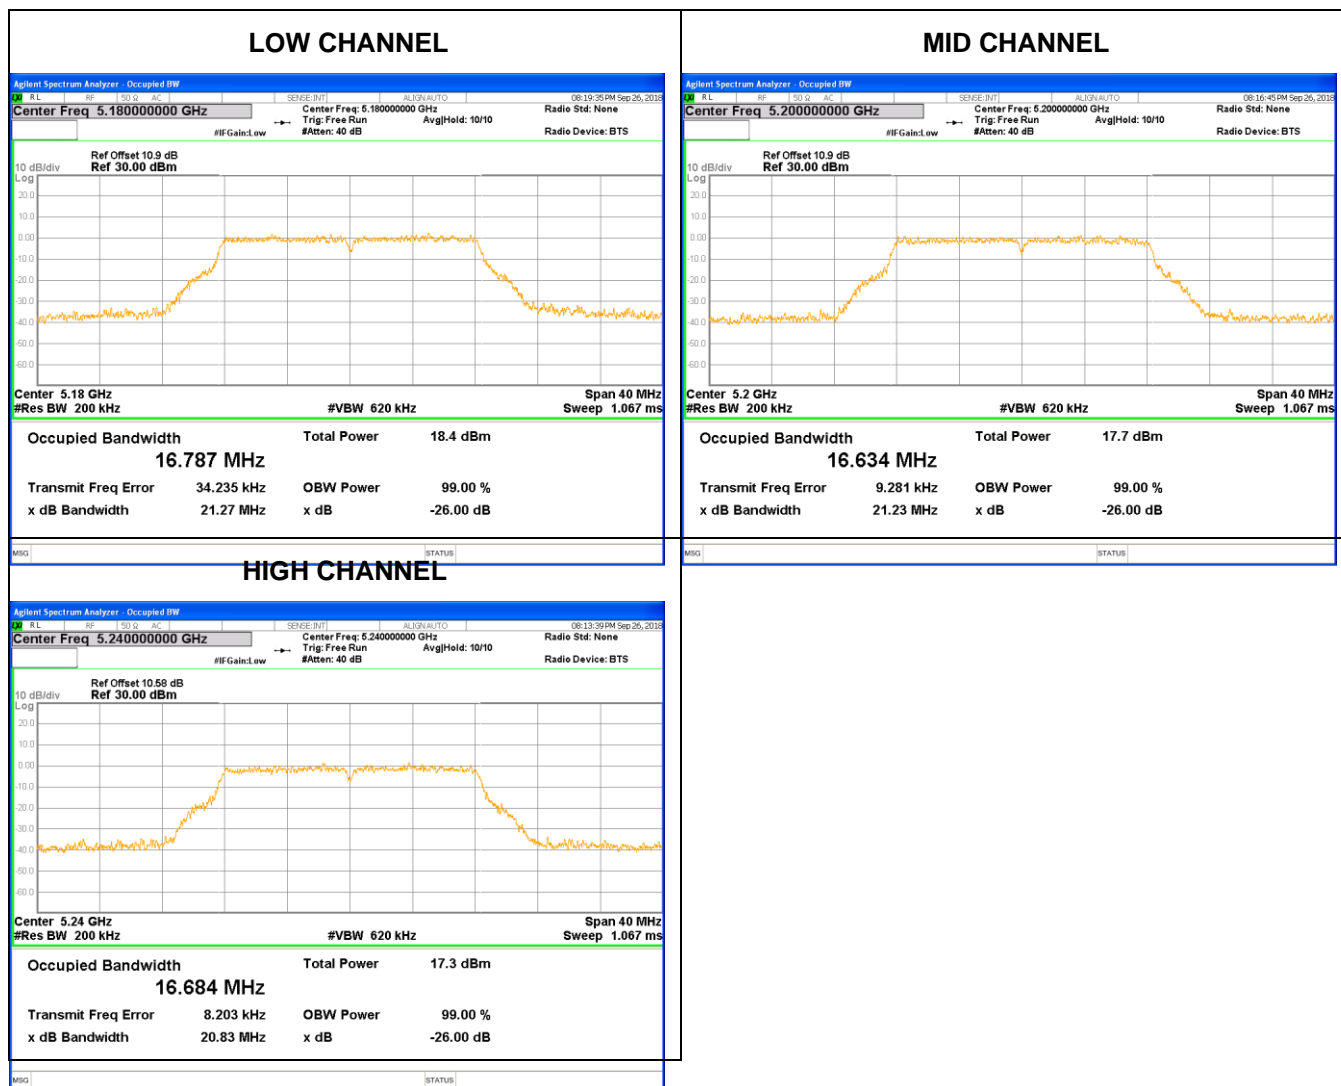




## 7.1.2. 802.11n HT20 MODE

### Chain 0


Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.44	17.921
Mid	5200	21.54	17.885
High	5240	21.04	17.805

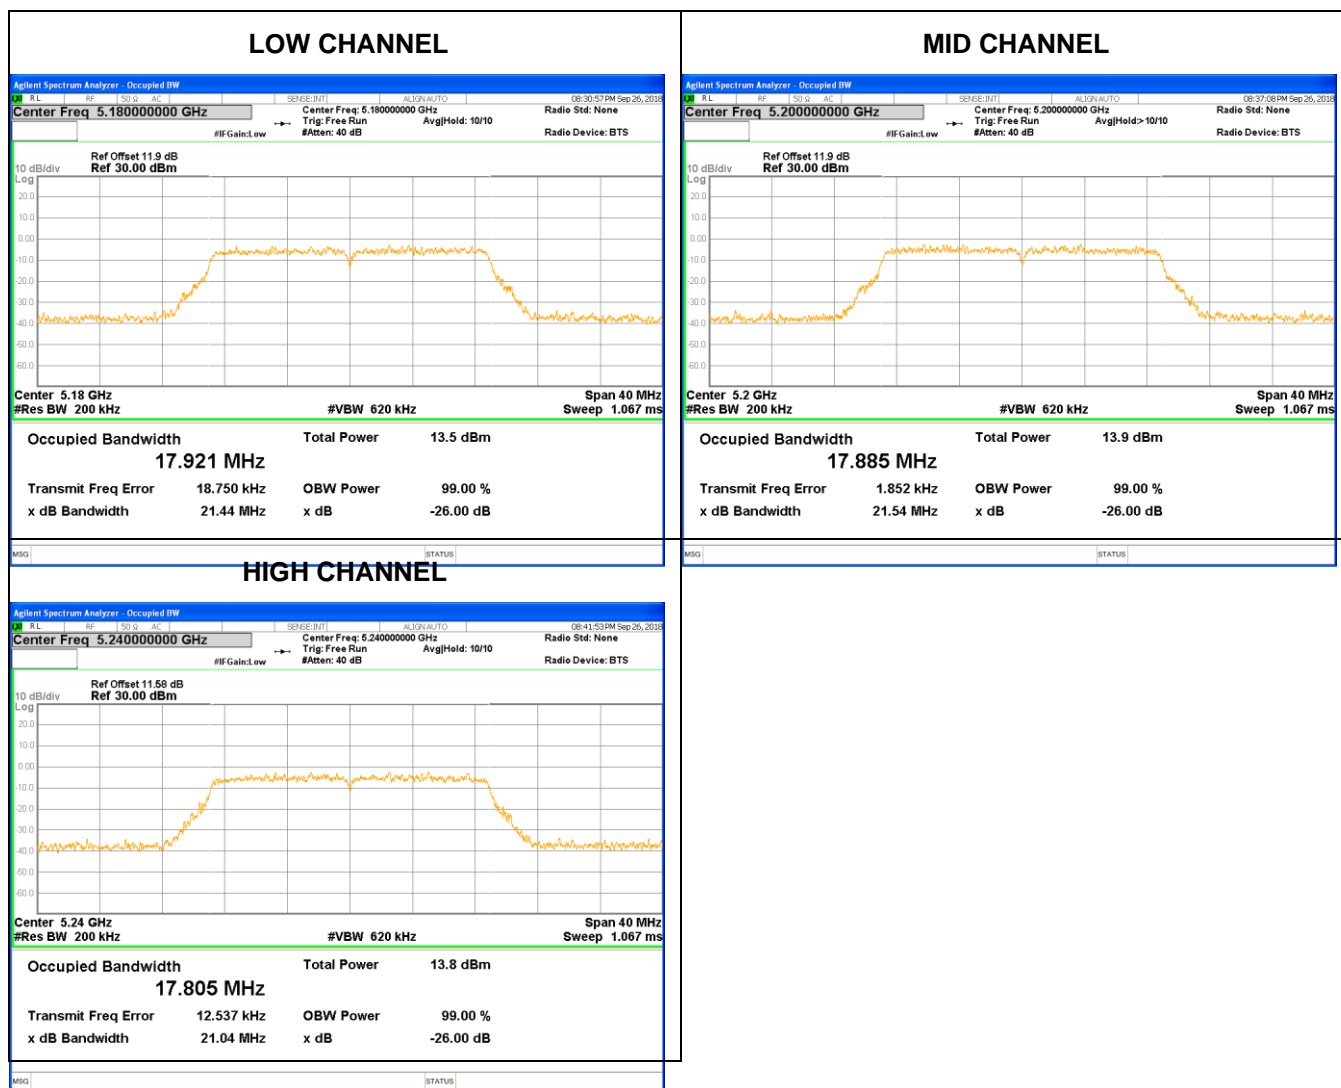



### Chain 1

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.14	17.864
Mid	5200	21.54	17.800
High	5240	21.16	17.829

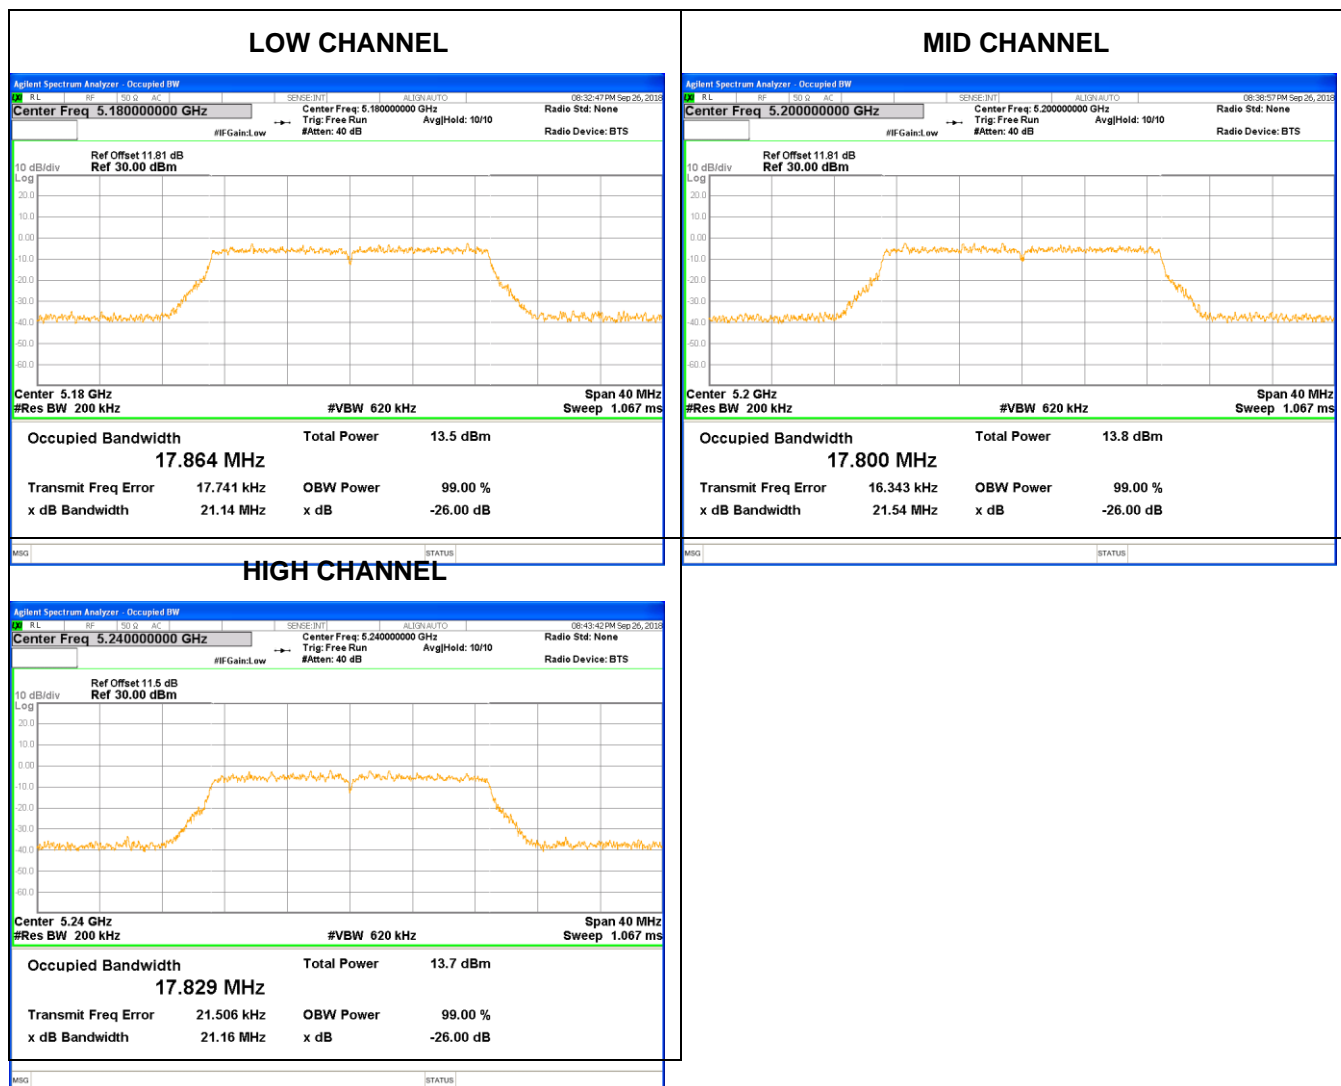




### 7.1.3. 802.11n HT40 MODE

#### Chain 0


Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5190	39.84	36.303
High	5230	39.50	36.272

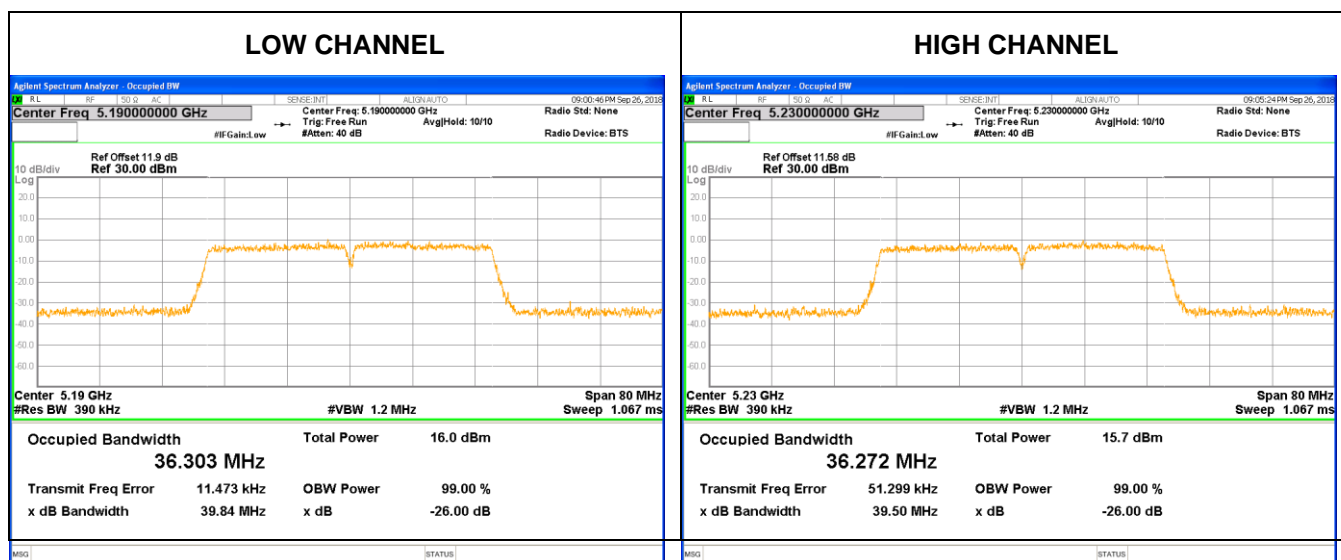



**Chain 1**

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5190	39.56	36.300
High	5230	39.32	36.344

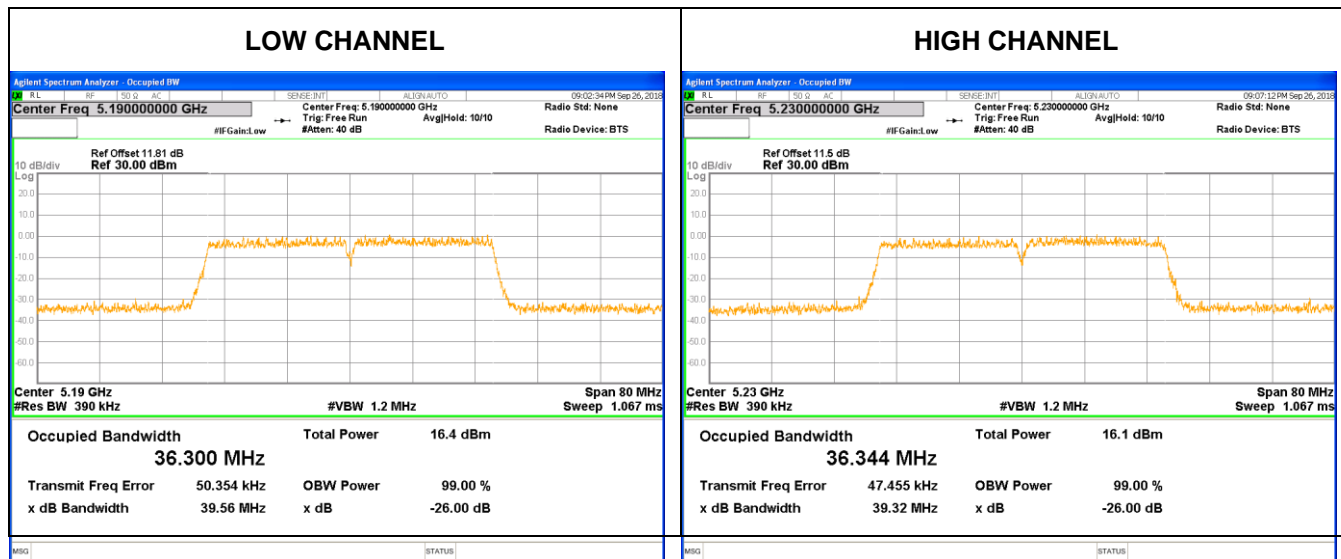




## 7.1.4. 802.11ac HT20 MODE

### Chain 0

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.30	17.872
Mid	5200	21.26	17.840
High	5240	21.29	17.773

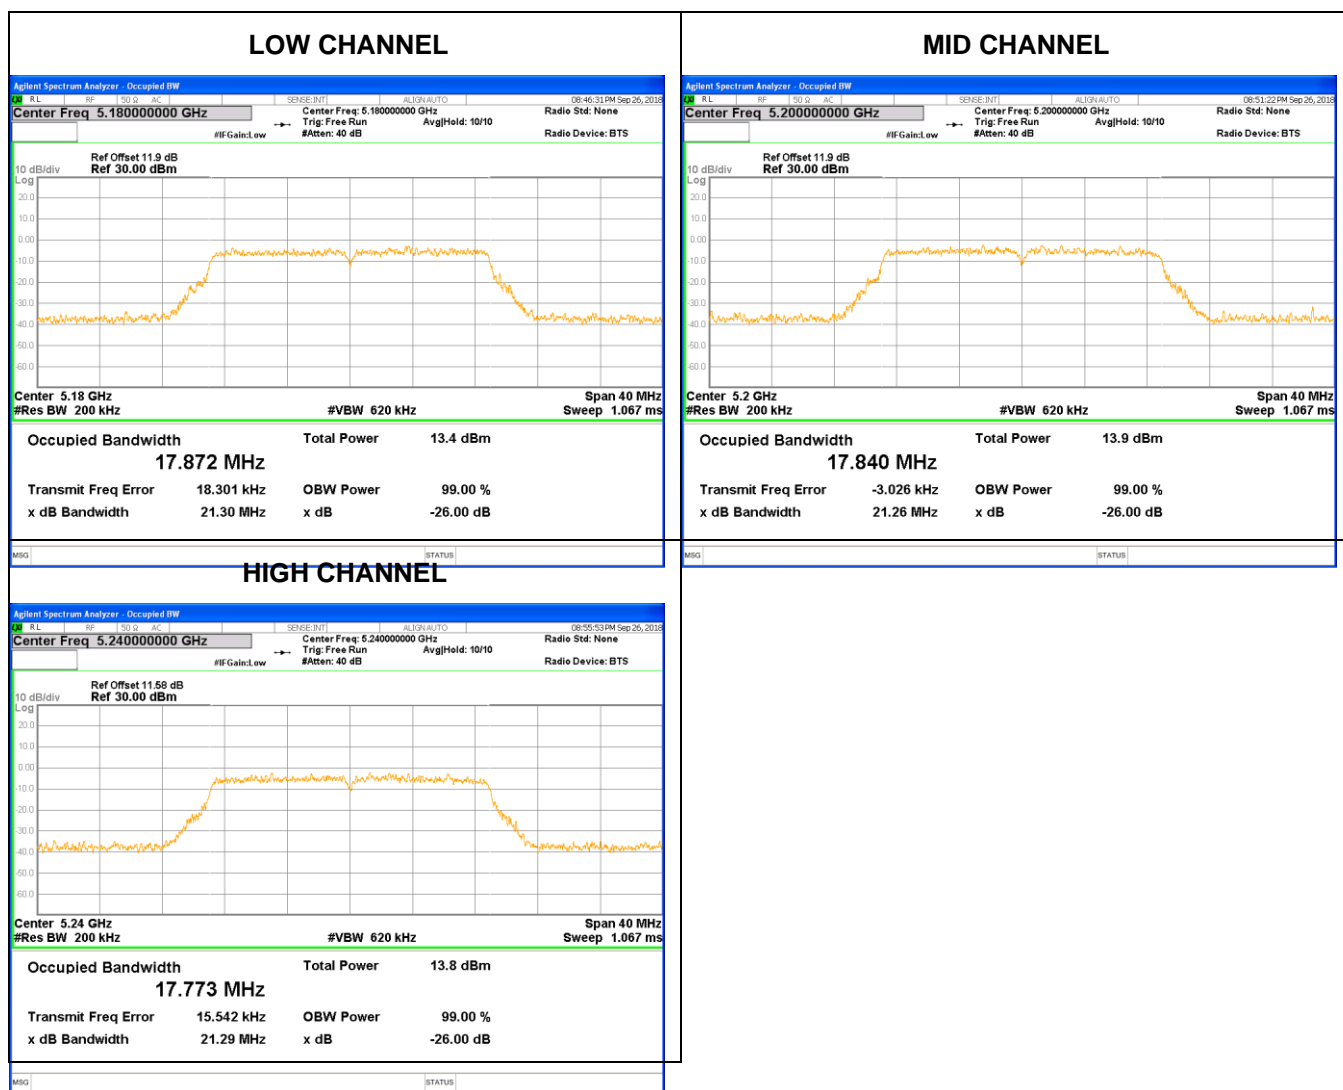






### Chain 1

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5180	21.41	17.836
Mid	5200	21.30	17.814
High	5240	21.30	17.792

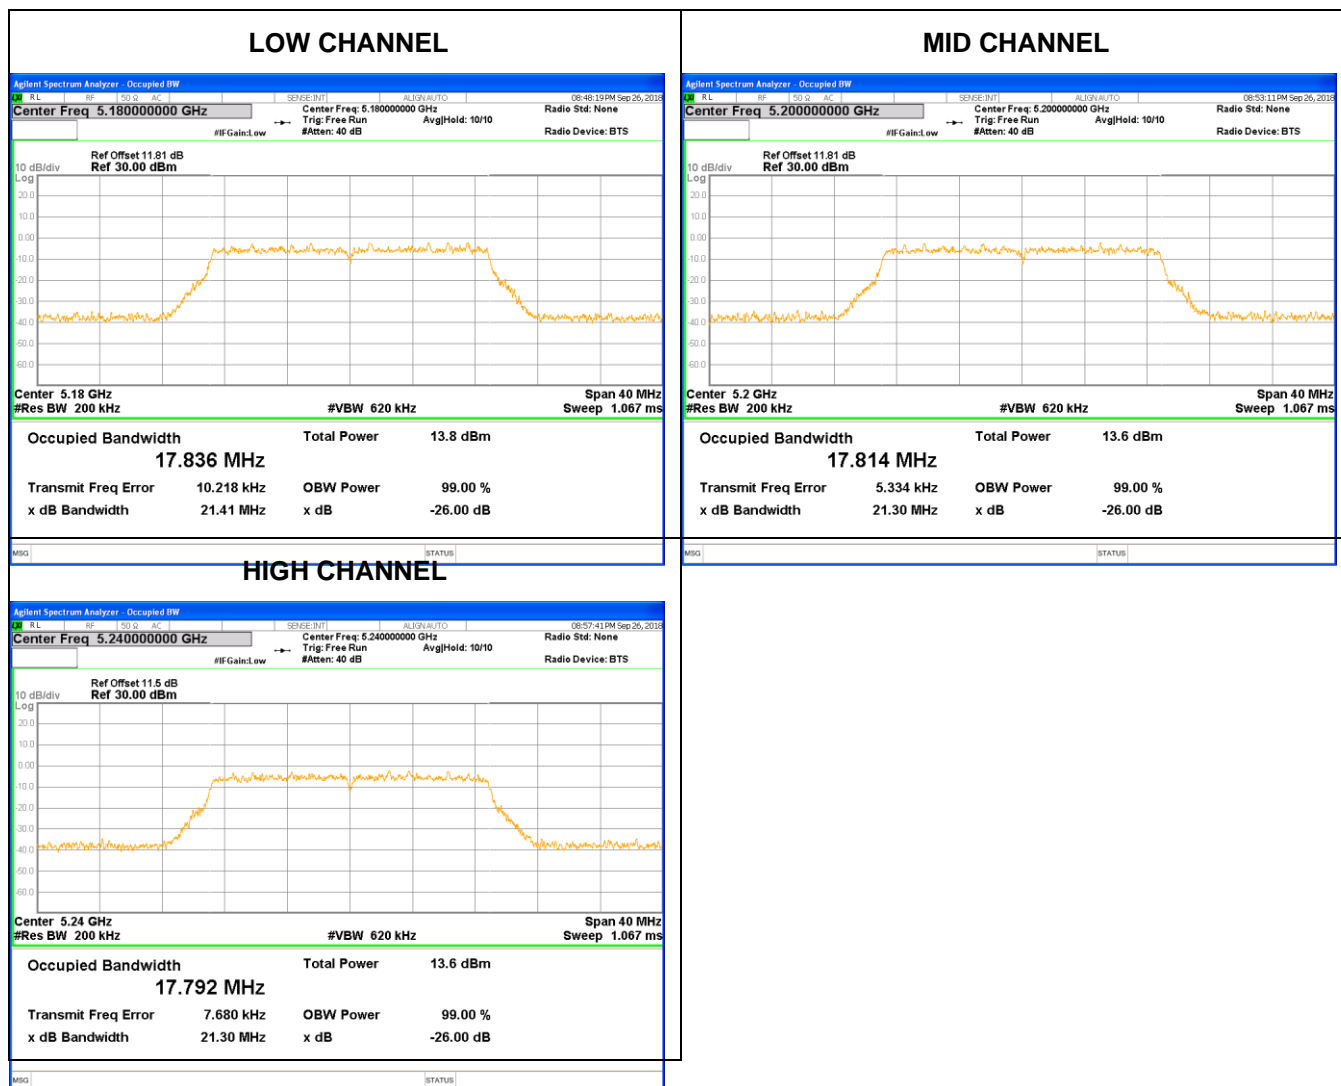




## 7.1.5. 802.11ac HT40 MODE

### Chain 0


Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5190	39.72	36.303
High	5230	39.62	36.263

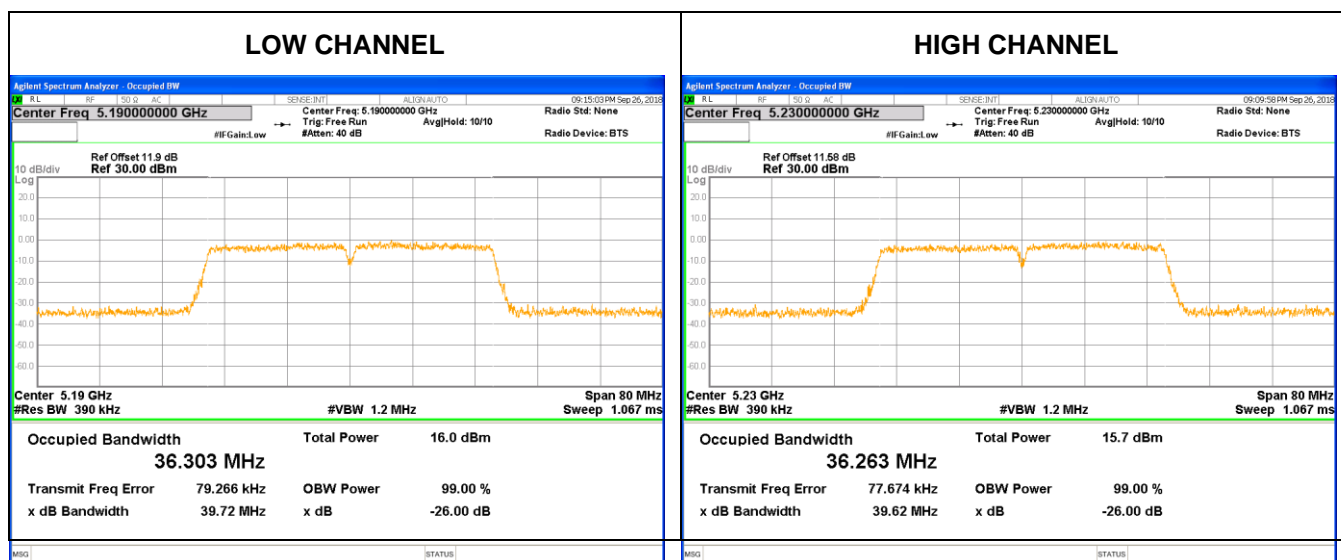



**Chain 1**

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5190	39.38	36.300
High	5230	39.09	36.295

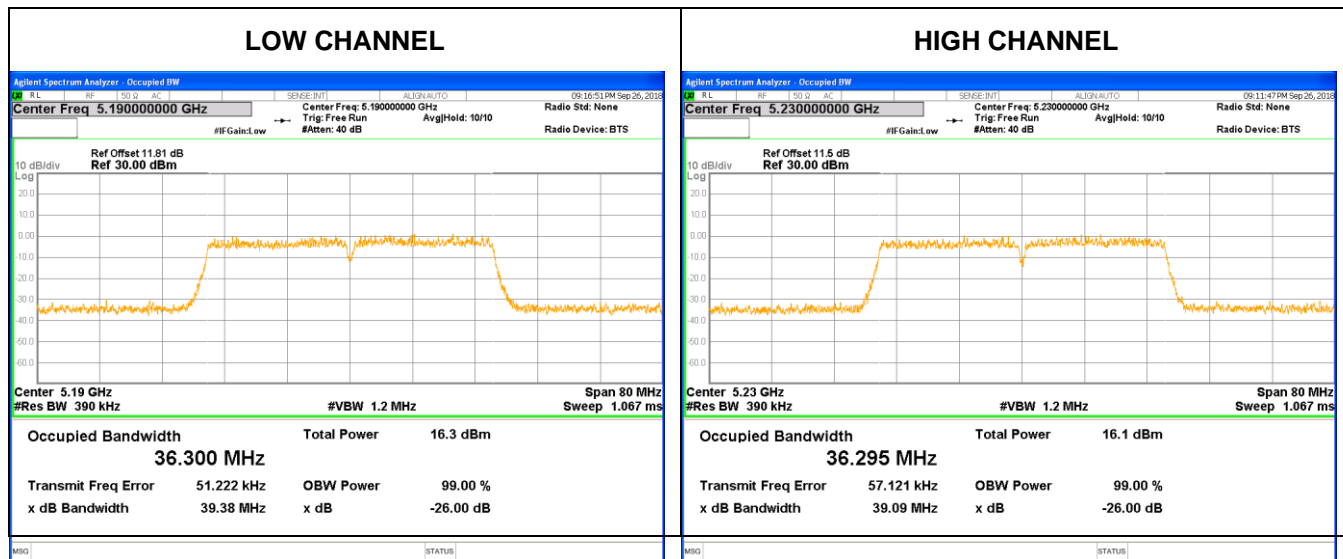




### 7.1.6. 802.11ac HT80 MODE

#### Chain 0


Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5210	81.35	75.653

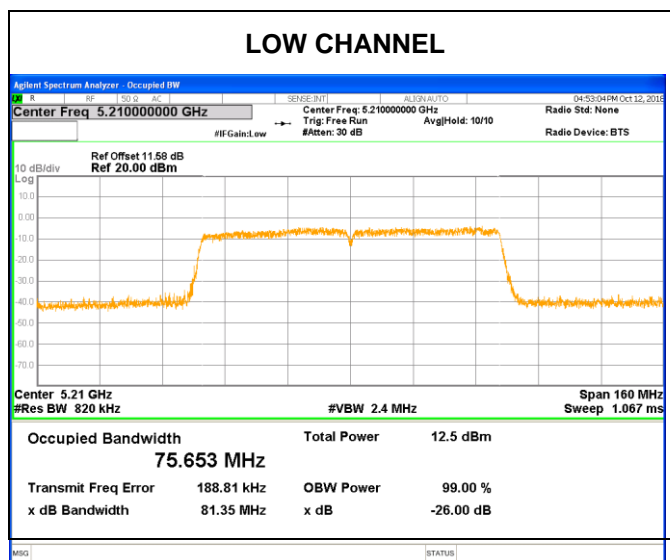



**Chain 1**

Channel	Frequency (MHz)	26 dB BW (MHz)	99% BW (MHz)
Low	5210	81.18	75.763

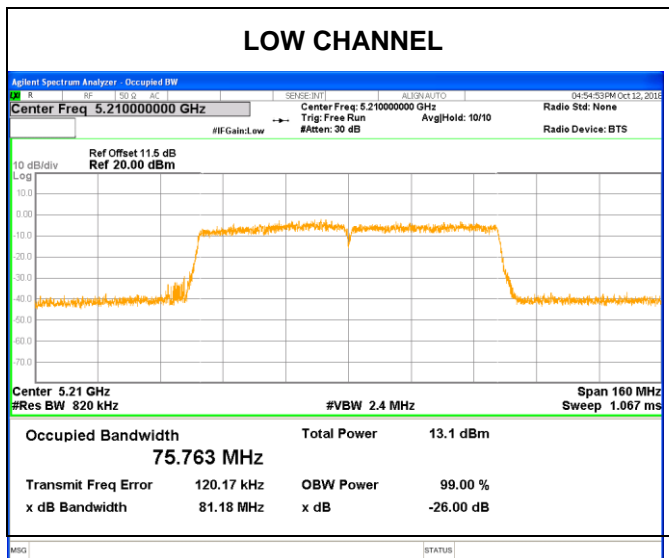



## 7.2. MAXIMUM CONDUCTED OUTPUT POWER

### LIMITS

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	FCC: For an indoor access point :1W (30dBm) FCC:For client devices: 250mw (24dBm)	5150-5250
	For RSS:e.i.r.p. power: not exceed 200 mW(23dBm) or $10 + 10 \log_{10} B$ , B is the 99% emission bandwidth in megahertz	
	250mW (24dBm)	5250-5350
	250mW (24dBm)	For FCC:5470-5725 For IC:5470-5600 5650-5725
	1 Watt (30dBm)	5725-5850


Note: 1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Directional gain: Please refer to the description in section 5.3.

### TEST PROCEDURE

Refer to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Connect the EUT to the a broadband gated RF average power meter, the power meter shall have a video bandwidth that is greater than or equal to the bandwidth and shall utilize a fast-responding diode detector.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V



## RESULTS

Mode	Channel	Chain	CONDUCTED POWER (dBm)		Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
			Single	Total			
a	5180	0	14.06		24	19.16	22.21
		1	14.57		24	19.37	22.21
	5200	0	13.14		24	18.24	22.21
		1	13.48		24	18.28	22.21
	5240	0	13.24		24	18.34	22.21
		1	13.26		24	18.06	22.21
n HT20	5180	0	8.27	11.51	24	16.61	22.50
		1	8.72				
	5200	0	8.18	11.42	24	16.52	22.50
		1	8.62				
	5240	0	8.29	11.48	24	16.68	22.50
		1	8.64				
ac HT20	5180	0	7.95	11.24	24	16.34	22.50
		1	8.49				
	5200	0	8.15	11.22	24	16.32	22.50
		1	8.27				
	5240	0	8.09	11.14	24	16.24	22.50
		1	8.17				
n HT40	5190	0	10.15	13.34	24	18.44	23
		1	10.51				
	5230	0	10.1	13.30	24	18.40	23
		1	10.48				
ac HT40	5190	0	9.83	12.99	24	18.09	23
		1	10.13				
	5230	0	9.65	12.78	24	17.88	23
		1	9.89				
ac HT80	5210	0	7.71	10.80	24	15.90	23
		1	7.86				

Remarks: 1.All the antennas ports had been tested, but only the worst data recorded in the report.  
2.EIRP= Conducted Out Power+ Directional gain.



### 7.3. POWER SPECTRAL DENSITY

#### LIMITS

FCC Part15, Subpart E/ RSS-247		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	For FCC: Other than Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250
	For RSS:10dBm/MHz	
	11dBm/MHz	5250-5350
	11dBm/MHz	For FCC:5470-5725 For IC:5470-5600 5650-5725
	30dBm/500kHz	5725-5850

Note: 1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. Directional gain: Please refer to the description in section 5.3.

#### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500KHz






VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

#### **TEST SETUP**



#### **TEST ENVIRONMENT**

Temperature	23.4°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

#### **RESULTS**



Mode	Channel	Chain	Conducted PSD (dBm)		Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
			Single	Total			
a	5180	0	1.756		11	6.856	10
		1	1.959		11	6.759	10
	5200	0	0.943		11	6.043	10
		1	1.073		11	5.873	10
	5240	0	0.854		11	5.954	10
		1	1.169		11	5.969	10
n HT20	5180	0	-3.501	-0.30	8.9	7.8	10
		1	-3.120				
	5200	0	-2.987	0.01	8.9	8.11	10
		1	-3.008				
	5240	0	-3.190	-0.12	8.9	7.98	10
		1	-3.069				
ac HT20	5180	0	-3.281	-0.15	8.9	7.95	10
		1	-3.042				
	5200	0	-2.781	0.15	8.9	8.25	10
		1	-2.946				
	5240	0	-2.825	0.13	8.9	8.23	10
		1	-2.940				
n HT40	5190	0	-3.248	-0.25	8.9	7.85	10
		1	-3.280				
	5230	0	-3.357	-0.25	8.9	7.85	10
		1	-3.155				
ac HT40	5190	0	-3.205	-0.34	8.9	7.76	10
		1	-3.486				
	5230	0	-3.207	-0.13	8.9	7.97	10
		1	-3.079				
ac HT80	5210	0	-7.639	-4.44	8.9	3.66	10
		1	-7.268				
Note: PSD= TEST PLOT Value + 10 log (1/x), where x is the duty cycle.							


Remarks: 1. All the antennas ports had been tested, but only the worst data recorded in the report.  
2.EIRP PSD= Conducted PSD+ Directional gain.




## TEST PLOT FOR ANTENNA B AND C

### 802.11a Mode

#### 5180MHz Chain 0

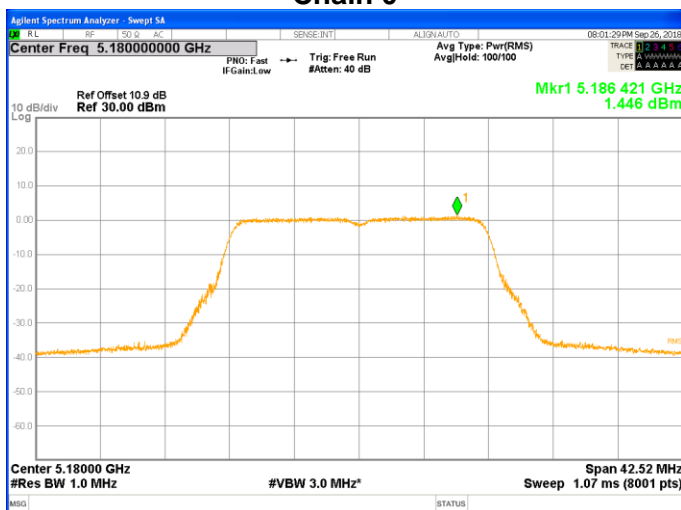


#### Chain 1

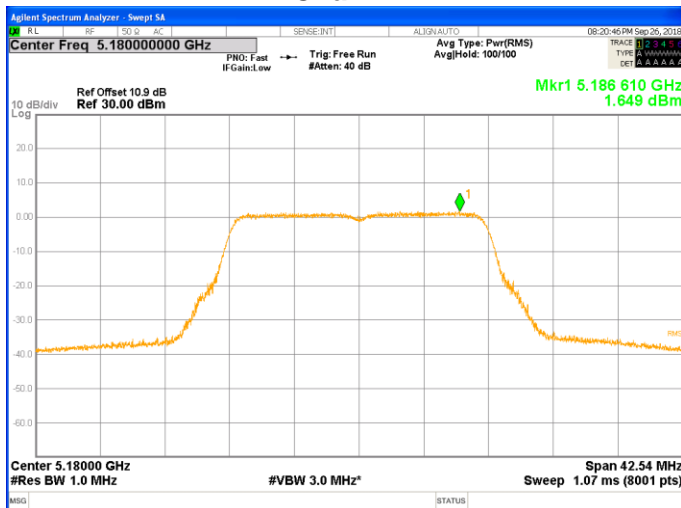




### 5200MHz Chain 0

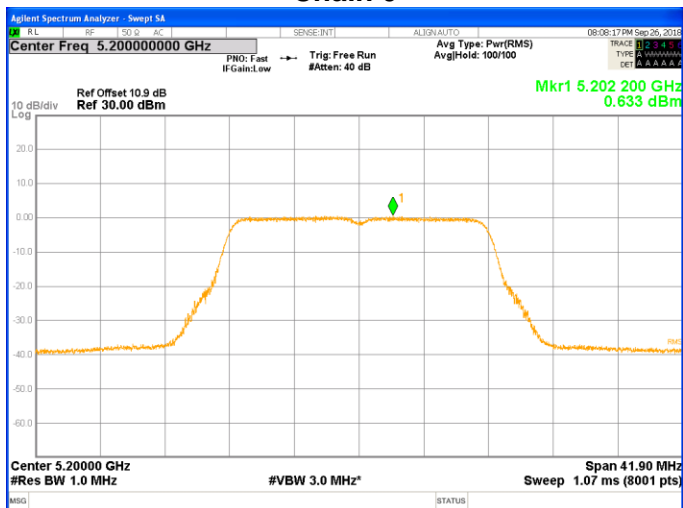


### Chain 1

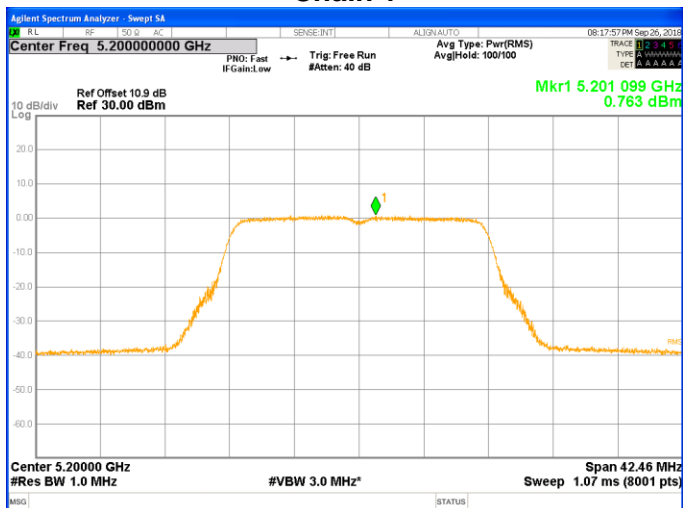




### 5240MHz Chain 0

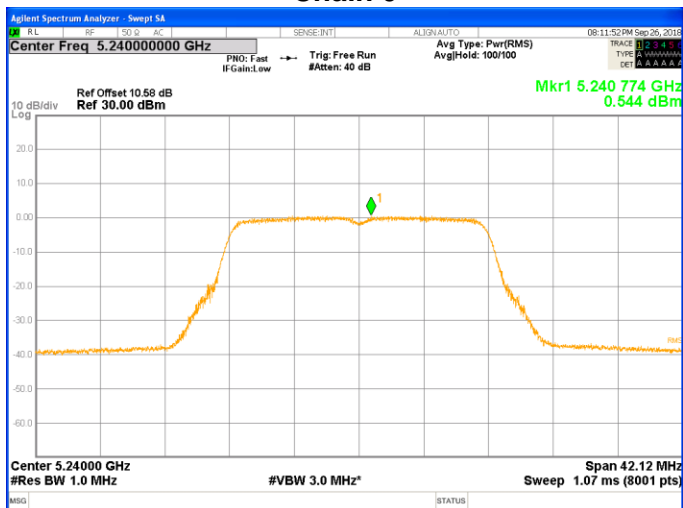

### Chain 1

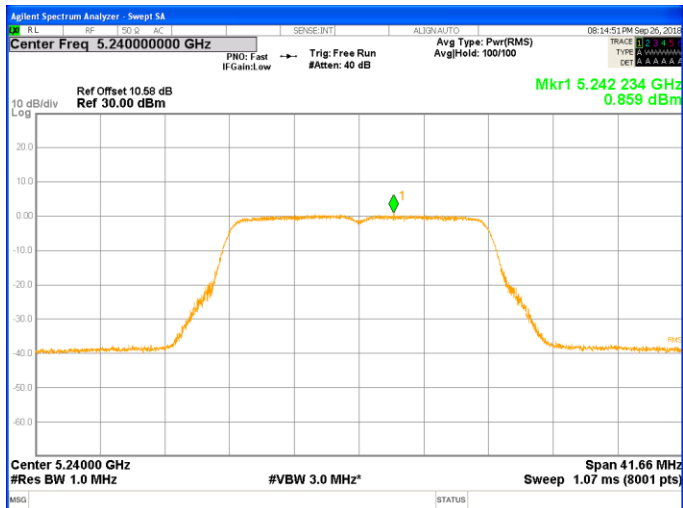





802.11 n HT20 Mode

5180MHz

Chain 0

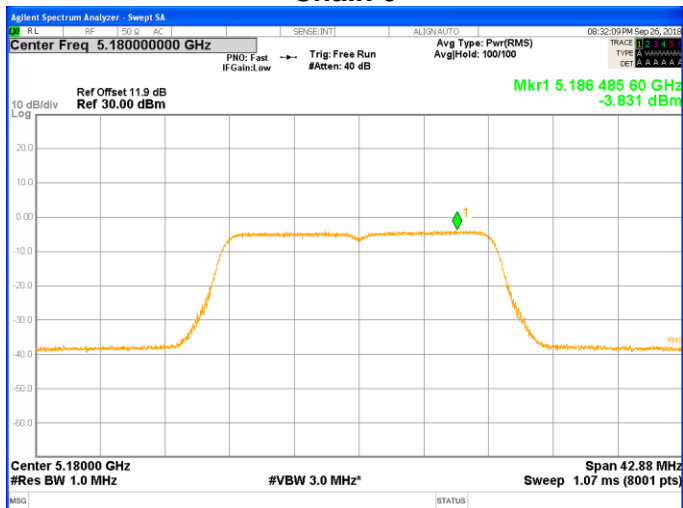


Chain 1

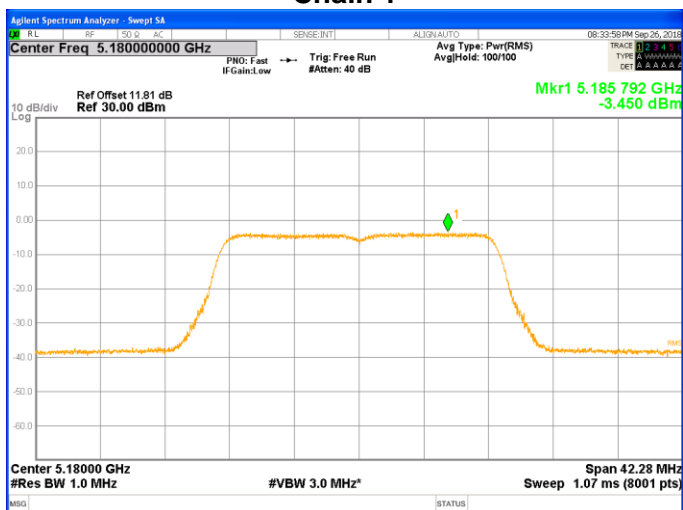




## 5200MHz

### Chain 0

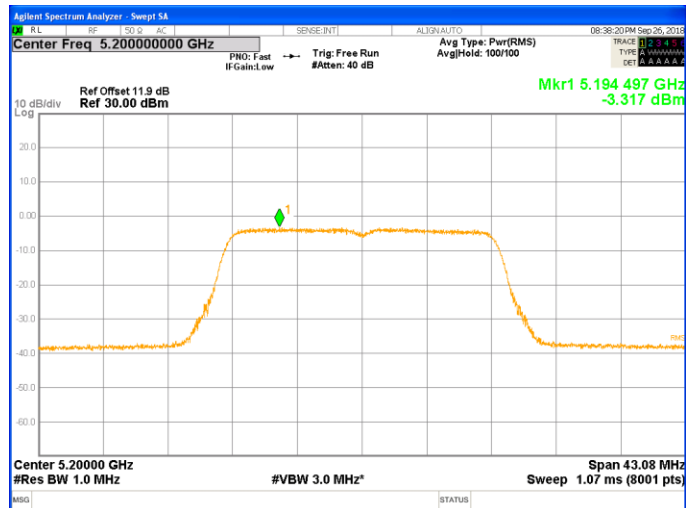


### Chain 1

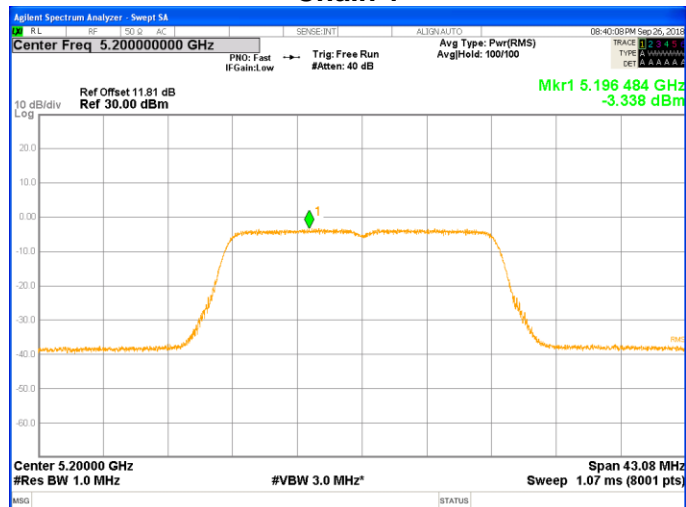




### 5240MHz Chain 0

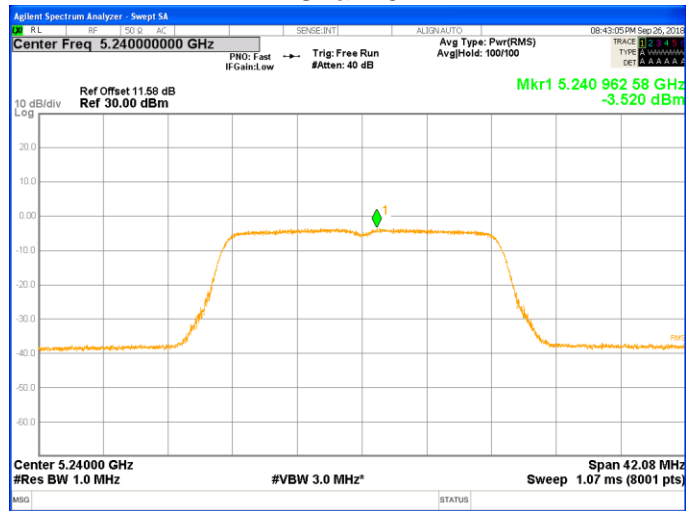

### Chain 1

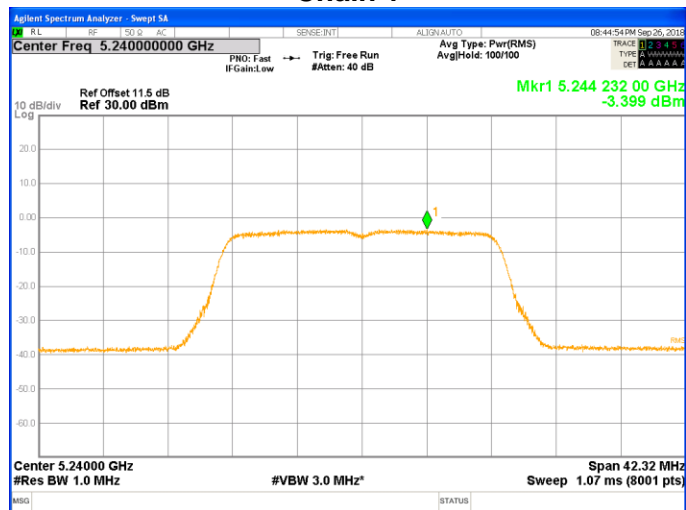






802.11n HT40 Mode

5190MHz

Chain 0




Chain 1

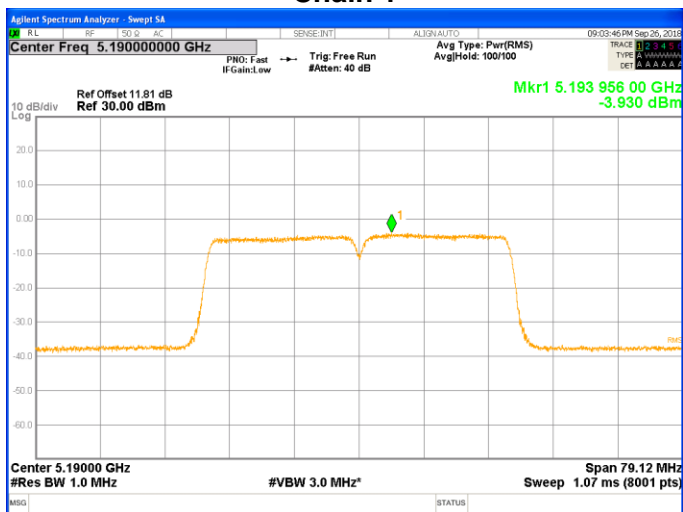




## 5230MHz

### Chain 0

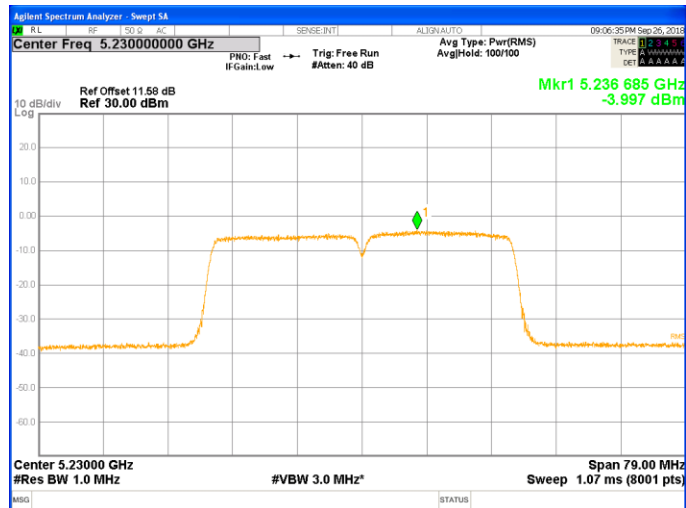


### Chain 1

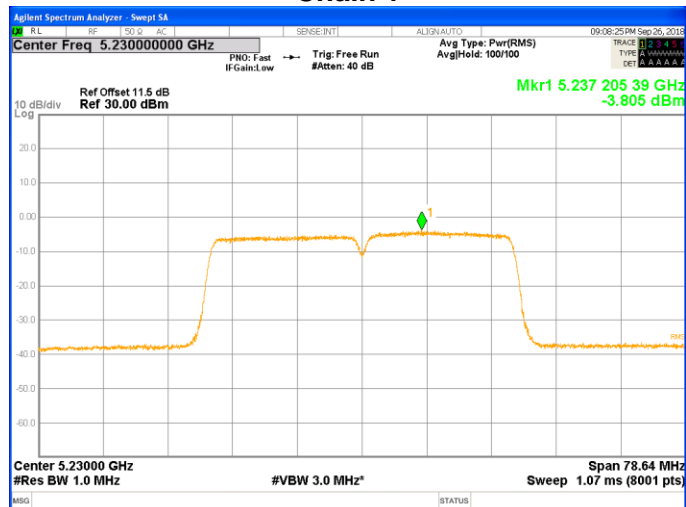




## 802.11 ac HT20 Mode

### 5180MHz Chain 0

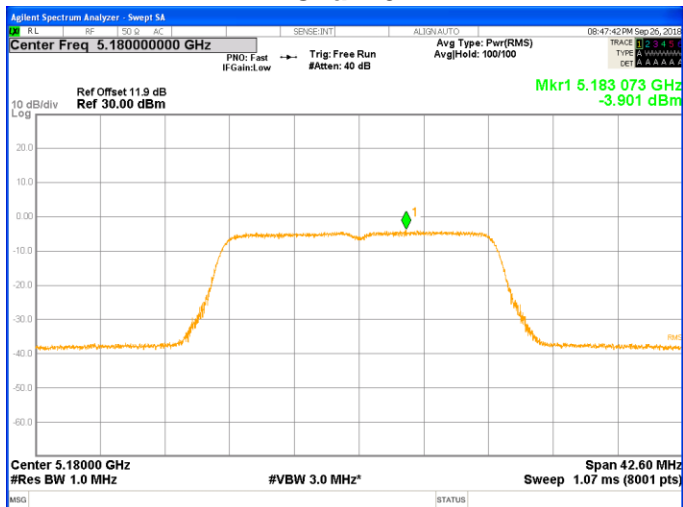


### Chain 1

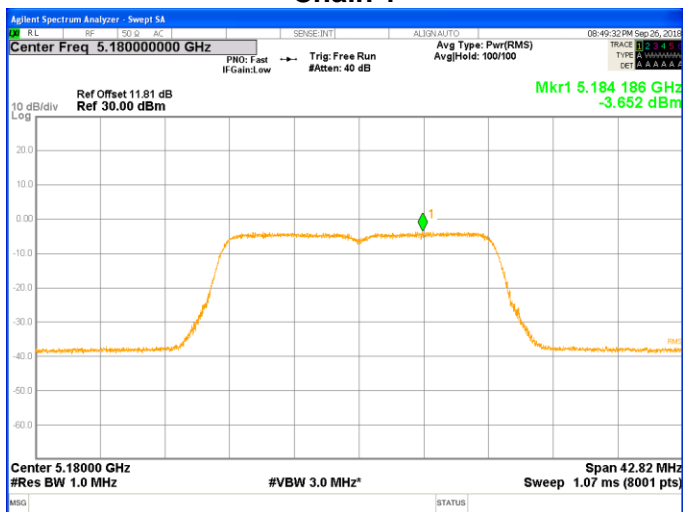




## 5200MHz

### Chain 0

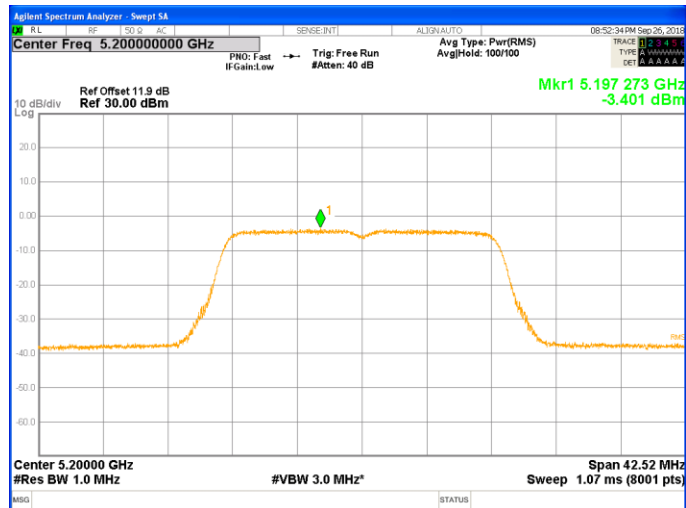


### Chain 1

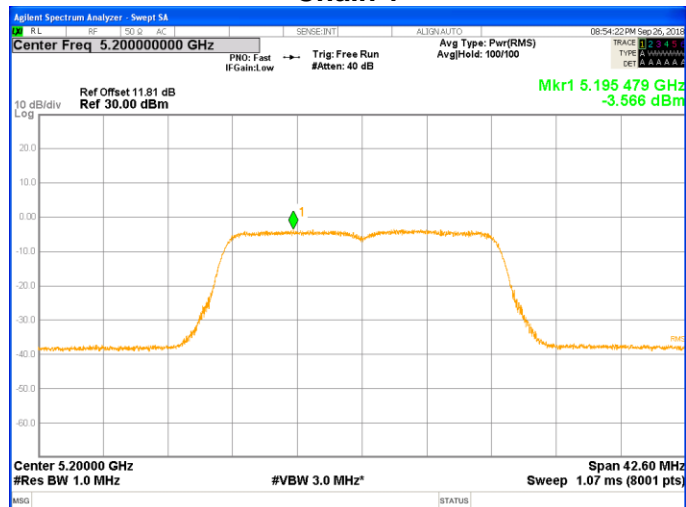




## 5240MHz

### Chain 0

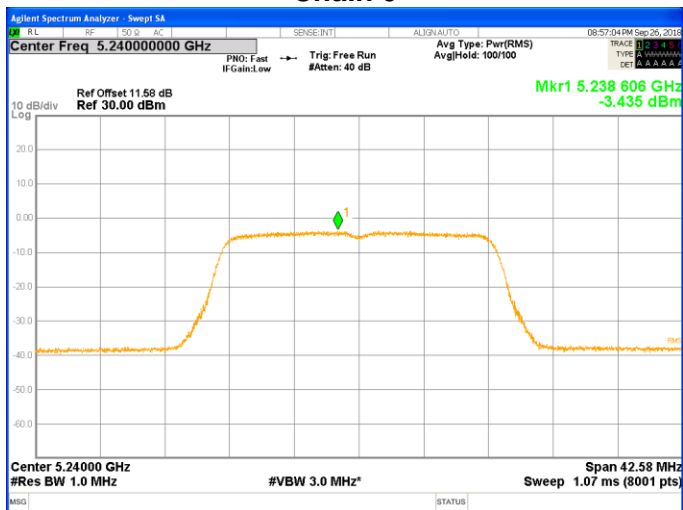

### Chain 1

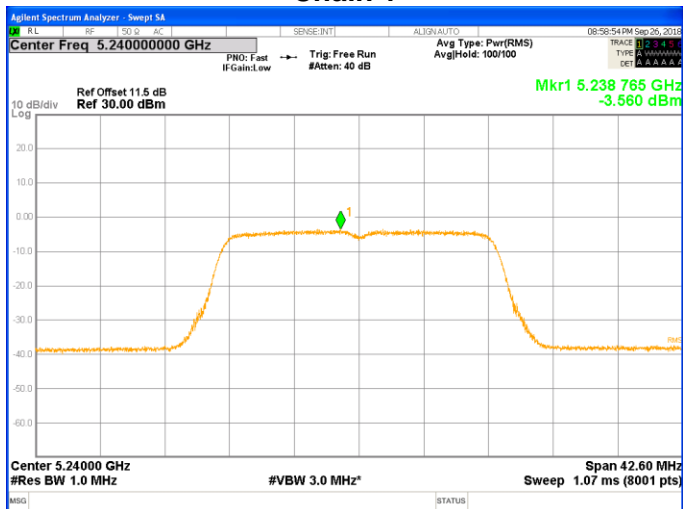



## 802.11ac HT40 Mode

### 5190MHz Chain 0




### Chain 1






## 5230MHz

### Chain 0

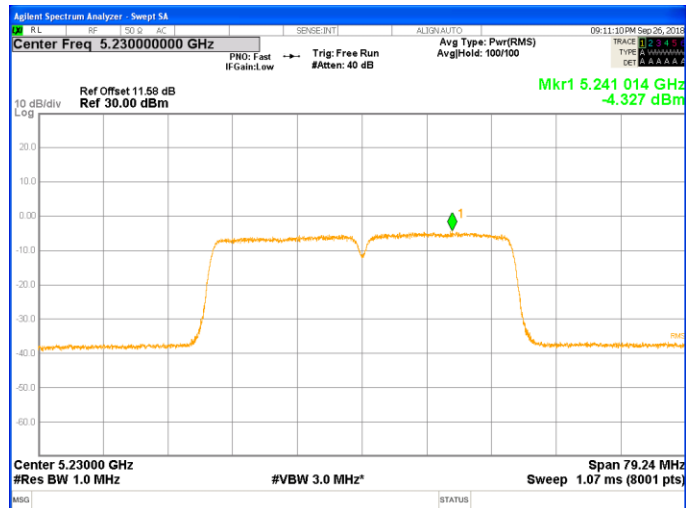

### Chain 1

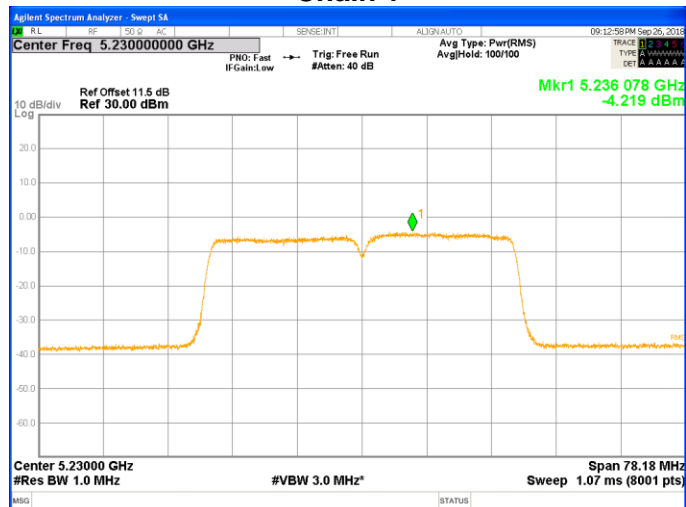





802.11ac HT80 Mode

5210MHz

Chain 0

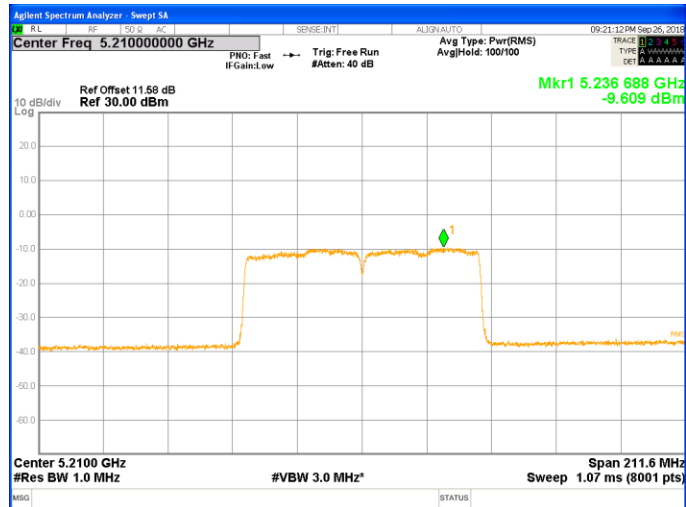

Chain 1

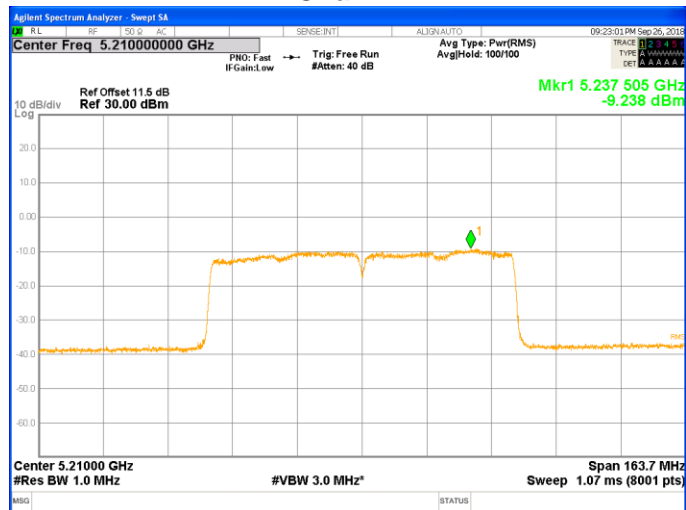





## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to FCC §15.205, §15.209 and §15.407(b) (4)

Please refer to RSS-GEN Clause 8.9 (Transmitter)

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.



IC Restricted bands please refer to ISED RSS-GEN Clause 8.10.  
FCC Restricted bands please refer to CFR 47 FCC 15.209.

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1GHz)			
Frequency Range (MHz)	Field Strength Limit ( $\mu\text{V/m}$ ) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$ ) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

Limits of unwanted emission out of the restricted bands

LIMITS OF RADIATED EMISSION MEASUREMENT ( Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dB $\mu\text{V/m}$ ) at 3 m
30 - 88		
5150~5250 MHz	PK:-27 (dBm/MHz)	PK:68.2(dB $\mu\text{V/m}$ )
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4	PK: 68.2(dB $\mu\text{V/m}$ ) *1 PK:105.2 (dB $\mu\text{V/m}$ ) *2 PK: 110.8(dB $\mu\text{V/m}$ ) *3 PK:122.2 (dB $\mu\text{V/m}$ ) *4

Note:

\*1 beyond 75 MHz or more above of the band edge.


\*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

\*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

\*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

## TEST SETUP AND PROCEDURE

Below 30MHz

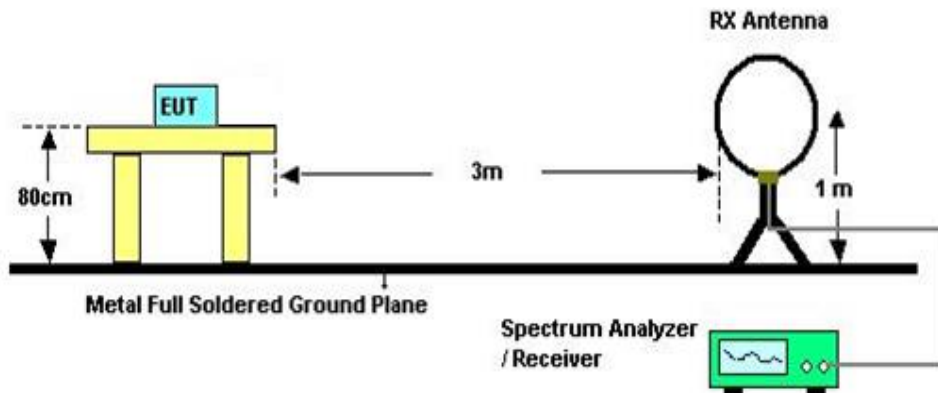


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

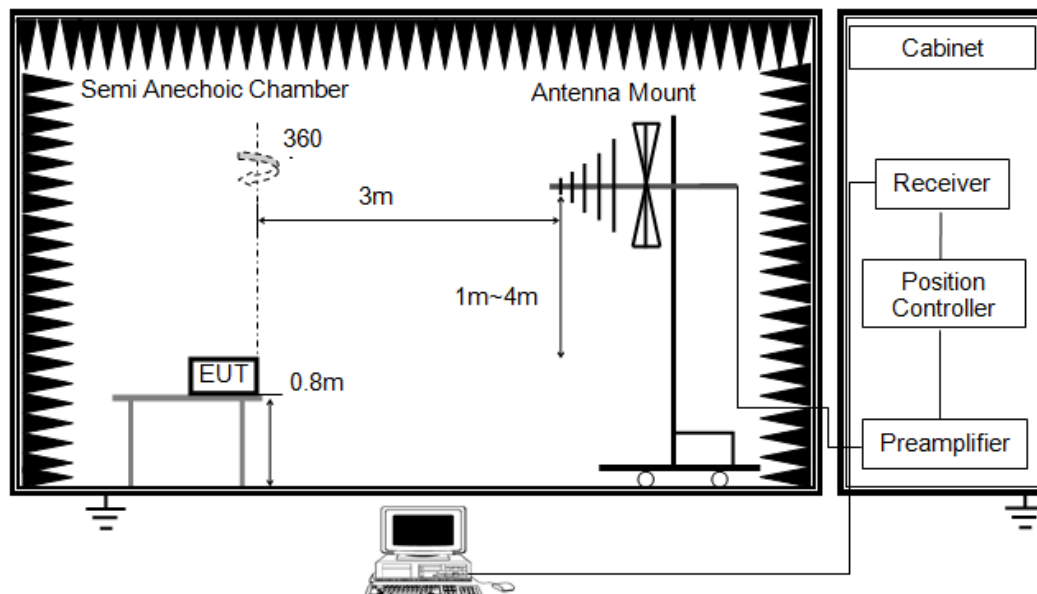


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

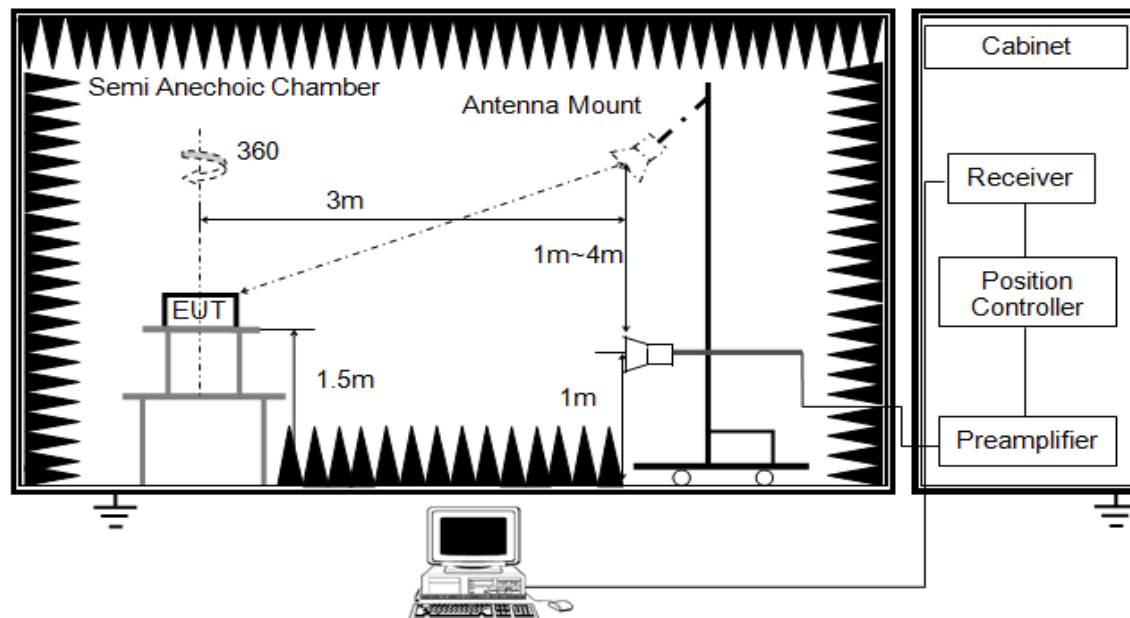

The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.



7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

#### **TEST ENVIRONMENT**

Temperature	24.4°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

#### **TEST RESULTS**

Note1: The chart shows Limits 74dBuV for Peak, 54dBuV for AVG, but Unwanted Emissions that fall Outside of the Restricted Bands is 68.2dBuV for Peak, No limit for AVG. All test results are in compliance with the limits.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.




## 8.1. 802.11a MODE

### 8.1.1. UNII-1 BAND

#### SISO Chain 0

#### RESTRICTED BANDEDGE LOW CHANNEL

#### HORIZONTAL RESULTS PEAK

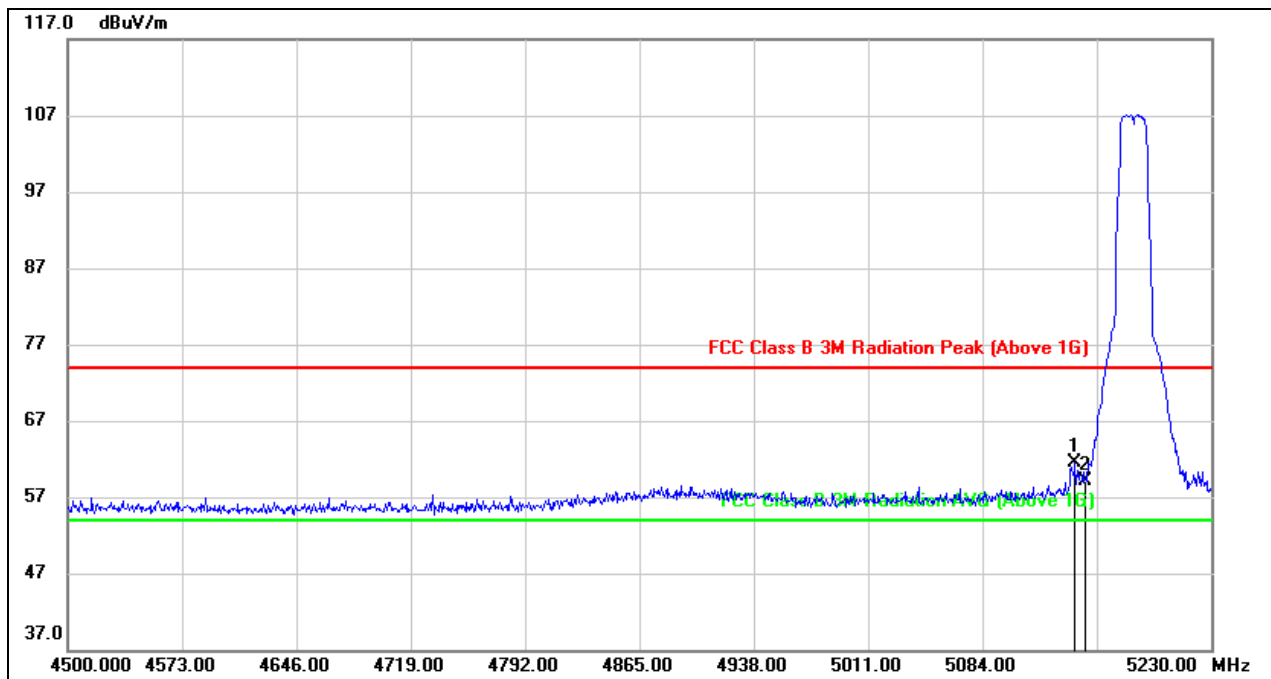


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.130	21.18	40.38	61.56	74.00	-12.44	peak
2	5150.000	18.76	40.40	59.16	74.00	-14.84	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



**AVG**

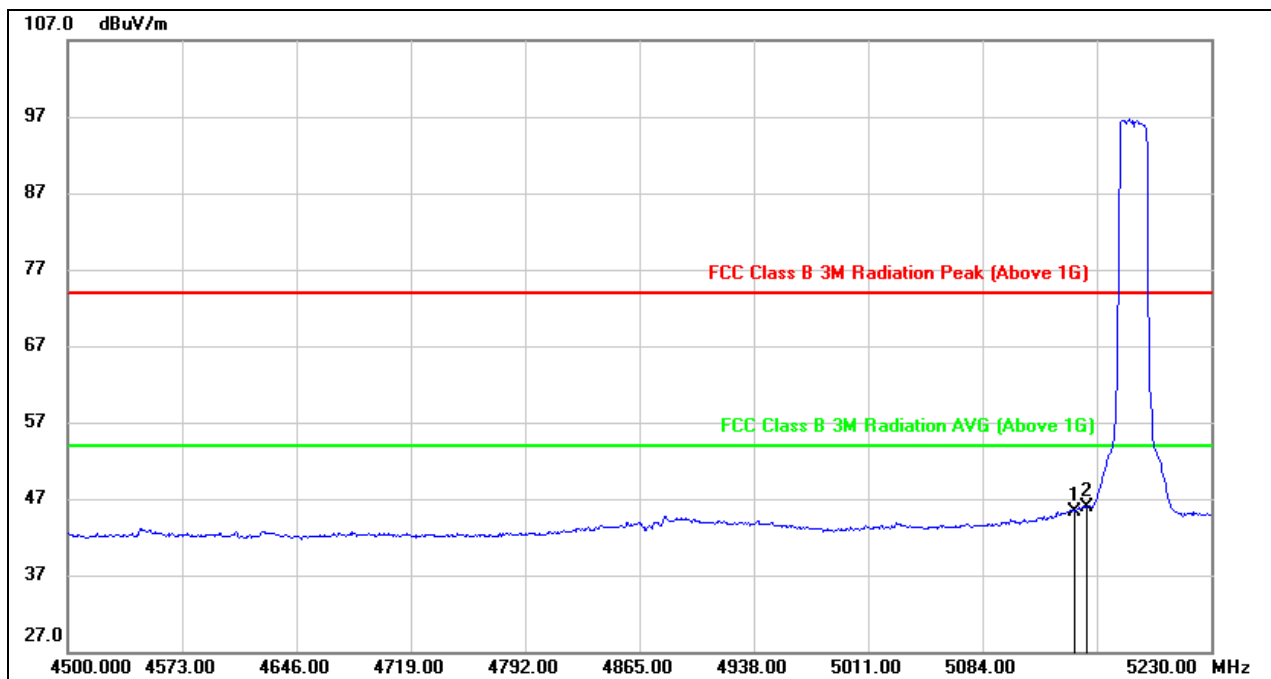


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.130	4.99	40.38	45.37	54.00	-8.63	AVG
2	5150.000	5.58	40.40	45.98	54.00	-8.02	AVG

Note: 1. Measurement = Reading Level + Correct Factor  
3. AVG:  $VBW=1/Ton$  where: ton is transmit duration.  
4. For transmit duration, please refer to clause 7.1.





**VERTICAL RESULTS**  
**PEAK**

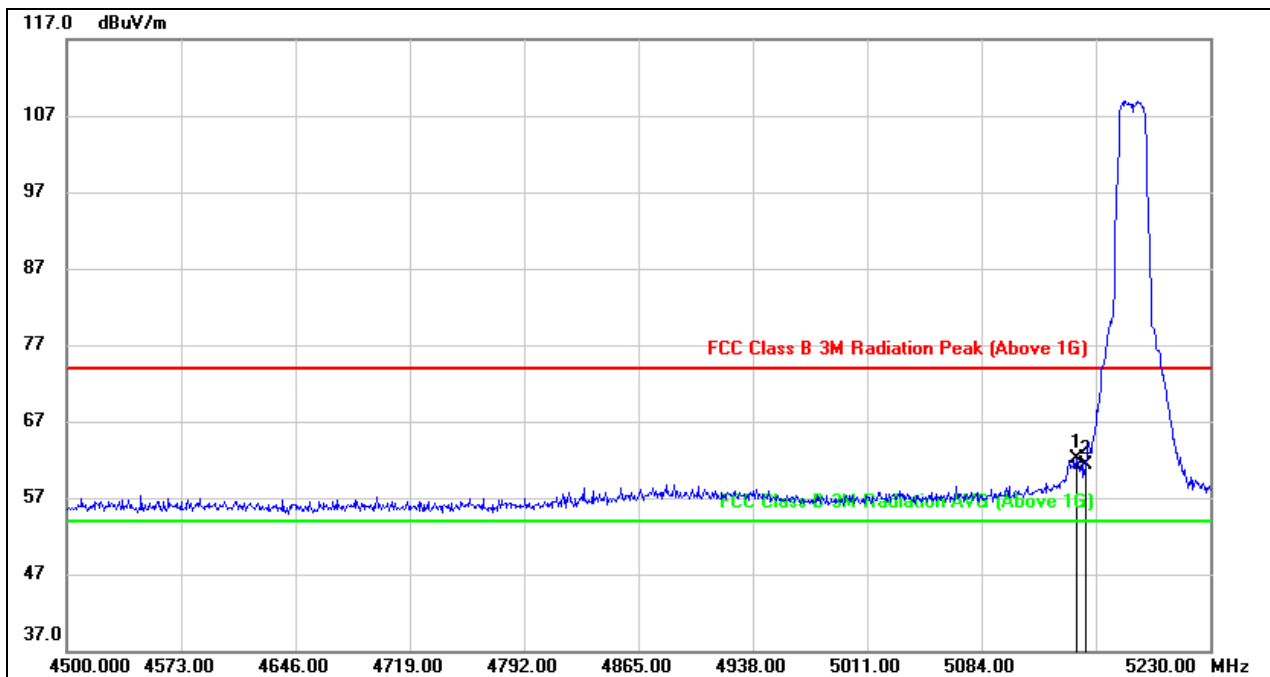


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.590	21.54	40.58	62.12	74.00	-11.88	peak
2	5150.000	20.63	40.60	61.23	74.00	-12.77	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



**AVG**

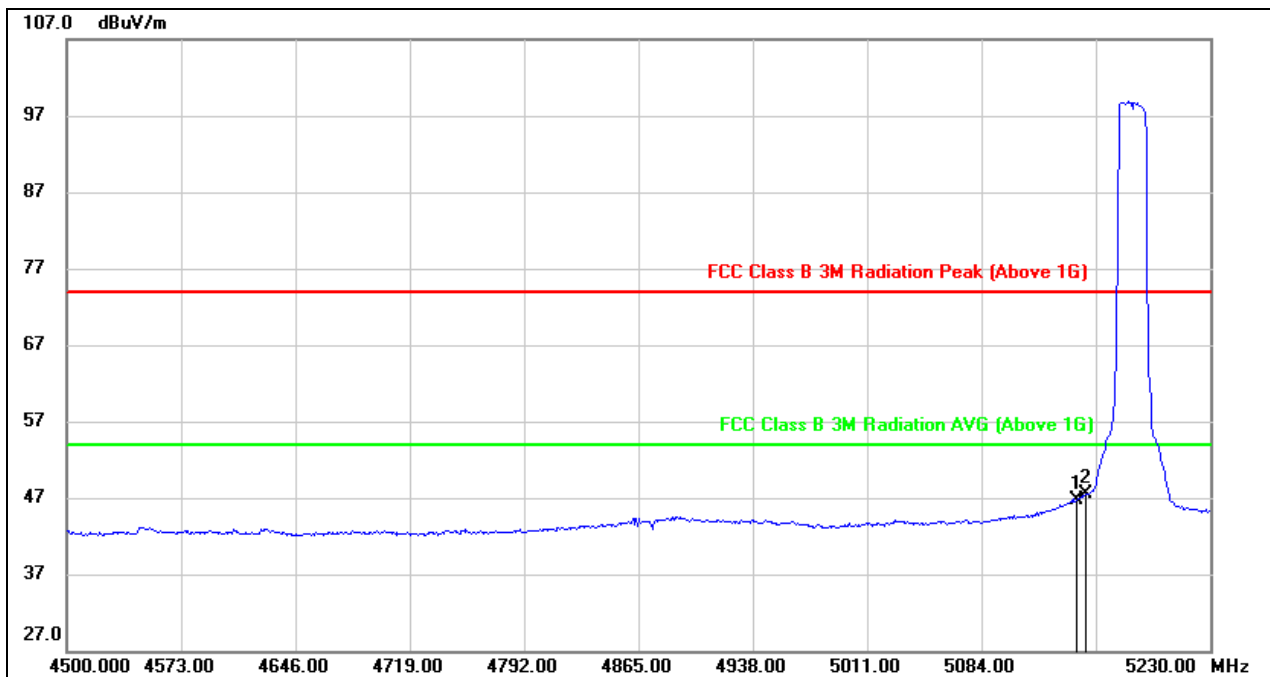


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.590	6.08	40.58	46.66	54.00	-7.34	AVG
2	5150.000	6.89	40.60	47.49	54.00	-6.51	AVG

Note: 1. Measurement = Reading Level + Correct Factor  
3. AVG: VBW=1/Ton where: ton is transmit duration.  
4. For transmit duration, please refer to clause 7.1.



## HARMONICS AND SPURIOUS EMISSIONS LOW CHANNEL

### HORIZONTAL RESULTS 1-7GHz

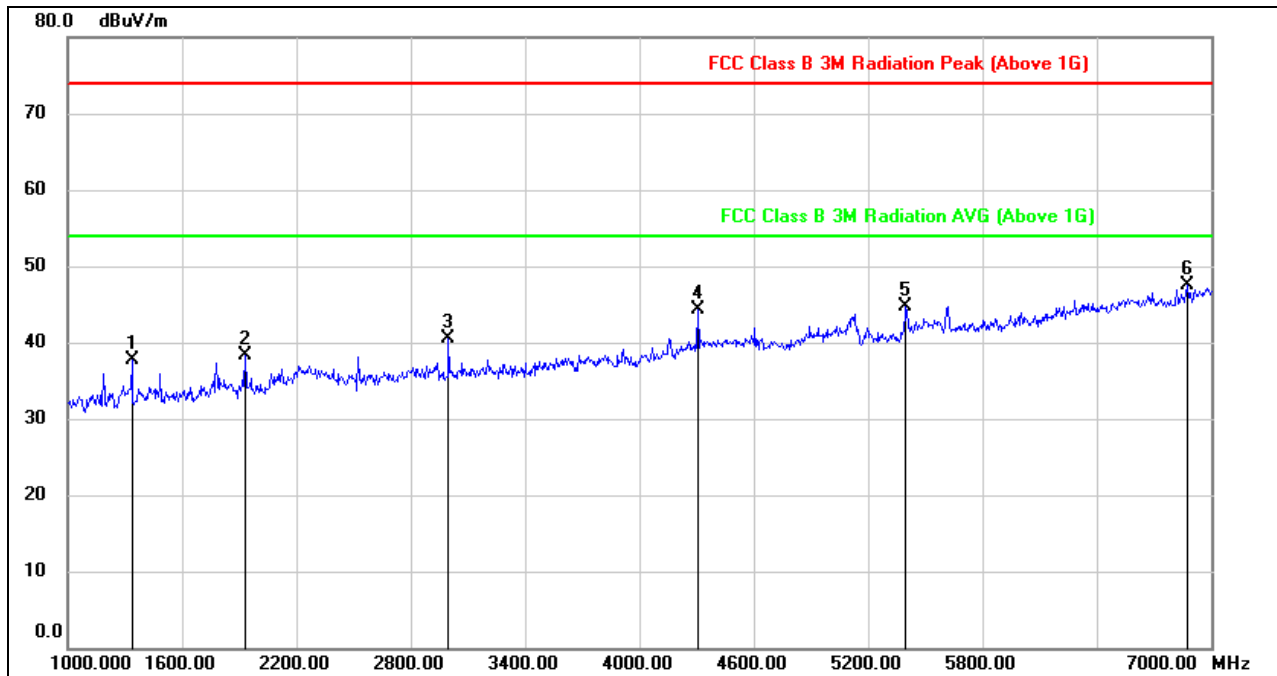


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1336.000	50.41	-12.72	37.69	74.00	-36.31	peak
2	1930.000	49.72	-11.38	38.34	74.00	-35.66	peak
3	2998.000	47.82	-7.29	40.53	74.00	-33.47	peak
4	4306.000	47.36	-3.09	44.27	74.00	-29.73	peak
5	5398.000	44.31	0.30	44.61	74.00	-29.39	peak
6	6874.000	42.73	4.84	47.57	74.00	-26.43	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



### HORIZONTAL RESULTS 7-18GHz

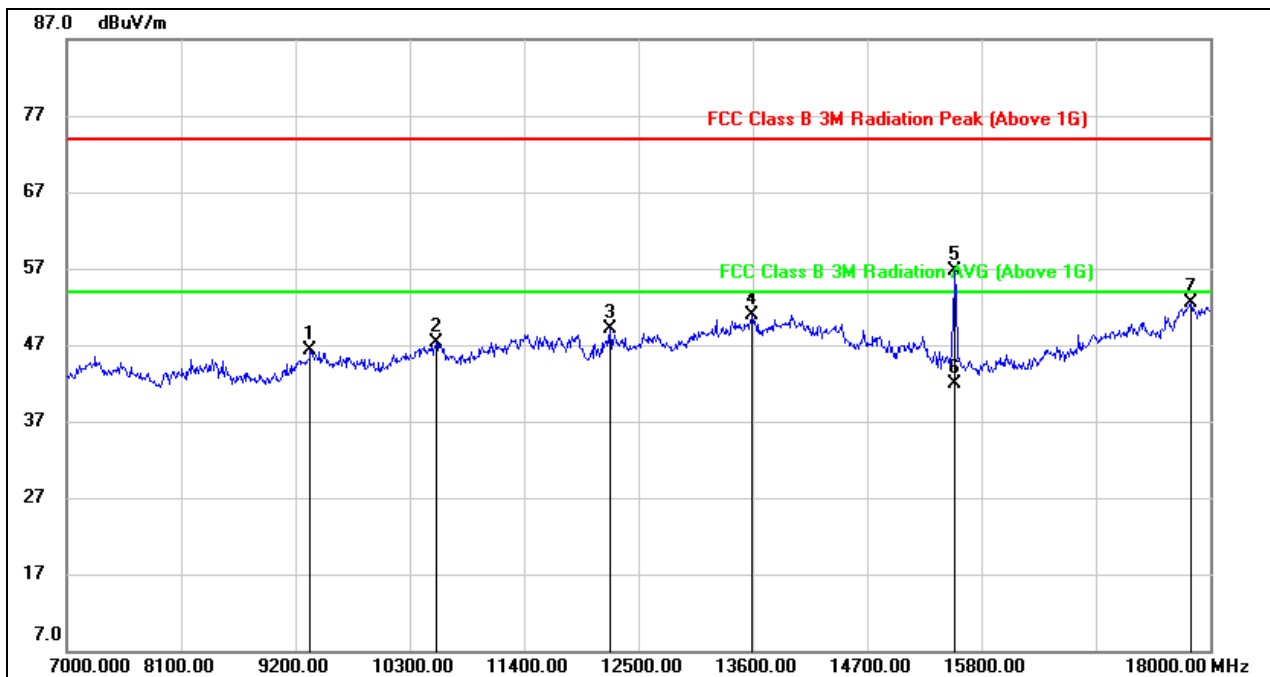


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	36.99	9.34	46.33	74.00	-27.67	peak
2	10553.000	35.39	11.97	47.36	74.00	-26.64	peak
3	12225.000	34.75	14.30	49.05	74.00	-24.95	peak
4	13589.000	32.38	18.49	50.87	74.00	-23.13	peak
5	15540.000	41.61	15.01	56.62	74.00	-17.38	peak
6	15540.000	26.91	15.01	41.92	54.00	-12.08	AVG
7	17813.000	28.30	24.25	52.55	74.00	-21.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



**VERTICAL RESULTS**  
**1-7GHz**

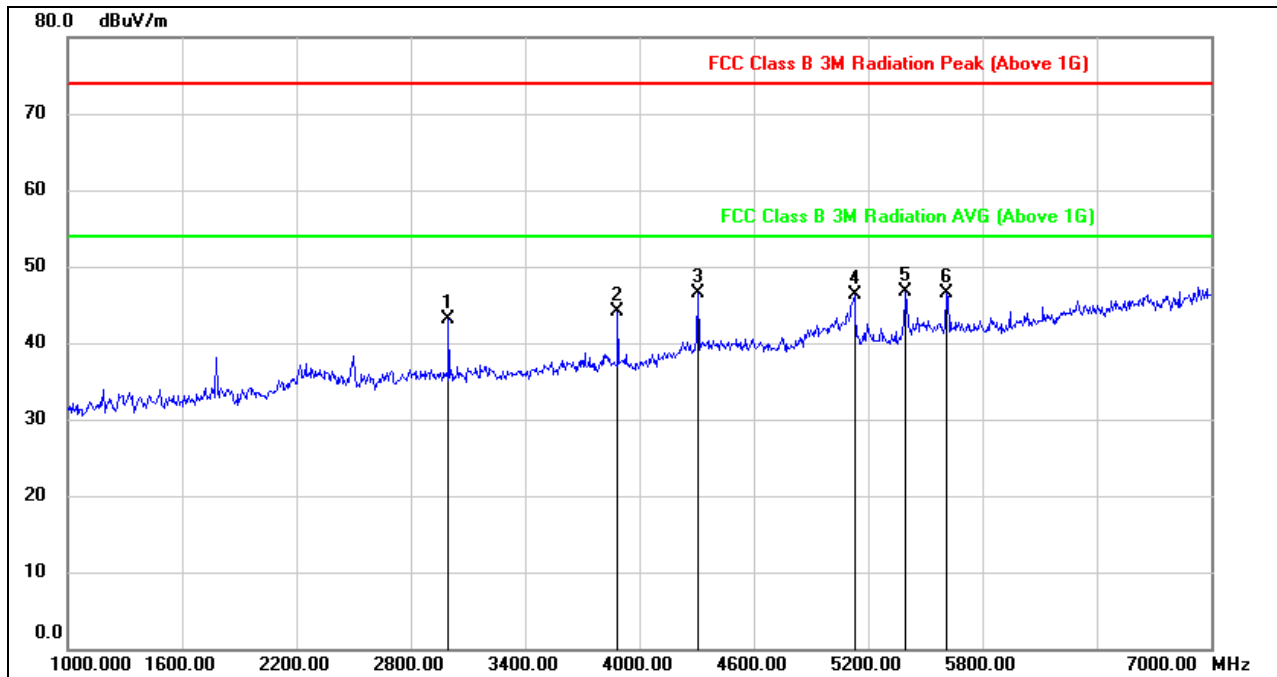


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2998.000	50.48	-7.29	43.19	74.00	-30.81	peak
2	3886.000	48.63	-4.48	44.15	74.00	-29.85	peak
3	4306.000	49.49	-2.99	46.50	74.00	-27.50	peak
4	5128.000	46.35	-0.14	46.21	74.00	-27.79	peak
5	5398.000	46.44	0.30	46.74	74.00	-27.26	peak
6	5608.000	45.77	0.70	46.47	74.00	-27.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



**VERTICAL RESULTS**  
**7-18GHz**

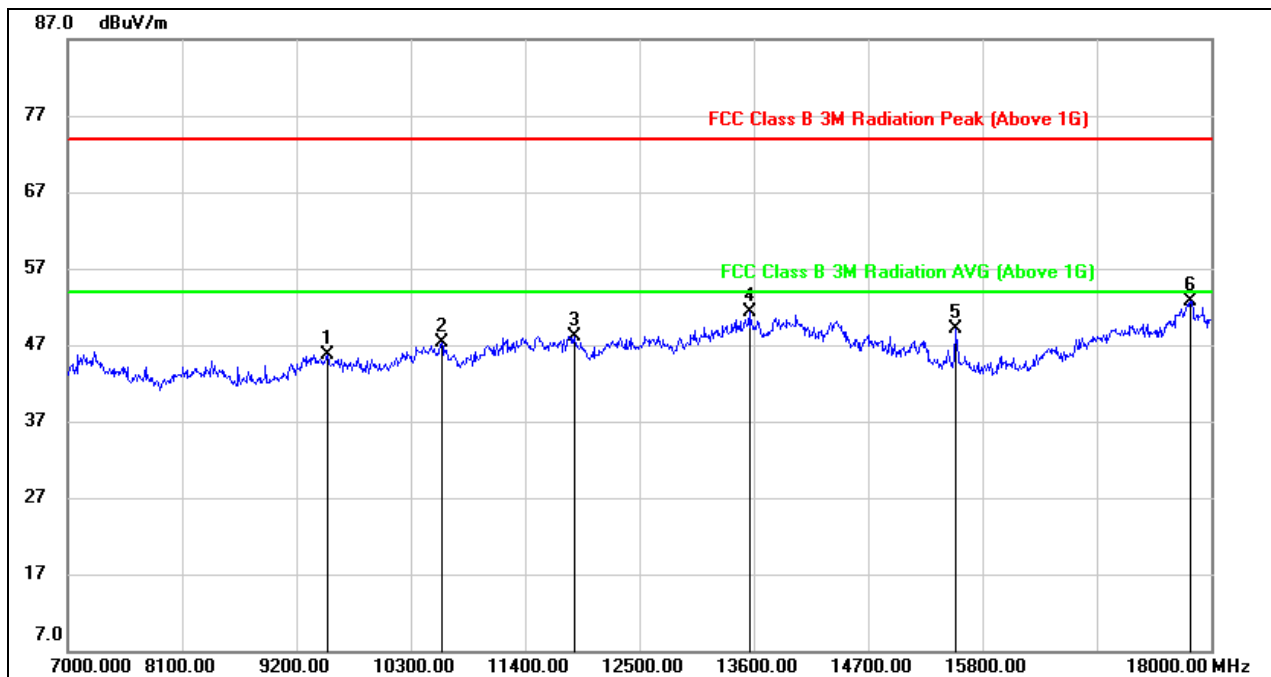


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9497.000	35.97	9.80	45.77	74.00	-28.23	peak
2	10597.000	35.29	11.94	47.23	74.00	-26.77	peak
3	11873.000	33.42	14.73	48.15	74.00	-25.85	peak
4	13556.000	32.46	18.84	51.30	74.00	-22.70	peak
5	15536.000	33.88	15.23	49.11	74.00	-24.89	peak
6	17802.000	28.19	24.61	52.80	74.00	-21.20	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



## HARMONICS AND SPURIOUS EMISSIONS MID CHANNEL

### HORIZONTAL RESULTS 1-7GHz

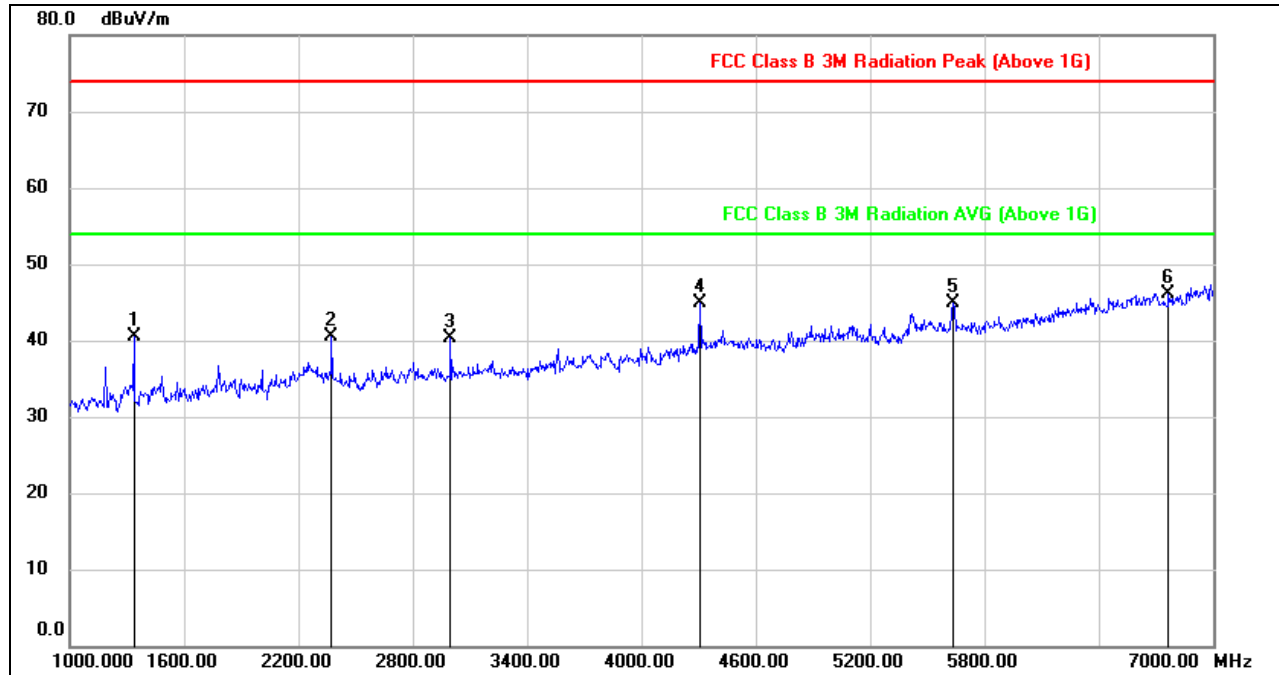


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1336.000	53.19	-12.72	40.47	74.00	-33.53	peak
2	2374.000	49.33	-8.85	40.48	74.00	-33.52	peak
3	2998.000	47.54	-7.29	40.25	74.00	-33.75	peak
4	4306.000	47.96	-3.09	44.87	74.00	-29.13	peak
5	5632.000	44.24	0.72	44.96	74.00	-29.04	peak
6	6766.000	41.93	4.20	46.13	74.00	-27.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



### HORIZONTAL RESULTS 7-18GHz

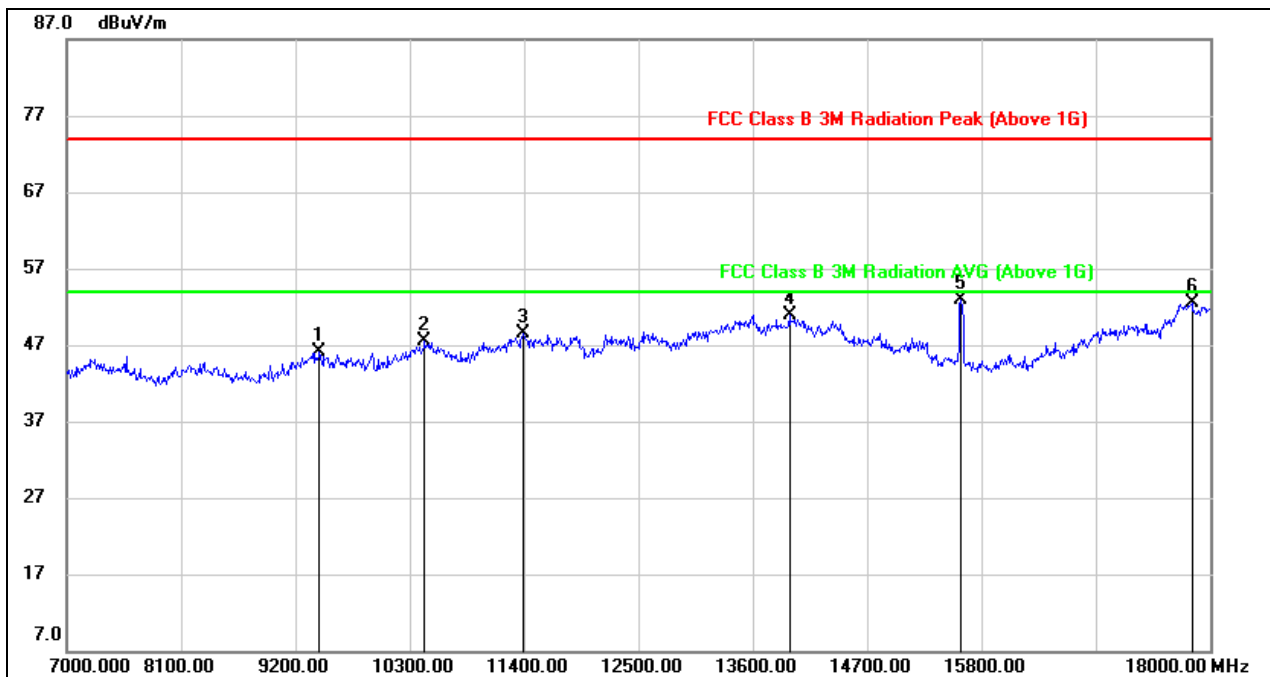


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9431.000	36.61	9.51	46.12	74.00	-27.88	peak
2	10443.000	35.83	11.63	47.46	74.00	-26.54	peak
3	11389.000	34.82	13.59	48.41	74.00	-25.59	peak
4	13952.000	32.35	18.56	50.91	74.00	-23.09	peak
5	15602.000	38.15	14.82	52.97	74.00	-21.03	peak
6	17824.000	28.24	24.25	52.49	74.00	-21.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.





**VERTICAL RESULTS**  
**1-7GHz**

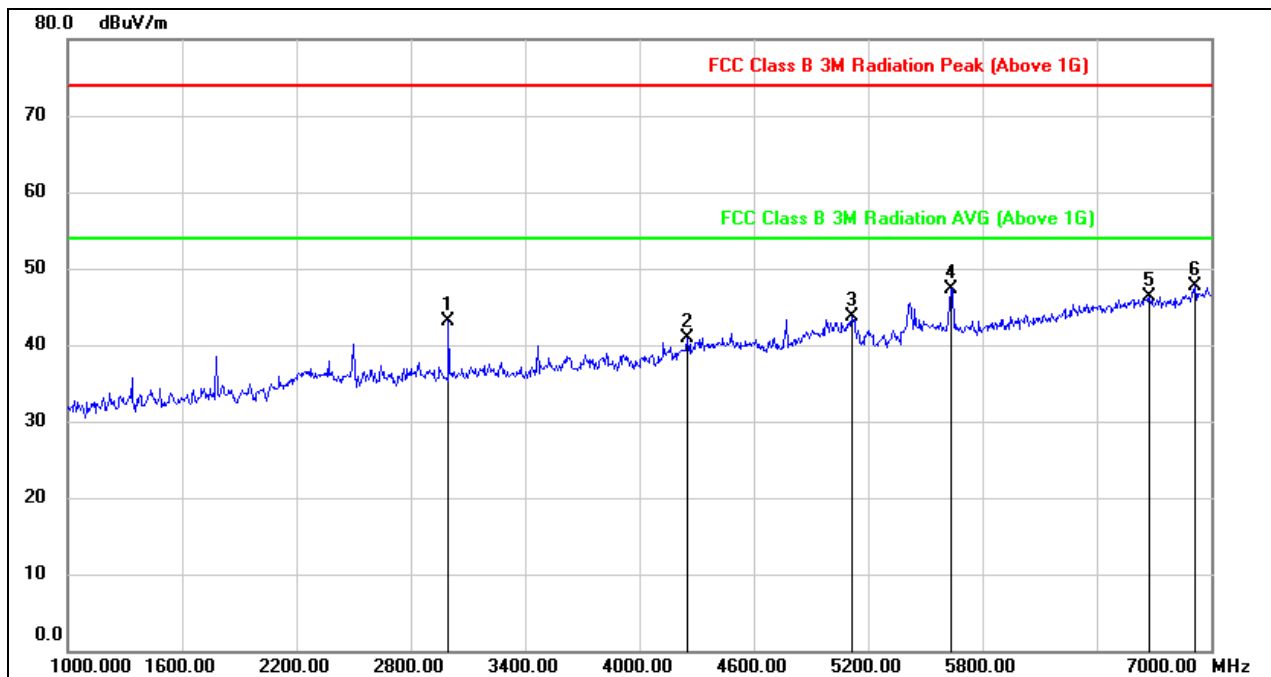


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2998.000	50.40	-7.29	43.11	74.00	-30.89	peak
2	4252.000	44.16	-3.33	40.83	74.00	-33.17	peak
3	5116.000	43.85	-0.21	43.64	74.00	-30.36	peak
4	5638.000	46.53	0.81	47.34	74.00	-26.66	peak
5	6676.000	42.02	4.32	46.34	74.00	-27.66	peak
6	6916.000	42.59	5.15	47.74	74.00	-26.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



**VERTICAL RESULTS**  
**7-18GHz**

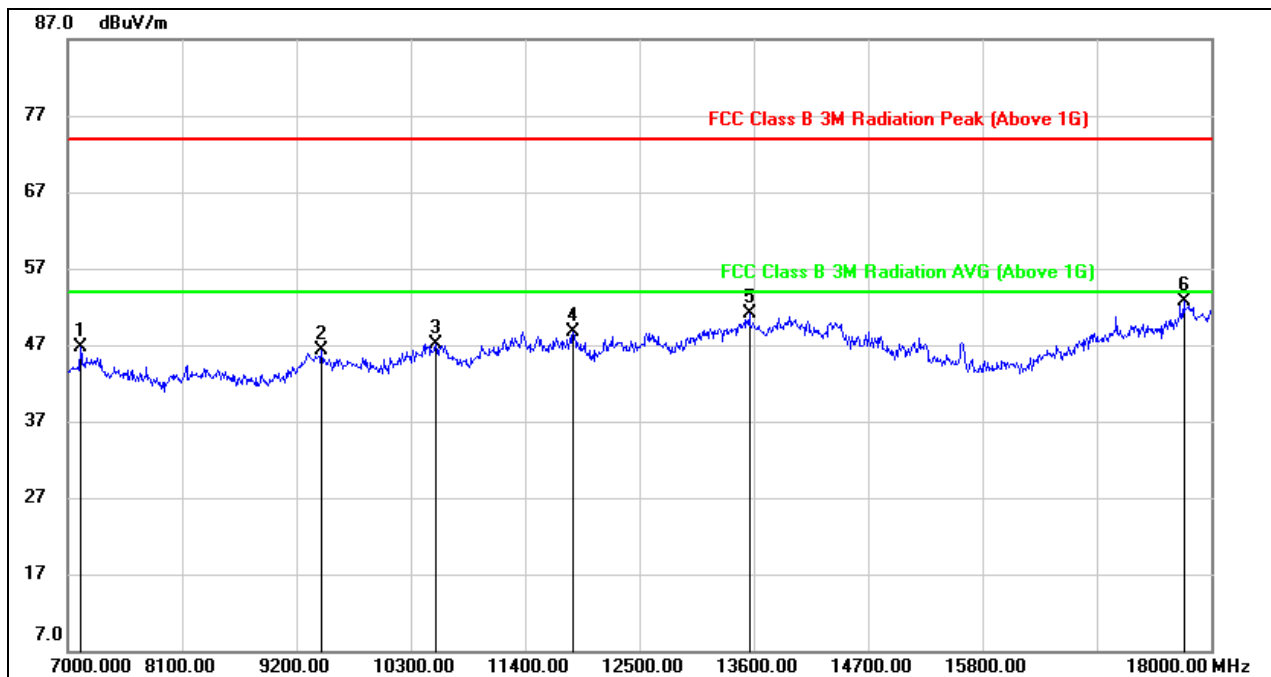


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7121.000	40.48	6.32	46.80	74.00	-27.20	peak
2	9442.000	36.59	9.66	46.25	74.00	-27.75	peak
3	10542.000	35.23	11.90	47.13	74.00	-26.87	peak
4	11862.000	33.98	14.73	48.71	74.00	-25.29	peak
5	13556.000	32.21	18.84	51.05	74.00	-22.95	peak
6	17736.000	28.87	23.80	52.67	74.00	-21.33	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



## HARMONICS AND SPURIOUS EMISSIONS HIGH CHANNEL

### HORIZONTAL RESULTS 1-7GHz

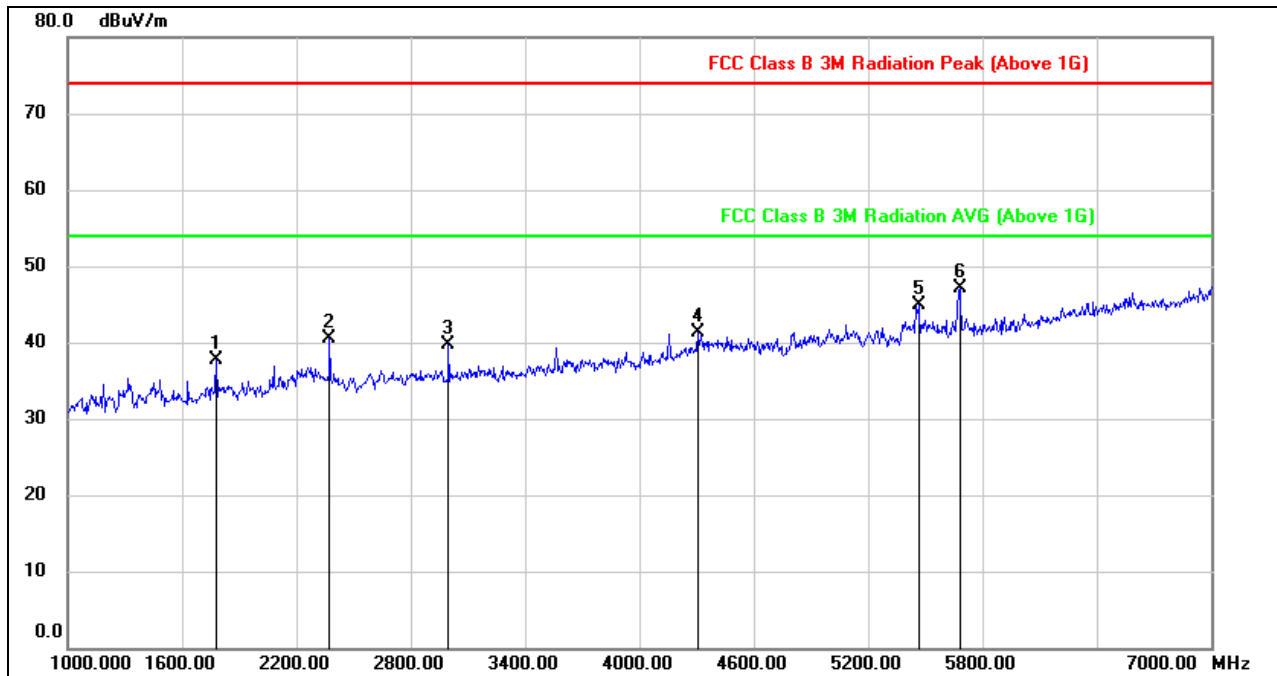


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1780.000	49.60	-11.80	37.80	74.00	-36.20	peak
2	2374.000	49.33	-8.85	40.48	74.00	-33.52	peak
3	2998.000	47.03	-7.29	39.74	74.00	-34.26	peak
4	4306.000	44.43	-3.09	41.34	74.00	-32.66	peak
5	5464.000	44.06	0.78	44.84	74.00	-29.16	peak
6	5680.000	46.25	0.83	47.08	74.00	-26.92	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.



### HORIZONTAL RESULTS 7-18GHz

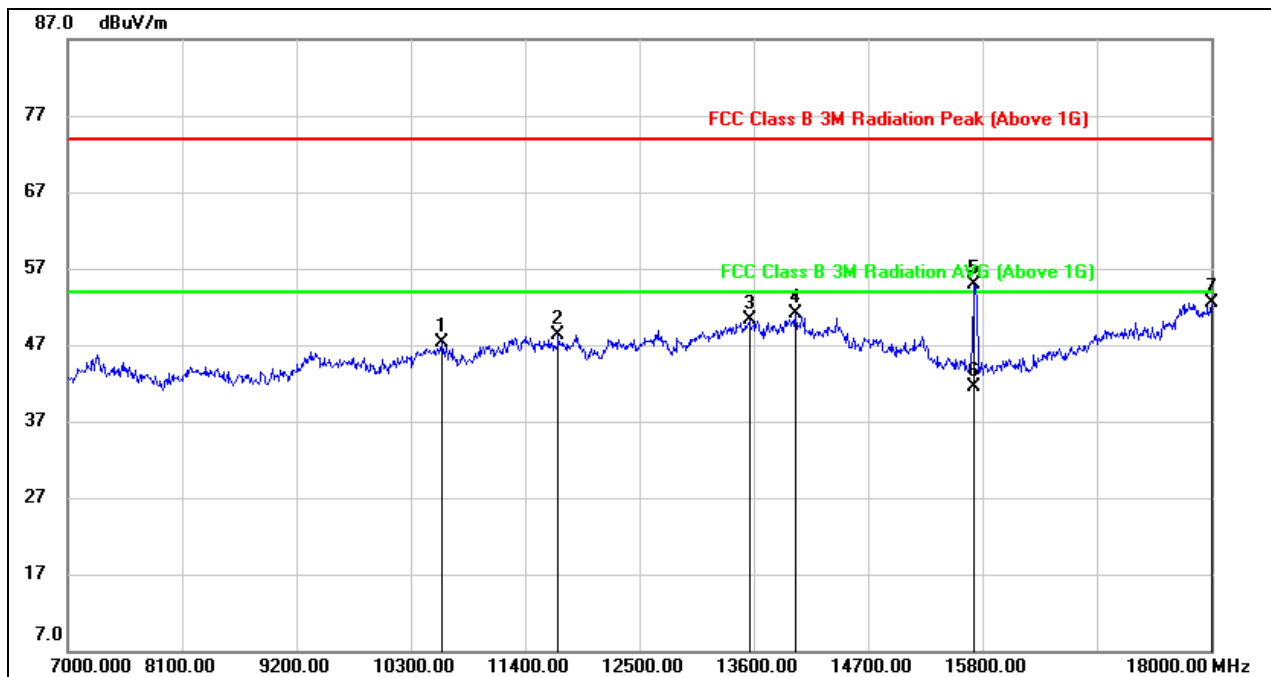

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10597.000	35.51	11.76	47.27	74.00	-26.73	peak
2	11719.000	33.99	14.25	48.24	74.00	-25.76	peak
3	13556.000	32.01	18.33	50.34	74.00	-23.66	peak
4	13996.000	32.61	18.48	51.09	74.00	-22.91	peak
5	15723.000	39.43	15.51	54.94	74.00	-19.06	peak
6	15723.000	26.08	15.51	41.59	54.00	-12.41	AVG
7	18000.000	27.74	24.81	52.55	74.00	-21.45	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak: Peak detector.