



SAR TEST REPORT

No. I16Z42044-SEM01

For

TCL Communication Ltd.

HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/LTE Tri Band mobile phone

Model Name: 4044W, 4044N

With

Hardware Version: 03

Software Version: C4N

FCC ID: 2ACCJN011

Issued Date: 2016-12-29



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China 100191
Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504
Email: ctl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I16Z42044-SEM01	Rev.0	2016-12-16	Initial creation of test report
I16Z42044-SEM01	Rev.1	2016-12-29	<ol style="list-style-type: none">1. Update the table 2.1 in section 2 on page 62. Update the table 14.1-19 on page 64 and table 14.2-19 on page 70

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	9
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	9
5 TEST METHODOLOGY	10
5.1 APPLICABLE LIMIT REGULATIONS	10
5.2 APPLICABLE MEASUREMENT STANDARDS.....	10
6 SPECIFIC ABSORPTION RATE (SAR).....	11
6.1 INTRODUCTION.....	11
6.2 SAR DEFINITION.....	11
7 TISSUE SIMULATING LIQUIDS	12
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	12
7.2 DIELECTRIC PERFORMANCE.....	12
8 SYSTEM VERIFICATION	18
8.1 SYSTEM SETUP	18
8.2 SYSTEM VERIFICATION	19
9 MEASUREMENT PROCEDURES	20
9.1 TESTS TO BE PERFORMED	20
9.2 GENERAL MEASUREMENT PROCEDURE.....	21
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	22
9.4 SAR MEASUREMENT FOR LTE.....	23
9.5 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES FOR SAR	24
9.6 POWER DRIFT.....	24
10 AREA SCAN BASED 1-G SAR.....	25
10.1 REQUIREMENT OF KDB.....	25
10.2 FAST SAR ALGORITHMS	25
11 CONDUCTED OUTPUT POWER.....	26

11.1 MANUFACTURING TOLERANCE	26
11.2 HOTSPOT	32
11.3 GSM MEASUREMENT RESULT	41
11.4 WCDMA MEASUREMENT RESULT.....	42
11.5 LTE MEASUREMENT RESULT	43
11.6 WI-FI AND BT MEASUREMENT RESULT	51
12 SIMULTANEOUS TX SAR CONSIDERATIONS.....	52
12.1 INTRODUCTION.....	52
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	52
12.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	53
13 EVALUATION OF SIMULTANEOUS.....	54
14 SAR TEST RESULT	55
14.1 SAR RESULTS FOR FAST SAR.....	55
14.2 SAR RESULTS FOR STANDARD PROCEDURE.....	67
14.3 WLAN EVALUATION	72
15 SAR MEASUREMENT VARIABILITY.....	75
16 MEASUREMENT UNCERTAINTY	77
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	77
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	78
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	79
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz).....	80
17 MAIN TEST INSTRUMENTS.....	81
ANNEX A GRAPH RESULTS.....	82
ANNEX B SYSTEMVERIFICATION RESULTS	132
ANNEX C SAR MEASUREMENT SETUP	143
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	149
ANNEX E EQUIVALENT MEDIA RECIPES.....	152
ANNEX F SYSTEM VALIDATION	153
ANNEX G PROBE CALIBRATION CERTIFICATE.....	154
ANNEX H DIPOLE CALIBRATION CERTIFICATE.....	165
ANNEX I ACCREDITATION CERTIFICATE.....	205

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg

1.3 Project Data


Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	October 30, 2016
Testing End Date:	November 05, 2016

1.4 Signature




Lin Xiaojun

(Prepared this test report)

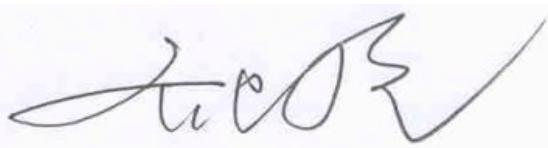

Qi Dianyuan

(Reviewed this test report)



Lu Bingsong

Deputy Director of the laboratory

(Approved this test report)

2 Statement of Compliance

The maximum results of SAR found during testing for TCL Communication Ltd. HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/LTE Tri Band mobile phone 4044W, 4044N are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/Kg)	Equipment Class
Head (Separation Distance 0mm)	GSM 850	0.53	PCE
	PCS 1900	0.21	
	UMTS FDD 5	0.47	
	UMTS FDD 4	0.46	
	UMTS FDD 2	0.41	
	LTE Band 2	0.32	
	LTE Band 4	0.39	
	LTE Band 12	0.44	
	Bluetooth	0.04	DTS
Body-Hotspot (Data) (Separation Distance 10mm)	WLAN 2.4 GHz	0.39	
	GSM 850	0.74	PCE
	PCS 1900	0.70	
	UMTS FDD 5	0.69	
	UMTS FDD 4	1.28	
	UMTS FDD 2	1.15	
	LTE Band 2	1.18	
	LTE Band 4	1.16	
	LTE Band 12	0.60	
Body-worn (Data) (Separation Distance 15mm)	Bluetooth	<0.01	DTS
	WLAN 2.4 GHz	0.25	
	PCS 1900	0.52	PCE
	UMTS FDD 4	1.43	
	UMTS FDD 2	1.05	
	LTE Band 2	1.22	
	LTE Band 4	1.18	
	LTE Band 12	0.33	DTS
	Bluetooth	<0.01	
	WLAN 2.4 GHz	0.13	

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1999.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm or 15mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report.

The highest reported SAR value is obtained at the case of (**Table 2.1**), and the values are: **1.43 W/kg(1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.53	0.39	0.92
Maximum reported SAR value for Body	Rear Unfold with 10mm	1.28	0.25	1.53
	Rear Unfold with 15mm	1.43	0.13	1.56

Table 2.3: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.53	0.04	0.57
Maximum reported SAR value for Body	Rear Unfold with 10mm	1.28	<0.01 ^[1]	1.28
	Rear Unfold with 15mm	1.43	<0.01 ^[1]	1.43

[1] – We have measured the body SAR of Bluetooth and all results is less than 0.01W/kg.

According to the above tables, the highest sum of reported SAR values is **1.56 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



3 Client Information

3.1 Applicant Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21- 31363544
Fax:	0086-21- 61460602

3.2 Manufacturer Information

Company Name:	TCL Communication Ltd.
Address /Post:	5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park, Pudong Area Shanghai, P.R. China. 201203
City:	Shanghai
Postal Code:	201203
Country:	P.R.China
Contact:	Gong Zhizhou
Email:	zhizhou.gong@tcl.com
Telephone:	0086-21- 31363544
Fax:	0086-21- 61460602

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	HSUPA/HSDPA/UMTS Tri Band/GSM Quad Band/LTE Tri Band mobile phone
Model name:	4044W, 4044N
Operating mode(s):	GSM 850/900/1800/1900, WCDMA 850/1700/1900 BT, Wi-Fi, LTE Band 2/4/12
Tested Tx Frequency:	825 – 848.8 MHz (GSM 850) 1850.2 – 1910 MHz (GSM 1900) 826.4–846.6 MHz (WCDMA850 Band V) 1712.4 – 1752.6 MHz (WCDMA 1700 Band IV) 1852.4–1907.6 MHz (WCDMA1900 Band II) 1860 – 1900 MHz (LTE Band 2) 1720 – 1745 MHz (LTE Band 4) 699.7 – 715.3 MHz (LTE Band 12) 2412 – 2462 MHz (Wi-Fi 2.4G)
GRPS/EGPRS Multislot Class:	33
GRPS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	/
Hotspot mode:	Support

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	014684000109087	03	C4N
EUT2	014684000109772	03	C4N
EUT3	014684000109616	03	C4N
EUT4	014684000109905	03	C4N

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1&2&3 and conducted power with the EUT4.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	SN	Manufacturer
AE1	Battery	TLi013C1	/	BYD

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid

Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.85~0.93	41.94	39.8~44.0
750	Body	0.96	0.91~1.01	55.5	52.7~58.3
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3


7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2016-05-03	Head	750 MHz	43.28	3.20	0.892	0.22
	Body	750 MHz	57.08	2.85	0.966	0.63
2016-05-04	Head	835 MHz	40.92	-1.40	0.933	3.67
	Body	835 MHz	54.33	-1.58	0.952	-1.86
2016-05-05	Head	1750 MHz	40.53	1.12	1.341	-2.12
	Body	1750 MHz	53.7	0.56	1.512	1.48
2016-05-06	Head	1900 MHz	39.48	-1.30	1.416	1.14
	Body	1900 MHz	54.35	1.97	1.553	2.17
2016-05-07	Head	2450 MHz	38.22	-2.50	1.836	2.00
	Body	2450 MHz	51.88	-1.56	1.998	2.46

Note: The liquid temperature is 22.0°C


z

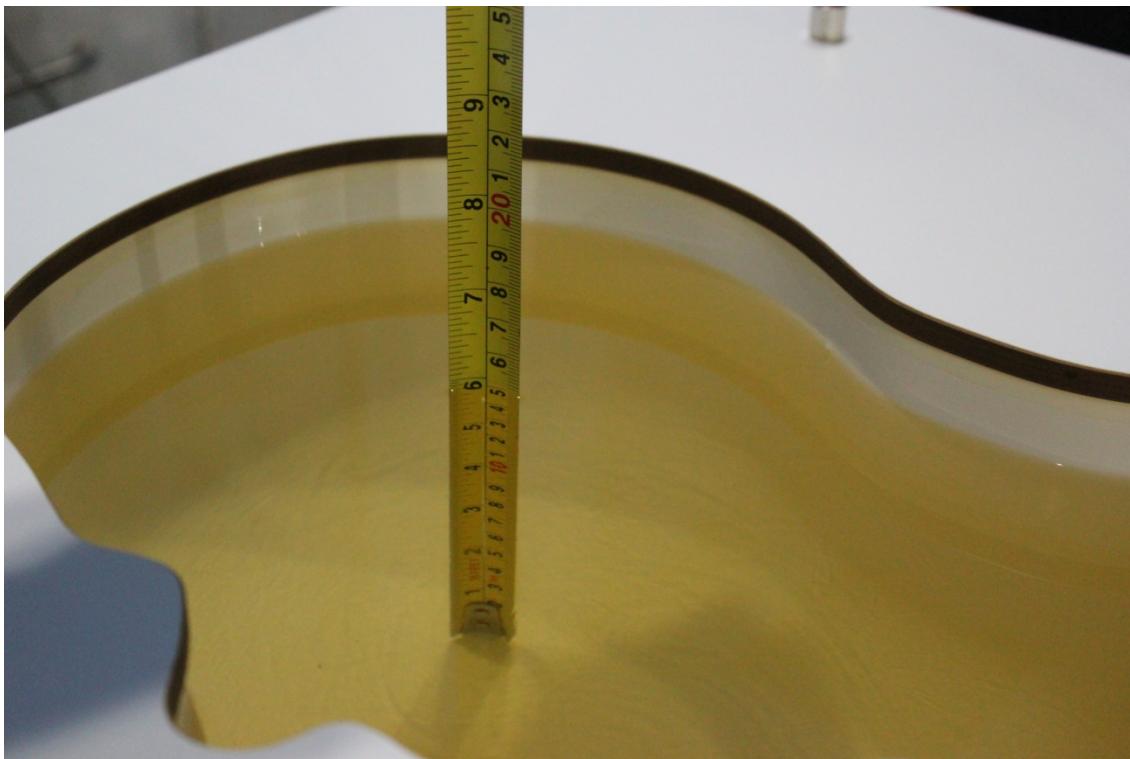

Picture 7-1: Liquid depth in the Head Phantom (750 MHz)



Picture 7-2: Liquid depth in the Flat Phantom (750 MHz)

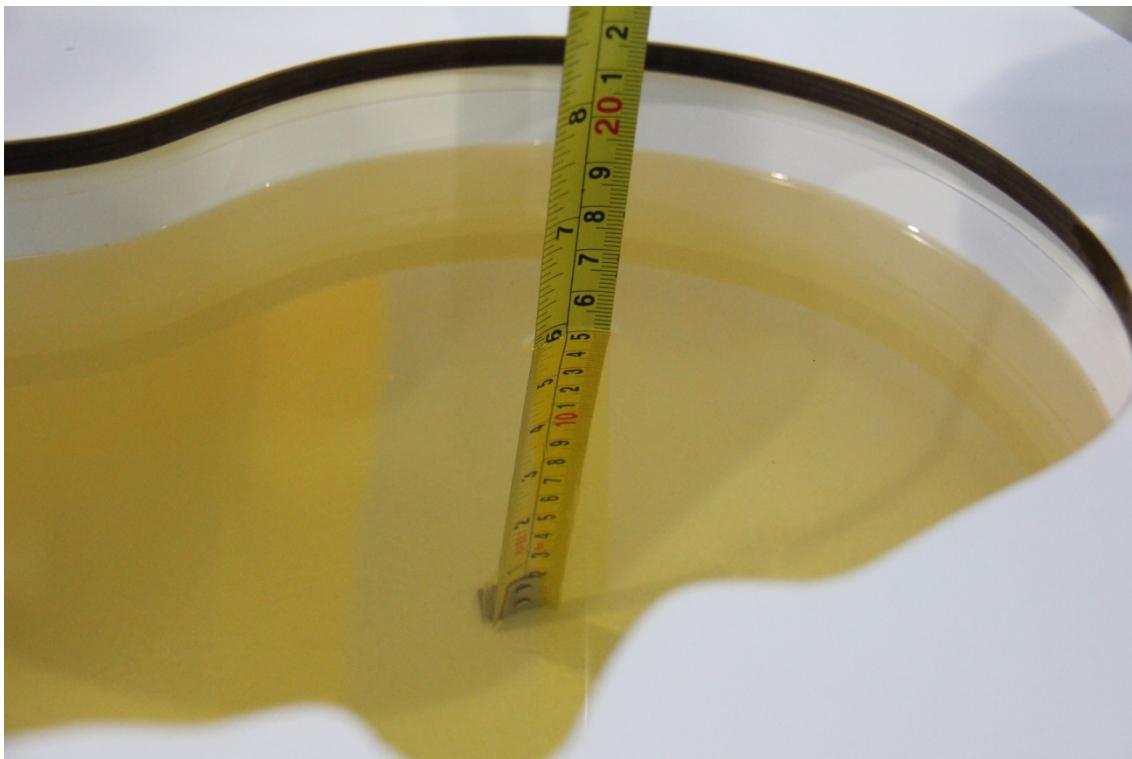


Picture 7-3 Liquid depth in the Head Phantom (835MHz)



Picture 7-4 Liquid depth in the Flat Phantom (835MHz)




Picture 7-5 Liquid depth in the Head Phantom (1750 MHz)

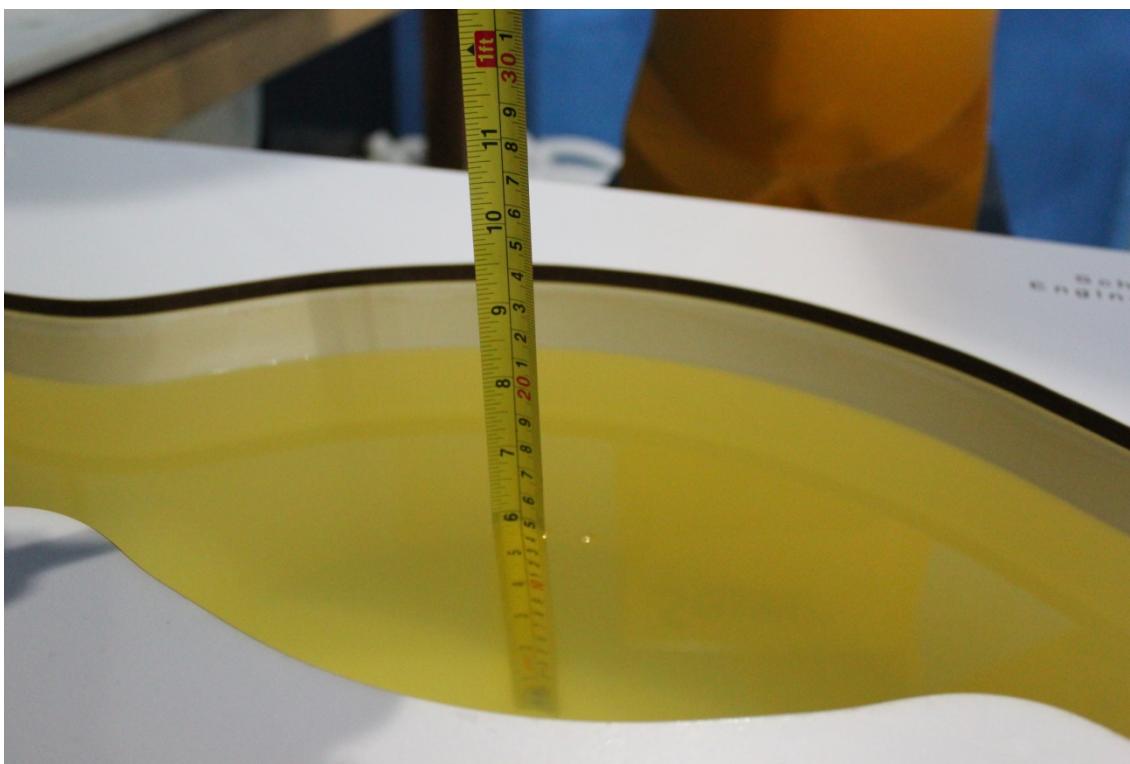

Picture 7-6 Liquid depth in the Flat Phantom (1750MHz)




Picture 7-7 Liquid depth in the Head Phantom (1900 MHz)

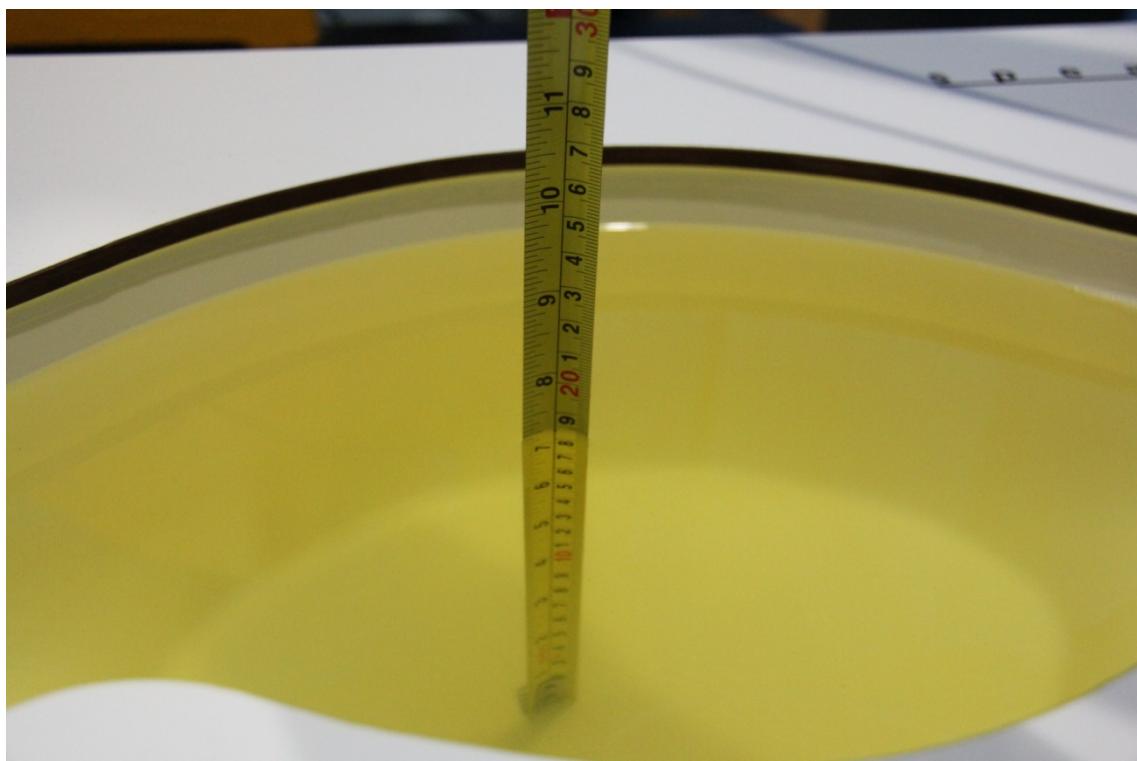

Picture 7-8 Liquid depth in the Flat Phantom (1900MHz)



Picture 7-9 Liquid depth in the Head Phantom (2450MHz)

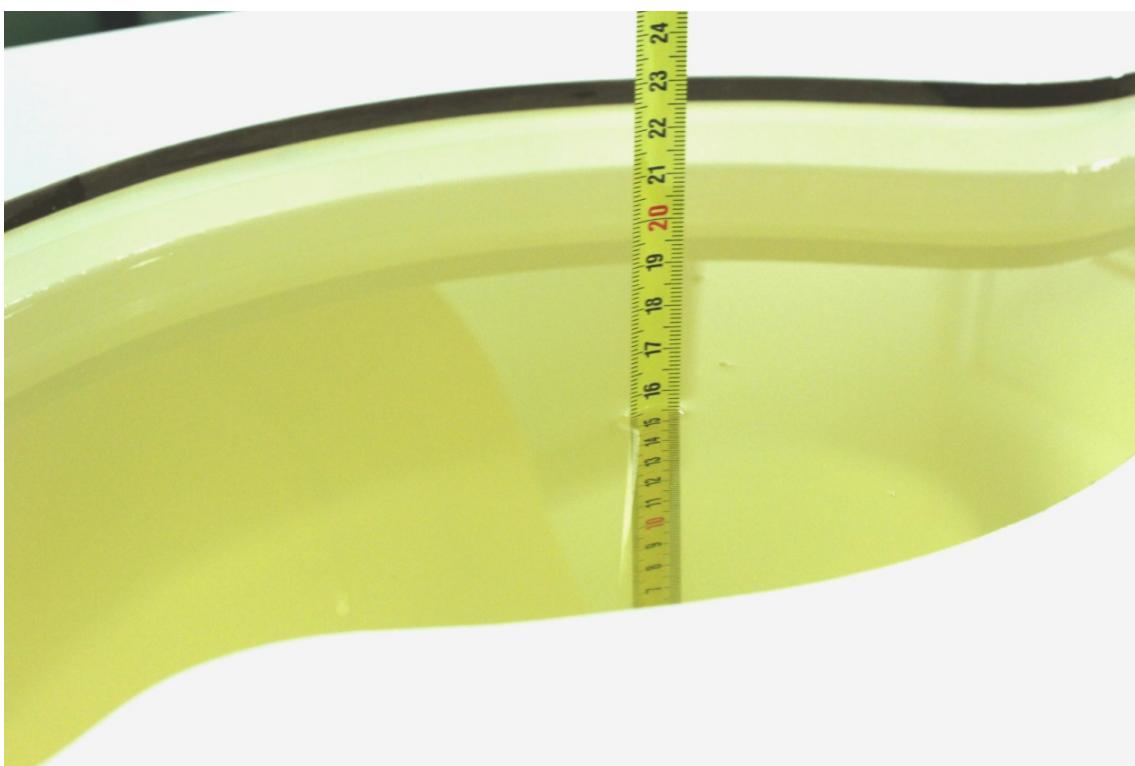


Picture 7-10 Liquid depth in the Flat Phantom (2450MHz)


8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

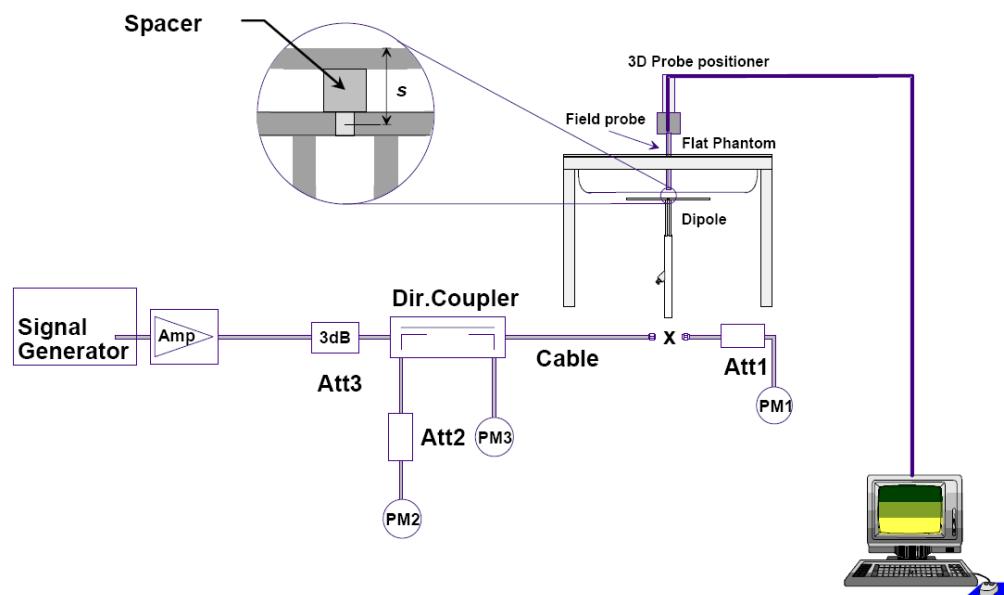

Picture 8.1 System Setup for System Evaluation

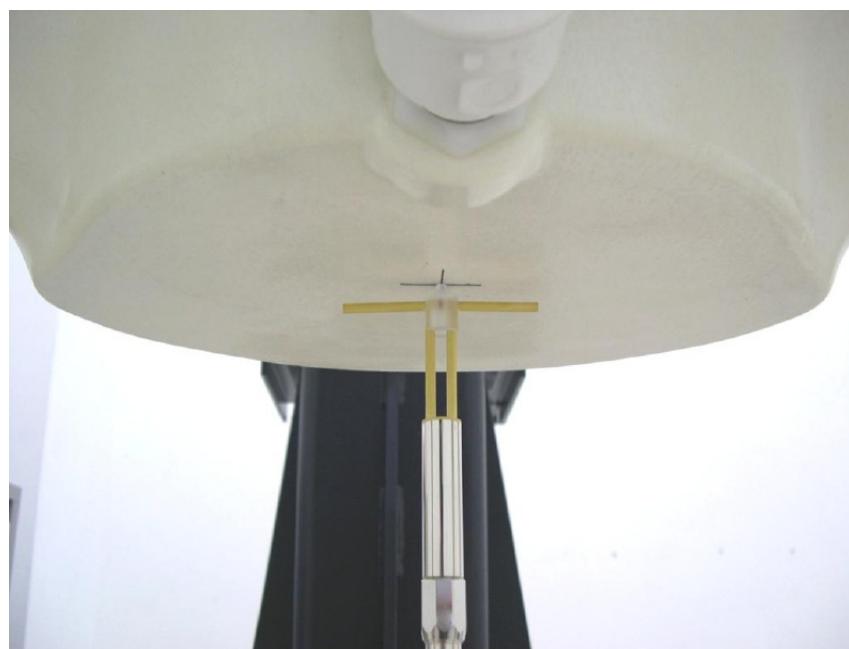

Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-11-1	750 MHz	5.46	8.33	5.28	8.08	-3.30%	-3.00%
2016-10-30	835 MHz	6.18	9.44	6.08	9.28	-1.62%	-1.69%
2016-11-3	1750 MHz	19.5	36.8	19.1	36.2	-2.15%	-1.74%
2016-10-31	1900 MHz	21.2	40.7	20.8	40.8	-1.89%	0.25%
2016-11-5	2450 MHz	24.6	52.8	25.4	54.0	3.25%	2.27%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2016-11-1	750 MHz	5.76	8.78	5.56	8.44	-3.47%	-3.87%
2016-10-30	835 MHz	6.36	9.69	6.32	9.64	-0.63%	-0.52%
2016-11-3	1750 MHz	19.6	37.0	19.92	37.48	1.63%	1.30%
2016-10-31	1900 MHz	21.3	40.1	21.08	40.80	-1.03%	1.75%
2016-11-5	2450 MHz	24.1	51.2	24.88	52.80	3.24%	3.12%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.

If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

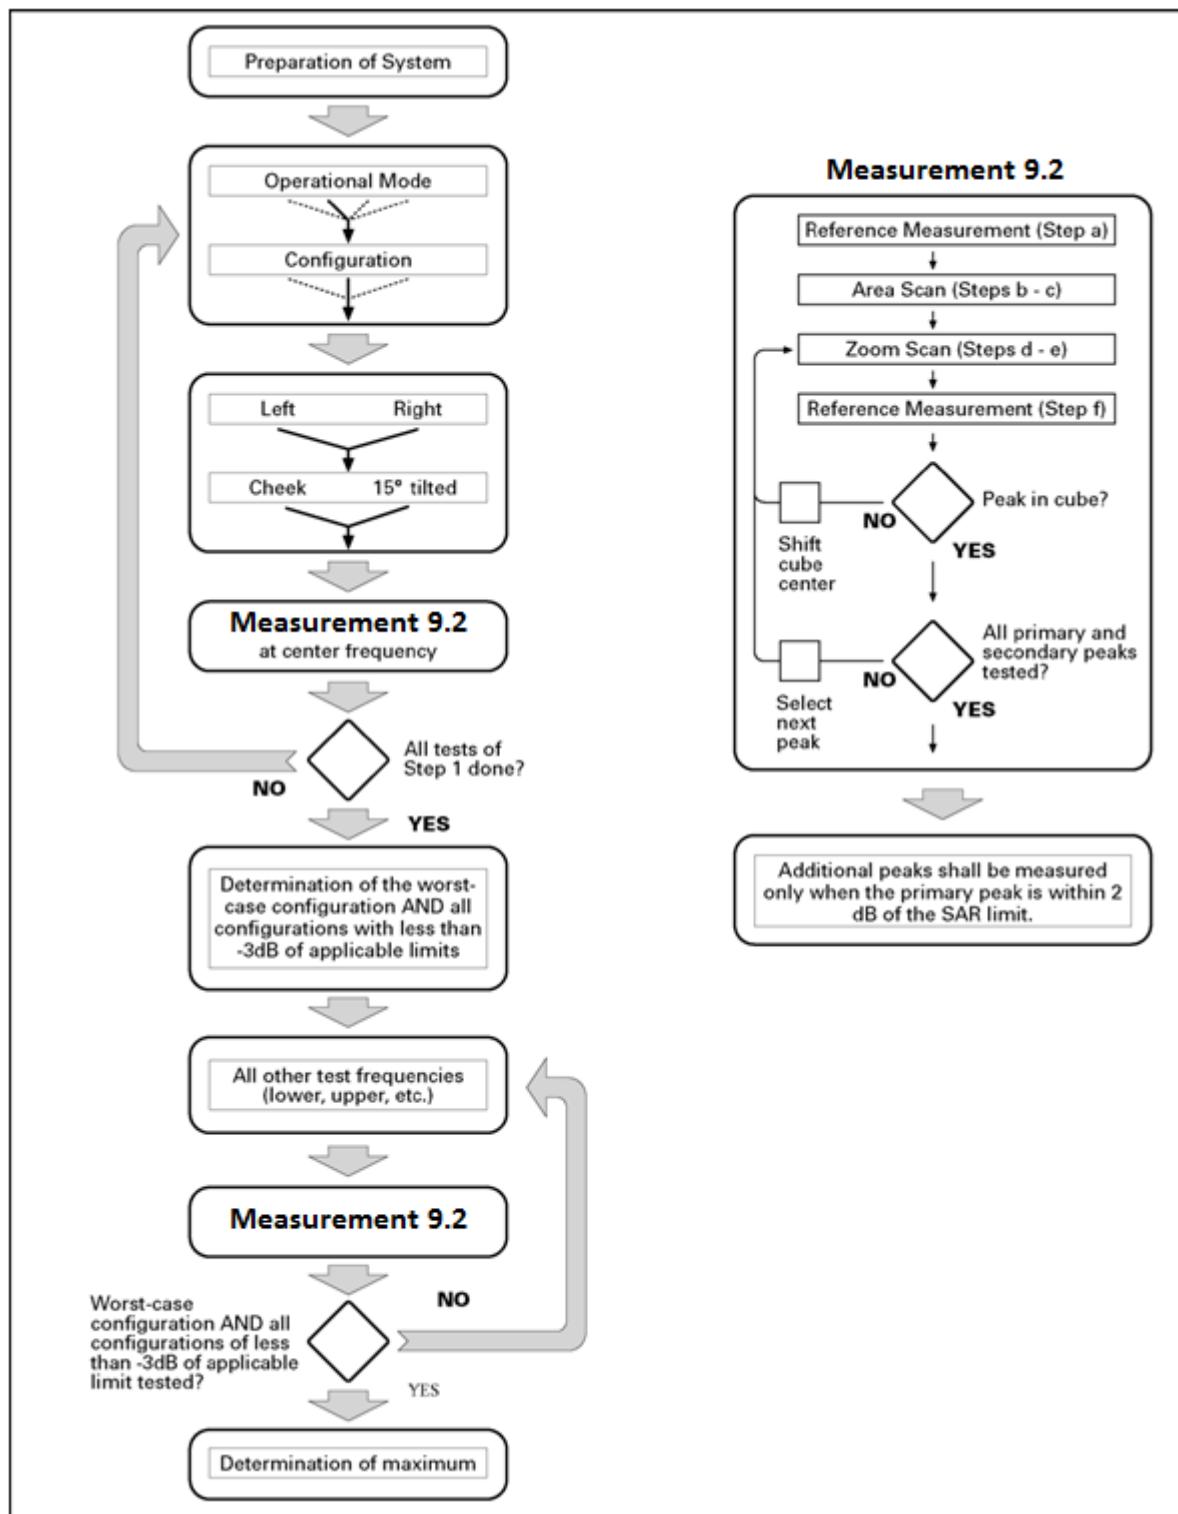

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe

tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

		$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{between } 1^{\text{st}}$ $\text{two points closest to}$ phantom surface $\Delta z_{\text{Zoom}}(n>1): \text{between}$ subsequent points	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.			
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other

physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	0.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	2.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$	4	2	1.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	2.0	2.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	0.0	0.0	21	81

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Rchwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output

power for that channel. When the reported SAR of a required test channel is $> 1.45 \text{ W/kg}$, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are $\leq 0.8 \text{ W/kg}$. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $> 1.45 \text{ W/kg}$, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-gSAR is $\leq 1.2 \text{ W/kg}$, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz)and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

11.1 Manufacturing tolerance

This project supports Hotspot mode. When WLAN Hotspot mode is activated (AP ON), the conducted output power will be reduced for PCS1900, WCDMA1700/1900 and LTE band 2/4/12. When WLAN Hotspot mode is deactivated (AP OFF), the RF output power level return to their normal RF power level.

When the hotspot mode is ON:

Table 11.1: GPRS and EGPRS

GSM 1900 GPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29.5	29.5	29.5
	Tune-up(dBm)	30.2	30.2	30.2
2 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
3 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
4 Txslots	Target (dBm)	24	24	24
	Tune-up(dBm)	24.7	24.7	24.7
GSM 1900 EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	29.5	29.5	29.5
	Tune-up(dBm)	30.2	30.2	30.2
2 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
3 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
4 Txslots	Target (dBm)	24	24	24
	Tune-up(dBm)	24.7	24.7	24.7
GSM 1900 EGPRS (8PSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
2 Txslots	Target (dBm)	25	25	25
	Tune-up(dBm)	25.7	25.7	25.7
3 Txslots	Target (dBm)	23.5	23.5	23.5
	Tune-up(dBm)	24.2	24.2	24.2
4 Txslots	Target (dBm)	21.5	21.5	21.5
	Tune-up(dBm)	22.2	22.2	22.2

Table 11.2: WCDMA

WCDMA 1700 CS			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	20.5	20.5	20.5
Tune-up(dBm)	21.2	21.2	21.2
HSUPA (sub-test 1/4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19	19	19
Tune-up(dBm)	19.7	19.7	19.7
HSUPA (sub-test 2/3)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	18	18	18
Tune-up(dBm)	18.7	18.7	18.7
HSUPA (sub-test 5)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19.5	19.5	19.5
Tune-up(dBm)	20.2	20.2	20.2
DC-HSDPA (sub-test 1-4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	19	19	19
Tune-up(dBm)	19.7	19.7	19.7
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	20.5	20.5	20.5
Tune-up(dBm)	21.2	21.2	21.2
HSUPA (sub-test 1/4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19	19	19
Tune-up(dBm)	19.7	19.7	19.7
HSUPA (sub-test 2/3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	18	18	18
Tune-up(dBm)	18.7	18.7	18.7
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19.5	19.5	19.5
Tune-up(dBm)	20.2	20.2	20.2
DC-HSDPA (sub-test 1-4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	19	19	19
Tune-up(dBm)	19.7	19.7	19.7

Table 11.3: LTE

Mode	Target (dBm)	Tune-up(dBm)
LTE Band 2	21.7	22.4
LTE Band 4	20.5	21.2
LTE Band 12	22.3	23

Note: When the hotspot mode is ON, MPR settings doesn't work.

When the hotspot mode is OFF:

Table 11.4: GSM Speech

GSM 850			
Channel	Channel 251	Channel 190	Channel 128
Target (dBm)	32.5	32.5	32.5
Tune-up(dBm)	33.2	33.2	33.2
GSM 1900			
Channel	Channel 810	Channel 661	Channel 512
Target (dBm)	30	30	30
Tune-up(dBm)	30.7	30.7	30.7

Table 11.5: GPRS and EGPRS

GSM 850 GPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.5	32.5	32.5
	Tune-up(dBm)	33.2	33.2	33.2
2 Txslots	Target (dBm)	30	30	30
	Tune-up(dBm)	30.7	30.7	30.7
3 Txslots	Target (dBm)	29	29	29
	Tune-up(dBm)	29.7	29.7	29.7
4 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
GSM 850 EGPRS (GMSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	32.5	32.5	32.5
	Tune-up(dBm)	33.2	33.2	33.2
2 Txslots	Target (dBm)	30	30	30
	Tune-up(dBm)	30.7	30.7	30.7
3 Txslots	Target (dBm)	29	29	29
	Tune-up(dBm)	29.7	29.7	29.7
4 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
GSM 850 EGPRS (8PSK)				
Channel		251	190	128
1 Txslot	Target (dBm)	27.5	27.5	27.5
	Tune-up(dBm)	28.2	28.2	28.2
2 Txslots	Target (dBm)	26	26	26
	Tune-up(dBm)	26.75	26.75	26.75
3 Txslots	Target (dBm)	24.5	24.5	24.5
	Tune-up(dBm)	25.2	25.2	25.2
4 Txslots	Target (dBm)	22.5	22.5	22.5
	Tune-up(dBm)	23.2	23.2	23.2

GSM 1900 GPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	30	30	30
	Tune-up(dBm)	30.7	30.7	30.7
2 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
3 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
4 Txslots	Target (dBm)	24	24	24
	Tune-up(dBm)	24.7	24.7	24.7
GSM 1900 EGPRS (GMSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	30	30	30
	Tune-up(dBm)	30.7	30.7	30.7
2 Txslots	Target (dBm)	28	28	28
	Tune-up(dBm)	28.7	28.7	28.7
3 Txslots	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
4 Txslots	Target (dBm)	24	24	24
	Tune-up(dBm)	24.7	24.7	24.7
GSM 1900 EGPRS (8PSK)				
Channel		810	661	512
1 Txslot	Target (dBm)	26.5	26.5	26.5
	Tune-up(dBm)	27.2	27.2	27.2
2 Txslots	Target (dBm)	25	25	25
	Tune-up(dBm)	25.7	25.7	25.7
3 Txslots	Target (dBm)	24	24	24
	Tune-up(dBm)	24.7	24.7	24.7
4 Txslots	Target (dBm)	21.5	21.5	21.5
	Tune-up(dBm)	22.2	22.2	22.2

Table 11.6: WCDMA

WCDMA 850 CS			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	23.5	23.5	23.5
Tune-up(dBm)	24.2	24.2	24.2
HSUPA (sub-test 1/4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7
HSUPA (sub-test 2/3)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	21	21	21
Tune-up(dBm)	21.7	21.7	21.7

HSUPA (sub-test 5)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22.5	22.5	22.5
Tune-up(dBm)	23.2	23.2	23.2
DC-HSDPA (sub-test 1-4)			
Channel	Channel 4233	Channel 4182	Channel 4132
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7
WCDMA 1700 CS			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	23.5	23.5	23.5
Tune-up(dBm)	24.2	24.2	24.2
HSUPA (sub-test 1/4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7
HSUPA (sub-test 2/3)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	21	21	21
Tune-up(dBm)	21.7	21.7	21.7
HSUPA (sub-test 5)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	22.5	22.5	22.5
Tune-up(dBm)	23.2	23.2	23.2
DC-HSDPA (sub-test 1-4)			
Channel	Channel 1513	Channel 1412	Channel 1312
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7
WCDMA 1900 CS			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	23.5	23.5	23.5
Tune-up(dBm)	24.2	24.2	24.2
HSUPA (sub-test 1/4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7
HSUPA (sub-test 2/3)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	21	21	21
Tune-up(dBm)	21.7	21.7	21.7
HSUPA (sub-test 5)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22.5	22.5	22.5

Tune-up(dBm)	23.2	23.2	23.2
DC-HSDPA (sub-test 1-4)			
Channel	Channel 9538	Channel 9400	Channel 9262
Target (dBm)	22	22	22
Tune-up(dBm)	22.7	22.7	22.7

Table 11.7: LTE

Mode	Target (dBm)		Tune-up(dBm)		
LTE Band 2	23.5			24.2	
LTE Band 4	23.5			24.2	
LTE Band 12	23.5			24.2	

LTE MPR will follow up 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

Table 11.8: Bluetooth

GFSK			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	10	9	8
Tune-up(dBm)	12	11	10
EDR2M-4_DQPSK			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	10	9	8
Tune-up(dBm)	12	11	10
EDR3M-8DPSK			
Channel	Channel 0	Channel 39	Channel 78
Target (dBm)	10	9	8
Tune-up(dBm)	12	11	10

Table 11.9: WiFi

Mode	Target (dBm)		Tune-up(dBm)
802.11b	18		20
802.11g	14		16
802.11n-20M	12.6		14.6

11.2 Hotspot

The conducted power is normal for all bands except PCS1900, WCDMA1700/1900 and LTE band 2/4/12. There is power reduction enabled for PCS1900, WCDMA1700/1900 and LTE band 2/4/12. The power reduction is enabled when the user enables hotspot mode via the manufacturer software. The tables below show the measured powers with hotspot.

Table 11.10: The conducted power measurement results for GPRS and EGPRS

PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	30.17	30.09	29.97	-9.03	21.14	21.06	20.94
2 Txslots	28.55	28.47	28.46	-6.02	22.53	22.45	22.44
3Txslots	26.86	26.79	26.80	-4.26	22.60	22.53	22.54
4 Txslots	24.53	24.50	24.44	-3.01	21.52	21.49	21.43
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	29.87	29.73	29.99	-9.03	20.84	20.70	20.96
2 Txslots	28.65	28.53	28.48	-6.02	22.63	22.51	22.46
3Txslots	26.90	26.80	26.85	-4.26	22.64	22.54	22.59
4 Txslots	24.67	24.63	24.58	-3.01	21.66	21.62	21.57
PCS1900 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	26.74	26.64	26.75	-9.03	17.71	17.61	17.72
2 Txslots	25.52	25.47	25.53	-6.02	19.50	19.45	19.51
3Txslots	24.00	23.93	23.98	-4.26	19.74	19.67	19.72
4 Txslots	21.86	21.82	21.80	-3.01	18.85	18.81	18.79

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 3Txslots for for PCS1900.

Table 11.11: The conducted Power for WCDMA

Item	band	FDDIV result		
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)
WCDMA	1	20.40	20.49	20.52
HSUPA	1	19.21	19.30	19.61
	2	18.50	18.58	18.41
	3	18.12	18.20	18.59
	4	18.98	19.05	19.19
	5	19.52	19.57	19.66

DC-HSDPA	1	19.36	19.28	19.47
	2	19.36	19.31	19.44
	3	19.39	19.29	19.42
	4	19.44	19.33	19.41
Item	band	FDDII result		
	ARFCN	9538(1907.6MHz)	9400(1880MHz)	9262(1852.4MHz)
WCDMA	\	20.44	20.38	20.34
HSUPA	1	19.21	19.09	19.51
	2	17.96	18.44	18.21
	3	17.60	17.97	18.38
	4	18.84	18.91	18.93
	5	19.42	19.40	19.43
DC-HSDPA	1	19.44	19.25	19.28
	2	19.41	19.26	19.25
	3	19.43	19.28	19.23
	4	19.45	19.31	19.20

Table 11.12: The conducted Power for LTE

Band 2							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1909.3	22.4	21.61	0	21.85	0
		1880	22.4	21.71	0	21.55	0
		1850.7	22.4	21.70	0	21.95	0
	1RB Middle (3)	1909.3	22.4	21.94	0	22.05	0
		1880	22.4	21.75	0	21.66	0
		1850.7	22.4	21.87	0	21.77	0
	1RB Low (0)	1909.3	22.4	21.87	0	22.02	0
		1880	22.4	21.78	0	21.70	0
		1850.7	22.4	21.78	0	21.40	0
	3RB High (3)	1909.3	22.4	21.69	0	21.80	0
		1880	22.4	21.85	0	21.61	0
		1850.7	22.4	21.74	0	21.88	0
	3RB Middle (1)	1909.3	22.4	21.88	0	21.91	0
		1880	22.4	21.97	0	21.83	0
		1850.7	22.4	22.06	0	21.64	0
	3RB Low (0)	1909.3	22.4	21.83	0	21.97	0
		1880	22.4	21.79	0	21.64	0
		1850.7	22.4	21.85	0	21.86	0
	6RB (0)	1909.3	22.4	21.80	0	21.84	0
		1880	22.4	21.78	0	21.71	0
		1850.7	22.4	21.94	0	21.74	0

3 MHz	1RB High (14)	1908.5	22.4	21.70	0	22.09	0
		1880	22.4	21.58	0	21.95	0
		1851.5	22.4	21.97	0	21.91	0
	1RB Middle (7)	1908.5	22.4	21.89	0	21.75	0
		1880	22.4	21.65	0	21.98	0
		1851.5	22.4	21.79	0	21.87	0
	1RB Low (0)	1908.5	22.4	21.75	0	21.95	0
		1880	22.4	21.66	0	22.15	0
		1851.5	22.4	21.82	0	21.89	0
	8RB High (7)	1908.5	22.4	21.82	0	21.66	0
		1880	22.4	21.79	0	21.75	0
		1851.5	22.4	21.82	0	21.73	0
	8RB Middle (4)	1908.5	22.4	21.80	0	21.99	0
		1880	22.4	21.85	0	21.79	0
		1851.5	22.4	21.86	0	21.86	0
	8RB Low (0)	1908.5	22.4	21.79	0	22.01	0
		1880	22.4	21.91	0	21.70	0
		1851.5	22.4	21.90	0	21.95	0
	15RB (0)	1908.5	22.4	21.90	0	21.94	0
		1880	22.4	21.94	0	21.93	0
		1851.5	22.4	21.96	0	21.82	0
5 MHz	1RB High (24)	1907.5	22.4	21.40	0	21.13	0
		1880	22.4	21.47	0	20.89	0
		1852.5	22.4	21.94	0	21.19	0
	1RB Middle (12)	1907.5	22.4	21.61	0	20.97	0
		1880	22.4	21.63	0	21.51	0
		1852.5	22.4	21.68	0	21.22	0
	1RB Low (0)	1907.5	22.4	21.59	0	21.41	0
		1880	22.4	21.67	0	21.56	0
		1852.5	22.4	21.65	0	21.56	0
	12RB High (13)	1907.5	22.4	21.78	0	21.67	0
		1880	22.4	21.79	0	21.79	0
		1852.5	22.4	21.92	0	21.79	0
	12RB Middle (6)	1907.5	22.4	21.83	0	21.73	0
		1880	22.4	21.89	0	21.74	0
		1852.5	22.4	21.95	0	22.02	0
	12RB Low (0)	1907.5	22.4	21.87	0	21.87	0
		1880	22.4	21.86	0	21.80	0
		1852.5	22.4	22.02	0	21.92	0
	25RB (0)	1907.5	22.4	21.77	0	21.87	0
		1880	22.4	21.96	0	21.84	0
		1852.5	22.4	21.98	0	22.01	0

10 MHz	1RB High (49)	1905	22.4	21.85	0	21.91	0
		1880	22.4	21.69	0	21.96	0
		1855	22.4	21.84	0	22.00	0
	1RB Middle (24)	1905	22.4	22.06	0	22.12	0
		1880	22.4	21.90	0	22.33	0
		1855	22.4	21.85	0	22.34	0
	1RB Low (0)	1905	22.4	21.74	0	22.15	0
		1880	22.4	21.88	0	22.22	0
		1855	22.4	22.00	0	22.31	0
	25RB High (25)	1905	22.4	21.76	0	21.73	0
		1880	22.4	21.84	0	21.88	0
		1855	22.4	21.92	0	21.92	0
	25RB Middle (12)	1905	22.4	21.80	0	21.80	0
		1880	22.4	21.98	0	21.77	0
		1855	22.4	21.97	0	21.99	0
	25RB Low (0)	1905	22.4	21.84	0	21.83	0
		1880	22.4	21.94	0	21.81	0
		1855	22.4	22.00	0	22.02	0
	50RB (0)	1905	22.4	21.84	0	21.78	0
		1880	22.4	21.97	0	21.90	0
		1855	22.4	22.03	0	22.01	0
15 MHz	1RB High (74)	1902.5	22.4	21.74	0	22.08	0
		1880	22.4	21.81	0	21.90	0
		1857.5	22.4	21.87	0	22.06	0
	1RB Middle (37)	1902.5	22.4	21.83	0	21.74	0
		1880	22.4	21.82	0	21.95	0
		1857.5	22.4	21.92	0	22.11	0
	1RB Low (0)	1902.5	22.4	21.81	0	22.11	0
		1880	22.4	22.10	0	22.30	0
		1857.5	22.4	22.03	0	22.25	0
	36RB High (38)	1902.5	22.4	21.75	0	21.73	0
		1880	22.4	21.85	0	21.82	0
		1857.5	22.4	22.05	0	22.03	0
	36RB Middle (19)	1902.5	22.4	21.84	0	21.71	0
		1880	22.4	21.96	0	22.00	0
		1857.5	22.4	21.93	0	21.92	0
	36RB Low (0)	1902.5	22.4	21.85	0	21.88	0
		1880	22.4	22.02	0	21.80	0
		1857.5	22.4	22.08	0	22.04	0
	75RB (0)	1902.5	22.4	21.92	0	21.81	0
		1880	22.4	21.96	0	21.92	0
		1857.5	22.4	22.08	0	21.91	0
20 MHz	1RB High (99)	1900	22.4	21.98	0	22.31	0
		1880	22.4	21.78	0	21.82	0
		1860	22.4	22.08	0	21.75	0
	1RB Middle (50)	1900	22.4	21.99	0	21.96	0
		1880	22.4	22.01	0	22.16	0
		1860	22.4	22.05	0	22.17	0

	1RB Low (0)	1900	22.4	22.00	0	22.24	0
		1880	22.4	22.07	0	22.23	0
		1860	22.4	22.06	0	22.23	0
	50RB High (50)	1900	22.4	21.76	0	21.74	0
		1880	22.4	21.89	0	21.92	0
		1860	22.4	22.00	0	22.05	0
	50RB Middle (25)	1900	22.4	21.85	0	21.81	0
		1880	22.4	21.94	0	22.00	0
		1860	22.4	22.04	0	22.06	0
	50RB Low (0)	1900	22.4	21.99	0	22.07	0
		1880	22.4	22.11	0	22.08	0
		1860	22.4	22.07	0	22.09	0
	100RB (0)	1900	22.4	21.89	0	21.91	0
		1880	22.4	22.05	0	22.05	0
		1860	22.4	22.13	0	22.16	0

Band 4

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1754.3	21.2	20.44	0	20.43	0
		1732.5	21.2	20.81	0	21.13	0
		1710.7	21.2	20.88	0	20.81	0
	1RB Middle (3)	1754.3	21.2	20.67	0	20.61	0
		1732.5	21.2	20.98	0	21.13	0
		1710.7	21.2	20.86	0	21.07	0
	1RB Low (0)	1754.3	21.2	20.77	0	21.06	0
		1732.5	21.2	20.98	0	21.09	0
		1710.7	21.2	20.90	0	21.02	0
	3RB High (3)	1754.3	21.2	20.71	0	20.49	0
		1732.5	21.2	20.75	0	20.81	0
		1710.7	21.2	20.68	0	20.75	0
	3RB Middle (1)	1754.3	21.2	20.83	0	20.86	0
		1732.5	21.2	21.02	0	20.98	0
		1710.7	21.2	20.86	0	20.91	0
	3RB Low (0)	1754.3	21.2	20.76	0	20.78	0
		1732.5	21.2	20.85	0	21.01	0
		1710.7	21.2	20.78	0	20.82	0
	6RB (0)	1754.3	21.2	20.76	0	20.90	0
		1732.5	21.2	20.82	0	20.81	0
		1710.7	21.2	20.76	0	20.91	0
3 MHz	1RB High (14)	1753.5	21.2	20.58	0	20.84	0
		1732.5	21.2	20.68	0	20.82	0
		1711.5	21.2	20.52	0	21.03	0
	1RB Middle (7)	1753.5	21.2	20.57	0	20.79	0
		1732.5	21.2	20.55	0	20.80	0
		1711.5	21.2	20.64	0	20.76	0
	1RB Low (0)	1753.5	21.2	20.62	0	20.84	0
		1732.5	21.2	20.85	0	20.87	0
		1711.5	21.2	20.94	0	20.93	0

	8RB High (7)	1753.5	21.2	20.68	0	20.66	0
		1732.5	21.2	20.70	0	20.61	0
		1711.5	21.2	20.71	0	20.77	0
	8RB Middle (4)	1753.5	21.2	20.75	0	20.58	0
		1732.5	21.2	20.69	0	20.52	0
		1711.5	21.2	20.79	0	20.94	0
	8RB Low (0)	1753.5	21.2	20.68	0	20.99	0
		1732.5	21.2	20.81	0	20.58	0
		1711.5	21.2	20.77	0	20.76	0
	15RB (0)	1753.5	21.2	20.81	0	20.74	0
		1732.5	21.2	20.84	0	20.80	0
		1711.5	21.2	20.73	0	20.81	0
5 MHz	1RB High (24)	1752.5	21.2	20.65	0	20.40	0
		1732.5	21.2	20.38	0	20.26	0
		1712.5	21.2	20.26	0	20.30	0
	1RB Middle (12)	1752.5	21.2	20.39	0	20.02	0
		1732.5	21.2	20.36	0	20.29	0
		1712.5	21.2	20.39	0	20.25	0
	1RB Low (0)	1752.5	21.2	20.47	0	20.34	0
		1732.5	21.2	20.52	0	20.45	0
		1712.5	21.2	20.52	0	20.40	0
	12RB High (13)	1752.5	21.2	20.70	0	20.76	0
		1732.5	21.2	20.76	0	20.58	0
		1712.5	21.2	20.68	0	20.61	0
	12RB Middle (6)	1752.5	21.2	20.70	0	20.67	0
		1732.5	21.2	20.75	0	20.65	0
		1712.5	21.2	20.79	0	20.73	0
	12RB Low (0)	1752.5	21.2	20.68	0	20.66	0
		1732.5	21.2	20.78	0	20.69	0
		1712.5	21.2	20.83	0	20.78	0
	25RB (0)	1752.5	21.2	20.83	0	20.75	0
		1732.5	21.2	20.83	0	20.88	0
		1712.5	21.2	20.74	0	20.73	0
10 MHz	1RB High (49)	1750	21.2	20.57	0	20.80	0
		1732.5	21.2	20.61	0	20.93	0
		1715	21.2	20.84	0	20.79	0
	1RB Middle (24)	1750	21.2	20.73	0	20.81	0
		1732.5	21.2	20.85	0	20.88	0
		1715	21.2	20.73	0	20.93	0
	1RB Low (0)	1750	21.2	20.78	0	20.96	0
		1732.5	21.2	20.83	0	20.82	0
		1715	21.2	20.94	0	20.92	0

	25RB High (25)	1750	21.2	20.75	0	20.58	0
		1732.5	21.2	20.73	0	20.56	0
		1715	21.2	20.75	0	20.74	0
	25RB Middle (12)	1750	21.2	20.71	0	20.83	0
		1732.5	21.2	20.76	0	20.62	0
		1715	21.2	20.75	0	20.82	0
	25RB Low (0)	1750	21.2	20.73	0	20.77	0
		1732.5	21.2	20.78	0	20.65	0
		1715	21.2	20.83	0	20.81	0
	50RB (0)	1750	21.2	20.84	0	20.75	0
		1732.5	21.2	20.79	0	20.82	0
		1715	21.2	20.88	0	20.83	0
15 MHz	1RB High (74)	1747.5	21.2	20.75	0	20.87	0
		1732.5	21.2	20.72	0	20.77	0
		1717.5	21.2	20.76	0	20.74	0
	1RB Middle (37)	1747.5	21.2	20.60	0	20.84	0
		1732.5	21.2	20.80	0	20.90	0
		1717.5	21.2	20.66	0	20.79	0
	1RB Low (0)	1747.5	21.2	20.81	0	21.20	0
		1732.5	21.2	20.81	0	20.96	0
		1717.5	21.2	20.89	0	20.94	0
	36RB High (38)	1747.5	21.2	20.70	0	20.72	0
		1732.5	21.2	20.73	0	20.55	0
		1717.5	21.2	20.69	0	20.81	0
	36RB Middle (19)	1747.5	21.2	20.73	0	20.74	0
		1732.5	21.2	20.76	0	20.61	0
		1717.5	21.2	20.62	0	20.84	0
	36RB Low (0)	1747.5	21.2	20.88	0	20.68	0
		1732.5	21.2	20.76	0	20.61	0
		1717.5	21.2	20.76	0	20.87	0
	75RB (0)	1747.5	21.2	20.73	0	20.75	0
		1732.5	21.2	20.77	0	20.73	0
		1717.5	21.2	20.73	0	20.82	0
20 MHz	1RB High (99)	1745	21.2	20.85	0	20.59	0
		1732.5	21.2	20.80	0	20.77	0
		1720	21.2	20.77	0	21.15	0
	1RB Middle (50)	1745	21.2	20.72	0	20.90	0
		1732.5	21.2	20.93	0	20.95	0
		1720	21.2	20.75	0	20.92	0
	1RB Low (0)	1745	21.2	20.84	0	21.02	0
		1732.5	21.2	20.86	0	20.97	0
		1720	21.2	20.76	0	21.02	0
	50RB High (50)	1745	21.2	20.69	0	20.80	0
		1732.5	21.2	20.76	0	20.89	0
		1720	21.2	20.72	0	20.75	0
	50RB Middle (25)	1745	21.2	20.82	0	20.89	0
		1732.5	21.2	20.79	0	20.93	0
		1720	21.2	20.71	0	20.86	0

	50RB Low (0)	1745	21.2	20.90	0	21.00	0
		1732.5	21.2	20.91	0	20.98	0
		1720	21.2	20.83	0	20.91	0
		1745	21.2	20.92	0	20.98	0
	100RB (0)	1732.5	21.2	20.85	0	20.82	0
		1720	21.2	20.89	0	20.96	0
Band 12							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB-High (5)	715.3	23	22.05	0	22.08	1
		707.5	23	21.99	0	21.94	1
		699.7	23	22.11	0	22.72	1
	1RB-Middle (3)	715.3	23	22.32	0	22.65	1
		707.5	23	22.19	0	22.57	1
		699.7	23	22.46	0	22.94	1
	1RB-Low (0)	715.3	23	22.37	0	22.49	1
		707.5	23	22.31	0	22.41	1
		699.7	23	22.36	0	22.28	1
	3RB-High (3)	715.3	23	22.14	0	21.97	1
		707.5	23	22.25	0	22.43	1
		699.7	23	22.20	0	22.04	1
	3RB-Middle (1)	715.3	23	22.41	0	22.09	1
		707.5	23	22.46	0	22.39	1
		699.7	23	22.39	0	22.04	1
	3RB-Low (0)	715.3	23	22.27	0	22.16	1
		707.5	23	22.21	0	22.35	1
		699.7	23	22.25	0	22.29	1
	6RB (0)	715.3	23	22.23	1	21.93	2
		707.5	23	22.34	1	22.07	2
		699.7	23	22.28	1	22.15	2
3 MHz	1RB-High (14)	714.5	23	22.23	0	22.43	1
		707.5	23	22.19	0	22.30	1
		700.5	23	22.12	0	22.62	1
	1RB-Middle (7)	714.5	23	22.01	0	22.39	1
		707.5	23	21.97	0	22.45	1
		700.5	23	22.13	0	22.55	1
	1RB-Low (0)	714.5	23	22.09	0	22.61	1
		707.5	23	22.06	0	22.44	1
		700.5	23	22.26	0	22.60	1
	8RB-High (7)	714.5	23	22.28	1	21.77	2
		707.5	23	22.12	1	21.69	2
		700.5	23	22.23	1	21.79	2
	8RB-Middle (4)	714.5	23	22.31	1	21.82	2
		707.5	23	22.18	1	21.67	2
		700.5	23	22.21	1	21.72	2

	8RB-Low (0)	714.5	23	22.32	1	21.73	2
		707.5	23	22.21	1	21.73	2
		700.5	23	22.16	1	22.06	2
	15RB (0)	714.5	23	22.34	1	21.86	2
		707.5	23	22.24	1	21.76	2
		700.5	23	22.29	1	21.94	2
5 MHz	1RB-High (24)	713.5	23	22.09	0	21.50	1
		707.5	23	22.17	0	21.94	1
		701.5	23	22.17	0	21.33	1
	1RB-Middle (12)	713.5	23	21.98	0	22.00	1
		707.5	23	21.93	0	21.70	1
		701.5	23	22.03	0	22.04	1
	1RB-Low (0)	713.5	23	22.17	0	21.79	1
		707.5	23	22.13	0	22.28	1
		701.5	23	22.13	0	22.22	1
	12RB-High (13)	713.5	23	22.21	1	21.81	2
		707.5	23	22.21	1	21.85	2
		701.5	23	22.18	1	21.93	2
	12RB-Middle (6)	713.5	23	22.28	1	21.82	2
		707.5	23	22.14	1	21.87	2
		701.5	23	22.21	1	21.79	2
	12RB-Low (0)	713.5	23	22.27	1	21.91	2
		707.5	23	22.23	1	21.89	2
		701.5	23	22.14	1	21.80	2
	25RB (0)	713.5	23	22.35	1	21.98	2
		707.5	23	22.16	1	21.84	2
		701.5	23	22.20	1	21.81	2
10 MHz	1RB-High (49)	711	23	22.23	0	22.48	1
		707.5	23	22.01	0	22.42	1
		704	23	21.98	0	22.24	1
	1RB-Middle (24)	711	23	22.22	0	22.47	1
		707.5	23	22.15	0	22.43	1
		704	23	22.00	0	22.60	1
	1RB-Low (0)	711	23	22.28	0	22.52	1
		707.5	23	22.11	0	22.25	1
		704	23	22.13	0	22.29	1
	25RB-High (25)	711	23	22.30	1	21.92	2
		707.5	23	22.13	1	21.72	2
		704	23	22.21	1	21.66	2
	25RB-Middle (12)	711	23	22.28	1	21.88	2
		707.5	23	22.15	1	21.74	2
		704	23	22.21	1	21.71	2
	25RB-Low (0)	711	23	22.29	1	21.99	2
		707.5	23	22.19	1	21.80	2
		704	23	22.13	1	21.63	2
	50RB (0)	711	23	22.21	1	21.93	2
		707.5	23	22.16	1	21.83	2
		704	23	22.20	1	21.89	2

11.3 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.13: The conducted power measurement results for GSM850/1900

GSM 850MHz	Conducted Power (dBm)		
	Channel 251(848.8MHz)	Channel 190(836.6MHz)	Channel 128(824.2MHz)
	32.50	32.43	32.69
GSM 1900MHz	Conducted Power(dBm)		
	Channel 810(1909.8MHz)	Channel 661(1880MHz)	Channel 512(1850.2MHz)
	30.31	30.12	30.04

Table 11.14: The conducted power measurement results for GPRS and EGPRS

GSM 850 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.53	32.76	32.68	-9.03	23.50	23.73	23.65
2 Txslots	30.27	30.14	30.00	-6.02	24.25	24.12	23.98
3Txslots	29.22	29.14	28.96	-4.26	24.96	24.88	24.70
4 Txslots	27.94	27.87	27.66	-3.01	24.93	24.86	24.65
GSM 850 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	32.51	32.43	32.69	-9.03	23.48	23.40	23.66
2 Txslots	30.28	30.14	30.01	-6.02	24.26	24.12	23.99
3Txslots	29.24	29.15	28.91	-4.26	24.98	24.89	24.65
4 Txslots	27.94	27.83	27.65	-3.01	24.93	24.82	24.64
GSM 850 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	251	190	128		251	190	128
1 Txslot	27.38	27.33	27.24	-9.03	18.35	18.30	18.21
2 Txslots	26.23	26.27	26.21	-6.02	20.21	20.25	20.19
3Txslots	24.63	24.58	24.57	-4.26	20.37	20.32	20.31
4 Txslots	22.66	22.56	22.54	-3.01	19.65	19.55	19.53
PCS1900 GPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	30.31	30.14	30.03	-9.03	21.28	21.11	21.00
2 Txslots	28.17	28.05	28.02	-6.02	22.15	22.03	22.00
3Txslots	26.72	26.53	26.51	-4.26	22.46	22.27	22.25
4 Txslots	24.28	24.24	24.25	-3.01	21.27	21.23	21.24
PCS1900 EGPRS (GMSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	30.35	30.17	30.05	-9.03	21.32	21.14	21.02
2 Txslots	28.21	28.10	28.07	-6.02	22.19	22.08	22.05
3Txslots	26.67	26.49	26.52	-4.26	22.41	22.23	22.26
4 Txslots	24.29	24.23	24.26	-3.01	21.28	21.22	21.25

PCS1900 EGPRS (8PSK)	Measured Power (dBm)			calculation	Averaged Power (dBm)		
	810	661	512		810	661	512
1 Txslot	26.47	26.34	26.30	-9.03	17.44	17.31	17.27
2 Txslots	25.39	25.27	25.28	-6.02	19.37	19.25	19.26
3Txslots	23.86	23.76	23.81	-4.26	19.60	19.50	19.55
4 Txslots	21.68	21.71	21.70	-3.01	18.67	18.70	18.69

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 3Txslots for GRPS and EGPRS.

11.4 WCDMA Measurement result

Table 11.15: The conducted Power for WCDMA

Item	band	FDDV result		
	ARFCN	4233(846.6MHz)	4182(836.4MHz)	4132(826.4MHz)
WCDMA	\	23.48	23.47	23.43
HSUPA	1	22.10	22.09	22.36
	2	20.95	20.86	21.12
	3	21.29	21.29	21.30
	4	21.86	21.86	21.87
	5	22.37	22.36	22.29
DC-HSDPA	1	22.13	22.05	22.01
	2	22.12	22.03	21.97
	3	22.15	22.02	21.96
	4	22.13	22.04	21.97
Item	band	FDDIV result		
	ARFCN	1513 (1752.6MHz)	1412 (1732.4MHz)	1312 (1712.4MHz)
WCDMA	\	23.16	23.24	23.18
HSUPA	1	22.23	22.31	22.01
	2	21.53	21.08	21.43
	3	21.19	20.72	21.23
	4	22.08	22.09	21.96
	5	22.46	22.48	22.51
DC-HSDPA	1	22.13	22.05	22.22
	2	22.11	22.09	22.19
	3	22.09	22.08	22.18
	4	22.05	22.11	22.13

Item	band	FDDII result		
	ARFCN	9538(1907.6MHz)	9400(1880MHz)	9262(1852.4MHz)
WCDMA	\	23.56	23.49	23.52
HSUPA	1	22.30	22.28	22.18
	2	21.22	21.20	21.30
	3	21.50	20.74	21.69
	4	22.15	22.14	22.15
	5	22.65	22.60	22.70
DC-HSDPA	1	22.38	22.24	22.24
	2	22.36	22.21	22.19
	3	22.35	22.23	22.21
	4	22.39	22.22	22.23

11.5 LTE Measurement result

Table 11.16: The conducted Power for LTE

Band 2							
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
	RB offset (Start RB)			Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1909.3	24.2	23.23	0	22.56	1
		1880	24.2	23.50	0	22.57	1
		1850.7	24.2	23.42	0	22.45	1
	1RB Middle (3)	1909.3	24.2	23.57	0	22.66	1
		1880	24.2	23.65	0	22.70	1
		1850.7	24.2	23.56	0	22.50	1
	1RB Low (0)	1909.3	24.2	23.49	0	22.58	1
		1880	24.2	23.67	0	22.64	1
		1850.7	24.2	23.38	0	22.54	1
	3RB High (3)	1909.3	24.2	23.28	0	22.58	1
		1880	24.2	23.59	0	22.42	1
		1850.7	24.2	23.47	0	22.65	1
	3RB Middle (1)	1909.3	24.2	23.44	0	22.53	1
		1880	24.2	23.60	0	22.39	1
		1850.7	24.2	23.49	0	22.55	1
	3RB Low (0)	1909.3	24.2	23.32	0	22.61	1
		1880	24.2	23.60	0	22.59	1
		1850.7	24.2	23.60	0	22.37	1
	6RB (0)	1909.3	24.2	22.34	1	21.45	2
		1880	24.2	22.55	1	21.73	2
		1850.7	24.2	22.50	1	21.54	2
3 MHz	1RB High (14)	1908.5	24.2	23.28	0	22.46	1
		1880	24.2	23.45	0	23.19	1
		1851.5	24.2	23.47	0	22.76	1

	1RB Middle (7)	1908.5	24.2	23.48	0	22.38	1
		1880	24.2	23.61	0	23.00	1
		1851.5	24.2	23.39	0	22.72	1
	1RB Low (0)	1908.5	24.2	23.47	0	22.47	1
		1880	24.2	23.52	0	23.16	1
		1851.5	24.2	23.65	0	22.79	1
	8RB High (7)	1908.5	24.2	22.22	1	21.21	2
		1880	24.2	22.56	1	21.57	2
		1851.5	24.2	22.54	1	21.79	2
	8RB Middle (4)	1908.5	24.2	22.35	1	21.30	2
		1880	24.2	22.61	1	21.80	2
		1851.5	24.2	22.52	1	21.57	2
	8RB Low (0)	1908.5	24.2	22.29	1	21.26	2
		1880	24.2	22.60	1	21.80	2
		1851.5	24.2	22.63	1	21.57	2
	15RB (0)	1908.5	24.2	22.40	1	21.44	2
		1880	24.2	22.64	1	21.69	2
		1851.5	24.2	22.58	1	21.75	2
5 MHz	1RB High (24)	1907.5	24.2	23.01	0	21.71	1
		1880	24.2	23.43	0	21.73	1
		1852.5	24.2	23.24	0	21.66	1
	1RB Middle (12)	1907.5	24.2	23.03	0	22.06	1
		1880	24.2	23.33	0	21.73	1
		1852.5	24.2	23.28	0	22.27	1
	1RB Low (0)	1907.5	24.2	23.27	0	21.53	1
		1880	24.2	23.32	0	21.85	1
		1852.5	24.2	23.48	0	22.44	1
	12RB High (13)	1907.5	24.2	22.31	1	21.29	2
		1880	24.2	22.61	1	21.50	2
		1852.5	24.2	22.56	1	21.62	2
	12RB Middle (6)	1907.5	24.2	22.33	1	21.29	2
		1880	24.2	22.46	1	21.56	2
		1852.5	24.2	22.58	1	21.66	2
	12RB Low (0)	1907.5	24.2	22.41	1	21.42	2
		1880	24.2	22.52	1	21.55	2
		1852.5	24.2	22.66	1	21.62	2
	25RB (0)	1907.5	24.2	22.37	1	21.49	2
		1880	24.2	22.62	1	21.59	2
		1852.5	24.2	22.61	1	21.54	2
10 MHz	1RB High (49)	1905	24.2	23.25	0	22.73	1
		1880	24.2	23.56	0	22.59	1
		1855	24.2	23.66	0	22.81	1
	1RB Middle (24)	1905	24.2	23.44	0	22.59	1
		1880	24.2	23.53	0	22.80	1
		1855	24.2	23.51	0	23.11	1

	1RB Low (0)	1905	24.2	23.48	0	22.43	1
		1880	24.2	23.47	0	22.88	1
		1855	24.2	23.63	0	22.85	1
	25RB High (25)	1905	24.2	22.26	1	21.29	2
		1880	24.2	22.45	1	21.70	2
		1855	24.2	22.55	1	21.55	2
	25RB Middle (12)	1905	24.2	22.49	1	21.48	2
		1880	24.2	22.62	1	21.57	2
		1855	24.2	22.63	1	21.65	2
	25RB Low (0)	1905	24.2	22.39	1	21.44	2
		1880	24.2	22.61	1	21.62	2
		1855	24.2	22.62	1	21.55	2
	50RB (0)	1905	24.2	22.34	1	21.45	2
		1880	24.2	22.55	1	21.54	2
		1855	24.2	22.67	1	21.67	2
15 MHz	1RB High (74)	1902.5	24.2	23.11	0	22.40	1
		1880	24.2	23.44	0	23.03	1
		1857.5	24.2	23.60	0	22.67	1
	1RB Middle (37)	1902.5	24.2	23.39	0	22.94	1
		1880	24.2	23.53	0	23.09	1
		1857.5	24.2	23.57	0	22.63	1
	1RB Low (0)	1902.5	24.2	23.45	0	22.45	1
		1880	24.2	23.86	0	23.12	1
		1857.5	24.2	23.59	0	22.90	1
	36RB High (38)	1902.5	24.2	22.35	1	21.38	2
		1880	24.2	22.51	1	21.60	2
		1857.5	24.2	22.73	1	21.59	2
	36RB Middle (19)	1902.5	24.2	22.41	1	21.43	2
		1880	24.2	22.69	1	21.70	2
		1857.5	24.2	22.54	1	21.49	2
	36RB Low (0)	1902.5	24.2	22.32	1	21.39	2
		1880	24.2	22.73	1	21.77	2
		1857.5	24.2	22.60	1	21.52	2
	75RB (0)	1902.5	24.2	22.34	1	21.38	2
		1880	24.2	22.58	1	21.62	2
		1857.5	24.2	22.63	1	21.65	2
20 MHz	1RB High (99)	1900	24.2	23.49	0	22.81	1
		1880	24.2	23.39	0	22.70	1
		1860	24.2	23.70	0	22.95	1
	1RB Middle (50)	1900	24.2	23.34	0	22.65	1
		1880	24.2	23.74	0	22.97	1
		1860	24.2	24.06	0	22.98	1
	1RB Low (0)	1900	24.2	23.54	0	22.87	1
		1880	24.2	23.82	0	23.15	1
		1860	24.2	23.89	0	23.11	1

	50RB High (50)	1900	24.2	22.40	1	21.35	2
		1880	24.2	22.49	1	21.60	2
		1860	24.2	22.66	1	21.67	2
	50RB Middle (25)	1900	24.2	22.31	1	21.28	2
		1880	24.2	22.61	1	21.74	2
		1860	24.2	22.65	1	21.67	2
	50RB Low (0)	1900	24.2	22.52	1	21.74	2
		1880	24.2	22.67	1	21.83	2
		1860	24.2	22.70	1	21.73	2
	100RB (0)	1900	24.2	22.40	1	21.45	2
		1880	24.2	22.53	1	21.61	2
		1860	24.2	22.67	1	21.61	2
Band 4							
Bandwidth (MHz)	RB allocation RB offset (Start RB)	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB High (5)	1754.3	24.2	23.44	0	22.34	1
		1732.5	24.2	23.56	0	22.42	1
		1710.7	24.2	23.64	0	22.96	1
	1RB Middle (3)	1754.3	24.2	23.66	0	22.95	1
		1732.5	24.2	23.78	0	23.13	1
		1710.7	24.2	23.80	0	23.08	1
	1RB Low (0)	1754.3	24.2	23.78	0	22.78	1
		1732.5	24.2	23.68	0	22.58	1
		1710.7	24.2	23.74	0	22.98	1
	3RB High (3)	1754.3	24.2	23.67	0	22.53	1
		1732.5	24.2	23.55	0	22.68	1
		1710.7	24.2	23.54	0	22.68	1
	3RB Middle (1)	1754.3	24.2	23.65	0	22.65	1
		1732.5	24.2	23.68	0	22.51	1
		1710.7	24.2	23.70	0	22.91	1
	3RB Low (0)	1754.3	24.2	23.56	0	22.77	1
		1732.5	24.2	23.52	0	22.62	1
		1710.7	24.2	23.61	0	22.40	1
	6RB (0)	1754.3	24.2	22.58	1	21.77	2
		1732.5	24.2	22.63	1	21.66	2
		1710.7	24.2	22.66	1	21.91	2
3 MHz	1RB High (14)	1753.5	24.2	23.54	0	22.74	1
		1732.5	24.2	23.63	0	22.93	1
		1711.5	24.2	23.35	0	23.01	1
	1RB Middle (7)	1753.5	24.2	23.38	0	23.13	1
		1732.5	24.2	23.43	0	22.91	1
		1711.5	24.2	23.71	0	22.86	1

	1RB Low (0)	1753.5	24.2	23.57	0	22.91	1
		1732.5	24.2	23.47	0	23.08	1
		1711.5	24.2	23.62	0	22.94	1
	8RB High (7)	1753.5	24.2	22.65	1	21.87	2
		1732.5	24.2	22.61	1	21.92	2
		1711.5	24.2	22.57	1	21.86	2
	8RB Middle (4)	1753.5	24.2	22.64	1	21.90	2
		1732.5	24.2	22.60	1	21.92	2
		1711.5	24.2	22.64	1	21.73	2
	8RB Low (0)	1753.5	24.2	22.65	1	21.98	2
		1732.5	24.2	22.63	1	21.96	2
		1711.5	24.2	22.70	1	21.99	2
	15RB (0)	1753.5	24.2	22.69	1	21.76	2
		1732.5	24.2	22.76	1	21.82	2
		1711.5	24.2	22.66	1	21.76	2
5 MHz	1RB High (24)	1752.5	24.2	23.47	0	21.95	1
		1732.5	24.2	23.47	0	21.78	1
		1712.5	24.2	23.10	0	21.63	1
	1RB Middle (12)	1752.5	24.2	23.33	0	21.80	1
		1732.5	24.2	23.38	0	22.45	1
		1712.5	24.2	23.34	0	22.31	1
	1RB Low (0)	1752.5	24.2	23.37	0	21.76	1
		1732.5	24.2	23.59	0	22.39	1
		1712.5	24.2	23.55	0	22.46	1
	12RB High (13)	1752.5	24.2	22.73	1	21.60	2
		1732.5	24.2	22.69	1	21.76	2
		1712.5	24.2	22.58	1	21.60	2
	12RB Middle (6)	1752.5	24.2	22.65	1	21.67	2
		1732.5	24.2	22.64	1	21.76	2
		1712.5	24.2	22.63	1	21.67	2
	12RB Low (0)	1752.5	24.2	22.63	1	21.64	2
		1732.5	24.2	22.77	1	21.88	2
		1712.5	24.2	22.68	1	21.72	2
	25RB (0)	1752.5	24.2	22.61	1	21.81	2
		1732.5	24.2	22.76	1	21.90	2
		1712.5	24.2	22.67	1	21.66	2
10 MHz	1RB High (49)	1750	24.2	23.57	0	22.78	1
		1732.5	24.2	23.46	0	22.78	1
		1715	24.2	23.52	0	22.92	1
	1RB Middle (24)	1750	24.2	23.72	0	22.77	1
		1732.5	24.2	23.84	0	23.11	1
		1715	24.2	23.53	0	23.07	1

	1RB Low (0)	1750	24.2	23.65	0	23.09	1
		1732.5	24.2	23.53	0	23.04	1
		1715	24.2	23.74	0	22.80	1
	25RB High (25)	1750	24.2	22.61	1	21.46	2
		1732.5	24.2	22.63	1	21.67	2
		1715	24.2	22.61	1	21.53	2
	25RB Middle (12)	1750	24.2	22.67	1	21.70	2
		1732.5	24.2	22.76	1	21.64	2
		1715	24.2	22.70	1	21.66	2
	25RB Low (0)	1750	24.2	22.68	1	21.73	2
		1732.5	24.2	22.70	1	21.66	2
		1715	24.2	22.69	1	21.68	2
	50RB (0)	1750	24.2	22.71	1	21.77	2
		1732.5	24.2	22.69	1	21.82	2
		1715	24.2	22.75	1	21.78	2
15 MHz	1RB High (74)	1747.5	24.2	23.67	0	23.16	1
		1732.5	24.2	23.55	0	22.73	1
		1717.5	24.2	23.50	0	22.77	1
	1RB Middle (37)	1747.5	24.2	23.51	0	22.66	1
		1732.5	24.2	23.53	0	22.85	1
		1717.5	24.2	23.44	0	22.63	1
	1RB Low (0)	1747.5	24.2	23.75	0	23.19	1
		1732.5	24.2	23.68	0	23.15	1
		1717.5	24.2	23.75	0	22.93	1
	36RB High (38)	1747.5	24.2	22.64	1	21.53	2
		1732.5	24.2	22.62	1	21.79	2
		1717.5	24.2	22.70	1	21.62	2
	36RB Middle (19)	1747.5	24.2	22.63	1	21.85	2
		1732.5	24.2	22.61	1	21.82	2
		1717.5	24.2	22.62	1	21.82	2
	36RB Low (0)	1747.5	24.2	22.76	1	21.96	2
		1732.5	24.2	22.72	1	21.95	2
		1717.5	24.2	22.74	1	21.92	2
	75RB (0)	1747.5	24.2	22.78	1	21.71	2
		1732.5	24.2	22.74	1	21.79	2
		1717.5	24.2	22.71	1	21.75	2
20 MHz	1RB High (99)	1745	24.2	23.73	0	22.95	1
		1732.5	24.2	23.52	0	22.90	1
		1720	24.2	23.71	0	22.93	1
	1RB Middle (50)	1745	24.2	23.75	0	23.00	1
		1732.5	24.2	23.82	0	23.07	1
		1720	24.2	23.72	0	23.05	1

	1RB Low (0)	1745	24.2	24.06	0	23.09	1
		1732.5	24.2	23.94	0	23.13	1
		1720	24.2	23.86	0	23.07	1
	50RB High (50)	1745	24.2	22.55	1	21.70	2
		1732.5	24.2	22.62	1	21.67	2
		1720	24.2	22.65	1	21.59	2
	50RB Middle (25)	1745	24.2	22.70	1	21.83	2
		1732.5	24.2	22.70	1	21.67	2
		1720	24.2	22.63	1	21.78	2
	50RB Low (0)	1745	24.2	22.81	1	21.91	2
		1732.5	24.2	22.71	1	21.77	2
		1720	24.2	22.70	1	21.87	2
	100RB (0)	1745	24.2	22.79	1	21.85	2
		1732.5	24.2	22.73	1	21.71	2
		1720	24.2	22.66	1	21.70	2

Band 12

Bandwidth (MHz)	RB allocation RB offset (Start RB)	Frequency (MHz)	Max. Target Power (dBm)	QPSK		16QAM	
				Actual output power (dBm)	MPR	Actual output power (dBm)	MPR
1.4 MHz	1RB-High (5)	715.3	24.2	23.51	0	22.93	1
		707.5	24.2	23.44	0	22.88	1
		699.7	24.2	23.60	0	22.79	1
	1RB-Middle (3)	715.3	24.2	23.88	0	22.72	1
		707.5	24.2	23.56	0	22.64	1
		699.7	24.2	23.75	0	22.75	1
	1RB-Low (0)	715.3	24.2	23.78	0	22.67	1
		707.5	24.2	23.68	0	22.59	1
		699.7	24.2	23.42	0	22.80	1
	3RB-High (3)	715.3	24.2	23.61	0	22.90	1
		707.5	24.2	23.59	0	22.48	1
		699.7	24.2	23.57	0	22.64	1
	3RB-Middle (1)	715.3	24.2	23.77	0	22.89	1
		707.5	24.2	23.56	0	22.73	1
		699.7	24.2	23.68	0	22.79	1
	3RB-Low (0)	715.3	24.2	23.62	0	22.82	1
		707.5	24.2	23.64	0	22.84	1
		699.7	24.2	23.48	0	22.69	1
	6RB (0)	715.3	24.2	22.65	1	21.67	2
		707.5	24.2	22.57	1	21.67	2
		699.7	24.2	22.67	1	21.65	2
3 MHz	1RB-High (14)	714.5	24.2	23.73	0	23.19	1
		707.5	24.2	23.52	0	23.19	1
		700.5	24.2	23.70	0	23.02	1

	1RB-Middle (7)	714.5	24.2	23.65	0	22.79	1
		707.5	24.2	23.60	0	23.15	1
		700.5	24.2	23.53	0	22.74	1
	1RB-Low (0)	714.5	24.2	23.65	0	22.90	1
		707.5	24.2	23.44	0	22.93	1
		700.5	24.2	23.36	0	22.92	1
	8RB-High (7)	714.5	24.2	22.65	1	21.51	2
		707.5	24.2	22.55	1	21.42	2
		700.5	24.2	22.71	1	21.48	2
	8RB-Middle (4)	714.5	24.2	22.62	1	21.76	2
		707.5	24.2	22.60	1	21.38	2
		700.5	24.2	22.63	1	21.78	2
	8RB-Low (0)	714.5	24.2	22.67	1	21.83	2
		707.5	24.2	22.62	1	21.50	2
		700.5	24.2	22.56	1	21.53	2
	15RB (0)	714.5	24.2	22.67	1	21.77	2
		707.5	24.2	22.57	1	21.64	2
		700.5	24.2	22.61	1	21.70	2
5 MHz	1RB-High (24)	713.5	24.2	23.57	0	21.83	1
		707.5	24.2	23.53	0	21.93	1
		701.5	24.2	23.60	0	22.06	1
	1RB-Middle (12)	713.5	24.2	23.35	0	21.86	1
		707.5	24.2	23.32	0	22.42	1
		701.5	24.2	23.39	0	22.27	1
	1RB-Low (0)	713.5	24.2	23.58	0	21.81	1
		707.5	24.2	23.37	0	22.00	1
		701.5	24.2	23.50	0	22.24	1
	12RB-High (13)	713.5	24.2	22.73	1	21.67	2
		707.5	24.2	22.54	1	21.48	2
		701.5	24.2	22.60	1	21.51	2
	12RB-Middle (6)	713.5	24.2	22.70	1	21.77	2
		707.5	24.2	22.61	1	21.61	2
		701.5	24.2	22.66	1	21.57	2
	12RB-Low (0)	713.5	24.2	22.82	1	21.68	2
		707.5	24.2	22.64	1	21.57	2
		701.5	24.2	22.62	1	21.58	2
	25RB (0)	713.5	24.2	22.78	1	21.88	2
		707.5	24.2	22.67	1	21.56	2
		701.5	24.2	22.67	1	21.70	2
10 MHz	1RB-High (49)	711	24.2	23.53	0	22.83	1
		707.5	24.2	23.45	0	23.14	1
		704	24.2	23.41	0	23.09	1
	1RB-Middle	711	24.2	23.66	0	23.15	1

	(24)	707.5	24.2	23.57	0	23.12	1
		704	24.2	23.51	0	22.87	1
1RB-Low (0)	711	24.2	23.71	0	22.93	1	
	707.5	24.2	23.41	0	22.80	1	
	704	24.2	23.49	0	22.75	1	
	711	24.2	22.72	1	21.64	2	
25RB-High (25)	707.5	24.2	22.58	1	21.55	2	
	704	24.2	22.60	1	21.56	2	
	711	24.2	22.73	1	21.63	2	
	707.5	24.2	22.57	1	21.46	2	
25RB-Middle (12)	704	24.2	22.63	1	21.59	2	
	711	24.2	22.64	1	21.55	2	
	707.5	24.2	22.52	1	21.57	2	
	704	24.2	22.51	1	21.58	2	
25RB-Low (0)	711	24.2	22.58	1	21.64	2	
	707.5	24.2	22.51	1	21.55	2	
	704	24.2	22.53	1	21.57	2	

11.6 Wi-Fi and BT Measurement result

The output power of BT antenna is as following:

Mode	Conducted Power (dBm)		
	Channel 0 (2402MHz)	Channel 39 (2441MHz)	Channel 78(2480MHz)
GFSK	10.01	9.89	8.52
EDR2M-4_DQPSK	11.03	10.46	9.34
EDR3M-8DPSK	10.54	10.05	8.86

The average conducted power for Wi-Fi is as following:

802.11b (dBm)

Channel\data rate	1Mbps	2Mbps	5.5Mbps	11Mbps
1	18.01	/	18.27	/
6	19.04	18.91	19.07	18.85
11	18.65	/	18.84	/

802.11g (dBm)

Channel\data rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
1	14.29	/	/	/	/	/	/	/
6	14.46	/	/	/	/	/	/	/
11	15.05	14.99	14.95	14.86	14.73	14.61	14.39	14.32

802.11n (dBm) - HT20 (2.4G)

Channel\data rate	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
1	12.67	/	/	/	/	/	/	/
6	12.63	/	/	/	/	/	/	/
11	13.49	13.42	13.30	13.17	13.03	12.90	12.78	12.62


12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

For this device, the BT and Wi-Fi can transmit simultaneous with other transmitters.

12.2 Transmit Antenna Separation Distances

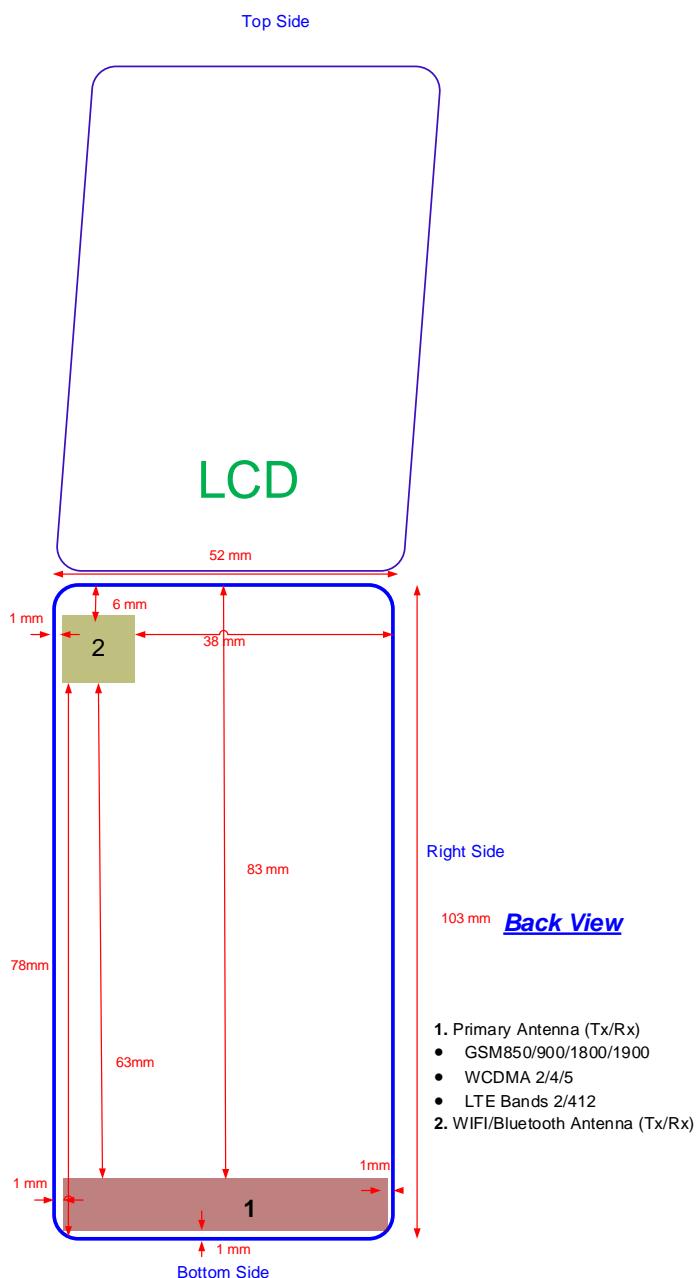

Picture 12.1 Antenna Locations

12.3 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	12	15.85	No
		Body	19.20	12	15.85	Yes
2.4GHz WLAN	2.45	Head	9.58	20	100	No
		Body	19.17	20	100	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi

	Position	Main antenna	WiFi	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.53	0.39	0.92
Maximum reported SAR value for Body	Rear Unfold with 10mm	1.28	0.25	1.53
	Rear Unfold with 15mm	1.43	0.13	1.56

Table 13.2: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.53	0.04	0.57
Maximum reported SAR value for Body	Rear Unfold with 10mm	1.28	<0.01 ^[1]	1.28
	Rear Unfold with 15mm	1.43	<0.01 ^[1]	1.43

[1] – We have measured the body SAR of Bluetooth and all results is less than 0.01W/kg.

Conclusion:

According to the above tables, the sum of reported SAR values is <1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.

The distance is 10mm or 15mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-gSAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM850/1900	1:8.3
GPRS&EGPRS	1:2.67
WCDMA<E	1:1

14.1 SAR results for Fast SAR

Table 14.1-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	Left	Touch	/	32.43	33.2	0.201	0.24	0.287	0.34	0.01
836.6	190	Left	Tilt	/	32.43	33.2	0.104	0.12	0.143	0.17	0.01
848.8	251	Right	Touch	Fig.1	32.50	33.2	0.293	0.34	0.452	0.53	-0.03
836.6	190	Right	Touch	/	32.43	33.2	0.261	0.31	0.405	0.48	-0.04
824.2	128	Right	Touch	/	32.69	33.2	0.253	0.28	0.392	0.44	-0.08
836.6	190	Right	Tilt	/	32.43	33.2	0.124	0.15	0.176	0.21	0.03

Table 14.1-2: SAR Values (GSM 850 MHz Band-Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
836.6	190	GPRS (3)	Front Fold	/	29.14	29.7	0.080	0.09	0.134	0.15	0.03
848.8	251	GPRS (3)	Rear Fold	Fig.2	29.22	29.7	0.406	0.45	0.666	0.74	-0.18
836.6	190	GPRS (3)	Rear Fold	/	29.14	29.7	0.364	0.41	0.653	0.74	-0.01
824.2	128	GPRS (3)	Rear Fold	/	28.96	29.7	0.279	0.33	0.521	0.62	-0.05
836.6	190	GPRS (3)	Left Fold	/	29.14	29.7	0.093	0.11	0.175	0.20	-0.01
836.6	190	GPRS (3)	Right Fold	/	29.14	29.7	0.215	0.24	0.402	0.46	0.03
836.6	190	GPRS (3)	Bottom Fold	/	29.14	29.7	0.037	0.04	0.076	0.09	0.04
836.6	190	GPRS (3)	Top Fold	/	29.14	29.7	0.025	0.03	0.045	0.05	0.04
836.6	190	GPRS (3)	Rear Unfold	/	29.14	29.7	0.161	0.18	0.326	0.37	0.01
836.6	190	GPRS (3)	Left Unfold	/	29.14	29.7	0.059	0.07	0.107	0.12	0.05
836.6	190	GPRS (3)	Right Unfold	/	29.14	29.7	0.166	0.19	0.299	0.34	-0.07
836.6	190	GPRS (3)	Bottom Unfold	/	29.14	29.7	0.039	0.04	0.084	0.10	-0.04
848.8	251	EGPRS (3)	Rear Fold	/	29.24	29.7	0.370	0.41	0.665	0.74	-0.06

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-3: SAR Values (GSM1900 MHz Band - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1909.8	810	Left	Touch	/	30.31	30.7	0.088	0.10	0.138	0.15	0.08
1880	661	Left	Touch	Fig.3	30.12	30.7	0.115	0.13	0.180	0.21	0.12
1850.2	512	Left	Touch	/	30.04	30.7	0.077	0.09	0.143	0.17	-0.02
1880	661	Left	Tilt	/	30.12	30.7	0.036	0.04	0.057	0.07	0.11
1880	661	Right	Touch	/	30.12	30.7	0.045	0.05	0.075	0.09	-0.14
1880	661	Right	Tilt	/	30.12	30.7	0.026	0.03	0.041	0.05	0.09

Table 14.1-4: SAR Values (GSM 1900 MHz Band-Body) – AP OFF

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	GPRS (3)	Front Fold	/	26.53	27.2	0.059	0.07	0.094	0.11	0.09
1909.8	810	GPRS (3)	Rear Fold	/	26.72	27.2	0.235	0.26	0.380	0.42	0.12
1880	661	GPRS (3)	Rear Fold	/	26.53	27.2	0.250	0.29	0.425	0.50	-0.10
1850.2	512	GPRS (3)	Rear Fold	Fig.4	26.51	27.2	0.276	0.32	0.440	0.52	-0.08
1880	661	GPRS (3)	Rear Unfold	/	26.53	27.2	0.253	0.29	0.392	0.46	0.01
1850.2	512	EGPRS (3)	Rear Fold	/	26.52	27.2	0.234	0.27	0.392	0.46	-0.17

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-5: SAR Values (GSM 1900 MHz Band-Body) – AP ON

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	GPRS (3)	Front Fold	/	26.79	27.2	0.080	0.09	0.132	0.14	0.07
1880	661	GPRS (3)	Rear Fold	/	26.79	27.2	0.347	0.38	0.581	0.64	0.05
1880	661	GPRS (3)	Left Fold	/	26.79	27.2	0.071	0.08	0.127	0.14	0.14
1880	661	GPRS (3)	Right Fold	/	26.79	27.2	0.034	0.04	0.058	0.06	0.06
1880	661	GPRS (3)	Bottom Fold	/	26.79	27.2	0.125	0.14	0.223	0.25	0.14
1880	661	GPRS (3)	Top Fold	/	26.79	27.2	0.013	0.01	0.019	0.02	0.06
1909.8	810	GPRS (3)	Rear Unfold	/	26.86	27.2	0.341	0.37	0.562	0.61	-0.06
1880	661	GPRS (3)	Rear Unfold	/	26.79	27.2	0.372	0.41	0.609	0.67	0.18
1850.2	512	GPRS (3)	Rear Unfold	Fig.5	26.80	27.2	0.390	0.43	0.639	0.70	-0.08
1880	661	GPRS (3)	Left Unfold	/	26.79	27.2	0.110	0.12	0.188	0.21	-0.03
1880	661	GPRS (3)	Right Unfold	/	26.79	27.2	0.076	0.08	0.130	0.14	0.03
1880	661	GPRS (3)	Bottom Unfold	/	26.79	27.2	0.129	0.14	0.226	0.25	0.09
1850.2	512	EGPRS (3)	Rear Unfold	/	26.85	27.2	0.357	0.39	0.625	0.68	-0.11

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-6: SAR Values (WCDMA850 MHz Band - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
836.4	4182	Left	Touch	/	23.47	24.2	0.195	0.23	0.326	0.39	-0.03
836.4	4182	Left	Tilt	/	23.47	24.2	0.114	0.13	0.172	0.20	-0.04
846.6	4233	Right	Touch	/	23.43	24.2	0.241	0.29	0.389	0.46	-0.13
836.4	4182	Right	Touch	/	23.47	24.2	0.242	0.29	0.378	0.45	0.10
826.4	4132	Right	Touch	Fig.6	23.48	24.2	0.255	0.30	0.399	0.47	0.04
836.4	4182	Right	Tilt	/	23.47	24.2	0.123	0.15	0.198	0.23	0.09

Table 14.1-7: SAR Values (WCDMA 850 MHz Band-Body)

			Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5 °C					
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Front Fold	/	23.47	24.2	0.098	0.12	0.147	0.17	0.04
846.6	4233	Rear Fold	/	23.43	24.2	0.352	0.42	0.566	0.68	-0.02
836.4	4182	Rear Fold	Fig.7	23.47	24.2	0.362	0.43	0.582	0.69	0.05
826.4	4132	Rear Fold	/	23.48	24.2	0.358	0.42	0.577	0.68	0.04
836.4	4182	Left Fold	/	23.47	24.2	0.108	0.13	0.180	0.21	0.06
836.4	4182	Right Fold	/	23.47	24.2	0.235	0.28	0.389	0.46	0.12
836.4	4182	Bottom Fold	/	23.47	24.2	0.046	0.05	0.078	0.09	-0.01
836.4	4182	Top Fold	/	23.47	24.2	0.019	0.02	0.042	0.05	0.01
836.4	4182	Rear Unfold	/	23.47	24.2	0.266	0.31	0.511	0.60	-0.03
836.4	4182	Left Unfold	/	23.47	24.2	0.089	0.11	0.144	0.17	-0.01
836.4	4182	Right Unfold	/	23.47	24.2	0.252	0.30	0.400	0.47	0.01
836.4	4182	Bottom Unfold	/	23.47	24.2	0.062	0.07	0.120	0.14	-0.06

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-8: SAR Values (WCDMA1700 MHz Band - Head)

			Ambient Temperature: 22.9 °C		Liquid Temperature: 22.5 °C						
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.8	23.18	24.2	0.254	0.32	0.367	0.46	0.06
1732.4	1412	Left	Touch	/	23.24	24.2	0.202	0.25	0.335	0.42	-0.10
1712.4	1312	Left	Touch	/	23.16	24.2	0.138	0.18	0.224	0.28	-0.03
1732.4	1412	Left	Tilt	/	23.24	24.2	0.120	0.15	0.177	0.22	0.07
1732.4	1412	Right	Touch	/	23.24	24.2	0.154	0.19	0.270	0.34	-0.11
1732.4	1412	Right	Tilt	/	23.24	24.2	0.095	0.12	0.138	0.17	-0.08

Table 14.1-9: SAR Values (WCDMA 1700 MHz Band-Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1732.4	1412	Front Fold	/	23.24	24.2	0.196	0.24	0.314	0.39	0.02
1752.6	1513	Rear Fold	/	23.18	24.2	0.551	0.70	0.901	1.14	-0.09
1732.4	1412	Rear Fold	/	23.24	24.2	0.503	0.63	0.892	1.11	0.08
1712.4	1312	Rear Fold	/	23.16	24.2	0.487	0.62	0.879	1.12	-0.04
1752.6	1513	Rear Unfold	/	23.18	24.2	0.653	0.83	1.09	1.38	-0.07
1732.4	1412	Rear Unfold	Fig.9	23.24	24.2	0.710	0.89	1.15	1.43	0.04
1712.4	1312	Rear Unfold	/	23.16	24.2	0.514	0.65	0.858	1.09	-0.03

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-10: SAR Values (WCDMA 1700 MHz Band-Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1732.4	1412	Front Fold	/	20.49	21.2	0.132	0.16	0.211	0.25	0.12
1752.6	1513	Rear Fold	/	20.52	21.2	0.320	0.37	0.699	0.82	-0.11
1732.4	1412	Rear Fold	/	20.49	21.2	0.474	0.56	0.810	0.95	0.04
1712.4	1312	Rear Fold	/	20.40	21.2	0.460	0.55	0.805	0.97	0.08
1732.4	1412	Left Fold	/	20.49	21.2	0.097	0.11	0.158	0.19	0.04
1732.4	1412	Right Fold	/	20.49	21.2	0.070	0.08	0.113	0.13	0.09
1732.4	1412	Bottom Fold	/	20.49	21.2	0.184	0.22	0.325	0.38	0.10
1732.4	1412	Top Fold	/	20.49	21.2	0.026	0.03	0.042	0.05	0.11
1752.6	1513	Rear Unfold	/	20.52	21.2	0.629	0.74	1.06	1.24	0.04
1732.4	1412	Rear Unfold	Fig.10	20.49	21.2	0.656	0.77	1.09	1.28	-0.04
1712.4	1312	Rear Unfold	/	20.40	21.2	0.602	0.72	1.04	1.25	-0.06
1732.4	1412	Left Unfold	/	20.49	21.2	0.212	0.25	0.360	0.42	0.02
1732.4	1412	Right Unfold	/	20.49	21.2	0.088	0.10	0.151	0.18	-0.01
1732.4	1412	Bottom Unfold	/	20.49	21.2	0.243	0.29	0.427	0.50	-0.11

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-11: SAR Values (WCDMA1900 MHz Band - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1907.6	9538	Left	Touch	/	23.52	24.2	0.177	0.21	0.309	0.36	0.01
1880	9400	Left	Touch	/	23.49	24.2	0.187	0.22	0.320	0.38	-0.08
1852.4	9262	Left	Touch	Fig.11	23.56	24.2	0.230	0.27	0.352	0.41	-0.11
1880	9400	Left	Tilt	/	23.49	24.2	0.082	0.10	0.141	0.17	0.07
1880	9400	Right	Touch	/	23.49	24.2	0.131	0.15	0.211	0.25	0.04
1880	9400	Right	Tilt	/	23.49	24.2	0.060	0.07	0.096	0.11	-0.01

Table 14.1-12: SAR Values (WCDMA 1900 MHz Band-Body) – AP OFF

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front Fold	/	23.49	24.2	0.137	0.16	0.201	0.24	0.02
1907.6	9538	Rear Fold	/	23.52	24.2	0.550	0.64	0.851	1.00	0.08
1880	9400	Rear Fold	Fig.12	23.49	24.2	0.559	0.66	0.895	1.05	0.04
1852.4	9262	Rear Fold	/	23.56	24.2	0.516	0.60	0.833	0.97	0.11
1880	9400	Rear Unfold	/	23.49	24.2	0.315	0.37	0.483	0.57	0.08

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-13: SAR Values (WCDMA 1900 MHz Band-Body) – AP ON

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C										
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Front Fold	/	20.38	21.2	0.105	0.13	0.176	0.21	0.05
1907.6	9538	Rear Fold	/	20.34	21.2	0.493	0.60	0.852	1.04	0.09
1880	9400	Rear Fold	/	20.38	21.2	0.488	0.59	0.838	1.01	-0.01
1852.4	9262	Rear Fold	/	20.44	21.2	0.481	0.57	0.823	0.98	0.12
1880	9400	Left Fold	/	20.38	21.2	0.107	0.13	0.180	0.22	-0.18
1880	9400	Right Fold	/	20.38	21.2	0.052	0.06	0.089	0.11	0.02
1880	9400	Bottom Fold	/	20.38	21.2	0.172	0.21	0.295	0.36	0.06
1880	9400	Top Fold	/	20.38	21.2	0.018	0.02	0.028	0.03	0.08
1907.6	9538	Rear Unfold	/	20.34	21.2	0.495	0.60	0.836	1.02	-0.01
1880	9400	Rear Unfold	/	20.38	21.2	0.506	0.61	0.858	1.04	0.11
1852.4	9262	Rear Unfold	Fig.13	20.44	21.2	0.591	0.70	0.967	1.15	-0.05
1880	9400	Left Unfold	/	20.38	21.2	0.164	0.20	0.283	0.34	-0.09
1880	9400	Right Unfold	/	20.38	21.2	0.099	0.12	0.168	0.20	-0.19
1880	9400	Bottom Unfold	/	20.38	21.2	0.159	0.19	0.278	0.34	-0.08

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-14: SAR Values (LTE Band2 - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1860	18700	1RB_Mid	Left	Touch	Fig.14	24.06	24.2	0.196	0.20	0.310	0.32	-0.13
1860	18700	1RB_Mid	Left	Tilt	/	24.06	24.2	0.065	0.07	0.100	0.10	-0.08
1860	18700	1RB_Mid	Right	Touch	/	24.06	24.2	0.102	0.11	0.163	0.17	0.03
1860	18700	1RB_Mid	Right	Tilt	/	24.06	24.2	0.044	0.05	0.068	0.07	0.09
1860	18700	50RB_Low	Left	Touch	/	22.70	23.2	0.175	0.20	0.287	0.32	-0.02
1860	18700	50RB_Low	Left	Tilt	/	22.70	23.2	0.053	0.06	0.084	0.09	0.11
1860	18700	50RB_Low	Right	Touch	/	22.70	23.2	0.086	0.10	0.141	0.16	-0.06
1860	18700	50RB_Low	Right	Tilt	/	22.70	23.2	0.038	0.04	0.059	0.07	0.01

Note: The LTE mode is QPSK_20MHz.

Table 14.1-15: SAR Values (LTE Band2 -Body) – AP OFF

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	1RB_Mid	Front Fold	/	24.06	24.2	0.160	0.17	0.264	0.27	0.04
1900	19100	1RB_Low	Rear Fold	Fig.15	23.54	24.2	0.646	0.75	1.05	1.22	0.16
1880	18900	1RB_Low	Rear Fold	/	23.82	24.2	0.576	0.63	0.963	1.05	0.02
1860	18700	1RB_Mid	Rear Fold	/	24.06	24.2	0.567	0.59	0.906	0.94	0.02
1900	19100	1RB_Low	Rear Unfold	/	23.54	24.2	0.562	0.65	0.915	1.07	0.01
1880	18900	1RB_Low	Rear Unfold	/	23.82	24.2	0.567	0.62	0.925	1.01	-0.02
1860	18700	1RB_Mid	Rear Unfold	/	24.06	24.2	0.535	0.55	0.847	0.87	-0.09
1860	18700	50RB_Low	Front Fold	/	22.70	23.2	0.125	0.14	0.199	0.22	-0.04
1900	19100	50RB_Low	Rear Fold	/	22.52	23.2	0.470	0.55	0.800	0.94	0.16
1880	18900	50RB_Low	Rear Fold	/	22.67	23.2	0.464	0.52	0.809	0.91	0.02
1860	18700	50RB_Low	Rear Fold	/	22.70	23.2	0.442	0.50	0.745	0.84	0.02
1900	19100	50RB_Low	Rear Unfold	/	22.52	23.2	0.362	0.42	0.578	0.68	0.01
1880	18900	50RB_Low	Rear Unfold	/	22.67	23.2	0.409	0.46	0.641	0.72	0.02
1860	18700	50RB_Low	Rear Unfold	/	22.70	23.2	0.473	0.53	0.753	0.84	0.07
1860	18700	100RB	Rear Fold	/	22.67	23.2	0.413	0.47	0.687	0.78	0.10
1860	18700	100RB	Rear Unfold	/	22.67	23.2	0.433	0.49	0.706	0.80	0.09

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-16: SAR Values (LTE Band2 -Body) – AP ON

		Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5 °C						
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	1RB_High	Front Fold	/	22.08	22.4	0.143	0.15	0.224	0.24	0.07
1900	19100	1RB_Low	Rear Fold	/	22.00	22.4	0.601	0.66	0.990	1.09	-0.07
1880	18900	1RB_Low	Rear Fold	/	22.07	22.4	0.576	0.62	0.945	1.02	0.04
1860	18700	1RB_High	Rear Fold	/	22.08	22.4	0.588	0.63	0.972	1.05	-0.13
1860	18700	1RB_High	Left Fold	/	22.08	22.4	0.117	0.13	0.187	0.20	0.08
1860	18700	1RB_High	Right Fold	/	22.08	22.4	0.064	0.07	0.103	0.11	0.10
1860	18700	1RB_High	Bottom Fold	/	22.08	22.4	0.031	0.03	0.049	0.05	0.02
1860	18700	1RB_High	Top Fold	/	22.08	22.4	0.199	0.21	0.331	0.36	0.04
1900	19100	1RB_Low	Rear Unfold	/	22.00	22.4	0.627	0.69	0.995	1.09	-0.03
1880	18900	1RB_Low	Rear Unfold	/	22.07	22.4	0.613	0.66	0.963	1.04	0.12
1860	18700	1RB_High	Rear Unfold	Fig.16	22.08	22.4	0.686	0.74	1.10	1.18	-0.05
1860	18700	1RB_High	Left Unfold	/	22.08	22.4	0.208	0.22	0.345	0.37	-0.11
1860	18700	1RB_High	Right Unfold	/	22.08	22.4	0.137	0.15	0.215	0.23	0.04
1860	18700	1RB_High	Bottom Unfold	/	22.08	22.4	0.207	0.22	0.344	0.37	0.08
1880	18900	50RB_Low	Front Fold	/	22.11	22.4	0.152	0.16	0.239	0.26	0.04
1900	19100	50RB_Low	Rear Fold	/	21.99	22.4	0.588	0.65	0.972	1.07	-0.07
1880	18900	50RB_Low	Rear Fold	/	22.11	22.4	0.593	0.63	0.990	1.06	0.09
1860	18700	50RB_Low	Rear Fold	/	22.07	22.4	0.606	0.65	0.999	1.08	0.11
1880	18900	50RB_Low	Left Fold	/	22.11	22.4	0.127	0.14	0.219	0.23	0.10
1880	18900	50RB_Low	Right Fold	/	22.11	22.4	0.069	0.07	0.110	0.12	0.11
1880	18900	50RB_Low	Bottom Fold	/	22.11	22.4	0.199	0.21	0.324	0.35	0.08
1880	18900	50RB_Low	Top Fold	/	22.11	22.4	0.031	0.03	0.050	0.05	-0.04
1900	19100	50RB_Low	Rear Unfold	/	21.99	22.4	0.593	0.65	0.927	1.02	0.08
1880	18900	50RB_Low	Rear Unfold	/	22.11	22.4	0.673	0.72	1.07	1.14	0.11
1860	18700	50RB_Low	Rear Unfold	/	22.07	22.4	0.681	0.73	1.08	1.17	-0.02
1880	18900	50RB_Low	Left Unfold	/	22.11	22.4	0.198	0.21	0.332	0.35	-0.02
1880	18900	50RB_Low	Right Unfold	/	22.11	22.4	0.124	0.13	0.194	0.21	0.10
1880	18900	50RB_Low	Bottom Unfold	/	22.11	22.4	0.232	0.25	0.380	0.41	0.16
1860	18700	100RB	Rear Fold	/	22.13	22.4	0.663	0.71	1.05	1.12	0.10
1860	18700	100RB	Rear Unfold	/	22.13	22.4	0.587	0.62	0.963	1.02	0.16

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-17: SAR Values (LTE Band4 - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C												
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1745	20300	1RB_Low	Left	Touch	Fig.17	24.06	24.2	0.262	0.27	0.382	0.39	0.10
1745	20300	1RB_Low	Left	Tilt	/	24.06	24.2	0.086	0.09	0.134	0.14	0.02
1745	20300	1RB_Low	Right	Touch	/	24.06	24.2	0.138	0.14	0.244	0.25	-0.11
1745	20300	1RB_Low	Right	Tilt	/	24.06	24.2	0.066	0.07	0.100	0.10	0.05
1745	20300	50RB_Low	Left	Touch	/	22.81	23.2	0.133	0.15	0.218	0.24	0.15
1745	20300	50RB_Low	Left	Tilt	/	22.81	23.2	0.060	0.07	0.092	0.10	-0.08
1745	20300	50RB_Low	Right	Touch	/	22.81	23.2	0.116	0.13	0.212	0.23	0.04
1745	20300	50RB_Low	Right	Tilt	/	22.81	23.2	0.048	0.05	0.071	0.08	-0.13

Note: The LTE mode is QPSK_20MHz.

Table 14.1-18: SAR Values (LTE Band4 -Body) – AP OFF

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1745	20300	1RB_Low	Front Fold	/	24.06	24.2	0.182	0.19	0.291	0.30	0.13
1745	20300	1RB_Low	Rear Fold	/	24.06	24.2	0.487	0.50	0.822	0.85	-0.18
1732.5	20175	1RB_Low	Rear Fold	/	23.94	24.2	0.543	0.58	0.914	0.97	0.01
1720	20050	1RB_Low	Rear Fold	/	23.86	24.2	0.374	0.40	0.631	0.68	-0.02
1745	20300	1RB_Low	Rear Unfold	/	24.06	24.2	0.632	0.65	1.02	1.05	-0.13
1732.5	20175	1RB_Low	Rear Unfold	Fig.18	23.94	24.2	0.685	0.73	1.11	1.18	0.18
1720	20050	1RB_Low	Rear Unfold	/	23.86	24.2	0.411	0.44	0.685	0.74	-0.02
1745	20300	50RB_Low	Front Fold	/	22.81	23.2	0.152	0.17	0.241	0.26	-0.07
1745	20300	50RB_Low	Rear Fold	/	22.81	23.2	0.482	0.53	0.835	0.91	0.16
1732.5	20175	50RB_Low	Rear Fold	/	22.71	23.2	0.528	0.59	0.927	1.04	-0.02
1720	20050	50RB_Low	Rear Fold	/	22.70	23.2	0.505	0.57	0.885	0.99	0.07
1745	20300	50RB_Low	Rear Unfold	/	22.81	23.2	0.533	0.58	0.916	1.00	0.09
1732.5	20175	50RB_Low	Rear Unfold	/	22.71	23.2	0.515	0.58	0.860	0.96	-0.09
1720	20050	50RB_Low	Rear Unfold	/	22.70	23.2	0.485	0.54	0.817	0.92	0.12
1745	20300	100RB	Rear Fold	/	22.79	23.2	0.411	0.45	0.695	0.76	0.09
1745	20300	100RB	Rear Unfold	/	22.79	23.2	0.492	0.54	0.815	0.90	-0.06

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-19: SAR Values (LTE Band4 -Body) – AP ON

		Ambient Temperature: 22.9 °C			Liquid Temperature: 22.5 °C						
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1732.5	20175	1RB_Mid	Front Fold	/	20.93	21.2	0.162	0.17	0.249	0.26	-0.03
1745	20300	1RB_High	Rear Fold	/	20.85	21.2	0.556	0.60	0.933	1.01	0.04
1732.5	20175	1RB_Mid	Rear Fold	/	20.93	21.2	0.590	0.63	1.02	1.09	0.04
1720	20050	1RB_High	Rear Fold	/	20.77	21.2	0.551	0.61	0.924	1.02	0.01
1732.5	20175	1RB_Mid	Left Fold	/	20.93	21.2	0.124	0.13	0.203	0.22	0.01
1732.5	20175	1RB_Mid	Right Fold	/	20.93	21.2	0.077	0.08	0.124	0.13	-0.05
1732.5	20175	1RB_Mid	Bottom Fold	/	20.93	21.2	0.189	0.20	0.323	0.34	-0.01
1732.5	20175	1RB_Mid	Top Fold	/	20.93	21.2	0.029	0.03	0.048	0.05	-0.05
1745	20300	1RB_High	Rear Unfold	/	20.85	21.2	0.633	0.69	1.05	1.14	-0.02
1732.5	20175	1RB_Mid	Rear Unfold	Fig.19	20.93	21.2	0.650	0.69	1.09	1.16	0.03
1720	20050	1RB_High	Rear Unfold	/	20.77	21.2	0.606	0.67	1.01	1.12	-0.06
1732.5	20175	1RB_Mid	Left Unfold	/	20.93	21.2	0.152	0.16	0.249	0.26	-0.02
1732.5	20175	1RB_Mid	Right Unfold	/	20.93	21.2	0.078	0.08	0.126	0.13	-0.01
1732.5	20175	1RB_Mid	Bottom Unfold	/	20.93	21.2	0.186	0.20	0.322	0.34	-0.05
1732.5	20175	50RB_Low	Front Fold	/	20.91	21.2	0.151	0.16	0.236	0.25	-0.01
1745	20300	50RB_Low	Rear Fold	/	20.90	21.2	0.556	0.60	0.979	1.05	-0.09
1732.5	20175	50RB_Low	Rear Fold	/	20.91	21.2	0.580	0.62	0.998	1.07	0.03
1720	20050	50RB_Low	Rear Fold	/	20.83	21.2	0.549	0.60	0.942	1.03	0.12
1732.5	20175	50RB_Low	Left Fold	/	20.91	21.2	0.124	0.13	0.204	0.22	0.04
1732.5	20175	50RB_Low	Right Fold	/	20.91	21.2	0.091	0.10	0.146	0.16	0.04
1732.5	20175	50RB_Low	Bottom Fold	/	20.91	21.2	0.230	0.25	0.392	0.42	0.01
1732.5	20175	50RB_Low	Top Fold	/	20.91	21.2	0.024	0.03	0.043	0.05	0.05
1745	20300	50RB_Low	Rear Unfold	/	20.90	21.2	0.636	0.68	1.06	1.14	0.04
1732.5	20175	50RB_Low	Rear Unfold	/	20.91	21.2	0.643	0.69	1.07	1.14	-0.07
1720	20050	50RB_Low	Rear Unfold	/	20.83	21.2	0.587	0.64	0.979	1.07	0.01
1732.5	20175	50RB_Low	Left Unfold	/	20.91	21.2	0.156	0.17	0.249	0.27	-0.04
1732.5	20175	50RB_Low	Right Unfold	/	20.91	21.2	0.085	0.09	0.136	0.15	-0.06
1732.5	20175	50RB_Low	Bottom Unfold	/	20.91	21.2	0.229	0.24	0.388	0.41	0.04
1745	20300	100RB	Rear Fold	/	20.92	21.2	0.564	0.60	0.961	1.02	-0.02
1745	20300	100RB	Rear Unfold	/	20.92	21.2	0.643	0.69	1.08	1.15	-0.06

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-20: SAR Values (LTEBand12 - Head)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
711	23130	1RB_Low	Left	Touch	/	23.71	24.2	0.175	0.20	0.288	0.32	-0.07
711	23130	1RB_Low	Left	Tilt	/	23.71	24.2	0.103	0.12	0.139	0.16	-0.03
711	23130	1RB_Low	Right	Touch	Fig.20	23.71	24.2	0.258	0.29	0.391	0.44	-0.02
711	23130	1RB_Low	Right	Tilt	/	23.71	24.2	0.085	0.10	0.114	0.13	-0.11
711	23130	25RB_Mid	Left	Touch	/	22.73	23.2	0.144	0.16	0.235	0.26	-0.07
711	23130	25RB_Mid	Left	Tilt	/	22.73	23.2	0.084	0.09	0.113	0.13	-0.03
711	23130	25RB_Mid	Right	Touch	/	22.73	23.2	0.220	0.25	0.326	0.36	-0.07
711	23130	25RB_Mid	Right	Tilt	/	22.73	23.2	0.082	0.09	0.111	0.12	-0.03

Note1: The LTE mode is QPSK_10MHz.

Table 14.1-21: SAR Values (LTE Band12 -Body) – AP OFF

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
711	23130	1RB_Low	Front Fold	/	23.71	24.2	0.053	0.06	0.069	0.08	0.02	
711	23130	1RB_Low	Rear Fold	Fig.21	23.71	24.2	0.216	0.24	0.296	0.33	-0.07	
711	23130	1RB_Low	Rear Unfold	/	23.71	24.2	0.091	0.10	0.136	0.15	0.04	
711	23130	25RB_Mid	Front Fold	/	22.73	23.2	0.042	0.05	0.054	0.06	-0.07	
711	23130	25RB_Mid	Rear Fold	/	22.73	23.2	0.166	0.18	0.225	0.25	0.03	
711	23130	25RB_Mid	Rear Unfold	/	22.73	23.2	0.179	0.20	0.244	0.27	-0.06	

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.1-22: SAR Values (LTE Band12 -Body) – AP ON

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	1RB_Low	Front Fold	/	22.28	23	0.081	0.10	0.102	0.12	0.05
711	23130	1RB_Low	Rear Fold	Fig.22	22.28	23	0.379	0.45	0.509	0.60	0.07
711	23130	1RB_Low	Left Fold	/	22.28	23	0.100	0.12	0.135	0.16	-0.02
711	23130	1RB_Low	Right Fold	/	22.28	23	0.130	0.15	0.178	0.21	0.09
711	23130	1RB_Low	Bottom Fold	/	22.28	23	0.031	0.04	0.049	0.06	0.14
711	23130	1RB_Low	Top Fold	/	22.28	23	0.013	0.02	0.016	0.02	-0.12
711	23130	1RB_Low	Rear Unfold	/	22.28	23	0.374	0.44	0.507	0.60	0.10
711	23130	1RB_Low	Left Unfold	/	22.28	23	0.083	0.10	0.107	0.13	0.01
711	23130	1RB_Low	Right Unfold	/	22.28	23	0.230	0.27	0.304	0.36	-0.02
711	23130	1RB_Low	Bottom Unfold	/	22.28	23	0.022	0.03	0.038	0.04	0.09
711	23130	25RB_High	Front Fold	/	22.30	23	0.081	0.10	0.101	0.12	0.18
711	23130	25RB_High	Rear Fold	/	22.30	23	0.292	0.34	0.381	0.45	-0.02
711	23130	25RB_High	Left Fold	/	22.30	23	0.082	0.10	0.112	0.13	-0.06
711	23130	25RB_High	Right Fold	/	22.30	23	0.136	0.16	0.186	0.22	-0.09
711	23130	25RB_High	Bottom Fold	/	22.30	23	0.031	0.04	0.045	0.05	0.15
711	23130	25RB_High	Top Fold	/	22.30	23	0.013	0.02	0.016	0.02	-0.08
711	23130	25RB_High	Rear Unfold	/	22.30	23	0.309	0.36	0.421	0.49	0.04
711	23130	25RB_High	Left Unfold	/	22.30	23	0.064	0.08	0.081	0.10	-0.13
711	23130	25RB_High	Right Unfold	/	22.30	23	0.202	0.24	0.268	0.31	0.01
711	23130	25RB_High	Bottom Unfold	/	22.30	23	0.019	0.02	0.031	0.04	-0.02

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.1-23: SAR Values (Bluetooth - Head)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5 °C											
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
2402	0	Left	Touch	/	11.03	12	0.005	0.01	0.013	0.02	0.01
2402	0	Left	Tilt	/	11.03	12	0.001	<0.01	0.002	<0.01	0.05
2480	78	Right	Touch	/	9.34	10	0.004	<0.01	0.010	0.01	0.04
2441	39	Right	Touch	/	10.46	11	0.006	0.01	0.012	0.01	-0.05
2402	0	Right	Touch	Fig.23	11.03	12	0.015	0.02	0.028	0.04	0.04
2402	0	Right	Tilt	/	11.03	12	<0.001	<0.01	0.001	<0.01	0.05

14.2 SAR results for Standard procedure

There is zoom scan measurement to beaded for the highest measured SAR in each exposure configuration/band.

Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	Right	Touch	Fig.1	32.50	33.2	0.293	0.34	0.452	0.53	-0.03

Table 14.2-2: SAR Values (GSM 850 MHz Band-Body)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
848.8	251	GPRS (3)	Rear Fold	Fig.2	29.22	29.7	0.406	0.45	0.666	0.74	-0.18

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-3: SAR Values (GSM1900 MHz Band - Head)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C					
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1880	661	Left	Touch	Fig.3	30.12	30.7	0.115	0.13	0.180	0.21	0.12

Table 14.2-4: SAR Values (GSM 1900 MHz Band-Body) – AP OFF

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	GPRS (3)	Rear Fold	Fig.4	26.51	27.2	0.276	0.32	0.440	0.52	-0.08

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.2-5: SAR Values (GSM 1900 MHz Band-Body) – AP ON

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C					
Frequency		Mode (number of timeslots)	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1850.2	512	GPRS (3)	Rear Unfold	Fig.5	26.80	27.2	0.390	0.43	0.639	0.70	-0.08

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-6: SAR Values (WCDMA850 MHz Band - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
826.4	4132	Right	Touch	Fig.6	23.48	24.2	0.255	0.30	0.399	0.47	0.04

Table 14.2-7: SAR Values (WCDMA 850 MHz Band-Body)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
836.4	4182	Rear Fold	Fig.7	23.47	24.2	0.362	0.43	0.582	0.69	0.05

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-8: SAR Values (WCDMA1700 MHz Band - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1752.6	1513	Left	Touch	Fig.8	23.18	24.2	0.254	0.32	0.367	0.46	0.06

Table 14.2-9: SAR Values (WCDMA 1700 MHz Band-Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
1732.4	1412	Rear Unfold	Fig.9	23.24	24.2	0.710	0.89	1.15	1.43	0.04	

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.2-10: SAR Values (WCDMA 1700 MHz Band-Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.										
1732.4	1412	Rear Unfold	Fig.10	20.49	21.2	0.656	0.77	1.09	1.28	-0.04	

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-11: SAR Values (WCDMA1900 MHz Band - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1852.4	9262	Left	Touch	Fig.11	23.56	24.2	0.230	0.27	0.352	0.41	-0.11

Table 14.2-12: SAR Values (WCDMA 1900 MHz Band-Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1880	9400	Rear Fold	Fig.12	23.49	24.2	0.559	0.66	0.895	1.05	0.04

Note: The distance between the EUT and the phantom bottom is 15mm.

Table 14.2-13: SAR Values (WCDMA 1900 MHz Band-Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C						
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.									
1852.4	9262	Rear Unfold	Fig.13	20.44	21.2	0.591	0.70	0.967	1.15	-0.05

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-14: SAR Values (LTE Band2 - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1860	18700	1RB_Mid	Left	Touch	Fig.14	24.06	24.2	0.196	0.20	0.310	0.32	-0.13

Note: The LTE mode is QPSK_20MHz.

Table 14.2-15: SAR Values (LTE Band2 -Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1900	19100	1RB_Low	Rear Fold	Fig.15	23.54	24.2	0.646	0.75	1.05	1.22	0.16

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-16: SAR Values (LTE Band2 -Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.										
1860	18700	1RB_High	Rear Unfold	Fig.16	22.08	22.4	0.686	0.74	1.10	1.18	-0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-17: SAR Values (LTE Band4 - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.											
1745	20300	1RB_Low	Left	Touch	Fig.17	24.06	24.2	0.262	0.27	0.382	0.39	0.10

Note: The LTE mode is QPSK_20MHz.

Table 14.2-18: SAR Values (LTE Band4 -Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
1732.5	20175	1RB_Low	Rear Unfold	Fig.18	23.94	24.2	0.685	0.73	1.11	1.18	0.18	

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-19: SAR Values (LTE Band4 -Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)	
MHz	Ch.											
1732.5	20175	1RB_Mid	Rear Unfold	Fig.19	20.93	21.2	0.650	0.69	1.09	1.16	0.03	

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-20: SAR Values (LTEBand12 - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C								
Frequency		Mode	Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.											
711	23130	1RB_Low	Right	Touch	Fig.20	23.71	24.2	0.258	0.29	0.391	0.44	-0.02

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-21: SAR Values (LTE Band12 -Body) – AP OFF

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	1RB_Low	Rear Fold	Fig.21	23.71	24.2	0.216	0.24	0.296	0.33	-0.07

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-22: SAR Values (LTE Band12 -Body) – AP ON

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Mode	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
711	23130	1RB_Low	Rear Fold	Fig.22	22.28	23	0.379	0.45	0.509	0.60	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-23: SAR Values (Bluetooth - Head)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2402	0	Right	Touch	Fig.23	11.03	12	0.015	0.02	0.028	0.04	0.04

14.3 WLAN Evaluation

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.3-1: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Fast SAR)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.				(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2437	6	Left	Touch	/	19.07	20	0.073	0.09	0.172	0.21	0.12
2437	6	Left	Tilt	/	19.07	20	0.012	0.01	0.022	0.03	0.07
2437	6	Right	Touch	/	19.07	20	0.144	0.18	0.275	0.34	0.01
2437	6	Right	Tilt	/	19.07	20	0.016	0.02	0.027	0.03	-0.15

As shown above table, the initial test position for head is "Right Touch". So the head SAR of WLAN is presented as below:

Table 14.3-2: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Full SAR)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C							
Frequency		Side	Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.				(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2437	6	Right	Touch	Fig.24	19.07	20	0.150	0.19	0.280	0.35	0.01

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.3-3: SAR Values (WLAN - Head) – 802.11b 5.5Mbps (Scaled Reported SAR)

Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C			
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)
MHz	Ch.					(W/kg)	(W/kg)
2437	6	Right	Touch	89.24%	100%	0.35	0.39

SAR is not required for OFDM because the 802.11b adjusted SAR ≤ 1.2 W/kg.

Body Evaluation

Table 14.3-4: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Fast SAR)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C				
Frequency		Test Position	Dis.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2437	6	Front Fold	10	19.07	20	0.022	0.03	0.040	0.05	0.06
2437	6	Rear Fold	10	19.07	20	0.057	0.07	0.102	0.13	-0.06
2437	6	Left Fold	10	19.07	20	0.002	0.00	0.064	0.08	0.07
2437	6	Right Fold	10	19.07	20	0.004	0.00	0.008	0.01	0.05
2437	6	Bottom Fold	10	19.07	20	0.080	0.10	0.139	0.17	0.14
2437	6	Top Fold	10	19.07	20	0.030	0.04	0.055	0.07	0.06
2437	6	Rear Unfold	10	19.07	20	0.088	0.11	0.159	0.20	-0.08
2437	6	Left Unfold	10	19.07	20	0.002	0.00	0.006	0.01	0.03
2437	6	Right Unfold	10	19.07	20	0.002	0.00	0.006	0.01	0.09
2437	6	Bottom Unfold	10	19.07	20	0.002	0.00	0.004	0.00	0.14
2437	6	Rear Unfold	15	19.07	20	0.056	0.07	0.094	0.12	-0.05

As shown above table, the initial test position for body is “Rear Unfold”. So the body SAR of WLAN is presented as below:

Table 14.3-5: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Full SAR)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C				
Frequency		Test Position	Figure No.	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
MHz	Ch.			(dBm)	(dBm)	(W/kg)	(W/kg)	(W/kg)	(W/kg)	(dB)
2437	6	Rear Unfold	Fig.25	19.07	20	0.088	0.11	0.160	0.20	-0.08

Note1: When the reported SAR of the initial test position is $> 0.4 \text{ W/kg}$, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq 0.8 \text{ W/kg}$.


Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is $> 0.8 \text{ W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq 1.2 \text{ W/kg}$ or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.3-6: SAR Values (WLAN - Body) – 802.11b 5.5Mbps (Scaled Reported SAR)

		Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5 °C	
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g) (W/kg)	Scaled reported SAR (1g) (W/kg)	
MHz	Ch.		(%)	(%)	(W/kg)	(W/kg)	
2437	6	Rear Unfold with 10mm	89.24%	100%	0.20	0.25	
2437	6	Rear Unfold with 15mm	89.24%	100%	0.12	0.13	

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq 1.2 \text{ W/kg}$.

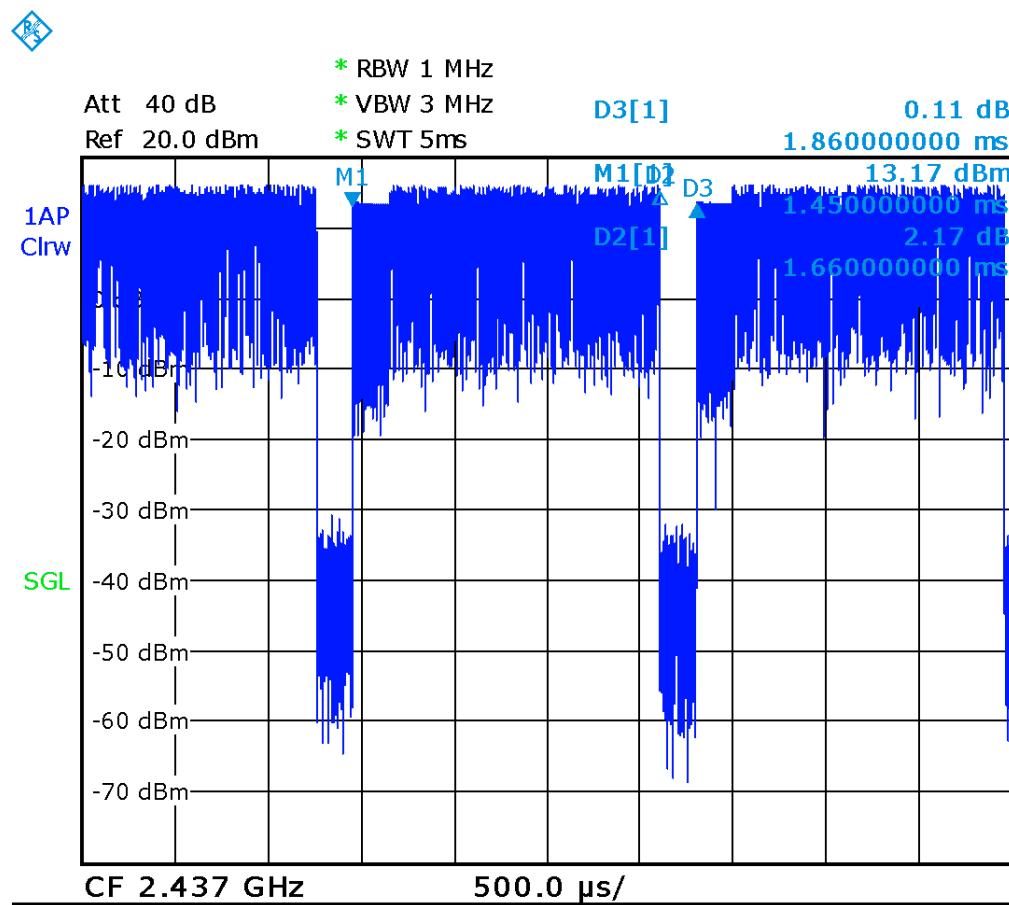

Picture 14.1 Duty factor plot

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body WCDMA1700 (1g) – AP OFF

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1732.4	1412	Rear Unfold	15	1.15	1.14	1.01	/

Table 15.2: SAR Measurement Variability for Body WCDMA1700 (1g) – AP ON

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1732.4	1412	Rear Unfold	10	1.09	1.07	1.02	/

Table 15.3: SAR Measurement Variability for Body WCDMA1900 (1g) – AP OFF

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1880	9400	Rear Fold	15	0.895	0.881	1.02	/

Table 15.4: SAR Measurement Variability for Body WCDMA1900 (1g) – AP ON

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1852.4	9262	Rear Unfold	10	0.967	0.959	1.01	/

Table 15.5: SAR Measurement Variability for Body LTE Band2 (1g) – AP OFF

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1900	19100	Rear Fold	15	1.05	1.03	1.02	/

Table 15.6: SAR Measurement Variability for Body LTE Band2 (1g) – AP ON

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1860	18700	Rear Unfold	10	1.10	1.08	1.02	/

Table 15.7: SAR Measurement Variability for Body LTE Band4 (1g) – AP OFF

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1732.5	20175	Rear Unfold	15	1.11	1.10	1.01	/

Table 15.8: SAR Measurement Variability for Body LTE Band4 (1g) – AP ON

Frequency		Test Position	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
MHz	Ch.						
1732.5	20175	Rear Unfold	10	1.09	1.09	1.00	/

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
-----	-------------------	------	-------------------	-----------------------	------	------------	-------------	----------------------	-----------------------	-------------------

Measurement system

1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

Test sample related

14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞

Phantom and set-up

17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43

20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
	Combined standard uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
	Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedo m
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞