

# Dell Latitude 5300 2-in-1 Chrome


## Setup and Specifications



## Messaggi di N.B., Attenzione e Avvertenza

 **N.B.:** un messaggio N.B. (Nota Bene) indica informazioni importanti che contribuiscono a migliorare l'utilizzo del prodotto.

 **ATTENZIONE:** un messaggio di ATTENZIONE evidenzia la possibilità che si verifichi un danno all'hardware o una perdita di dati ed indica come evitare il problema.

 **AVVERTENZA:** un messaggio di AVVERTENZA evidenzia un potenziale rischio di danni alla proprietà, lesioni personali o morte.

© 2019 Dell Inc. o sue sussidiarie. Tutti i diritti riservati. Dell, EMC e gli altri marchi sono marchi commerciali di Dell Inc. o delle sue sussidiarie. Gli altri marchi possono essere marchi dei rispettivi proprietari.

<b>1 Set up your Latitude 5300 2-in-1 Chrome.....</b>	<b>5</b>
<b>2 Panoramica del telaio.....</b>	<b>8</b>
Vista schermo.....	8
Vista lato sinistro.....	9
Vista lato destro.....	9
Visualizzazione del supporto per i polsi.....	10
Vista dal basso.....	11
Modalità di utilizzo.....	11
<b>3 Specifiche di Latitude 5300 2-in-1 Chrome.....</b>	<b>13</b>
Processors.....	13
Chipset.....	13
Memoria.....	13
Archiviazione.....	14
Porte e connettori.....	14
Adattatore di alimentazione.....	15
Lettore di schede multimediali.....	15
Audio.....	15
Video.....	16
Fotocamera.....	16
Communications.....	17
Schermo.....	17
Tastiera.....	18
Touchpad.....	19
Touchpad gestures.....	19
Batteria.....	19
Dimensioni e peso.....	20
Sistema operativo.....	20
Ambiente del computer.....	20
<b>4 Software.....</b>	<b>21</b>
Operating system.....	21
Chrome OS.....	21
Verified Boot.....	22
Disk Partition Map.....	23
Developer and Recovery mode.....	24
Coreboot and U-boot Custom Firmware.....	24
Chrome vs Chromium OS.....	24
Visualizzare le informazioni di sistema.....	25
<b>5 Tecnologia e componenti.....</b>	<b>28</b>
Keyboard shortcuts.....	28
Touchpad.....	32

Bluetooth..... 33

**6 Getting help and contacting Dell..... 34**

# Set up your Latitude 5300 2-in-1 Chrome

## About this task

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Steps

1. Connect the power adapter and press the power button.



**NOTE:** The images used are for illustration purposes only. The actual computer may vary depending on the region and configuration ordered.

**NOTE:** To conserve battery power, the battery might enter power saving mode. Connect the power adapter and press the power button to turn on the computer.


2. Finish Chrome OS setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Chrome updates.


**NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the internet, sign-in with or create a Google account following the link <https://accounts.google.com/signup/v2/webcreateaccount?flowName=GlifWebSignIn&flowEntry=SignUp>. If not connected to the internet, use **Guest** account.
- a) Select the language settings. On the "Connect" screen that appears, select the language to be used by default. If there is more than one way to type in the language, users may be prompted to select a keyboard input method as well.
  - b) Connect to a network. Select a wireless network from the network menu.

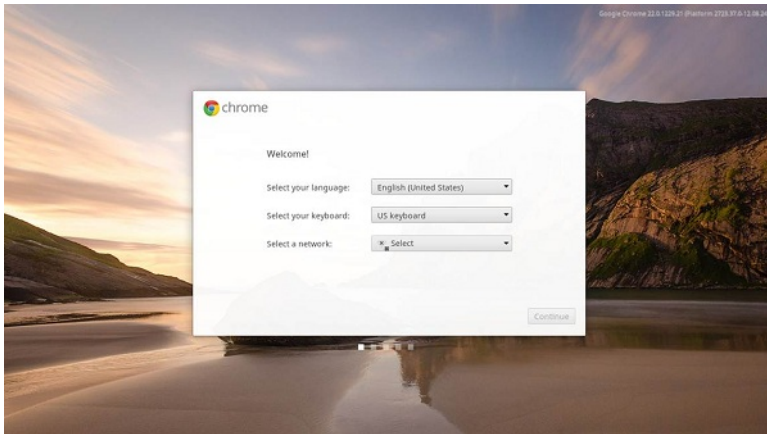


- c) Accept the terms of service with one click. Once connected to a network, Chrome device will then download any available system updates so users automatically get the latest features.

**NOTE:** The option to automatically send usage statistics to Google is intended for troubleshooting purposes. No personal information is collected.

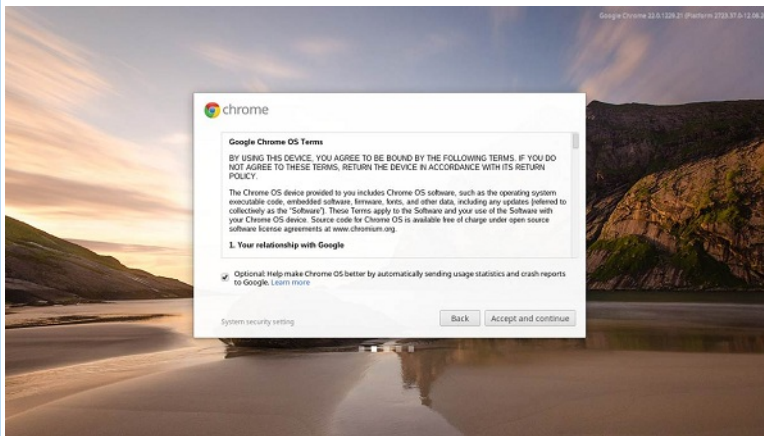


- d) Enroll the Chrome device (optional). If the Chrome device was provided by work or school, users might need to enroll it with the domain before signing in below. Ask the network administrator for instructions before continuing with these steps.
- e) The system will automatically install any available update. This may take a few minutes. The system checks for updates every time it is powered on.
- f) Sign in with Google Account. In the sign-in box that appears, enter the Google Account username and password and click Sign in. Make sure to sign in with your primary Google Account, because this account will be set as the owner account.


**NOTE:** Users can also use the computer without an account by clicking Browse as a Guest on the right.

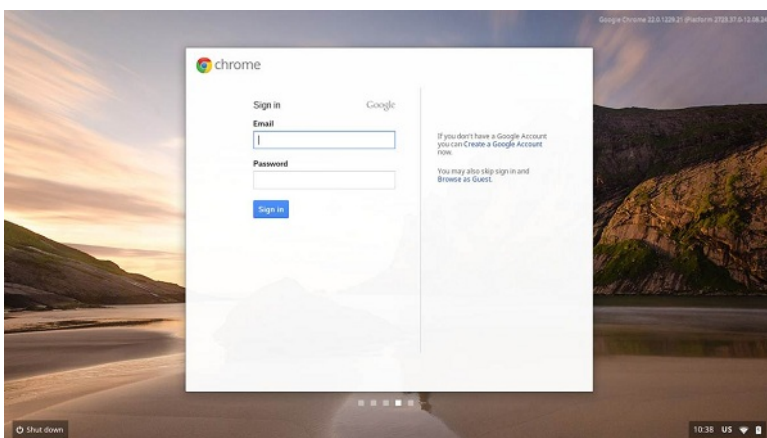

- g) Set an account picture. This picture will represent the user's account on the main sign-in screen and status area. If users have a camera, there is an option to take a photo with the built-in webcam. If users don't want to take a photo at this time, choose a fun icon instead. Users can always update their picture after signing in.

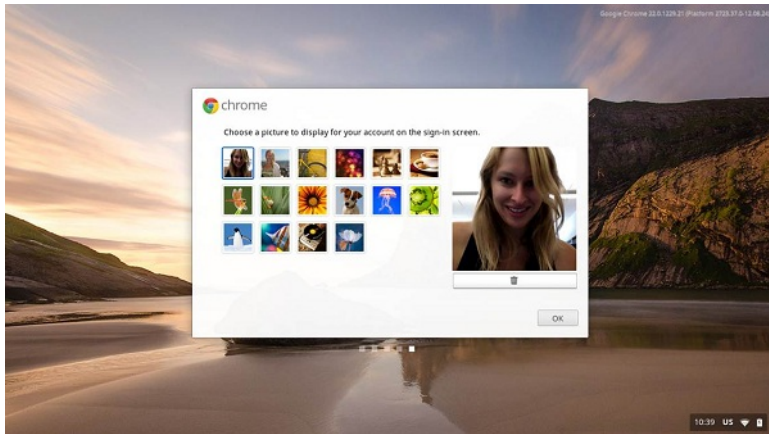

3. **Get to know your Latitude 5300 2-in-1 Chrome** After setting up the profile, users will be shown the Get Started app. Users can learn about the desktop, discover new web apps, find instructions on how to print, and much more. This app is customized based on the computer model so users will only see information relevant to them

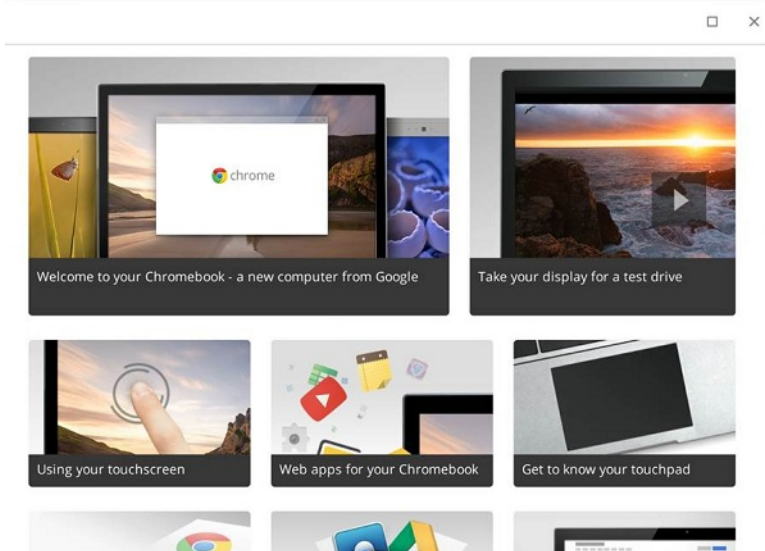


## Panoramica del telaio

### Argomenti:

- Vista schermo
- Vista lato sinistro
- Vista lato destro
- Visualizzazione del supporto per i polsi
- Vista dal basso
- Modalità di utilizzo


### Vista schermo

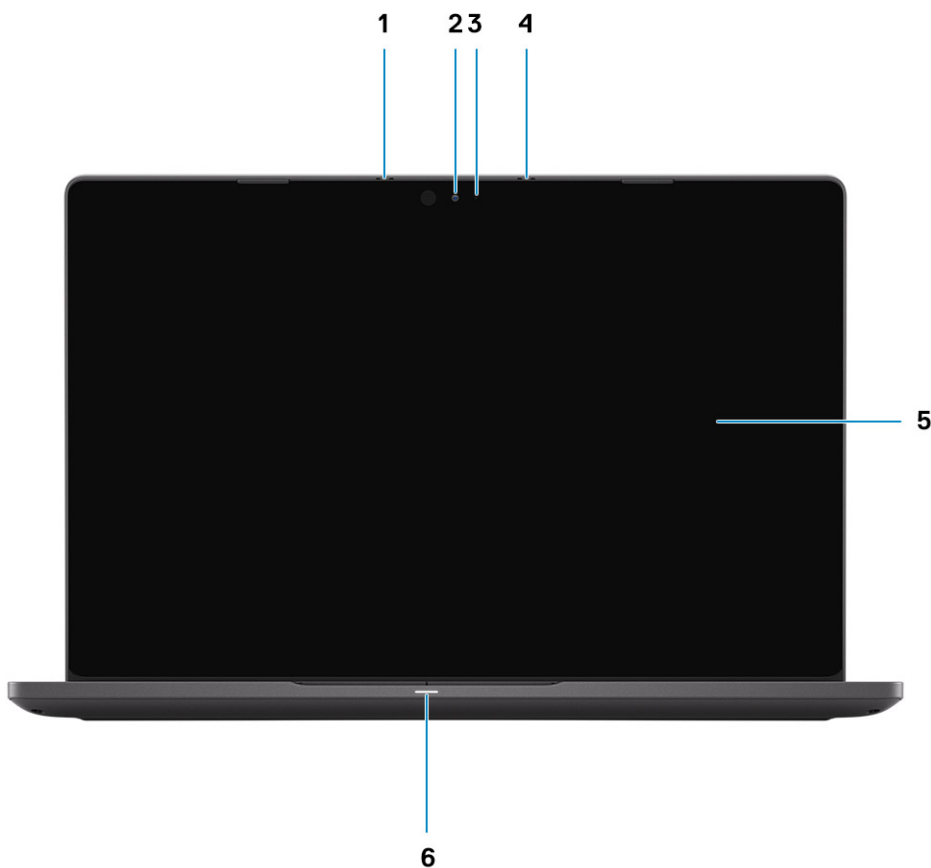

1. Microphone array
2. Camera
3. Camera status LED
4. Microphone array
5. LCD panel
6. Battery indicator LED




## Vista lato sinistro

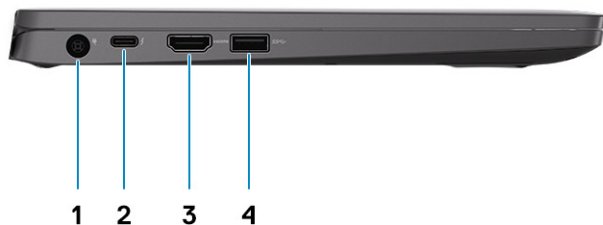


1. Power connector port
2. USB Type-C 3.1 Gen 2 port (Power Delivery) and DisplayPort support
3. HDMI 1.4b port
4. USB Type-A 3.1 Gen 1 port

## Vista lato destro

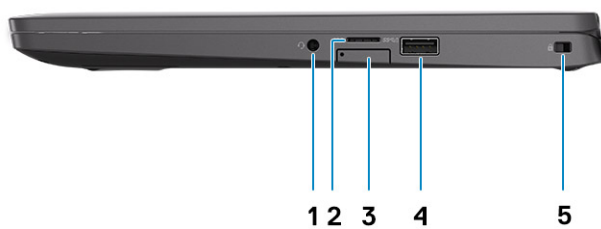


1. Universal audio microphone port
2. micro-SD card reader
3. micro-SIM card slot (optional)
4. USB Type-A 3.1 Gen 1 port (with PowerShare)
5. Noble Wedge lock slot

# Visualizzazione del supporto per i polsi

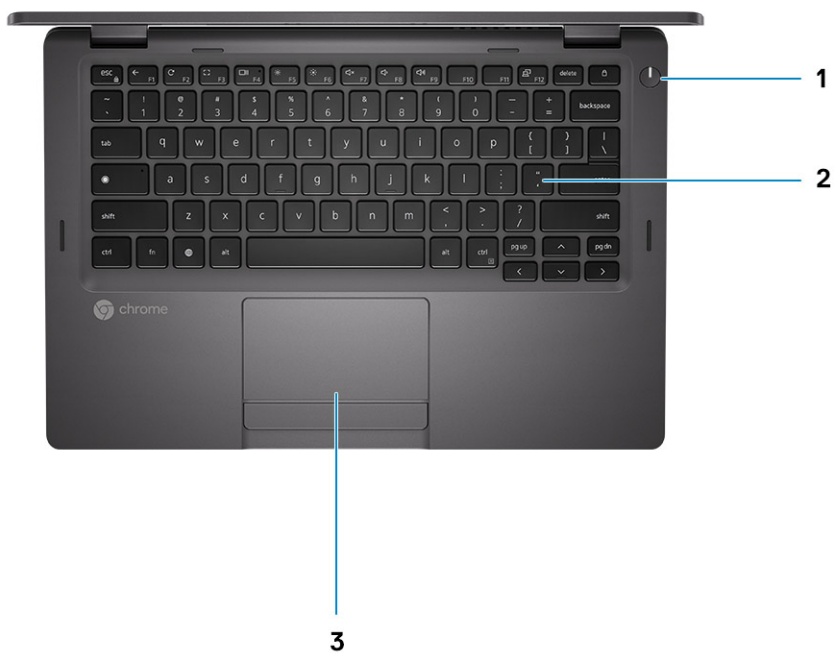

1. Power button (with LED indicator)
2. Keyboard
3. Touchpad

# Vista dal basso

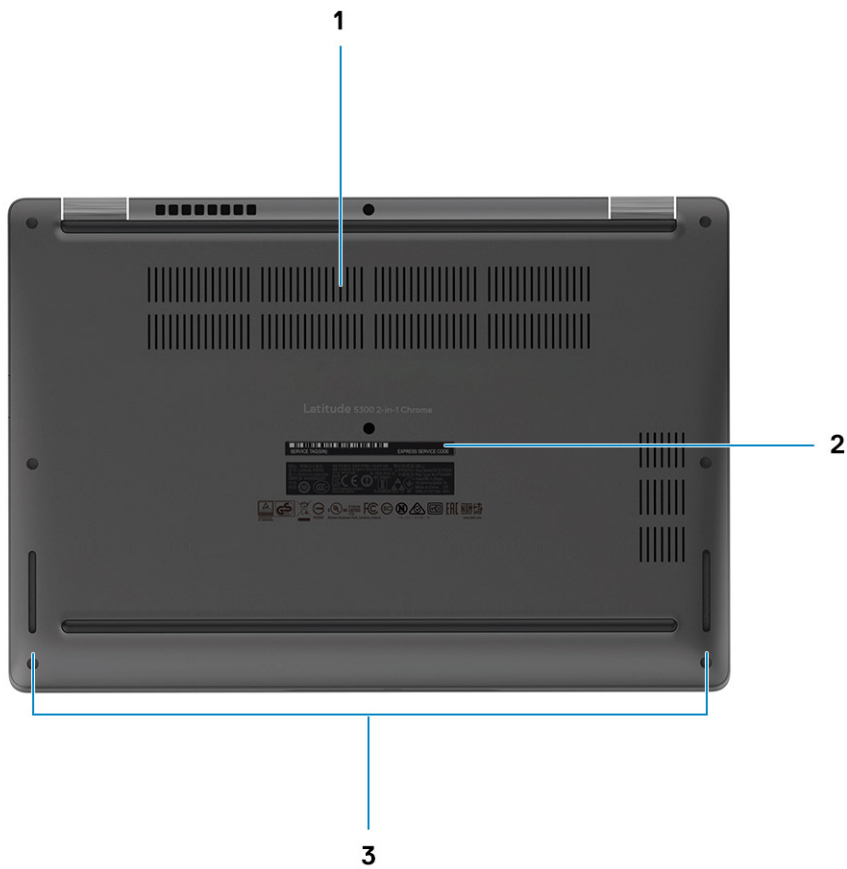

- 1. Heatsink fan outlet
- 2. Service tag label
- 3. Speaker outlet

# Modalità di utilizzo

Questa sezione illustra le varie modalità di utilizzo del Latitude 5300 2-in-1 Chrome

**Tabella 1. Modalità di utilizzo 2-in-1**

**Modalità**

---

**Modalità supporto**



## Modalità

---

### Modalità notebook



---

### Modalità tenda



---

### Modalità tablet



# Specifiche di Latitude 5300 2-in-1 Chrome

## Processors

Table 2. Processors

Description	Values			
Processors	8 <sup>th</sup> Generation Intel Celeron-4305U	8 <sup>th</sup> Generation Intel Core i3-8145U	8 <sup>th</sup> Generation Intel Core i5-8365U	8 <sup>th</sup> Generation Intel Core i7-8665U
Wattage	15 W	15 W	15 W	15 W
Core count	2	2	4	4
Thread count	2	4	8	8
Speed	Up to 2.2 GHz	2.1 GHz to 3.9 GHz	1.6 GHz to 4.1 GHz	1.9 GHz to 4.8 GHz
Cache	2 MB	4 MB	6 MB	8 MB
Integrated graphics	Intel UHD Graphics 610	Intel UHD Graphics 620	Intel UHD Graphics 620	Intel UHD Graphics 620

## Chipset

Tabella 3. Chipset

Descrizione	Valori
Chipset	Cannon Lake PCH-LP
Processore	8 <sup>th</sup> Generation Celeron and Core (i3/ i5/ i7)
Larghezza bus memoria DRAM	64 bit
Flash EPROM	32 MB
bus PCIe	Gen 3.0

## Memoria

Tabella 4. Specifiche della memoria

Descrizione	Valori
Slot	2 - SoDIMM slots
Tipo	DDR4
Velocità	2400 MHz
Memoria massima	16 GB
Memoria minima	4 GB

Descrizione	Valori
Capacità di memoria per slot	4 GB, 8 GB, 16 GB, 32 GB
Configurazioni supportate	<ul style="list-style-type: none"> <li>• 4 GB (1 x 4 GB)</li> <li>• 8 GB (2 x 4 GB, 1 x 8 GB)</li> <li>• 16 GB (2 x 8 GB, 1 x 16 GB)</li> <li>• 32 GB (2 x 16 GB)</li> </ul>

## Archiviazione

**ATTENZIONE:** Applicazioni Web su Chrome OS, archivia tutti i dati importanti nel cloud. Alcuni tipi di file, come download, cookie e file cache del browser, potrebbero essere ancora presenti sul computer. Chrome OS crittografa questi dati utilizzando un hardware resistente alle manomissioni, impedendo a chiunque di accedere a tali file. Si consiglia di eseguire regolarmente il backup dei dati sul computer, poiché nel caso in cui il computer necessiti di assistenza, tutti i dati andranno persi e saranno irrecuperabili.

Tabella 5. Specifiche di immagazzinamento

Tipo di storage	Tipo di interfaccia	Capacità
<ul style="list-style-type: none"> <li>• M.2 2230 solid-state drive</li> <li>• M.2 2280 solid state drive</li> </ul>	PCIe Gen 3.0 x4/ x2 NVMe, upto 32 Gbps	<ol style="list-style-type: none"> <li>1. M.2 2230 SSD: <ul style="list-style-type: none"> <li>• Up to 128 GB</li> </ul> </li> <li>2. M.2 2280 SSD: <ul style="list-style-type: none"> <li>• 256 GB</li> <li>• 512 GB</li> <li>• 1 TB</li> </ul> </li> </ol>

## Porte e connettori

Tabella 6. Porte e connettori esterni

Esterna:	
USB	<ul style="list-style-type: none"> <li>• <b>Left:</b> <ul style="list-style-type: none"> <li>• 1 USB Type-A 3.1 Gen 1 port</li> <li>• 1 USB Type-C 3.1 Gen 2 port (with Power Delivery and DisplayPort support)</li> </ul> </li> <li>• <b>Right:</b> <ul style="list-style-type: none"> <li>• 1 USB Type-A 3.1 Gen 1 port (with PowerShare support)</li> </ul> </li> </ul>
Audio	1- Universal headphone and microphone combo port
Video	<ul style="list-style-type: none"> <li>• 1 USB Type-C 3.1 Gen 2 port (DisplayPort support))</li> <li>• 1 HDMI 1.4 port</li> </ul>
Lettore di scheda multimediale	1-micro SD- card slot
Porta di alloggiamento	Supported through USB Type-C port
Porta adattatore di alimentazione	7.4 mm Barrel Type DC-in
Sicurezza	Security-cable slot (Noble wedge slot)

## Tabella 7. Porte e connettori interni

### Interna:

M.2	<ul style="list-style-type: none"><li>• M.2 2230 slot for WiFi and/ or Bluetooth combo card</li><li>• M.2 3042 slot for WWAN card</li><li>• M.2 2280/ 2230 slot for solid-state drive</li></ul>
-----	---

**N.B.:** Per ulteriori informazioni sulle caratteristiche dei vari tipi di schede M.2, consultare l'articolo della knowledge base [SLN301626](#).

# Adattatore di alimentazione

Tabella 8. Specifiche dell'adattatore di alimentazione

Descrizione	Valori	
	65 W 7.4 mm Barrel Type	90 W 7.4 mm Barrel Type
Tipo		
Diametro (connettore)	7.4 mm x 4.5 mm	7.4 mm x 4.5 mm
Tensione d'ingresso	100 VAC x 240 VAC	100 VAC x 240 VAC
Frequenza d'entrata	50 Hz x 60 Hz	50 Hz x 60 Hz
Corrente d'ingresso (massima)	1.6 A/ 1.7 A	1.50 A
Corrente di uscita (continua)	3.34 A	4.62 A
Tensione nominale di uscita	19.50 VDC	19.50 VDC
Intervallo di temperatura:		
In funzione	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Archiviazione	-40°C to 70°C (-40 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F)

# Letture di schede multimediali

Tabella 9. Specifiche del lettore di schede multimediali

Descrizione	Valori
Tipo	1 micro SD card slot
Schede supportate	<ul style="list-style-type: none"><li>• Secure Digital (SD)</li><li>• Secure Digital High Capacity (SDHC)</li><li>• Secure Digital Extended Capacity (SDXC)</li></ul>

**N.B.:** La capacità massima supportata dal lettore di schede multimediali varia a seconda dello standard della scheda multimediale installata nel computer.

# Audio

Tabella 10. Specifiche dell'audio

Descrizione	Valori
Controller	Realtek ALC3254

Descrizione	Valori
Conversione stereo	Supported
Interfaccia interna	High-definition audio interface
Interfaccia esterna	Universal Audio Jack
Altoparlanti	2
Amplificatore stereo interno	Supported (audio codec integrated)
Controlli volume esterni	Keyboard shortcut controls
Uscita dell'altoparlante:	
Media	2 W
Picco	2.5 W
Uscita subwoofer	Not supported
Microfono	Single digital microphone in the camera assembly

## Video

Tabella 11. Specifiche video

### Scheda grafica integrata

Controller	Supporto schermo esterno	Dimensione memoria	Processore
Intel UHD 610 graphics	<ul style="list-style-type: none"> <li>One HDMI 1.4b port</li> <li>DisplayPort over USB Type-C</li> </ul>	Shared system memory	8 <sup>th</sup> Generation Intel Core Celeron processors
Intel UHD 620 graphics	<ul style="list-style-type: none"> <li>One HDMI 1.4b port</li> <li>DisplayPort over USB Type-C</li> </ul>	Shared system memory	8 <sup>th</sup> Generation Intel Core i3/ i5/ i7 processors

## Fotocamera

Tabella 12. Specifiche della fotocamera

Descrizione	Valori
Numero di fotocamere	1
Tipo	HD RGB camera
Posizione	Front, Top
Tipo di sensore	CMOS sensor technology
Risoluzione:	
Immagine fissa	0.9 megapixels
Video	1280 x 720 at 30 FPS
Angolo di visualizzazione diagonale	78.6 degrees



# Communications

## Wireless module

Table 13. Wireless module specifications

Description	Values
Model number	Intel Wireless-AC 9560
Transfer rate	Up to 1.73 Gbps
Frequency bands supported	2.4 GHz/ 5 GHz
Wireless standards	<ul style="list-style-type: none"><li>• WiFi 802.11a/ b/ g</li><li>• Wi-Fi 4 (WiFi 802.11n)</li><li>• Wi-Fi 5 (WiFi 802.11ac)</li></ul>
Encryption	<ul style="list-style-type: none"><li>• 64-bit/128-bit WEP</li><li>• 128-bit AES-CCMP</li><li>• TKIP</li></ul>
Bluetooth	Bluetooth 5.0

## Mobile broadband

Table 14. WWAN card specifications

Description	Values
Model number	Dell DW5820e Intel 7360 LTE-A; LTE Cat 9
Baseband Processor	X-GOLD 736
Baseband Functions	<ul style="list-style-type: none"><li>• LTE FDD: B1/ B2/ B3/ B4/ B5/ B7/ B8/ B11/ B12/ B13/ B17/ B18/ B19/ B20/ B21/ B26/ B28/ B29/ B30/ B66</li><li>• LTE TDD: B38/ B39/ B40/ B41</li><li>• WCDMA: B1/ B2/ B4/ B5/ B8</li></ul>
RF Transceiver	SMARTi 5
RF Transceiver Functions	16 receiver input ports, single chip inter-band/intra-band LTE, downlink Carrier Aggregation
Data Rate / Data Transmission	<ul style="list-style-type: none"><li>• LTE FDD(Mbps): 450(DL)/50(UL) (Cat9)</li><li>• LTE TDD(Mbps):347(DL)30(UL)(Cat9)</li><li>• UMTS(kbps):384(DL)/384(UL)</li><li>• DC-HSPA+ (Mbps):42(DL)/5.76(UL)</li></ul>

# Schermo

Tabella 15. Specifiche dello schermo

Descrizione	Valori
Tipo	Full High Definition (FHD)
Tecnologia del pannello	Wide Viewing Angle (WVA)
Luminanza (tipico)	255 nits
Dimensioni (area attiva):	

Descrizione	Valori
Altezza	165.24 mm (6.51 in.)
Larghezza	293.76 mm (11.57 in.)
Diagonale	337.04 mm (13.27 in.)
Risoluzione nativa	1920 x 1080
Megapixel	2.0736
Gamut di colori	72% (NTSC)
Pixel per pollice (PPI)	166
Fattore di contrasto (min.)	600:1
Tempo di risposta (max.)	35 ms
Frequenza d'aggiornamento	60 Hz
Angolo di visualizzazione orizzontale	80 +/- degrees
Angolo di visualizzazione verticale	80 +/- degrees
Passo pixel	0.153 mm
Consumo energetico (massimo)	4.5 W
Finitura antiriflesso o patinata	Anti-Reflection (AR)/ Anti-Glare (AG) Gorilla 5 glass
Opzioni per sfioramento	Yes

## Tastiera

**Tabella 16. Specifiche della tastiera**

Descrizione	Valori
Tipo	<ul style="list-style-type: none"> <li>Standard keyboard</li> <li>Backlit keyboard</li> </ul>
Layout	<ul style="list-style-type: none"> <li>QWERTY</li> <li>AZERTY</li> <li>MUI</li> </ul>
Numero di tasti	Varies as per language and layout of the keyboard
Dimensione	X=18.05 mm key pitch Y=18.05 mm key pitch
Tasti di scelta rapida	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.

# Touchpad

Tabella 17. Specifiche del touchpad

Descrizione	Valori
Risoluzione:	
Orizzontale	2819
Verticale	1548
Dimensioni:	
Orizzontale	91.90 mm (3.62 in.)
Verticale	51.40 mm (2.02 in.)

## Touchpad gestures

For more information about touchpad gestures for Chrome OS devices, see the Google Chrome OS Help at <https://support.google.com/chromebook/answer/1047367>.

# Batteria

Tabella 18. Specifiche della batteria

Descrizione	Valori		
Tipo	3-cell Polymer (42 WHr)	4-cell Polymer (60 WHr)	4-cell Polymer (60 WHr LCL)
Tensione	11.40 VDC	7.6 VDC	7.6 VDC
Peso (massimo)	0.19 kg (0.42 lb)	0.27 kg (0.60 lb)	0.27 kg (0.60 lb)
Dimensioni:			
Altezza	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)
Larghezza	200.50 mm (7.89 in.)	238 mm (9.37 in.)	238 mm (9.37 in.)
Profondità	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)
Intervallo di temperatura:			
In funzione	0 °C to 70 °C (32 °F to 158 °F)	0 °C to 70 °C (32 °F to 158 °F)	0 °C to 70 °C (32 °F to 158 °F)
Archiviazione	-20 °C to 60 °C (-4 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)
Autonomia	Varia in base alle condizioni operative e può essere notevolmente ridotta in condizioni di consumo intenso.		
Tempo di ricarica (approssimativo)	4 hours (when the computer is off)	4 hours (when the computer is off)	4 hours (when the computer is off)
Durata (approssimativa)	300 cicli di scarica/ricarica	300 cicli di scarica/ricarica	1000 cicli di scarica/ricarica
Batteria a pulsante	CR2032		

# Dimensioni e peso

Tabella 19. Dimensioni e peso

Descrizione	Valori
Altezza:	
Parte anteriore	16.90 mm (0.66 in.)
Posteriore	19.30 mm (0.76 in.)
Larghezza	305.70 mm (12.04 in.)
Profondità	207.50 mm (8.17 in.)
Peso (massimo)	Starting weight - 1.42 kg (3 lb)
	<b>① N.B.: Il peso del computer può variare a seconda della configurazione desiderata e della variabilità produttiva.</b>

# Sistema operativo

- Chrome Operating System

# Ambiente del computer

**Livello di sostanze contaminanti trasmesse per via aerea:** G1 come definito da ISA-S71.04-1985

Tabella 20. Ambiente del computer

Descrizione	In funzione	Archiviazione
Intervallo di temperatura	0 °C to 35 °C (32 °F to 95 °F)	-40°C to 65°C (-40 °F to 149 °F)
Umidità relativa (massima)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibrazione (massima)*	0.66 GRMS	1.30 GRMS
Urto (massimo):	110 G†	160 G†
Altitudine (massima):	-15.2 m to 3048 m (4.64 ft to 5518.4 ft)	-15.2 m to 10668 m (4.64 ft to 19234.4 ft)

\* Misurata utilizzando uno spettro a vibrazione casuale che simula l'ambiente dell'utente.

† Misurato utilizzando un impulso semisinusoidale di 2 ms quando il disco rigido è in uso.

# Software

Il presente capitolo descrive i sistemi operativi supportati e fornisce le relative istruzioni su come installare i driver.


## Argomenti:

- [Operating system](#)
- [Visualizzare le informazioni di sistema](#)

## Operating system

This page contains information about the operating system used by the Dell Latitude 5300 2-in-1 Chrome.

## Chrome OS

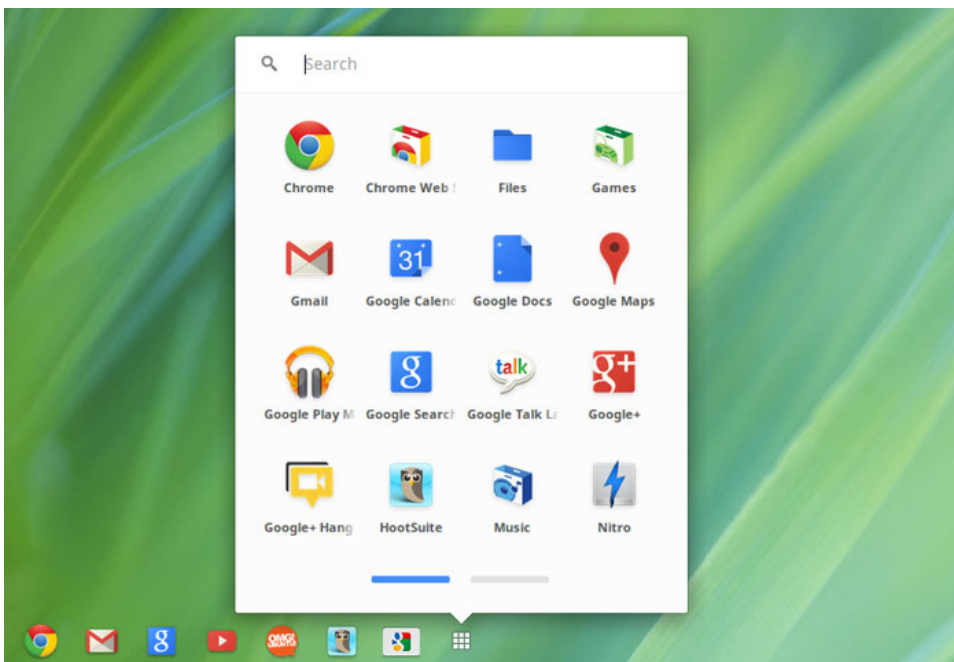

Chrome devices are powered by the Google Chrome operating system, based on Google's popular Chrome browser. It has been developed to provide a fast, simple, and more secure computing experience for users who spend most of their time online.


### Key Benefits

- Speed
- Simplicity
- Security
- Updated
- Synchronization
- High power at low cost
- Easy to learn and use
- Documents, calendar, e-mail, contacts, and tasks available online and offline, and all securely backed-up and synchronized in the cloud.
- Access to the Chrome web app store
- Killer web apps
- The latest Intel Core processors
- Fun games

- Built-in support for popular file types and external devices

For more information about the Chrome OS, please visit the [Chrome OS training page](https://www.google.com/chromebook/) <https://www.google.com/chromebook/>.

## Verified Boot

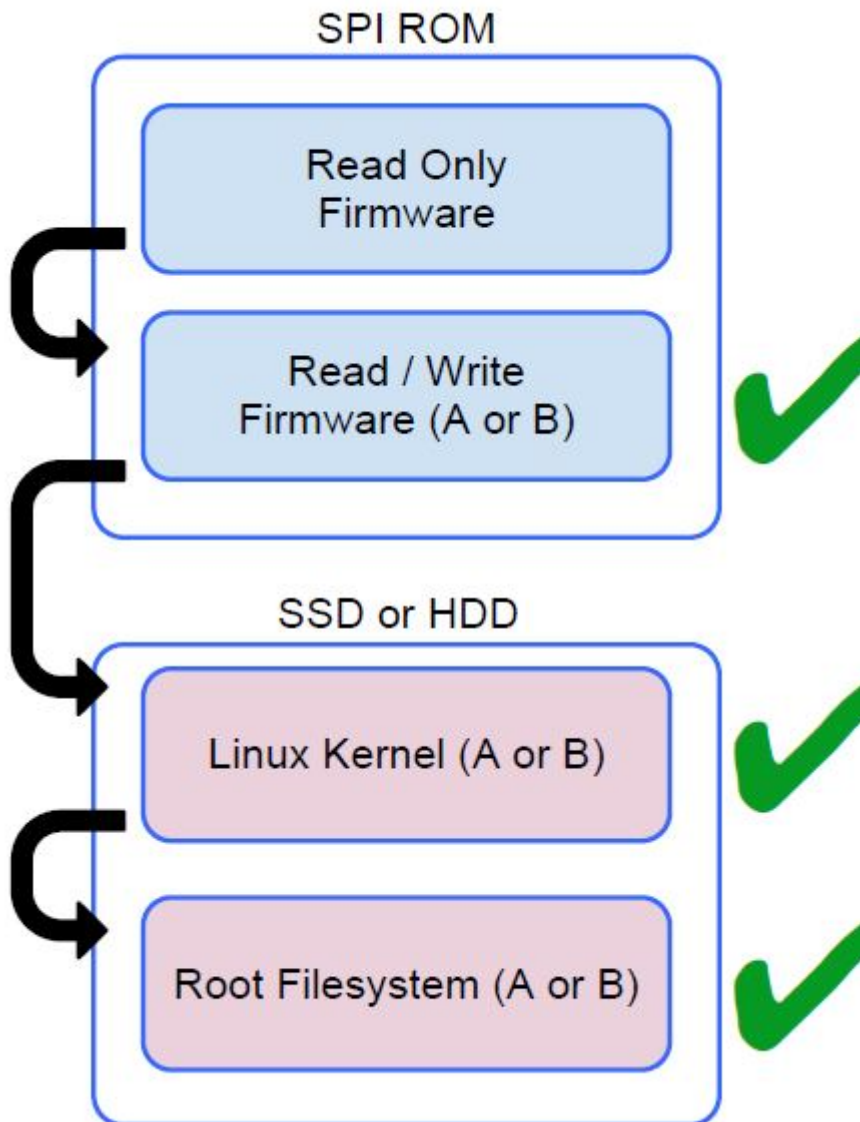


Read Only firmware verifies the integrity of Read/Write (R/W) firmware. R/W firmware verifies the active Linux kernel. During run time, the kernel verifies each block read from disk.

If a verification step fails and there is no backup option, the machine enters recovery mode.

The Developer Mode switch turns off verified boot (at the Kernel stage) to enable users to run Chromium OS (or other OS). The BIOS is always verified.

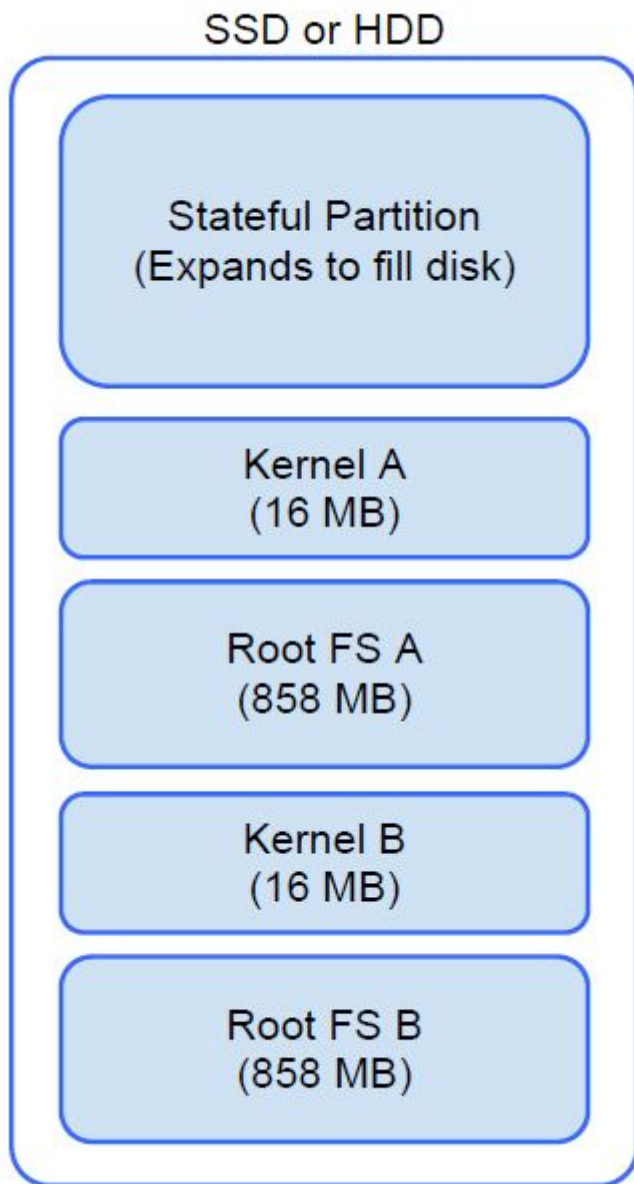

## Disk Partition Map



There are two copies of Chrome OS on disk: an active copy and a backup copy. Each copy consists of a kernel partition and a root file system. The backup copy is updated automatically in the background. Users only need to reboot. The partition contains encrypted user data and is also used in the factory for storing test software.

# Developer and Recovery mode

Table 21. Developer and Recovery mode

Developer Mode	Recovery Mode
<p><b>Developer Mode BIOS screen</b></p> 	<p><b>Recovery Mode BIOS screen</b></p> 
<ul style="list-style-type: none"> <li>• Used to boot without verification.</li> <li>• Can be turned on via key combination during boot.</li> <li>• Stateful partition is wiped during transitions.</li> <li>• Used in the factory to boot test image.</li> </ul>	<ul style="list-style-type: none"> <li>• Allows a user to reinstall the Chrome OS from a USB key or SD card.</li> <li>• Recovery mode is entered if verified boot fails.</li> <li>• A user can force recovery mode via a key combination during boot.</li> </ul>

## Coreboot and U-boot Custom Firmware

### Coreboot (x86 only)

- Memory and chipset initialization
- Open-source, except for MRC binary from Intel.

### U-Boot

- Performs verified boot
- Handles recovery and Developer Mode
- Open source code

Normal boot is very fast, as it takes less than 1 second to start loading kernel. Chrome devices does not boot other operating systems such as Windows or OS X.

## Chrome vs Chromium OS

Table 22. Difference between Chromium and Chrome OS

Difference between Chromium and Chrome OS	
Chromium OS	Chrome OS
<ul style="list-style-type: none"> <li>• Is an open source project: <a href="https://www.chromium.org/chromium-os">https://www.chromium.org/chromium-os</a></li> <li>• Runs on regular PCs and Chrome devices</li> </ul>	<ul style="list-style-type: none"> <li>• Is based on Chromium OS</li> <li>• Only runs on the Chrome devices with required hardware features (TPM, RO firmware, recovery button, developer switch).</li> <li>• Includes additional licensed features such as the Netflix plugin, video codecs, and fonts</li> </ul>




# Visualizzare le informazioni di sistema

Questa pagina contiene tutte le informazioni sulla visualizzazione delle informazioni di sistema per Dell Latitude 5300 2-in-1 Chrome.

Dell Latitude 5300 2-in-1 Chrome non supporta Dell BIOS. Pertanto vi sono diversi modi per controllare le specifiche del sistema in base alle informazioni che si desidera ricercare. La tabella di seguito elenca alcuni dei metodi più comunemente utilizzati per visualizzare informazioni e specifiche del sistema.

**Tabella 23. Visualizzare le informazioni di sistema**

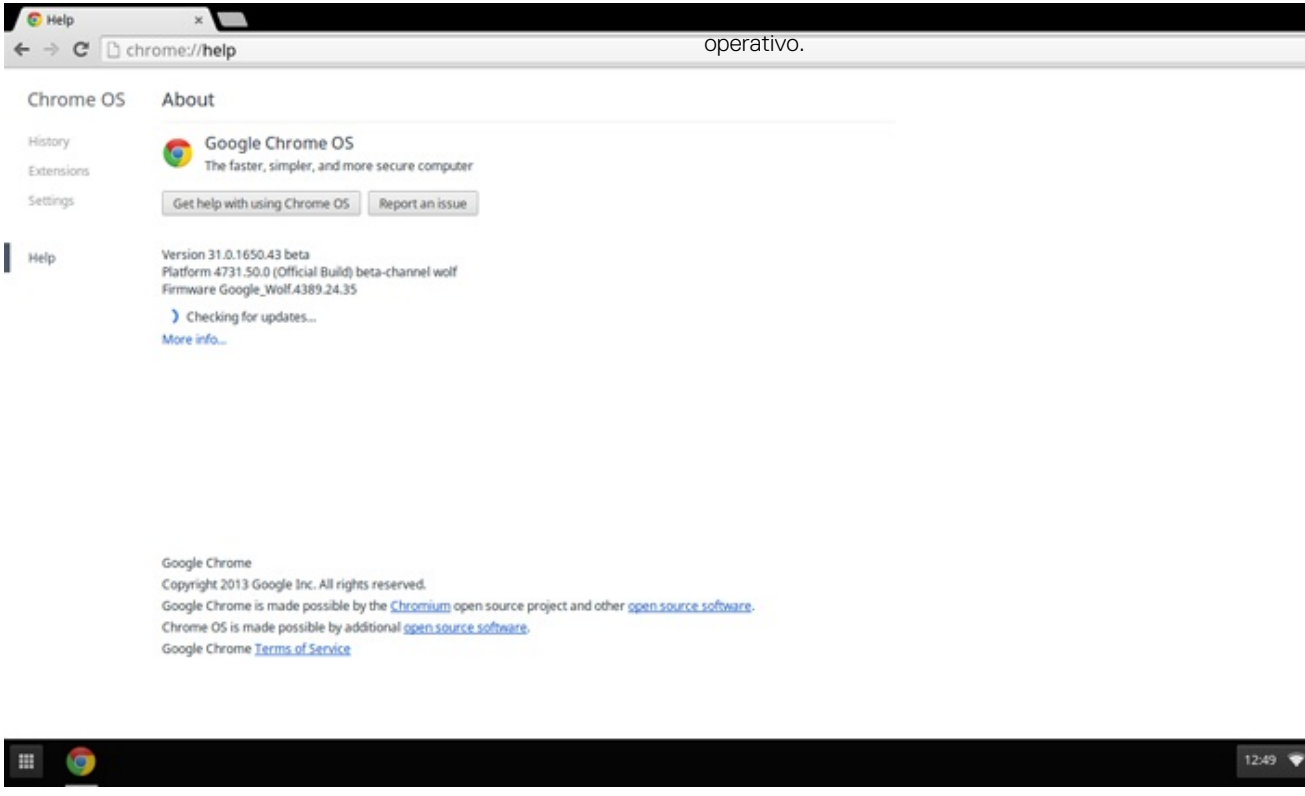
Comandi	Schermata	Azione e scopo
Chrome:help		operativo.

**Comandi**

**Schermata**


**Azione e scopo**

Chrome:settings

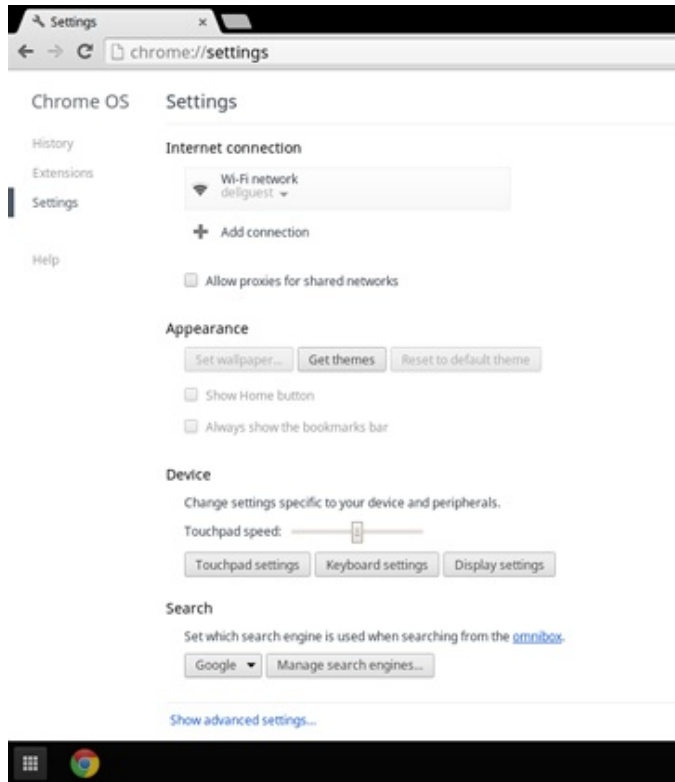


risoluzione dello schermo (Dispositivo > Impostazioni di visualizzazione), touchpad e altre informazioni hardware di base.

Chrome:system

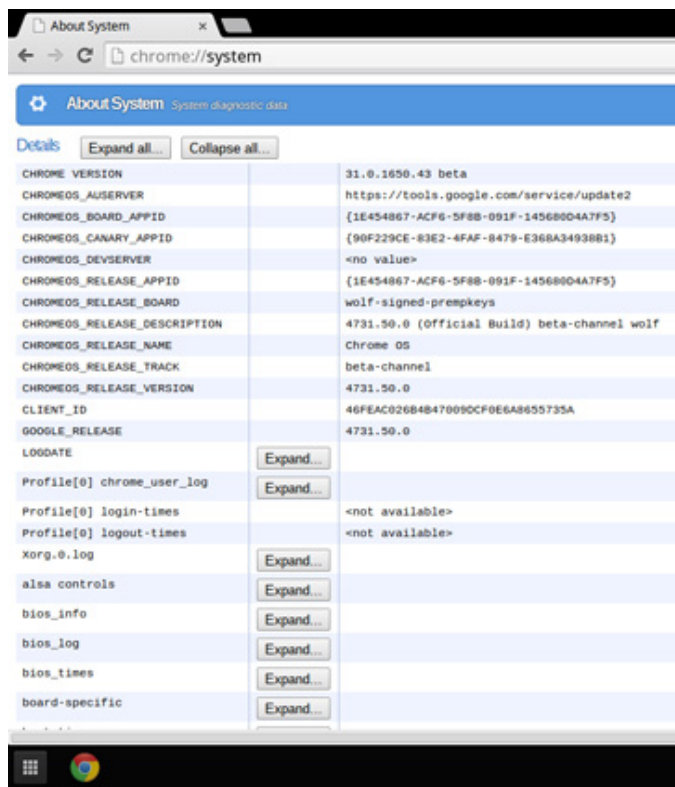

la versione di Google Chrome, le informazioni del BIOS, della CPU e della memoria, lo stato della rete, le informazioni sull'alimentazione e così via.

Chrome:net-internals

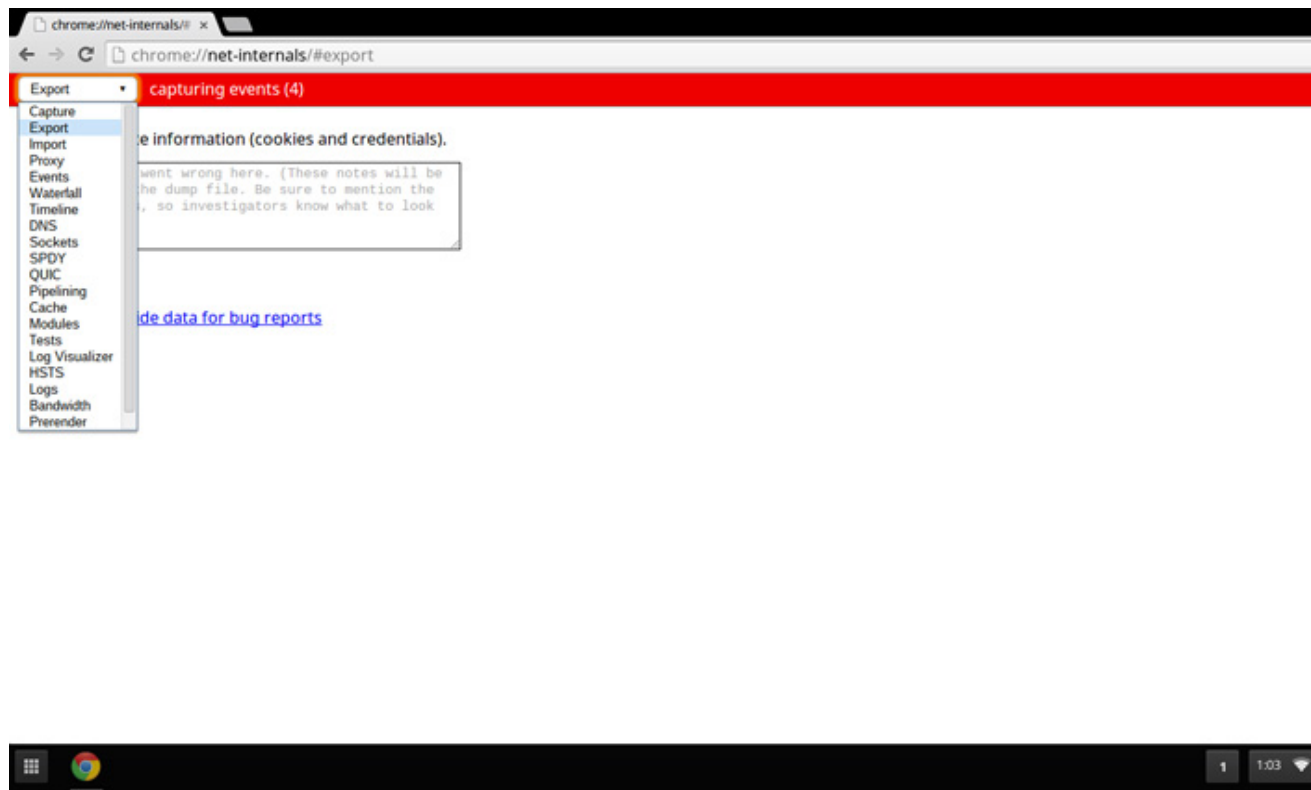

# Tecnologia e componenti

Questo capitolo descrive la tecnologia e i componenti disponibili nel sistema.








## Argomenti:








- [Keyboard shortcuts](#)
- [Touchpad](#)
- [Bluetooth](#)

## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

**Table 24. List of keyboard shortcuts**

Keys	Primary behavior	Secondary behavior (Fn+Key)
	Esc behavior	—
	Browser Back	F1 behavior
	Reload current page	F2 behavior
	Open your page in fullscreen mode	F3 behavior
	Switch to your next tab or window	F4 behavior
	Decrease screen brightness	F5 behavior
	Increase screen brightness	F6 behavior

Keys	Primary behavior	Secondary behavior (Fn+Key)
	Mute	F7 behavior
	Decrease the volume	F8 behavior
	Increase the volume	F9 behavior
	F10 behavior	F10 behavior
	F11	None
	Changes display layout (multi monitors setup)	F12 behavior
	Delete	None
	Lock Key	None

### Keyboard shortcut keys

Table 25. Shortcut keys

Shortcut keys	
Shortcut	Function
<b>Esc</b>	Stop the loading of your current page
<b>Ctrl + F5</b>	Decrease keyboard brightness
<b>Ctrl + F6</b>	Increase keyboard brightness
<b>Alt + Up arrow</b>	Page up
<b>Alt + Down arrow</b>	Page down
<b>Alt + Left arrow (Backspace)</b>	Go to previous page in your browsing history
<b>Alt + Right arrow (Shift + Backspace)</b>	Go to the next page in your browsing history
<b>Ctrl + Right arrow</b>	Move to the end of the next word
<b>Ctrl + Down arrow</b>	Move to the start of the previous word

## Shortcut keys

Shortcut	Function
<b>Ctrl + Alt</b> + Up arrow	Home
<b>Ctrl + Alt</b> + Down arrow	End
<b>Ctrl + Alt</b> + Right arrow	Select next word or letter
<b>Ctrl + Alt</b> + Left arrow	Select previous word or letter
<b>Ctrl + Alt + Z</b>	Enable or disable accessibility features if you're not signed in with a Google Account. If you're signed in, you can configure the accessibility feature on the Settings page.
<b>Ctrl + Alt + /</b>	Open the list of available keyboard shortcuts
<b>Ctrl + Shift + D</b>	Save all open pages in the current window as bookmarks in a new folder
<b>Ctrl + Shift + G</b> or <b>Shift + Enter</b>	Go to the previous match for the input in the find bar
<b>Ctrl + Shift + B</b>	Toggle the display of the bookmarks bar. Bookmarks appear on the New Tab page if the bar is hidden.
<b>Ctrl + Shift + I</b>	Toggle the display of the Developer Tools panel
<b>Ctrl + Shift + J</b>	Toggle the display of the DOM Inspector
<b>Ctrl + Shift + L</b>	Locks the screen
<b>Ctrl + Shift + N</b>	Open a new window in incognito mode
<b>Ctrl + Shift + B</b>	Toggle the bookmark bar
<b>Ctrl + Shift + Q</b>	Sign out Google Account
<b>Ctrl + Shift + Q (twice)</b>	Sign out Google Account on Chrome OS
<b>Ctrl + Shift + R</b>	Reload your current page without using cached content
<b>Ctrl + Shift + T</b>	Reopen the last tab being closed. Google Chrome remembers the last 10 tabs being closed.
<b>Ctrl + Shift + V</b>	Paste content from the clipboard as plain text
<b>Ctrl + Shift + W</b>	Close the current window
<b>Ctrl + .</b>	Display hidden files in the Files app
<b>Ctrl + ?</b>	Go to the Help Center
<b>Ctrl + 0</b>	Reset zoom level
<b>Ctrl + 1</b> through <b>Ctrl + 8</b>	Go to the tab at the specified position in the window
<b>Ctrl + 9</b>	Go to the last tab in the window
<b>Ctrl + A</b>	Select everything on the page
<b>Ctrl + C</b>	Copy selected content to the clipboard
<b>Ctrl + D</b>	Save your current webpage as a bookmark
<b>Ctrl + F</b>	Search your current webpage
<b>Ctrl + G</b> or <b>Enter</b>	Go to the next match for the input in the find bar
<b>Ctrl + H</b>	Open the History page
<b>Ctrl + J</b>	Open the Downloads page
<b>Ctrl + K</b> or <b>Ctrl + E</b>	Perform a search. Type a search term after the question mark in the address bar and press Enter.

### Shortcut keys

Shortcut	Function
<b>Ctrl + L</b> or <b>Alt + D</b>	Select the content in the address bar
<b>Ctrl + N</b>	Open a new window
<b>Ctrl + O</b>	Open a file in the browser
<b>Ctrl + P</b>	Print your current page
<b>Ctrl + R</b>	Reload your current page
<b>Ctrl + S</b>	Save your current page
<b>Ctrl + T</b>	Open a new tab
<b>Ctrl + U</b>	View page source
<b>Ctrl + V</b>	Paste content from the clipboard
<b>Ctrl + W</b>	Close the current tab
<b>Ctrl + X</b>	Cut
<b>Ctrl + Z</b>	Undo the last action
<b>Ctrl + Backspace</b>	Delete the previous word
<b>Ctrl + Tab</b>	Switch to next tab
<b>Ctrl + Enter</b>	Add www. and .com to your input in the address bar and open the resulting URL
<b>Ctrl + Shift + Tab</b>	Go to the previous tab in the window
<b>Ctrl + Shift + Refresh</b>	Rotate screen 90 degrees
<b>Ctrl + Shift + )</b>	Reset screen scale
<b>Ctrl + Shift + +</b>	Increase screen scale
<b>Ctrl + Shift + -</b>	Decrease screen scale
<b>Ctrl + Shift + Refresh</b>	Rotate screen 90 degrees
<b>Ctrl + +</b>	Zoom in on the page
<b>Ctrl + -</b>	Zoom out on the page
<b>Alt + click a link</b>	Open the link you clicked in a new background tab
<b>Alt + 1</b> through <b>Alt + 8</b>	Go to the window at the specified position
<b>Alt + 9</b>	Go to the last window open
<b>Alt + E</b> or <b>Alt + F</b>	Open the Chrome menu on the browser toolbar
<b>Alt + Backspace</b>	Delete the next letter (forward delete)
<b>Alt + Tab</b>	Go to the next window that have opened
<b>Alt + Shift + Tab</b>	Go to the previous window that have opened
<b>Alt + Shift + M</b>	Open the Files app
<b>Alt + Shift + B</b>	Place focus on the bookmarks bar. Use the actions listed for Shift +Alt+T to move the focus.
<b>Shift + Alt + S</b>	Opens the status area in the bottom-right corner of the screen

## Shortcut keys

Shortcut	Function
<b>Shift + Alt + L</b>	Place focus on the launcher <ul style="list-style-type: none"><li>• Press Tab or the right arrow to focus on the next item in the toolbar</li><li>• Press Shift+Tab or the left arrow to focus on the previous item in the toolbar</li><li>• Press Space or Enter to activate buttons, including page actions and browser actions</li><li>• Press Shift + Volume increase to open the context menu for the button (if available)</li><li>• Press Esc to return focus to the page</li></ul>
<b>Shift + Search + Volume Up</b>	Open right-click menus for focused items
<b>Shift + Esc</b>	Open the Task Manager

To see more shortcuts, simply press Ctrl+Alt+?. To open the keyboard viewer on your screen.




## Touchpad

Questa pagina contiene informazioni sui movimenti del touchpad di Dell Latitude 5300 2-in-1 Chrome.

La seguente tabella elenca alcuni gesti e azioni supportati dal touchpad Chromebook:

**Tabella 26. Comandi gestuali del touchpad**

### Movimenti sul touchpad

movimenti	Spiegazione
	È sufficiente spostare il dito sul touchpad.
	Premere verso il basso sulla metà inferiore del touchpad. Poiché la funzione tap-to-click è abilitata per impostazione predefinita, è possibile toccare rapidamente sul touchpad per far registrare un clic.
	Toccare il touchpad con due dita.



## Movimenti sul touchpad



Posizionare due dita sul touchpad e spostarli in alto e in basso per scorrere in verticale, a destra e a sinistra per scorrere in orizzontale. Se lo scorrimento "Australian" è abilitato, muovere due dita verso l'alto per scorrere verso il basso. La funzione è simile allo scorrimento su smartphone o tablet. Se sono aperte più schede nel browser, è anche possibile scorrere a sinistra o destra con tre dita per spostarsi tra di esse.

Striscia

Spostare rapidamente due dita verso sinistra o destra per andare indietro o avanti nelle pagine Web o mentre si utilizzano app.





Fare clic sull'elemento che si desidera spostare con un dito. Con un secondo dito, spostare l'elemento. Alzare entrambe le dita per lasciare l'elemento nella nuova posizione.

## Bluetooth

Questa sezione descrive le istruzioni per associare un dispositivo Bluetooth con i dispositivi Chrome.


La tecnologia Bluetooth consente di collegare dispositivi senza fili su brevi distanze. Per utilizzare gli accessori Bluetooth sul Chromebook, per prima cosa verificare se il modello del Chromebook supporti Bluetooth. Sarà quindi necessario abbinarlo con l'accessorio.

Per verificare se sia possibile utilizzare gli accessori Bluetooth con il Chromebook, fare clic sull'area di stato nell'angolo in basso a destra, in

cui viene visualizzata l'immagine dell'account. Se viene visualizzata l'icona Bluetooth  o  nel menu, il Chromebook supporta Bluetooth. Se non viene visualizzata una di queste icone, il Chromebook non supporta Bluetooth. Se il Chromebook supporta Bluetooth, è in grado di connettersi a una vasta gamma di accessori Bluetooth, inclusi i seguenti:

- Tastiere
- Mouse
- Altoparlanti
- Cuffie
- Cuffie con microfono (solo audio)

Per collegare un dispositivo Bluetooth al Chromebook, è necessario associarli. Ecco come:

1. Accedere al Chromebook.
2. Fare clic sull'area di stato nell'angolo in basso a destra, in cui viene visualizzata l'immagine dell'account.
3. Selezionare lo stato Bluetooth nel menu visualizzato.
4. Se Bluetooth è disconnesso, fare clic sull'icona di disconnessione  o fare clic su Abilita Bluetooth nel menu. Il Chromebook inizierà automaticamente a rilevare eventuali dispositivi Bluetooth disponibili.
5. Scegliere il dispositivo da aggiungere dall'elenco di dispositivi Bluetooth disponibili e fare clic su Connetti.
6. Seguire le istruzioni visualizzate per collegare il dispositivo Bluetooth.
  - Se si sta collegando un mouse, solitamente non viene richiesto un PIN. Se viene richiesto un PIN, immettere il PIN del mouse tramite la tastiera del dispositivo Chrome.
  - Se si sta collegando una tastiera, immettere il PIN generato casualmente sulla tastiera che si desidera associare e premere INVIO.

Per confermare che il dispositivo Bluetooth è connesso, verificare lo stato Bluetooth. Il dispositivo, se connesso, verrà visualizzato lì.

**ⓘ N.B.: È il primo utilizzo del Chromebook o Chromebox? Se si sta accendendo il dispositivo Chrome per la prima volta e si dispone di un dispositivo Bluetooth anch'esso acceso, il dispositivo Chrome potrebbe rilevarlo automaticamente e visualizzare passaggi per associarlo. Le istruzioni vengono visualizzate solo se il dispositivo Chrome non ha già un simile dispositivo connesso o se la funzionalità relativa non è integrata, come per una tastiera o un trackpad.**

# Getting help and contacting Dell


## Self-help resources

You can get information and help on Latitude 5300 2-in-1 Chrome and other Dell products and services using these self-help resources:


**Table 27. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="https://www.dell.com">https://www.dell.com</a>
Online help for operating system	<a href="https://www.dell.com/support/article/sln293900">https://www.dell.com/support/article/sln293900</a>
Troubleshooting information, user manuals, setup instructions, product specifications, technical help blogs, drivers, software updates, and so on.	<a href="https://www.dell.com/support">https://www.dell.com/support</a>
Dell knowledge base articles for a variety of computer concerns.	<a href="https://www.dell.com/support/home/app=knowledgebase">https://www.dell.com/support/home/app=knowledgebase</a>
Learn and know the following information about your product: <ul style="list-style-type: none"> <li>• Product specifications</li> <li>• Operating system</li> <li>• Setting up and using your product</li> <li>• Data backup</li> <li>• Troubleshooting and diagnostics</li> <li>• Factory and system restore</li> </ul>	<p>See <i>Service Manual and Setup and Specifications</i> at <a href="https://www.dell.com/support/manuals">https://www.dell.com/support/manuals</a>.</p> <p>To locate the <i>Service Manual and Setup and Specifications</i> relevant to your product, identify your product through one of the following:</p> <ul style="list-style-type: none"> <li>• Select <b>Detect Product</b>.</li> <li>• Locate your product through the drop-down menu under <b>View Products</b>.</li> <li>• Enter the <b>Service Tag number</b> or <b>Product ID</b> in the search bar.</li> </ul>

## Contacting Dell

 **NOTE: If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.**

To contact Dell for sales, technical support, or customer service issues, see <https://www.dell.com/contactdell>.

 **NOTE: Availability varies by country/region and product, and some services may not be available in your country/region.**

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

1. Go to <https://www.Dell.com/support>
2. Select your support category.
3. Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
4. Select the appropriate service or support link based on your need.