



TCP Optimization


Table 1: Feature History

| Feature Name | Release Information | Description |
|------------------|--------------------------------------|--|
| TCP Optimization | Cisco IOS XE Release 17.3.1a | TCP optimization support extended to Cisco ISR4221, Cisco ISRv, and Cisco 1000 Series Integrated Services Routers. See Supported Platforms for more information. |
| | Cisco IOS XE SD-WAN Release 16.12.1d | This feature optimizes TCP data traffic by decreasing any round-trip latency and improving throughput. |

TCP optimization fine tunes the processing of TCP data traffic to decrease round-trip latency and improve throughput.

This article describes optimizing TCP traffic in service-side VPNs on Cisco IOS XE SD-WAN devices. Optimizing TCP traffic is especially useful for improving TCP traffic performance on long-latency links, such as transcontinental links and the high-latency transport links used by VSAT satellite communications systems. TCP optimization can also improve the performance of SaaS applications.

With TCP optimization, a router acts as a TCP proxy between a client that is initiating a TCP flow and a server that is listening for a TCP flow, as illustrated in the following figure:

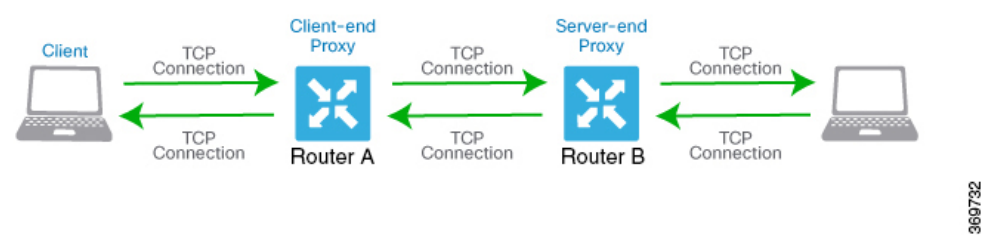

The figure shows two routers acting as proxies. Router A is the proxy for the client, and is called the client proxy. Router B is the proxy for the server, called the server proxy. Without TCP optimization, the client establishes a TCP connection directly to the server. When you enable TCP optimization on the two routers, Router A terminates the TCP connection from the client and establishes a TCP connection with Router B. Router B then establishes a TCP connection to the server. The two routers cache the TCP traffic in their buffers to ensure that the traffic from the client reaches the server without allowing the TCP connection to time out.

It is recommended that you configure TCP optimization on both the routers, the router closer to the client and the router closer to the server. This configuration is sometimes called a dual-ended proxy. It is possible to configure TCP optimization only on the router closer to the client, a scenario called single-ended proxy, but this configuration is not recommended because the TCP optimization process is compromised. TCP is a bidirectional protocol and operates only when connection-initiation messages (SYNs) are acknowledged by ACK messages in a timely fashion.

If both the client and the server are connected to the same router, no TCP optimization is performed.

To use TCP optimization, first enable the feature on the router. Then define which TCP traffic to optimize. Before you configure TCP optimization, to start with the configuration transaction, you can use the following command such as,

```
ntp server 198.51.241.229 source GigabitEthernet1 version 4
```

- [Topology and Roles, on page 2](#)
- [Supported Platforms, on page 3](#)
- [Limitations and Restrictions, on page 4](#)
- [TCP Optimization Configuration Examples, on page 4](#)

Topology and Roles

For a branch, the Cisco IOS XE SD-WAN device acts as both controller and service-node.

Data Center


For a data center, the controller and service-node roles are performed by separate Cisco IOS XE SD-WAN devices. This optimizes performance and enables handling more traffic.

The service-node is an external node that has control connections to vManage to receive configurations.



Note

The service-node Cisco IOS XE SD-WAN device must have an underlay connection to the controller on the global VRF to establish an apnnav tunnel.

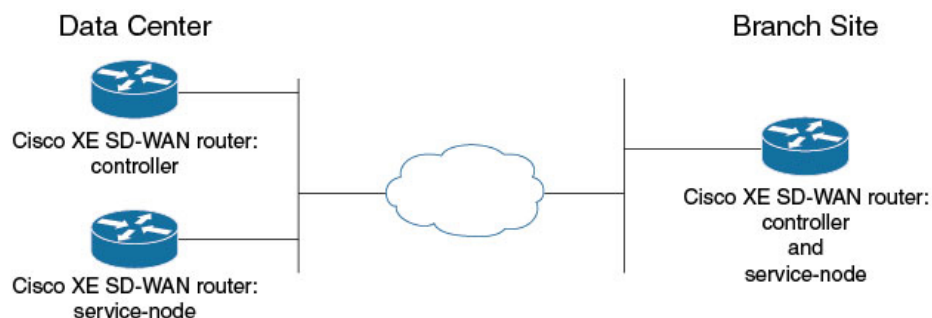

369 733

Supported Platforms

| Release | Supported Platforms |
|--|--|
| Cisco IOS XE Release 17.2.1r and later | <ul style="list-style-type: none"> • Cisco 4331 Integrated Services Router (ISR 4331) • Cisco 4431 Integrated Services Router (ISR 4431) • Cisco 4321 Integrated Services Router (ISR 4321) • Cisco 4351 Integrated Services Router (ISR 4351) • Cisco 4451 Integrated Services Router (ISR 4451) • Cisco 4461 Integrated Services Router (ISR 4461) • Cisco CSR 1000v Cloud Services Router (CSRv) |
| Cisco IOS XE Release 17.3.1a and later | <ul style="list-style-type: none"> • Cisco 4221 Integrated Services Router (ISR4221) • Cisco Integrated Services Virtual Router (ISRv) • Cisco 1000 Series Integrated Services Routers <p>Note The support is only applicable on Cisco 1000 Series Integrated Services Routers that have a RAM of 8 GB or more. See Cisco 1000 Series Integrated Services Routers Data Sheet for platform specifications.</p> |
| Cisco IOS XE Release 17.3.2 | <ul style="list-style-type: none"> • Cisco Catalyst 8300 Series Edge Platforms |
| Cisco IOS XE Release 17.4.1a | <ul style="list-style-type: none"> • Cisco ISR 1100X Series Integrated Services Routers • Cisco Catalyst 8000V Edge Software (Cisco Catalyst 8000V) • Cisco Catalyst 8200 Series Edge Platforms • Cisco Catalyst 8300 Series Edge Platforms |

Minimum Resource Requirements

- The platforms must have a minimum of 8 GB of DRAM.
- The platforms must have four or more data cores, with the exception of Cisco 4321 Integrated Services Router (ISR 4321), which is supported in spite of having fewer than four data cores.

Limitations and Restrictions

- TCP optimization in Cisco SD-WAN uses the Bottleneck Bandwidth and Round-trip Propagation Time (BBR) algorithm for congestion control. Because BBR is used, if clients request for Explicit Congestion Notification (ECN), the proxy disables it because it is not supported.

TCP Optimization Configuration Examples

Example: Configure Service Insertion using CLI – Branch Router

This example configures a branch Cisco IOS XE SD-WAN device to act as controller and service-node.



Note

By default, subnet 192.168.1.1/30 and 192.0.2.1/30 used for VPG0 and VPG1 (UTD) and 192.168.2.1/24 used for VPG2 (APPQOE) is configured through Cisco vManage. Use any RFC 1918 subnet for Transport and Service VPN configurations other than these netmask.

```
service-insertion appnav-controller-group ACG-APPQOE
  appnav-controller 192.3.3.1
!
service-insertion service-node-group SNG-APPQOE
  service-node 192.3.3.2
!
service-insertion service-context appqoe/1
  appnav-controller-group ACG-APPQOE
  service-node-group      SNG-APPQOE
  enable
  vrf global
!

interface VirtualPortGroup2
  no shutdown
  ip address 192.3.3.1 255.255.255.0
  service-insertion appqoe
exit
```

Example: Configure Service Insertion Using Cisco vManage – Branch Router

For a branch, the Cisco IOS XE SD-WAN device acts as both controller and service-node.

This example configures the branch Cisco IOS XE SD-WAN device as controller and service-node.



Note

When enabling the AppQoE feature on a device through Cisco vManage, ensure that you remove any Virtual Port Groups (VPG) that already have **service-insertion appqoe** in their configuration and have an IP address that differs from the one you are pushing through vManage. Enabling AppQoE on a device that has an existing **service-insertion appqoe** configuration on a VPG could lead to a conflict in configurations. This conflict may result in the AppQoE status remaining indeterminate.

1. From the Cisco vManage menu, choose **Configuration > Templates**.

2. Click **Feature**.
3. Choose a device from one of the device options listed.
4. Under **Other Templates** in the right pane, choose **AppQoE**.
5. Enter a name and description for the template.
6. Click the **Controller** option.
7. Enter the following details for the controller option:
 - Controller IP: Corresponds to the appnav-controller value that would be configured by the service-insertion appnav-controller-group command when configuring by CLI.
 - Internal: Check this check box.
 - Service Node IP: Corresponds to the service-node value that would be configured by the service-insertion service-node-group command when configuring by CLI.
8. Click **Save**.
9. Add the feature template that was created in a previous step, to a device template page. In the AppQoE drop-down menu, choose the name of the feature template. Add the AppQoE template you created in the previous step following the steps below.
 - a. From the Cisco vManage menu, choose **Configuration > Templates**.
 - b. Click **Device**.
 - c. From the devices listed in the window, click ...for the device you want to attach the AppQoE template to. Click **Edit**.
 - d. Click **Additional Templates** and under the AppQoE drop-down list, choose the AppQoE template created.
10. Click **Update**.

Example: Configure Service Insertion Using Cisco vManage – Data Center Controller

1. From the Cisco vManage, choose **Configuration > Templates**.
2. Click **Feature**.
3. Under **Select Devices**, choose the branch device to configure.
4. Under **Other Templates** in the right pane, choose **AppQoE**.
5. Enter a name and description for the template.
6. Click the **Controller** option.
7. Create a feature template for the Cisco IOS XE SD-WAN device acting as controller. Enter:
 - Controller IP: Corresponds to the appnav-controller value that would be configured by the service-insertion appnav-controller-group command when configuring by CLI.
 - Internal: Leave this option unchecked.

- Service Node IP: Corresponds to the service-node value that would be configured by the service-insertion service-node-group command when configuring by CLI.
8. Click **Save**.
 9. Add the feature template that was created in a previous step, to a device template. In the AppQoE drop-down menu, choose the name of the feature template. Add the AppQoE template you created in the previous following the steps below.
 - a. From the Cisco vManage menu, choose **Configuration > Templates**
 - b. Click **Device**.
 - c. From the devices listed on the page, select the device you want to attach the AppQoE template to and click the More Options icon (...) next to the selected device. Click **Edit**.
 - d. Click **Additional Templates** and under the AppQoE drop-down menu, choose the AppQoE template created.
 10. Click **Update**.

Example: Configure Service Insertion Using vManage – Data Center Service-Node



Note

When enabling the AppQoE feature on a device through vManage, ensure that you remove any Virtual Port Groups (VPG) that already have **service-insertion appqoe** in their configuration and have an IP address that differs from the one you are pushing through vManage. Enabling AppQoE on a device that has an existing **service-insertion appqoe** configuration on a VPG could lead to a conflict in configurations. This conflict may result in the AppQoE status remaining indeterminate.

1. From the Cisco vManage menu, choose **Configuration > Templates**.
2. Click **Feature**.
3. Under **Select Devices**, choose the branch device to configure.
4. Under **Other Templates** in the right pane, choose **AppQoE**.
5. Click the **Service Node** button.
6. Create a feature template for the Cisco IOS XE SD-WAN device acting as service-node. Enter:
 - Template Name
 - Service Node IP: Corresponds to the appnav-controller value that would be configured by the service-insertion service-node-group command when configuring by CLI.
 - Virtual Port Group IP: Corresponds to the service-node value that would be configured by the interface VirtualPortGroup2 command when configuring by CLI.
7. Click **Save**.
8. Add the feature template that was created in a previous step, to a device template page. In the AppQoE drop-down list, choose the name of the feature template.

9. Click **Create**.

