



Connecting the Cisco MDS 9132T Switch

The Cisco MDS 9132T switch provides the following types of ports:

- Console port—An RS-232 port that you can use to create a local management connection.
- MGMT 10/100/1000 Ethernet port—Two Ethernet port that you can use to access and manage the switch by IP address, such as through the CLI or Fabric Manager. One of the Ethernet ports can also be used to export analytic data.
- Fibre Channel ports—Fibre Channel ports that you can use to connect to the SAN, or for in-band management.
- USB port—USB port for USB flash disk that you can use for configuration file backups, log dumps, report captures, and so on.

This chapter describes how to connect the various components of the Cisco MDS 9132T switch.

- [Preparing for Network Connections, on page 1](#)
- [Connecting the Console Port, on page 2](#)
- [Connecting the Management Port, on page 4](#)
- [Connecting to a Fibre Channel Port, on page 4](#)
- [Powering Up the Switch, on page 7](#)

Preparing for Network Connections

When preparing your site for network connections to the Cisco MDS 9132T switch, consider the following for each type of interface:

- Cabling required for each interface type
- Distance limitations for each signal type
- Additional interface equipment needed

Before installing the component, have all the additional external equipment and cables available.

Connecting the Console Port

This section describes how to connect the RS-232 console port to a PC. The console port allows you to perform the following functions:

- Configure the switch from the CLI.
- Monitor network statistics and errors.
- Configure SNMP agent parameters.
- Download software updates to the switch or distribute software images residing in flash memory to attached devices.
- Perform initial switch configuration
- Perform password recovery

Connecting the Console Port to a PC

You can connect the console port to a PC serial port for local administrative access to the Cisco MDS 9132T switch.



Note The PC must support VT100 terminal emulation. The terminal emulation software—frequently a PC application, such as HyperTerminal Plus—makes the communication between the Cisco MDS 9132T switch and your PC possible during setup and configuration.

To connect the console port to a PC, follow these steps:

Step 1 Configure the baud rate and character format of the PC terminal emulation program to match the following management port default characteristics:

- 9600 baud
- 8 data bits
- 1 stop bit
- No parity

Step 2 Attach the adapter required for your PC to its communication port. It must present an RJ-45 socket towards the switch.

- For a DB-9 serial port, attach the supplied RJ-45-to-DB-9 female adapter.
- For a DB-25 serial port, attach the supplied RJ-45-to-DB-25 female adapter.
- For a USB port, attach a customer-supplied USB-to-serial dongle.

- Step 3** Connect one end of the supplied console cable (a rollover RJ-45-to-RJ-45 cable) to the console port. Connect the other end to the female RJ-45 adapter attached to the PC communication port.
-

Connecting the Console Port to a Modem Before Switch is Powered On



Caution Do not connect the console port to a modem while the switch is booting as it may interrupt the boot process. Connect the console port to a modem either before powering the switch on or after the switch has completed the boot process.

To connect the console port to a modem before the switch is powered on, follow these steps:

- Step 1** Connect the supplied console cable (a rollover RJ-45-to-RJ-45 cable) to the console port.
- Step 2** Connect the other end of the console cable to the supplied RJ-45-to-DB-25 adapter.
- Step 3** Connect the RJ-45-to-DB-25 adapter to the DB-25 port on the modem.
- Step 4** Power on the switch. The switch boots automatically, and the following default console port characteristics are applied to the modem connection:
- 9600 baud
 - 8 data bits
 - 1 stop bit
 - No parity
 - Default initialization string (ATE0Q1&D2&C1S0=1\015) if previously configured

Note For instructions on how to change these settings, see the [Cisco Fabric Manager Fundamentals Configuration Guide](#).

Connecting the Console Port to a Modem After Switch is Powered On

To connect the console port to a modem after the switch is powered on, follow these steps:

- Step 1** Ensure that the system has completed booting and the system image is running.
- Step 2** Connect the supplied console cable (a rollover RJ-45-to-RJ-45 cable) to the console port.
- Step 3** Connect the other end of the console cable to the supplied RJ-45-to-DB-25 adapter.
- Step 4** Connect the RJ-45-to-DB-25 adapter to the DB-25 port on the modem.
- Step 5** Initialize and configure the modem as specified in the [Cisco Fabric Manager Fundamentals Configuration Guide](#) and the [Cisco NX-OS Fundamentals Configuration Guide](#).
-

Connecting the Management Port

The autosensing 10/100/1000 Mbps Ethernet management ports are located on the left side of the front panel (labeled MGMT ETH0 and MGMT ETH1), below the console port. MGMT ETH0 is the default Ethernet management port (interface mgmt0). This port is used for out-of-band management of the Cisco MDS 9132T switch. It can also be used for upstream data transferring.



Note MGMT ETH1 is disabled and reserved for further use.

Use a modular, RJ-45, straight-through UTP cable (Cisco Catalyst 5000 Switch or Cisco Catalyst 6000 Switch) to connect the 10/100/1000 Mbps Ethernet management ports to external hubs and switches.

Connecting to a Fibre Channel Port

The Fibre Channel ports are compatible with FC LC-type fiber-optic SFP transceivers and cables (see the [Removing and Installing Cables into SFP Transceivers](#) section). You can use these ports to connect to the SAN or for in-band management. For information about configuring the switch for in-band management, see the [Cisco Fabric Manager Fundamentals Configuration Guide](#) or the [Cisco NX-OS Fundamentals Configuration Guide](#).

Each transceiver must match the transceiver at the other end of the cable, and the cable must not exceed the stipulated cable length for reliable communications. SFP transceivers can be ordered either separately or with the Cisco MDS 9132T switch.



Warning **Class 1 laser product.** Statement 1008



Warning **Invisible laser radiation may be emitted from disconnected fibers or connectors. Do not stare into beams or view directly with optical instruments.** Statement 1051



Note Wear an ESD wrist strap connected to the chassis when handling transceivers. Keep optical connectors covered when not in use, and do not touch connector ends. The fiber-optic connectors must be free of dust, oil, and other contaminants.

Removing and Installing Cables into SFP Transceivers



Caution To prevent damage to the fiber-optic cables, do not place more tension on them than the rated limit and do not bend to a radius of less than one inch (2.5 cm) if there is no tension in the cable, or two inches (5 cm) if there is tension in the cable.

Installing a Cable into an SFP Transceiver




Caution To prevent possible damage to the cable or transceiver, install the transceiver in the port before installing the cable in the transceiver.

To install a cable into a transceiver, follow these steps:

- Step 1** Attach an ESD-preventive wrist strap and follow its instructions for use.
- Step 2** Remove the dust cover from the connector on the cable.
- Step 3** Remove the dust plug from the cable-end of the transceiver.
- Step 4** Align the cable connector with the transceiver and insert the connector into the transceiver until it clicks into place.

Figure 1: Connecting the LC-Type Cable to a Fibre Channel Port

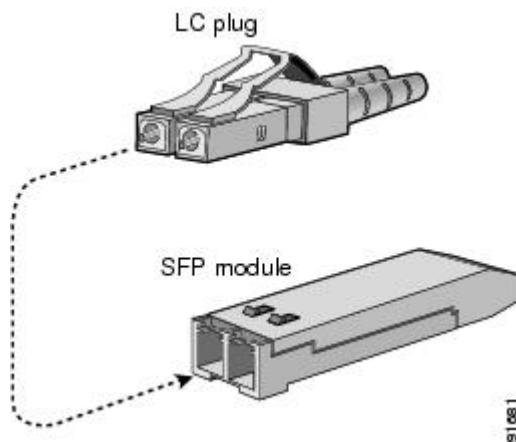

Caution If the cable does not install easily, ensure that it is correctly oriented before continuing.

For instructions on verifying connectivity, see the [Cisco Fabric Manager Fundamentals Configuration Guide](#) and the [Cisco NX-OS Fundamentals Configuration Guide](#).

Removing a Cable from an SFP Transceiver



- Caution**
- When pulling a cable from a transceiver, grip the body of the connector. Do not pull on the jacket sleeve because this can compromise the fiber optic termination in the connector.
 - If the cable does not remove easily, ensure that any latch present on the cable has been released before continuing.

To remove the cable, follow these steps:

-
- Step 1** Attach an ESD-preventive wrist strap and follow its instructions for use.
- Step 2** Press the release latch on the cable, grasp the connector near the connection point, and gently pull the connector from the transceiver.
- Step 3** Insert a dust plug into the cable-end of the transceiver.
- Step 4** Insert a dust cover into the end of the cable.
-

Removing and Installing SFP Transceivers

**Warning**

Removing and installing an SFP transceiver can shorten its useful life. Do not remove and insert SFP transceivers more often than is absolutely necessary. We recommend that you disconnect the cables before installing or removing SFP transceivers to prevent damage to the cable or transceiver.

**Note**

Use only Cisco SFP transceivers on the Cisco MDS 9132T switch. Each Cisco SFP transceiver is encoded with model information that enables the switch to verify that the SFP transceiver meets the requirements for the switch.

The Cisco MDS 9132T switch supports SFP transceivers with the following types of latching devices:

- Mylar tab latch
- Bale-clasp latch

Installing an SFP Transceiver

To install an SFP transceiver, follow these steps:

-
- Step 1** Attach an ESD-preventive wrist strap and follow its instructions for use.
- Caution** If the transceiver does not install easily, ensure that it is correctly oriented and the tab or clasp are in the correct position before continuing.
- Step 2** Remove the dust plug from the switch-port cage.
- Step 3** Remove the dust cover from the port-end of the transceiver.
- Step 4** Insert the transceiver into the port.
- Step 5** Insert or leave the dust plug in the cable-end of the transceiver if a cable is not being installed in the transceiver.
-

Removing an SFP Transceiver

To remove an SFP transceiver, follow these steps:

-
- Step 1** Attach an ESD-preventive wrist strap and follow its instructions for use.
- Step 2** Remove attached fibre-optic cables, if any. For more information, see the [Removing a Cable from an SFP Transceiver](#) section.
- Step 3** Remove the transceiver from the port:
- If the transceiver has a mylar tab latch, gently pull the tab straight out (do not twist), and then pull the transceiver out of the port.
 - If the transceiver has a bale-clasp latch, open the clasp by pressing it downwards, and then pull the transceiver out of the port.
- Step 4** Insert a dust cover into the cable-end of the transceiver and place the transceiver on an antistatic mat or into a static shielding bag.
- Step 5** Protect the switch port by inserting a clean dust plug if another transceiver is not being installed.
-

Maintaining SFP, SFP+, or QSFP+ Transceivers and Fiber-Optic Cables

SFP, SFP+, or QSFP+ transceivers and fiber optic cables must be kept clean and dust-free to maintain high signal accuracy and prevent damage to the connectors. Attenuation (loss of light) is increased by contamination. Therefore, attenuation should be kept below 0.35 dB.

Follow these maintenance guidelines:

- SFP, SFP+, or QSFP+ transceivers are sensitive to static discharge. To prevent ESD damage, wear an ESD-preventive wrist strap that is connected to the chassis.
- Do not remove and reinsert a transceiver more often than necessary. Repeated removals and insertions can shorten its useful life.
- Keep all optical connections covered when not in use. If they become dusty, clean before using in order to prevent dust from scratching the fiber optic cable ends.
- Do not touch the ends of connectors. This prevents fingerprints and other contamination of the connectors.
- Inspect cables before installation, for dust and damage. If damage is suspected, clean the ends and check for excessive light loss with a light meter.

Powering Up the Switch

This section provides instructions for powering up the switch and verifying component installation.

**Caution**

During this procedure, wear grounding wrist straps to avoid ESD damage to the switch.



Note Do not connect the MGMT 10/100/1000 Ethernet port to the LAN until the initial switch configuration has been performed. For instructions on connecting to this port, see the [Connecting the Management Port](#) section.

To power up the switch and verify hardware operation, follow these steps:

-
- Step 1** Verify that the power supplies and fan modules are installed, and tighten loose captive screws, if any.
- Step 2** Plug the power cables into the power supplies and arrange the cables so that they cannot be accidentally pulled out.
- Note** Depending on the outlet receptacle on your power distribution unit, you may need the optional jumper power cord to connect the Cisco MDS 9132T Switch to your outlet receptacle. For more information about the jumper power cord, see the [Jumper Power Cord](#) section.
- Step 3** Connect the other end of the power cables to the site power outlets that have the required power voltages.
- Step 4** Ensure that the switch is adequately grounded, as described in the [Grounding the Switch](#) section.
- Step 5** Connect a terminal device to the serial console port. For more information, see the [Connecting the Console Port](#) section.
- Step 6** Turn the site power outlet switches to On. The switch boots automatically.
- Step 7** Listen for the fans; they should begin operating as soon as the switch is powered on.
- Note** Do not operate the switch without a functioning fan module, except briefly during the fan module-replacement procedure. Cisco MDS 9000 Series Switches can operate for only a few minutes without any functioning fan modules before they begin to overheat.
- Step 8** Verify that the LED behavior is as follows when the switch has finished booting:
- Fan status LED is green.
 - Each power supply LED is green.
 - The switch status LED is green. If this LED is orange or red, it indicates that one or more environmental monitors is reporting a problem.
 - The Ethernet port link LEDs should not be On unless the cable is connected.
- Note** The LEDs for the Fibre Channel ports remain orange until the ports are enabled, and the LED for the MGMT 10/100/1000 Ethernet ports remains Off until the port is connected.
- Step 9** If a component is not operating properly, try removing and reinstalling it. If it still does not operate correctly, contact your customer service representative for a replacement.
- Note** If you purchased Cisco support through a Cisco reseller, contact the reseller directly. If you purchased support directly from Cisco, contact [Cisco Technical Support](#).
- Step 10** Verify that the system software has booted and the switch has initialized without error messages. If any problems occur, see the [Cisco MDS 9000 Series System Messages Guide](#). If you cannot resolve an issue, contact your customer service representative.
- Step 11** Complete the worksheets provided in Site Planning and Maintenance Records for future reference.

Note A setup utility is automatically launched the first time you access the switch, and guides you through the basic configuration. For instructions about how to configure the switch and check module connectivity, see the [Cisco Fabric Manager Fundamentals Configuration Guide](#).
