

# NEC Express5800/R120h-1E System Configuration Guide



## Introduction

This document contains product and configuration information that will enable you to configure your system. The guide will ensure fast and proper configuration of your NEC Express5800 server.


## Contents

<b>MODEL LINEUP .....</b>	<b>4</b>
8x2.5-inch Drive Model .....	4
4x3.5-inch Drive Model .....	4
<b>TECHNICAL SPECIFICATION .....</b>	<b>5</b>
Specification .....	5
<b>CONFIGURATION DIAGRAM .....</b>	<b>7</b>
Expansion slot map .....	8
<b>SERVER CONFIGURATION .....</b>	<b>9</b>
<b>1 Base Models.....</b>	<b>9</b>
<b>2 Processors .....</b>	<b>9</b>
<b>3 Memory.....</b>	<b>11</b>
<b>4 Internal Storage .....</b>	<b>13</b>
4.1 Drive Configuration.....	13
4.2 Optional Drive Cages .....	13
4.3 Storage Controllers and Options.....	14
4.4 Internal Drives .....	16
<b>5 Optical Drive .....</b>	<b>19</b>
<b>6 PCI Card.....</b>	<b>20</b>
6.1 PCI Riser Card .....	20
6.2 Network Interface Controller.....	20
6.3 External Storage Controller .....	23
6.4 Serial Port Adapter .....	24
<b>7 Other Add-in Components .....</b>	<b>25</b>
7.1 Power Supply .....	25
7.2 Cooling Fan Kit.....	25
7.3 Trusted Platform Module Kit.....	25
7.4 USB Memory Kit.....	26
<b>8 Factory Server Setting Service .....</b>	<b>27</b>
8.1 Memory RAS Settings .....	27
8.2 RAID Configuration Service .....	27
<b>9 Add-on Components .....</b>	<b>28</b>
9.1 17-inch LCD Console Drawer.....	28
9.2 KVM Switch .....	28
9.3 Server Management License .....	28
9.4 Dust Proof Filter Kit .....	29
9.5 Slide Rail Kit .....	29
9.6 Cable Management Arm.....	29
9.7 Starter Pack DVD .....	29
9.8 Flash FDD.....	30
<b>REFERENCES .....</b>	<b>31</b>
<b>External Views .....</b>	<b>31</b>
Front and Rear Views .....	31
<b>Dimensions (mm) .....</b>	<b>32</b>
<b>General supplementary Matters .....</b>	<b>33</b>

<b>Memory Supplementary Matters.....</b>	<b>34</b>
<b>Internal Drive Supplementary Matters .....</b>	<b>35</b>
<b>Server Management .....</b>	<b>38</b>
<b>OS Support Matrix for PCI Cards and Embedded Controllers .....</b>	<b>39</b>
<b>Supported PCI Cards and Installable Slots .....</b>	<b>40</b>
Expansion Slots .....	40
<b>Supported Tape and Removal Disk Backup Drive List .....</b>	<b>41</b>
<b>Boot Mode Setting.....</b>	<b>41</b>
<b>Guideline of Maximum Power Consumption.....</b>	<b>42</b>
<b>Copyright Notice and Liability Disclaimer.....</b>	<b>43</b>
<b>REVISION HISTORY.....</b>	<b>44</b>

## Model Lineup

### 8x2.5-inch Drive Model



### 4x3.5-inch Drive Model



# Technical Specification

## Specification


Model		R120h-1E	
		8x 2.5-inch Drive Model	4x 3.5-inch Drive Model
Part Number		N8100-2602F	N8100-2603F
Processor	Type	Intel® Xeon® Processor Bronze 3104(6C/6T, 1.70 GHz, 8.25MB, TDP 85W) Bronze 3106(8C/8T, 1.70 GHz, 11MB, TDP 85W) Silver 4108(8C/16T, 1.80 GHz, 11MB, TDP 85W) Silver 4110(8C/16T, 2.10 GHz, 11MB, TDP 85W) Silver 4112(4C/8T, 2.60 GHz, 8.25MB, TDP 85W) Silver 4114(10C/20T, 2.20 GHz, 13.75MB, TDP 85W) Silver 4116(12C/24T, 2.10 GHz, 16.50MB, TDP 85W) Gold 5115(10C/20T, 2.40 GHz, 13.75MB, TDP 85W) Gold 5118(12C/24T, 2.30 GHz, 16.50MB, TDP 105W) Gold 5120(14C/28T, 2.20 GHz, 19.25MB, TDP 105W) Gold 5122(4C/8T, 3.60 GHz, 16.50MB, TDP 105W) Gold 6126(12C/24T, 2.60 GHz, 19.25MB, TDP 125W) Gold 6128(6C/12T, 3.40 GHz, 19.25MB, TDP 115W) Gold 6130(16C/32T, 2.10 GHz, 22MB, TDP 125W) Gold 6132(14C/28T, 2.60 GHz, 19.25MB, TDP 140W) Gold 6134(8C/16T, 3.20 GHz, 24.75MB, TDP 130W) Gold 6136(12C/24T, 3 GHz, 24.75MB, TDP 150W) Gold 6138(20C/40T, 2 GHz, 27.50MB, TDP 125W) Gold 6140(18C/36T, 2.30 GHz, 24.75MB, TDP 140W) Gold 6142(16C/32T, 2.60 GHz, 22MB, TDP 150W) Gold 6148(20C/40T, 2.40 GHz, 27.50MB, TDP 150W) Gold 6152(22C/44T, 2.10 GHz, 30.25MB, TDP 140W)	
	Number of Processors	1 or 2	
Chipset		Intel® C622 Chipset	
Memory	Type	DDR4-2666 Registered DIMM (8/16/32GB) DDR4-2666 Load Reduced DIMM (64GB)	
	Standard Capacity	0 GB	
	Maximum Capacity	1 TB (16 x 64 GB)	
	Memory protection	ECC, x4 SDDC, x4 DDDC, Memory Mirroring, Memory Sparring	
Internal Storage	Standard Capacity	0 GB	
	Disk Controller	SATA : 6Gb/s, RAID 0/1/5/6/10/50/60 (Optional) SAS: 12 Gb/s, RAID 0/1/5/6/10/50/60 (Optional)	
	Hot Plug	Supported	
	Optical Disk Drive	Optional	
	Optical Drive Bays	1	
	Standard Disk Drive Bays	8	4
Expansion Slots	Standard	Total: 2 slots available 1 PCIe 3.0 x8 (x8 connector) for a dedicated RAID card 1 slot for a dedicated LOM controller * The slot configuration is changed by installing optional riser cards	
Video	Controller (VRAM)	Integrated into Server Management Controller (16MB)	
	Resolution	640x480, 800x600, 1,024x768, 1,280x1,024, 1,600x1,200, 1,920x1,200	
Interfaces		Front: 1x USB3.0, 1x USB2.0 (BMC) Rear: 2x USB3.0, 1x VGA (15-pin mini D-sub), 1x Management LAN connector (RJ-45), 2x Data LAN connector (RJ-45), 1x Serial (9-pin mini D-sub, Optional) Internal: 1x USB3.0, 2x SATA 2.0	
Redundant Fan		Optional, non-hot plug	
Redundant Power Supply		Optional, hot plug	
Power Supply		1x 500 Watt 80 PLUS® Platinum certified non-hot plug PSU 500 Watt : 100-120/200-240VAC ± 10% 50 / 60 Hz ± 3 Hz 1-2 x 500 Watt, 800 Watt 80 PLUS® Platinum certified hot plug PSU 500 Watt, 800 Watt : 100-120/200-240VAC ± 10% 50 / 60 Hz ± 3 Hz 1-2 x 800 Watt 80 PLUS® Titanium certified hot plug PSU 800Watt, Watt : 200-240 VAC ± 10% 50 / 60 Hz ± 3 Hz	
Dimensions (W x D x H)		434.6 x 614.9 x 42.9 mm	

## SYSTEM CONFIGURATION GUIDE – NEC Express5800/R120h-1E

Model	R120h-1E	
	8x 2.5-inch Drive Model	4x 3.5-inch Drive Model
	17.1 x 24.2 x 1.7 in (1U)	
Temperature, Relative Humidity (non-condensing)	Operating: 10° to 35° C / 50° to 95° F, 8 to 90% Non-Operating: -30° to 60° C / -22° to 140° F, 5 to 95%	
Regulatory and Safety	FCC, UL/cUL, CB, CE, Mexico (CoC), RCM, RoHS, WEEE	
Operating Systems	Microsoft® Windows Server® 2012 R2 Standard Microsoft® Windows Server® 2012 R2 Datacenter Microsoft® Windows Server® 2016 Standard Microsoft® Windows Server® 2016 Datacenter Red Hat Enterprise Linux 7.3 or later VMware ESXi™ 6.0 Update 3 VMware ESXi™ 6.5 Update 1 or later VMware ESXi™ 6.7 or later	


# Configuration Diagram

## 8x 2.5-inch Drive Model

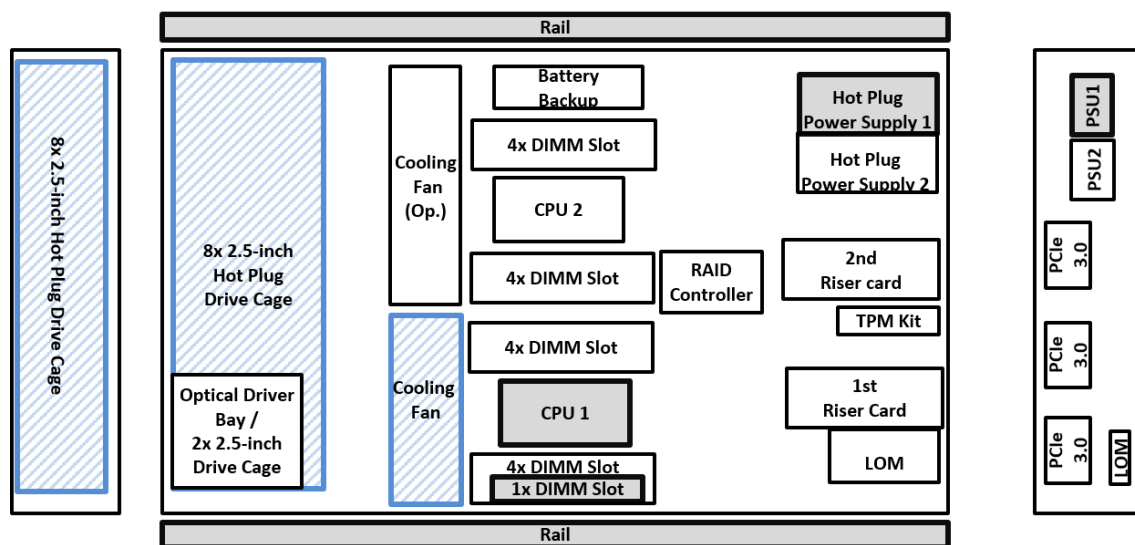


Legend: Standard Components Mandatory Components

## 4x 3.5-inch Drive Model

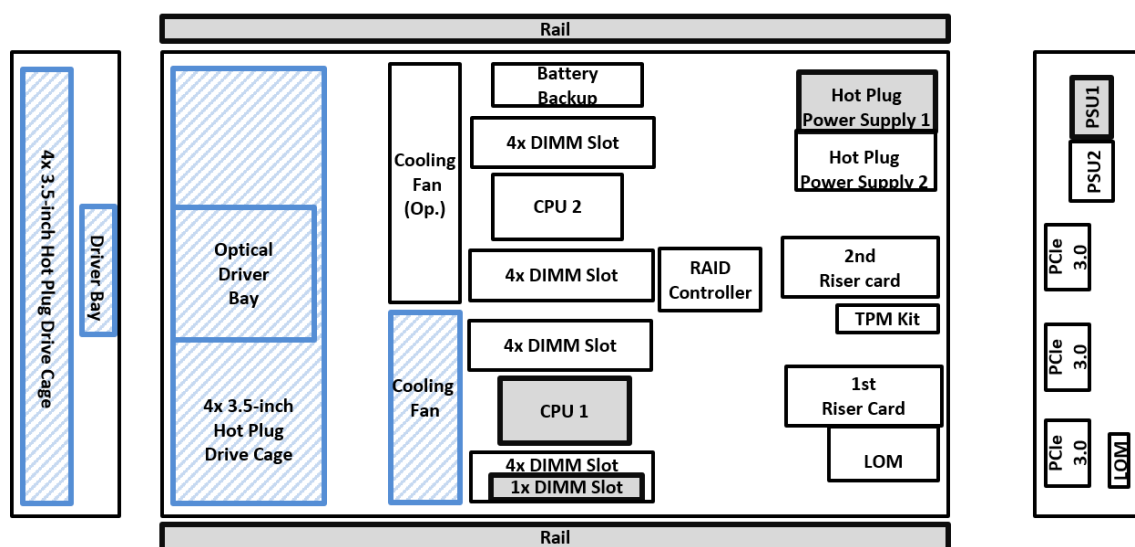

Legend: Standard Components Mandatory Components

## Expansion slot map

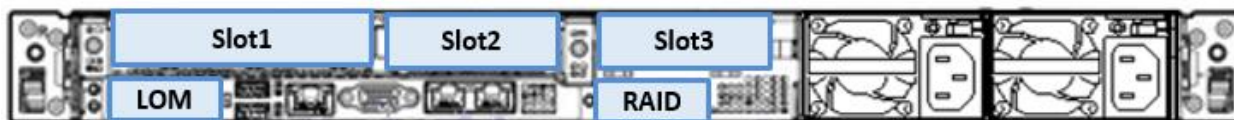

Legend			Remarks
Standard	LOM	Intel C622 Chipset embedded LAN, for a dedicated LOM controller	
	RAID	PCIe 3.0 x8, x8 connector, for a dedicated internal RAID card	
N8116-71 1st Riser Card (option)	Slot 1	PCIe 3.0 x16, x16 connector, Full-height, 168mm length	
	Slot 2	PCIe 3.0 x8, x8 connector, Low Profile, 168mm length	
N8116-82 1st Riser Card (option)	Slot 1	ALOM Slot x8, x8 connector, and x8 NVMe connector	
	Slot 2	PCIe 3.0 x8, x8 connector, Low Profile, 168mm length	
N8116-72 2nd Riser Card (option)	Slot 3	PCIe 3.0 x16, x16 connector, Low Profile, 168mm length	2CPU required

### NOTE:

- Riser Card is not standard implementation. If PCI Card is selected, Riser Card is required.
- Either only a 2nd Riser Card or a RAID Controller for Dedicated PCI Slot can be mounted.
- Install Riser Cards in the following order, 1st Riser Card → 2nd Riser Card



# Server Configuration

## 1 Base Models

Product Name / Description	Part Number
<b>NEC Express5800/R120h-1E 8x 2.5-inch Drive Model</b> No processor, no RAM, no HDD, no ODD, no Rail, no Power Supply Unit, no Riser Card Kit. Including : Front Bezel, 2.5-inch Drive Cage	N8100-2602F
<b>NEC Express5800/R120h-1E 4x 3.5-inch Drive Model</b> No processor, no RAM, no HDD, no ODD, no Rail, no Power Supply Unit, no Riser Card Kit. Including : Front Bezel, 3.5-inch Drive Cage	N8100-2603F

### NOTE:

The base model must be ordered with [a processor kit](#), [a memory kit](#), [SAS/SATA cable](#), [a power supply kit](#) and [Rail](#).

## 2 Processors

Available sockets: 2

Category	Product Name / Description	Part Number
<b>Xeon® Bronze 3100 Series</b>	<b>Xeon Bronze 3104 Processor Kit</b> Intel® Xeon ® Bronze 3104 (1.70 GHz, 6C/6T, 8.25MB, TDP 85W)	N8101-1275 (1st) N8101-1276 (2nd)
	<b>Xeon Bronze 3106 Processor Kit</b> Intel® Xeon ® Bronze 3106 (1.70 GHz, 8C/8T, 11MB, TDP 85W)	N8101-1277 (1st) N8101-1278 (2nd)
	<b>Xeon Silver 4108 Processor Kit</b> Intel® Xeon ® Silver 4108 (1.80 GHz, 8C/16T, 11MB, TDP 85W)	N8101-1279 (1st) N8101-1280 (2nd)
	<b>Xeon Silver 4110 Processor Kit</b> Intel® Xeon ® Silver 4110 (2.10 GHz, 8C/16T, 11MB, TDP 85W)	N8101-1281 (1st) N8101-1282 (2nd)
<b>Xeon® Silver 4100 Series</b>	<b>Xeon Silver 4112 Processor Kit</b> Intel® Xeon ® Silver 4112 (2.60 GHz, 4C/8T, 8.25MB, TDP 85W)	N8101-1283 (1st) N8101-1284 (2nd)
	<b>Xeon Silver 4114 Processor Kit</b> Intel® Xeon ® Silver 4114 (2.20 GHz, 10C/20T, 13.75MB, TDP 85W)	N8101-1287 (1st) N8101-1288 (2nd)
	<b>Xeon Silver 4116 Processor Kit</b> Intel® Xeon ® Silver 4116 (2.10 GHz, 12C/24T, 16.50MB, TDP 85W)	N8101-1289 (1st) N8101-1290 (2nd)
	<b>Xeon Gold 5115 Processor Kit</b> Intel® Xeon ® Gold 5115 (2.40 GHz, 10C/20T, 13.75MB, TDP 85W)	N8101-1291 (1st) N8101-1292 (2nd)
<b>Xeon® Gold 5100 Series</b>	<b>Xeon Gold 5118 Processor Kit</b> Intel® Xeon ® Gold 5118 (2.30 GHz, 12C/24T, 16.50MB, TDP 105W)	N8101-1293 (1st) N8101-1294 (2nd)
	<b>Xeon Gold 5120 Processor Kit</b> Intel® Xeon ® Gold 5120 (2.20 GHz, 14C/28T, 19.25MB, TDP 105W)	N8101-1295 (1st) N8101-1296 (2nd)
	<b>Xeon Gold 5122 Processor Kit</b> Intel® Xeon ® Gold 5122 (3.60 GHz, 4C/8T, 16.50MB, TDP 105W)	N8101-1297 (1st) N8101-1298 (2nd)
	<b>Xeon Gold 6126 Processor Kit</b> Intel® Xeon ® Gold 6126 (2.60 GHz, 12C/24T, 19.25MB, TDP 125W)	N8101-1299 (1st) N8101-1300 (2nd)
<b>Xeon® Gold 6100 Series</b>	<b>NOTE:</b> - The processor kit is make-to-order product.	
	<b>Xeon Gold 6128 Processor Kit</b> Intel® Xeon ® Gold 6128 (3.40 GHz, 6C/12T, 19.25MB, TDP 115W)	N8101-1301 (1st) N8101-1302 (2nd)
	<b>NOTE:</b> - The processor kit is make-to-order product.	
	<b>Xeon Gold 6130 Processor Kit</b> Intel® Xeon ® Gold 6130 (2.10 GHz, 16C/32T, 22MB, TDP 125W)	N8101-1303 (1st) N8101-1304 (2nd)
	<b>NOTE:</b> - The processor kit is make-to-order product.	
	<b>Xeon Gold 6132 Processor Kit</b> Intel® Xeon ® Gold 6132 (2.60 GHz, 14C/28T, 19.25MB, TDP 140W)	N8101-1305 (1st) N8101-1306 (2nd)
	<b>NOTE:</b> - The processor kit is make-to-order product.	
	<b>Xeon Gold 6134 Processor Kit</b> Intel® Xeon ® Gold 6134 (3.20 GHz, 8C/16T, 24.75MB, TDP 130W)	N8101-1307 (1st) N8101-1308 (2nd)
	<b>NOTE:</b>	

Category	Product Name / Description	Part Number
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6136 Processor Kit</b>	N8101-1480 (1st)
	Intel® Xeon® Gold 6136 (3 GHz, 12C/24T, 24.75MB, TDP 150W)	N8101-1481 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6138 Processor Kit</b>	N8101-1309 (1st)
	Intel® Xeon® Gold 6138 (2 GHz, 20C/40T, 27.50MB, TDP 125W)	N8101-1310 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6140 Processor Kit</b>	N8101-1311 (1st)
	Intel® Xeon® Gold 6140 (2.30 GHz, 18C/36T, 24.75MB, TDP 140W)	N8101-1312 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6142 Processor Kit</b>	N8101-1482 (1st)
	Intel® Xeon® Gold 6142 (2.60 GHz, 16C/32T, 22MB, TDP 150W)	N8101-1483 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6148 Processor Kit</b>	N8101-1484 (1st)
	Intel® Xeon® Gold 6148 (2.40 GHz, 20C/40T, 27.50MB, TDP 150W)	N8101-1485 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	
	<b>Xeon Gold 6152 Processor Kit</b>	N8101-1313 (1st)
	Intel® Xeon® Gold 6152 (2.10 GHz, 22C/44T, 30.25MB, TDP 140W)	N8101-1314 (2nd)
	<b>NOTE:</b>	
	- The processor kit is make-to-order product.	

**NOTE:**

- The processor kit for the 1st CPU must be ordered with a base model.
- The processors must be the same to configure dual processor system.
- The processor kit for 1st CPU contains CPU Heatsink, the processor kit for 2nd CPU contains CPU Heatsink and CPU fan.
- When using 3 PCIe slots (except LOM slot and RAID slot), it is necessary to purchase the riser card option after setting it to 2 CPU configuration.

## The maximum number of logical processors supported by OS

See the table below for the maximum number of logical processors that you can actually use on your system.

Operating Systems	Number of Logical Processors Supported by Operating Systems	Maximum Available Number of Logical Processors
Microsoft Windows Server 2012 R2 Standard	640 <sup>1</sup>	104
Microsoft Windows Server 2012 R2 Datacenter		
Microsoft Windows Server 2016 Standard	640 <sup>1</sup>	104
Microsoft Windows Server 2016 Datacenter		
VMware ESXi 6.0	480	104
VMware ESXi 6.5	576	104
VMware ESXi 6.7	768	104

<sup>1</sup> The maximum numbers of logical processors when using Hyper-V are below:

- Windows Server 2012 R2: 320
- Windows Server 2016: 512

### 3 Memory

Available slots: 8 per processor

Category	Product Name / Description	Part Number
Registered DIMM (RDIMM)	<b>8GB DDR4-2666 REG Memory Kit (1x8GB/SR)</b> 1 x 8GB Registered ECC DIMM, DDR4-2666(PC4-2666), Single Rank	N8102-708
	<b>16GB DDR4-2666 REG Memory Kit (1x16GB/SR)</b> 1 x 16GB Registered ECC DIMM, DDR4-2666(PC4-2666), Single Rank	N8102-709
	<b>16GB DDR4-2666 REG Memory Kit (1x16GB/DR)</b> 1 x 16GB Registered ECC DIMM, DDR4-2666(PC4-2666), Dual Rank	N8102-710
	<b>32GB DDR4-2666 REG Memory Kit (1x32GB/DR)</b> 1 x 32GB Registered ECC DIMM, DDR4-2666(PC4-2666), Dual Rank	N8102-711
Load Reduced DIMM (LRDIMM)	<b>64GB DDR4-2666 LR Memory Kit (1x64GB/QR)</b> 1 x 64GB Load Reduced ECC DIMM, DDR4-2666(PC4-2666), Quad Rank	N8102-712

**NOTE:**

- Minimum one memory kit per processor must be installed.
- It is recommended to install memory kits in multiples of 6 identical DIMMs for 6-channel symmetric memory configurations to increase memory transfer speed.
- Mix configurations of RDIMM and LRDIMM are not supported.
- See page 35 for additional memory configuration information.

### Memory Configuration Feature Comparison

See the table below for feature comparisons of memory configurations supported.

	Independent Channel	Memory Sparing	Memory Mirroring
<b>Performance</b>	Best	Better	Good
<b>Data Protection</b>	No	Multiple single bit error protection	Multiple single bit and multi bit error protection
<b>Redundancy</b>	No	Partly	Fully
<b>Data Correction</b>	ECC, x4 SDDC	ECC, x4 SDDC	ECC, x4 SDDC
<b>Available Memory</b>	Full physical memory	Two ranks of memory per channel : Half physical memory Four ranks of memory per channel : 3/4 physical memory Eight ranks of memory per channel : 7/8 physical memory	Half physical memory
<b>Available Memory Channels</b>	6	6	6
<b>Notes</b>	-	All DIMMs in the system must be identical. Six DIMMs per processor are supported, one DIMM is populated per channel	All DIMMs in the system must be identical. Two or four DIMMs per processor are supported, <b>It is necessary to re-populate DIMMs after shipment, please contact your sales representative for Memory Mirroring.</b>

**NOTE:**

- Single Rank Memory (N8102-708/-709) does not support Memory Mirroring Mode Configuration Service.
- Refer to "Memory RAS Settings"

### Maximum Memory Speed

See the table below for the actual maximum memory transfer speed. DDR4 memory speed depends on CPU series.

Processor Type	DIMM Speed
Xeon® Gold 6100 series Xeon® Gold 5122 Processor	2666 MHz
Xeon® Gold 5100 series excluding Xeon® Gold 5122 Processor Xeon® Silver 4100 series	2400 MHz
Xeon® Bronze 3100 series	2133 MHz

## Maximum Available Memory

See the table below for the maximum memory size that you can actually use on your system.

Operating Systems	Maximum Memory Size Supported by Operating Systems	Maximum Available Memory
Microsoft Windows Server 2012 R2 Standard Microsoft Windows Server 2012 R2 Datacenter	4 TB	1 TB <sup>1</sup>
Microsoft Windows Server 2016 Standard Microsoft Windows Server 2016 Datacenter	24 TB	1 TB <sup>1</sup>
VMware ESXi 6.0	6 TB	1 TB <sup>2</sup>
VMware ESXi 6.5	12TB	1 TB <sup>3</sup>
VMware ESXi 6.7 <sup>3</sup>	16TB	1 TB

<sup>1</sup> The maximum available memory size of Hyper-V systems is below:

- Windows Server 2012 R2 : 4 TB
- Windows Server 2016 : 24 TB

<sup>2</sup> Up to 4 TB of the main memory is available to each virtual machine.

<sup>3</sup> Up to 6 TB of the main memory is available to each virtual machine.

## 4 Internal Storage

### 4.1 Drive Configuration


Choose appropriate drive model and optional drive cages in accordance with the type and number of the drive you want to install.

#### List of the number that Internal Drives can be mounted

Base Model	Front cage
2.5-inch Drive Model	Standard : 8x 2.5-inch SAS/SATA Drive Expansion : 2x 2.5-inch SAS/SATA Drive
3.5-inch Drive Model	Standard : 4x 3.5-inch SAS/SATA Drive

#### Drive Bay for 2.5-inch Drive Model

Eight 2.5-inch drive bays are standard. With an optional 2.5-inch drive cage, up to ten 2.5-inch drive bays can be equipped.



Standard eight drives are available, if add more drives, Expansion Drive cage is needed.

#### Drive Bay for 3.5-inch Drive Model

Four 3.5-inch drive bays are equipped as standard



Standard four drives are available.

### 4.2 Optional Drive Cages

#### 4.2.1 8x 2.5-inch Drive model

Category	Product Name / Description	Part Number
Drive Cage	2.5-inch Hot Plug Drive Cage Kit (SAS/SATA) for 8x 2.5-inch Drive Model <b>NOTE:</b> The Drive Cage Kit does not include internal cables. Choose the appropriate interface cable in accordance with the type of storage controllers.	(standard)
Expansion Drive Cage (Factory Integration option)	2.5-inch Hot Plug Drive Cage Kit for 8x 2.5-inch Drive Model <b>NOTE:</b> The Drive Cage Kit does not include internal cables. Choose the appropriate interface cable in accordance with the type of storage controllers.	N8154-126
Expansion Drive Cage (Field upgrade option)	2.5-inch Hot Plug Drive Cage Kit Including internal cables, for 8x 2.5-inch Drive Model	N8154-102

#### NOTE:

- If equipped with N8154-102/-126 2.5-inch Hot Plug Drive Cage Kit, N8154-125 Internal DVD Drive Installation Kit cannot be mounted.
- If you select N8154-126 2.5-inch Hot Plug Drive Cage Kit, this cage is connected to Embedded SATA Controller.

### 4.2.2 4x 3.5-inch Drive model

Category	Product Name / Description	Part Number
Drive Cage	<b>2.5-inch Hot Plug Drive Cage Kit (SAS/SATA)</b> for 4x 3.5-inch Drive Model <b>NOTE:</b> The Drive Cage Kit does not include internal cables. Choose the appropriate interface cable in accordance with the type of storage controllers.	(standard)

**NOTE:**

- Up to four drives can be installed in Non-RAID (Embedded SATA) configuration. Refer to “Conditions for mixing of Internal Drives” in References.
- In default factory configuration, there are some conditions of drive types and RAID levels can be installed. Refer to “Conditions of internal drives in default factory configuration.” in References

## 4.3 Storage Controllers and Options

### 4.3.1 Embedded SATA Controller

Category	Product Name / Description	Part Number
Storage Controller	<b>Embedded SATA Controller</b> 10 x 6Gb/s SATA	(Standard)
Cable	<b>2.5-inch Drive Mode</b>	
	<b>Internal SAS/SATA Cable</b> For 2.5-inch Drive Model, up to eight drives are supported, 2x [1 x mini-SAS to 1 x mini-SAS]	K410-379(00)
	<b>Internal SAS/SATA Cable</b> For N8154-126 2.5-inch Hot Plug Drive Cage, up to two drives are supported, 1x [1x mini-SAS to 1 x mini-SAS]	K410-427(00)
	<b>3.5-inch Drive Mode</b>	
	<b>Internal SAS/SATA Cable</b> For 3.5-inch Drive Model, up to four drives are supported, 2x [1 x mini-SAS to 1 x mini-SAS]	K410-429(00)

**NOTE:**

- All internal SATA cables are factory integrated options. You cannot order only the cables separately.
- In default factory configuration, up to eight drives can be installed in the system.
- Hot plug insertion/removal are not supported in the configuration.

### 4.3.2 Embedded SATA RAID Controller (RAID 0/1/10)

Category	Product Name / Description	Part Number
Storage Controller	<b>Embedded SATA Controller</b> 10 x 6Gb/s SATA	(Standard)
Cable	<b>2.5-inch Drive Model</b>	
	<b>Internal SAS/SATA Cable</b> For 2.5-inch Drive Model, up to eight drives are supported, 2x [1 x mini-SAS to 1 x mini-SAS]	K410-379(00)
	<b>Internal SAS/SATA Cable</b> For N8154-126 2.5-inch Hot Plug Drive Cage, up to four drives are supported, 1x [1x mini-SAS to 1 x mini-SAS]	K410-427(00)
	<b>3.5-inch Drive Model</b>	
	<b>Internal SAS/SATA Cable</b> For 3.5-inch Drive Model, up to four drives are supported, 2x [1 x mini-SAS to 1 x mini-SAS]	K410-429(00)

**NOTE:**

- All internal SATA cables are factory integrated options. You cannot order the cables separately.
- In default factory configuration, up to eight drives can be installed in the system.
- The Embedded SATA RAID Controller is available for Windows operating system only.
- When the Embedded SATA RAID controller is used, choose an external DVD-ROM drive if needed. An internal DVD-ROM drive requires the embedded SATA controller connection.

### 4.3.3 RAID Controller for Dedicated PCI Slot

Choose the appropriate RAID controller in accordance with RAID feature required, the number of drives to install and whether a full-length PCI card is installed.

Category	Product Name / Description		Part Number
Storage Controller	<b>RAID Controller (RAID 0/1)</b> RAID 0/1/5/10 and SAS HBA mode, 0MB, Int. 8 port, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s, Low Profile Heat Sink		N8103-192
	<b>RAID Controller (2GB, RAID 0/1/5/6)</b> RAID 0/1/5/6/10/50/60, 2GB, Int. 8 port, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s, Low Profile Heat Sink		N8103-193
Battery Backup	<b>Battery Backup Unit</b> Lithium-ion Battery for RAID controller with cache memory		N8103-198
Cable	2.5-inch Drive Model	<b>Internal SAS/SATA Cable</b> For 2.5-inch Drive Model, up to eight drives are supported	K410-380(00)
	3.5-inch Drive Model	<b>Internal SAS/SATA Cable</b> For 3.5-inch Drive Model, up to four drives are supported	K410-381(00)

**NOTE:**

- PCI slot #2 is not available when the RAID controller is installed into the dedicated slot.
- One battery backup unit must be installed per one system.
- Mix configuration of N8103-192 RAID Controller (RAID 0/1) and N8103-201 RAID Controller (2GB, RAID 0/1/5/6) is not supported.
- Mix configuration of N8103-193 RAID Controller (2GB, RAID 0/1/5/6) and N8103-195 RAID Controller (RAID 0/1) is not supported.
- N8103-192 supports RAID5 in addition to RAID 0/1 although the product name does not contain "5". If higher performance is needed, choose RAID controller with cache memory.

### 4.3.4 RAID Controller for Standard PCI Slot

Category	Product Name / Description		Part Number
Storage Controller	<b>RAID Controller (RAID 0/1)</b> RAID 0/1/5/10 and SAS HBA mode, 0MB, Int. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s, Standard H/S type		N8103-195
	<b>RAID Controller (2GB, RAID 0/1/5/6)</b> RAID 0/1/5/6/10/50/60, 2GB, Int. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s, Standard H/S type		N8103-201
Battery Backup	<b>Battery Backup Unit</b> Lithium-ion Battery for RAID controller with cache memory		N8103-198
Cable	2.5-inch Drive Model	<b>Internal SAS/SATA Cable</b> For 2.5-inch Drive Model	K410-380(00)
	3.5-inch Drive Model	<b>Internal SAS/SATA Cable</b> For 3.5-inch Drive Model	K410-381(00)

**NOTE:**

- The RAID controller must be installed after shipment.
- One battery backup unit must be installed per one system.
- Mix configuration of N8103-192 RAID Controller (RAID 0/1) and N8103-201 RAID Controller (2GB, RAID 0/1/5/6) is not supported.
- Mix configuration of N8103-193 RAID Controller (2GB, RAID 0/1/5/6) and N8103-195 RAID Controller (RAID 0/1) is not supported.
- N8103-195 supports RAID5 in addition to RAID 0/1 although the product name does not contain "5". If higher performance is needed, choose RAID controller with cache memory.

## 4.4 Internal Drives

### 4.4.1 2.5-inch SATA Hard Disk Drives

Category	Product Name / Description	Part Number
512n Sector	<b>1TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-596
512e Sector	<b>2TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512e sector	N8150-545

**NOTE:**

- 512e sector drives are not available for VMware ESXi system.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SATA SSDs can be mixed.

### 4.4.2 2.5-inch SATA Solid State Drives

Category	Product Name / Description	Part Number
Read Intensive DWPD ≈ 1	<b>240GB Hot Plug 2.5-inch SATA SSD</b> 1 x 240GB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Read Intensive	N8150-1740
	<b>480GB Hot Plug 2.5-inch SATA SSD</b> 1 x 480GB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Read Intensive	N8150-1741
	<b>960GB Hot Plug 2.5-inch SATA SSD</b> 1 x 960GB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Read Intensive	N8150-1742
	<b>1.92TB Hot Plug 2.5-inch SATA SSD</b> 1 x 1.92TB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Read Intensive	N8150-1743
	<b>3.84TB Hot Plug 2.5-inch SATA SSD</b> 1 x 3.84TB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Read Intensive	N8150-1744
Value Endurance DWPD ≈ 3	<b>480GB Hot Plug 2.5-inch SATA SSD</b> 1 x 480GB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Value Endurance	N8150-1737
	<b>960GB Hot Plug 2.5-inch SATA SSD</b> 1 x 960GB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Value Endurance	N8150-1738
	<b>1.92TB Hot Plug 2.5-inch SATA SSD</b> 1 x 1.92TB SATA SSD, 2.5-inch, 6Gb/s, 512n sector, Value Endurance	N8150-1739

**NOTE:**

- All drives within a RAID array should be of the same type, capacity.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SATA SSDs and SAS SSDs can be mixed.

### 4.4.3 2.5-inch SAS Hard Disk Drives

Category	Product Name / Description	Part Number
512n Sector / 10,000 rpm	<b>300GB Hot Plug 2.5-inch SAS HDD</b> 1 x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-546
	<b>600GB Hot Plug 2.5-inch SAS HDD</b> 1 x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-547
	<b>1.2TB Hot Plug 2.5-inch SAS HDD</b> 1 x 1.2TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-549
512e Sector / 10,000 rpm	<b>1.8TB Hot Plug 2.5-inch SAS HDD</b> 1 x 1.8TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512e sector	N8150-550
	<b>2.4TB Hot Plug 2.5-inch SAS HDD</b> 1 x 2.4 TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512e sector	N8150-591
512n Sector / 15,000 rpm	<b>300GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-551
	<b>600GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-552
	<b>900GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 900 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-602

**NOTE:**

- 512e sector drives are not available for VMware ESXi system.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SATA SSDs and SAS SSDs can be mixed.



- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.

#### 4.4.4 2.5-inch SAS Solid State Drives

Category	Product Name / Description	Part Number
<b>Middle Endurance</b> DWPD ≈ 10	<b>400GB Hot Plug 2.5-inch SAS SSD</b> 1 x 400GB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Middle Endurance	N8150-1750
	<b>800GB Hot Plug 2.5-inch SAS SSD</b> 1 x 800GB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Middle Endurance	N8150-1751
<b>Value Endurance</b> DWPD ≈ 3	<b>400GB Hot Plug 2.5-inch SAS SSD</b> 1 x 400GB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Value Endurance	N8150-1752
	<b>800GB Hot Plug 2.5-inch SAS SSD</b> 1 x 800GB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Value Endurance	N8150-1753
<b>Read Intensive</b> DWPD ≈ 1	<b>960GB Hot Plug 2.5-inch SAS SSD</b> 1 x 960GB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Read Intensive	N8150-1754
	<b>1.92TB Hot Plug 2.5-inch SAS SSD</b> 1 x 1.92TB SAS SSD, 2.5-inch, 12Gb/s, 512n sector, Read Intensive	N8150-1755

**NOTE:**

- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SATA SSDs and SAS SSDs can be mixed.
- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.

#### 4.4.5 3.5-inch SATA Hard Disk Drives

Category	Product Name / Description	Part Number
<b>512n Sector/ 7,200 rpm</b>	<b>1TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-565
	<b>2TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-566
	<b>4TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 4 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-568
<b>512e Sector 7,200 rpm</b>	<b>6TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 6 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512e sector	N8150-569
	<b>8TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 8 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512e sector	N8150-570
	<b>12TB 7.2K Hot Plug 3.5-inch SATA HDD</b> 1 x 12 TB SATA HDD, 3.5-inch, 6Gb/s, 7,200 rpm, 512e sector	N8150-588

**NOTE:**

- 512e sector drives are not available for VMware ESXi system.
- All drives within a RAID array should be of the same type, capacity.
- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.

#### 4.4.6 3.5-inch Near Line SAS Hard Disk Drives

Category	Product Name / Description	Part Number
<b>512e Sector 7,200 rpm</b>	<b>8TB 7.2K Hot Plug 3.5-inch SAS HDD</b> 1 x 8 TB Near Line SAS HDD, 3.5-inch, 12Gb/s, 7,200 rpm, 512e sector <b>NOTE:</b> - This HDD is make-to-order product.	N8150-573
	<b>12TB 7.2K Hot Plug 3.5-inch SAS HDD</b> 1 x 12 TB SAS HDD, 3.5-inch, 12Gb/s, 7,200 rpm, 512e sector	N8150-590

**NOTE:**

- 512e sector drives are not available for VMware ESXi system.
- All drives within a RAID array should be of the same capacity.
- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.

## SYSTEM CONFIGURATION GUIDE – NEC Express5800/R120h-1E

- Near Line SAS HDD (7200 rpm) and SAS-HDD (10,000rpm / 15,000rpm) are equipped with SAS interface, they have the same maximum transfer speed and error recovery capabilities from the perspective of the interface specification, however Near Line SAS HDDs have the same I/O performance and endurance life as SATA HDDs(7200rpm) have.

## 5 Optical Drive

Category		Product Name / Description	Part Number
Internal	Installation Kit	<b>Internal DVD Drive Installation Kit</b> Installation kit for 8x2.5-inch Drive Model <b>NOTE:</b> - The Installation Kit cannot be installed if N8154-102/126 2x2.5-inch Hot Plug Drive Cage Kit (SAS/SATA) is installed.	N8154-125
	Drive	<b>Internal Slim DVD-ROM drive</b> Slim DVD-ROM drive	N8151-137
		<b>Internal DVD-Super Multi Drive</b> Slim DVD Super Multi drive, including writing software <b>NOTE:</b> - Not supported for Linux or VMware	N8151-138
	External	<b>External DVD-ROM Drive</b> Slim DVD-ROM drive, USB bus powered, 1.6A require, USB	N8160-102

**NOTE:**

- N8151-137/ -138 can be installed in 8x 2.5-inch Drive Model with N8154-125 or 4x 3.5-inch Drive Model
- If N8154-125 Internal DVD Drive Installation Kit is selected, an Internal DVD drive must be selected.

## 6 PCI Card

Up to two PCI riser cards can be installed in the system and 1st riser card is NOT installed as standard. Up to two PCI cards can be mounted on the 1st riser card, to be install three PCI cards, 2nd PCI riser card is required.






Please refer to [Supported PCI Cards and Installable Slots](#) with regard to the position of PCI slot which can mount PCI card supported.

### 6.1 PCI Riser Card

#### 6.1.1 PCI Slot Configuration

Choose the appropriate configuration in accordance with the number and the type of PCI cards you want to install and whether you need PCIe SSD slot and ALOM slot.

#### 6.1.2 PCI Riser Card Kit

Category	Product Name / Description		Part Number
1st Riser	<b>Riser Card Kit(2xPCI)</b> Riser card for slot 1 with one PCIe 3.0 x16 slot, and riser card for slot 2 with one PCIe 3.0 x8 slot	Slot2 	N8116-71
		Slot1 	
	<b>Riser Card Kit(2xPCI, 1xPCIe SSD)</b> Riser card for slot 1 with one PCIe SSD slot and one ALOM slot, and riser card for slot 2 with PCIe 3.0 x8 slot	Slot2 	N8116-82
		Slot1 	
2nd Riser	<b>Riser Card Kit(1xPCI)</b> Riser card for slot 3 with one PCIe 3.0 x16 slot <b>NOTE:</b> <ul style="list-style-type: none"> <li>- To install 2nd Riser Card Kit, the system must be configured with a dual processor.</li> <li>- The 2nd Riser Card Kit is available if the 1st Riser Card is installed.</li> <li>- The 2nd Riser Card Kit is not available if the RAID controller for dedicated slot is installed.</li> </ul>	Slot3 	N8116-72

### 6.2 Network Interface Controller

Category	Product Name / Description	Part Number
LOM Card (FLOM Slot)	<b>1GbE</b> <b>Dual Port 1000BASE-T LOM Card</b> Integrated into Intel C622 chipset	N8104-193
	<b>10GbE</b> <b>Dual Port 10GBASE-T LOM Card</b> Integrated into Intel C622 chipset	N8104-195
	<b>Dual Port 10GBASE-SR LOM Card</b> Integrated into Intel C622 chipset	N8104-194
	<b>NOTE:</b> <ul style="list-style-type: none"> <li>- N8104-189 SFP+ Module is required to connect with an optical cable.</li> <li>- Up to two SFP+ Modules can be installed.</li> </ul>	
LOM Card (ALOM Slot)	<b>1GbE</b> <b>Quad Port 1000BASE-T LOM Card</b> Broadcom BCM5719 PCIe 2.0(x4)	N8104-171
	<b>Quad Port 1000BASE-T LOM Card</b> Intel Ethernet Controller I350 PCIe 2.0(x4)	N8104-172
	<b>10GbE</b> <b>Dual Port 10GBASE-T LOM Card</b> QLogic 57810S PCIe 2.0(x8)	N8104-173
	<b>Dual Port 10GBASE-T LOM Card</b>	N8104-175

Category		Product Name / Description	Part Number
		Intel X550 <b>PCIe 3.0(x4)</b> <b>Dual Port 10GBASE SFP+ LOM Card</b> Intel Ethernet Controller X710 PCIe 3.0(x8) <b>NOTE:</b> - N8104-189 SFP+ Module is required to connect with an optical cable. - Up to two SFP+ Modules can be installed.	N8104-176
	25GbE	<b>Dual Port 25GBASE SFP+ LOM Card</b> Cavium 45604 PCIe 3.0(x16) <b>NOTE:</b> - N8104-190 SFP28 Module is required to connect with an optical cable. - Up to 2 SFP28 Modules can be installed. - Twinax cable can be installed - 6 or more memories per processor are needed for maximum performance.	N8104-177
Adapter	1GbE	<b>Dual Port 1000BASE-T Adapter</b> Broadcom BCM5720 Gigabit Ethernet Controller PCIe 2.0(x1)	N8104-178
		<b>Dual Port 1000BASE-T Adapter</b> Intel Ethernet Controller I350 PCIe 2.0(x4) <b>NOTE:</b> - Network cables with RJ-45 plug covers cannot be used.	N8104-180
		<b>Quad Port 1000BASE-T Adapter</b> Broadcom BCM5719 Gigabit Ethernet Controller PCIe 2.0(x4) <b>NOTE:</b> - Network cables with RJ-45 plug covers cannot be used. - N8116-71 Riser Card Kit(2xPCI) is required.	N8104-179
		<b>Quad Port 1000BASE-T Adapter</b> Intel Ethernet Controller I350 PCIe 2.0(x4) <b>NOTE:</b> - Network cables with RJ-45 plug covers cannot be used. - N8116-71 Riser Card Kit(2xPCI) is required.	N8104-181
	10GbE	<b>Dual Port 10GBASE-T Adapter</b> QLogic 57810S PCIe 2.0(x8)	N8104-182
		<b>Dual Port 10GBASE-T Adapter</b> Cavium QL41401, <b>PCIe3.0(x8)</b>	N8104-183
		<b>Dual Port 10GBASE-T Adapter</b> Intel X550-AT2, <b>PCIe3.0(x4)</b>	N8104-184
		<b>Dual Port 10GBASE SFP+ Adapter</b> QLogic 57810S PCIe 2.0(x8) <b>NOTE:</b> - N8104-189 SFP+ Module is required to connect with an optical cable. - Up to 2 SFP+ Modules can be installed. - Twinax cable can be installed	N8104-185
		<b>Dual Port 10GBASE SFP+ Adapter</b> Intel Ethernet Controller X710 PCIe 3.0(x8) <b>NOTE:</b> - N8104-189 SFP+ Module is required to connect with an optical cable. - Up to 2 SFP+ Modules can be installed. - Twinax cable can be installed	N8104-186
		<b>Dual Port 25GBASE SFP28 Adapter</b> Cavium QL41401, PCIe3.0(x8)	N8104-187

Category	Product Name / Description		Part Number
	<b>NOTE:</b> <ul style="list-style-type: none"><li>- N8104-190 SFP28 Module is required to connect with an optical cable.</li><li>- Up to 2 SFP28 Modules can be installed.</li><li>- Twinax cable can be installed</li><li>- 6 or more memories per processor are needed for maximum performance.</li></ul>		
<b>SFP Module</b>	<b>10GbE</b>	<b>SFP+ Module (10G-SR)</b> 1 x SFP+ Module	N8104-189
	<b>25GbE</b>	<b>SFP28 Module(25G-SR)</b> 1 x SFP28 Module	N8104-190

**NOTE:**

- The NIC cards must be installed under the maximum configuration limits for networking when running with VMware systems. For more detail, see the Networking Maximum in the Configuration Maximums document for VMware.

<https://configmax.vmware.com/>

## NIC Teaming feature – NIC Teaming and bonding features

The Express 5800 server supports NIC teaming, which enables you to configure multiple NICs as a virtual single network interface for dual path, load balancing, for fault tolerance and network load balancing respectively.

See the table below for supported network interfaces and OS combinations.

Network Interface	Team	Operating Systems
<b>1GbE NIC</b> On-board LAN Interface N8104-172/-180/-181/-193	Up to four ports per one team <b>NOTE:</b> <ul style="list-style-type: none"> <li>- N8104-172/-180/-181 do NOT support Windows Server 2012 R2</li> <li>- N8104-193 does NOT support VMware ESXi 6.0 Update3</li> </ul>	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>1GbE NIC</b> N8104-171/-178/-179	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>10GbE NIC</b> N8104-173/-182	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>10GbE NIC</b> N8104-175/-184/-195	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>10GbE NIC</b> N8104-183	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>10GbE NIC</b> N8104-185	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.0 Update3 VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later

<b>10GbE NIC</b> N8104-176/-186/-194	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 6.9 or later Red Hat Enterprise Linux 7.3 or later VMware ESXi 6.5 Update1 or later VMware ESXi 6.7 or later
<b>25GbE NIC</b> N8104-177/-187	Up to four ports per one team	Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux 7.3 or later

**NOTE:**

- NIC Teaming feature is not supported on iSCSI interfaces.
- The network interfaces for each teaming must be the same.
- When 1GbE, 10GbE and 25GbE NIC teaming are mixed, the maximum number of team must be as follows:
  - Windows Server 2012, Windows Server 2012 R2, Windows Server 2016 : up to five per one system
  - Red Hat Enterprise Linux : up to five per one system

## 6.3 External Storage Controller

### 6.3.1 RAID Controller

Category	Product Name / Description	Part Number
<b>Controller</b>	<b>RAID Controller (4GB, RAID0/1/5/6)</b> RAID0/1/5/6/10/50/60, 4GB, 8 External port PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s	N8103-196
<b>Battery Backup</b>	<b>Battery Backup Unit</b> Lithium-ion Battery for RAID controller.	N8103-198

**NOTE:**

- Only one SAS JBOD Enclosure can be connected to one RAID controller.
- 4Kn sector drives are not supported with the RAID controller.
- One battery backup unit must be installed per one system.
- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.
- It is recommended to set RAID array configuration drives up to eight in order to minimize the risk of becoming multiple hard drives failure.

### 6.3.2 Fibre Channel / SAS Controller

Category	Product Name / Description	Part Number
<b>Fibre Channel</b>	<b>Fibre Channel Controller (1ch)</b> Cavium QLogic, QLE2690 16Gb/s, Optical, PCIe 3.0 x8	N8190-165
	<b>NOTE:</b> <ul style="list-style-type: none"> <li>- The controller is qualified with NEC Storage M series, OS support WS2012R2 and WS2016</li> <li>- The controller is qualified with NEC Storage T series, OS support WS2012R2, WS2016 and RHEL7.3</li> </ul>	
	<b>Fibre Channel Controller (2ch)</b> Cavium QLogic, QLE2692 16Gb/s, Optical, PCIe 3.0 x8	N8190-166
	<b>NOTE:</b> <ul style="list-style-type: none"> <li>- The controller is qualified with NEC Storage M series, OS support WS2012R2 and WS2016</li> <li>- The controller is qualified with NEC Storage T series, OS support WS2012R2, WS2016 and RHEL7.3</li> </ul>	
	<b>Fibre Channel Controller (1ch)</b> Broadcom, LPe31000 16Gb/s, Optical, PCIe 3.0 x8	N8190-163
	<b>NOTE:</b> <ul style="list-style-type: none"> <li>- The controller is qualified with NEC Storage M series.</li> <li>- The controller is not qualified with NEC Storage T series.</li> </ul>	
	<b>Fibre Channel Controller (2ch)</b> Broadcom, LPe31002	N8190-164

16Gb/s, Optical, PCIe 3.0 x8

**NOTE:**

- The controller is qualified with NEC Storage M series.
- The controller is not qualified with NEC Storage T series.

**Fibre Channel Controller (1ch)**

Broadcom, LPe32000

32Gb/s, Optical, PCIe 3.0 x8

**NOTE:**

- The controller is qualified with NEC Storage M series.
- The controller is not qualified with NEC Storage T series.

**Fibre Channel Controller (2ch)**

Broadcom, LPe32002

32Gb/s, Optical, PCIe 3.0 x8

**NOTE:**

- The controller is qualified with NEC Storage M series.
- The controller is not qualified with NEC Storage T series.

<b>SAS</b>	<b>SAS Controller</b> LSI SAS9300-8e Host Bus Adapter 12Gb/s SAS, ext. 8(SFF-8644 x2), PCIe 3.0(x8) <b>NOTE:</b> <ul style="list-style-type: none"><li>- Support for connection to NEC Storage T series and M series and LTO The controller is not qualified with tape drive connection via Device Expansion Unit.</li><li>- Please download the driver kit from Express5800 web site</li><li>- This controller must be installed after shipment.</li><li>- This controller is an factory installation option. Select N8103-184 for the field upgrade use after shipment.</li></ul>	N8103-E184
	<b>SAS Controller</b> 12Gb/s SAS, ext. 8(SFF-8644 x2), PCIe 3.0 x8 <b>NOTE:</b> <ul style="list-style-type: none"><li>- Support tape drive connection via Device Expansion Unit only</li></ul>	N8103-197

**NOTE:**

- Please refer to the NEC Storage website for supported OS and device
- For FC-SAN boot, please refer to "FC SAN Boot Configuration Guide"
- For the cluster configuration, please refer to the Express Cluster website
- Fibre Channel (FC) link speed varies by types and length of cables

## 6.4 Serial Port Adapter

Product Name / Description	Part Number
<b>Additional Serial Port Kit</b> Serial port Connector	N8117-11

**NOTE:**

- Up to one Serial Port Adapter can be installed.



## 7 Other Add-in Components

### 7.1 Power Supply

Category	Product Name / Description		Part Number
Non Redundant	500W Non-hot Plug Power Supply		N8181-168
Redundant	Power Cage	Redundant PSU Cage	N8181-174
	Power Unit	500W Platinum Hot Plug Power Supply 1 x 500 Watt 80 PLUS® Platinum, including one 2m IEC320 C14 power cord	N8181-159
		800W Platinum Hot Plug Power Supply 1 x 800 Watt 80 PLUS® Platinum, including one 2m IEC320 C14 power cord	N8181-160
		800W Titanium Hot Plug Power Supply 1 x 800 Watt 80 PLUS® Titanium, including one 2m IEC320 C14 power cord	N8181-161
	NOTE:		
	- 200 VAC input only supported		

**NOTE:**

- Minimum one power supply unit must be installed.
- Up to two redundant power supply units are available per system, they must be the same unit to configure redundancy.

### Available Power Supplies

See the table below for available power supplies based on the number and type of processor, the number and type of DIMMs, and the number of drives.

Number of Processors	Type of Processor	Type of DIMMs	Number of DIMMs	Number of Drives	Available Power Supply
1CPU	Processor with 130 Watt or less	-	-	-	500W, 800W
		RDIMM	-	-	500W, 800W
	Processor with 140 Watt or more	LRDIMM	Up to six	Up to eight	500W, 800W
				Nine or more	800W
			Seven or more	-	800W
2CPU	Processor with 85 Watt	RDIMM	Six or less	Up to four	500W, 800W
				Five or more	800W
		-	Seven or more	-	800W
	Processor with 105 Watt or more	LRDIMM	-	-	800W
		-	-	-	800W

### 7.2 Cooling Fan Kit

Product Name / Description	Part Number
Non Redundant Fan Kit Non redundant cooling fans	(Standard)
Redundant Fan Kit Redundant cooling fans	N8181-166

### 7.3 Trusted Platform Module Kit

Product Name / Description	Part Number
Trusted Platform Module Kit TPM 2.0 module	N8115-35

**NOTE:**

- The kit is not available in China.
- The kit is not removable after attachment.
- The kit supports only with Windows operating system configured with UEFI boot mode.
- "Chipset-TPM" in BIOS setup menu must be activated prior to use of this product.

To use Windows BitLocker drive encryption, be sure to keep the "recovery password" of BitLocker function. The recovery password is required to restore data for hardware replacement during a system error.

### 7.4 USB Memory Kit

Product Name / Description	Part Number
8GB USB Memory	N8106-017
Dual 8GB microSD Kit(USB) Including 2x 8GB microSD, USB dual microSD memory card reader, RAID1 Support	N8106-016

**NOTE:**

- The USB Memory Kit is installed in the system when you order it with the base model.
- The kit does not include VMware ESXi installation media and license.
- To use VMware vSAN, combination of vSAN certified hardware is required.

## 8 Factory Server Setting Service

### 8.1 Memory RAS Settings

If you need to change the BIOS settings for the memory RAS feature in the factory, select the appropriate configuration service.

Product Name / Description	Part Number
<b>Memory Mirroring Mode Configuration Service</b> Setup option to change the Memory RAS of BIOS menu to Memory Mirroring Mode	NESV16-013
<b>Memory Sparing Mode Configuration Service</b> Setup option to change the Memory RAS of BIOS menu to Memory Sparing Mode	NESV16-014

**NOTE:**

- It is an option only for factory setup
- Single Rank Memory (N8102-708/-709) does not support Memory Mirroring Mode Configuration Service (NESV16-013)

### 8.2 RAID Configuration Service

If RAID configuration setup is NOT needed when a RAID controller is installed at the factory, select this option service.

Product Name / Description	Part Number
<b>RAID Config Option(None)</b> Server setting option service without RAID configuration setup when a RAID controller is installed.	NESV16-039

## 9 Add-on Components

### 9.1 17-inch LCD Console Drawer

Category		Product Name / Description	Part Number
Drawer w/ KVM	Drawer	<b>17-inch LCD Console Drawer (8port)</b> 17-inch LCD, US 83-keys Keyboard, Optical mouse, 8 port KVM switch, 1U height	N8143-106F
	Cable	<b>Switch Unit Connection Cable Set (USB, 1.8m)</b> 1.8 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(1A)
		<b>Switch Unit Connection Cable Set (USB, 3m)</b> 3 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(03)
		<b>Switch Unit Connection Cable Set (USB, 5m)</b> 5 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(05)
Drawer w/o KVM	Drawer	<b>17inch LCD Console Unit 1U</b> 17-inch LCD, US 83-keys Keyboard, Optical mouse, 1U height, 4-pin USB B to 4-pin USB A cable 2 m, PS/2 Y-splitter cable 2m, 15-pin mini D-sub VGA cable 2 m	N8143-105F
		<b>17inch LCD Console Drawer (1port)</b> 17-inch LCD, US 103-keys Keyboard with 10-key, Touch pad with 3-button, 1U height, 4-pin USB B to 4-pin USB A cable 1.8 m, Two PS/2 cable 1.8 m, 15-pin mini D-sub VGA cable 1.8 m	N8143-108F
		<b>17.3inch LCD Console Drawer (1port)</b> 17.3-inch wide Full HD LCD, US 103-keys Keyboard with 10-key, Touch pad with 2-button, 1U height, 4-pin USB B to 4-pin USB A cable 1.8 m, 15-pin mini D-sub VGA cable 1.8 m, DVI-D cable 1.8m	N8143-122F
	Keypad	<b>Keyboard Unit (JP)</b> JP 108-keys Keyboard with 10-key for N8143-108F 17inch LCD Console Drawer (1port)	N8143-109
		<b>Keyboard Unit (UK)</b> UK 104-keys Keyboard with 10-key, for N8143-108F 17inch LCD Console Drawer (1port)	N8143-111

**NOTE:**

- Keyboard of N8143-105F/-106F does not have 10-key.

### 9.2 KVM Switch

Category		Product Name / Description	Part Number
KVM Switch		<b>Server Switch Unit (8 server)</b> 1U USB 8 port KVM switch	N8191-14F
Cable	KVM	<b>Switch Unit Connection Cable Set (USB,1.8m)</b> 1.8 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(1A)
		<b>Switch Unit Connection Cable Set (USB,3m)</b> 3 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(03)
		<b>Switch Unit Connection Cable Set (USB,3m)</b> 5 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(05)
	Cascading	<b>Switch Unit Connection Cable 1.8 m</b> 1.8 m, 1 x 15-pin mini D-sub - 1x 15-pin mini D-Sub / 2x PS/2	K410-119(1A)

**NOTE:**

- Order Switch Unit Connection Cable Set as same sets as servers to be connected to. (N8191-14F: max 8 servers)

### 9.3 Server Management License

Choose the following license kit to use additional remote management features. See "Server Management" in References.

Product Name / Description	Part Number
<b>License for Remote Management (Advanced)</b> License per server Remote console: - Integrated Remote Console (IRC) with full functionality Remote media: - Virtual media access via Integrated Remote Console (IRC) - Scripted virtual media access	N8115-33

System management:	
- Global team collaboration for up to six consoles	
- Integrated Remote Console (IRC) recording and playback	
<b>License for Remote Management (Scale-Out)</b>	N8115-34
License per server	
Remote console:	
- Text-based remote console via SSH	
- Integrated Remote Console (IRC) under Pre-OS	
System management:	
- Email alert	
- Remote Syslog feature	
- Virtual Serial Port recording and playback	
<b>License for Remote Management (Essentials)</b>	N8115-36
License per server	
Remote console:	
- Integrated Remote Console (IRC)	
Remote media:	
- Virtual media access via Integrated Remote Console (IRC)	
System management:	
- Email alert	

**NOTE:**

- Remote management features are not available for virtual machines.

## 9.4 Dust Proof Filter Kit

Product Name / Description	Part Number
<b>Dust proof Filter Kit</b>	N8147-32
Including the filter attachment kit and 10 sets of dust proof filters	
Suggested replacement: Every three months (depending on environment).	

**NOTE:**

- The Dustproof Filter Kit is make-to-order products. Please consult your sales representative in regard to production lead time.

## 9.5 Slide Rail Kit

Product Name / Description	Part Number
<b>Rail kit for 1U server</b>	N8143-135

## 9.6 Cable Management Arm

Product Name / Description	Part Number
<b>Cable Management Arm for 1U Server</b>	N8143-125

## 9.7 Starter Pack DVD

The starter pack DVD includes the software and driver qualified by NEC. In order to obtain technical support from NEC, please be sure to install the software and drivers provided with the starter pack. The latest DVD image can be downloaded for free from NEC website during the warranty period.

Product Name / Description	Part Number
<b>Express5800/R120h-1E, 2E Starter Pack</b>	UL9020-B111

**NOTE:**

- By applying Starter Pack, Driver software qualified by NEC can be installed. To use servers, UL9020-B111 Starter Pack or Starter Pack downloaded from Web site must be installed.
- Starter Pack may be updated without notice. The latest version of Start Pack is available in Web site. Starter Pack can be downloaded within Warranty term.
- User Guide of this product is supplied as PDF file in NEC Web site.

## 9.8 Flash FDD

Choose the Flash FDD if you need to prepare an alternative device for a floppy drive.

Category	Product Name / Description	Part Number
External	<b>Flash FDD</b> USB flash emulating USB floppy disk, Native capacity 1.44 MB	N8160-96

**NOTE:**


- Up to one drive can be connected.

# References

## External Views

### Front and Rear Views

#### Front View for 8x 2.5-inch Drive Model

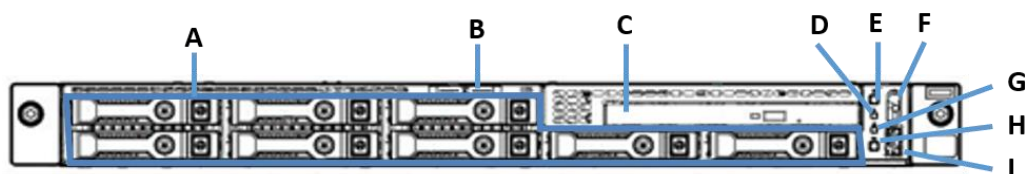

#### Legend

A.	2.5-inch Drive Bays	F.	USB 3.0 Connector
B.	Pull-out tab	G.	LINK/ACT LED
C.	Optional Drive Bay	H.	UID Button LED
D.	Health LED	I.	iLO Service Connector
E.	Power On/standby button/LED		


#### Front View for 4x 3.5-inch Drive Model



#### Legend

A.	3.5-inch Drive Bays	F.	UID Button LED
B.	Optional Drive Bay	G.	LINK/ACT LED
C.	Pull-out tab	H.	Health LED
D.	iLO Service Connector	I.	Power On/standby button/LED
E.	USB 3.0 Connector		


### Rear View

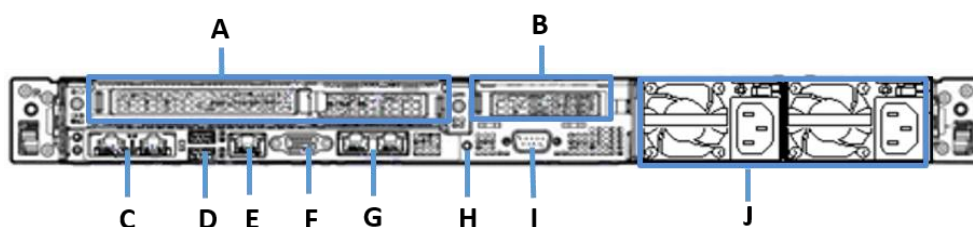

#### Legend

A.	PCIe slots (option)	F.	VGA connector
B.	PCIe slots (option)	G.	NIC ports 1-2 (1Gb)
C.	Flexible LOM (optional)	H.	UID LED
D.	USB 3.0 Connectors	I.	Serial Port Connector (optional)
E.	Management Port	J.	Power Supply

## Dimensions (mm)

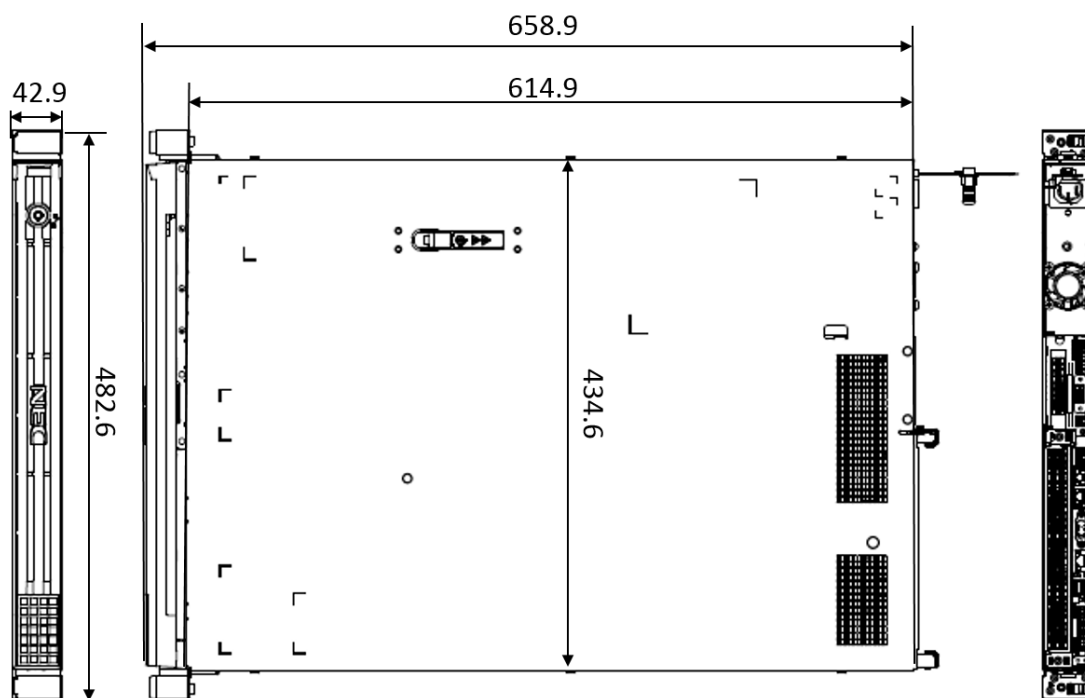



## General supplementary Matters

### HDD

- The Capacity of Hard disk drive is indicated in decimal not binary. 1GB=1000<sup>3</sup>B, 1TB=1000<sup>4</sup>B.

### PCI expansion slot

- Transfer speed of PCI Express
  - ◆ PCI Express (PCIe): 2.5Gb/s (simplex) per lane
  - ◆ PCI Express 2.0 (PCIe 2.0): 5Gb/s (simplex) per lane
  - ◆ PCI Express 3.0 (PCIe 3.0): 8Gb/s (simplex) per lane

### Time display

- A system clock is affected by temperature conditions in storage. If high accuracy of the system clock is required, use of NPT servers is recommended.

## Memory Supplementary Matters

### Installation rule


- The number of memory which can be installed varies depending on the number of CPU.
- This installation rule is defined to maximize performance efficiently in multiple cores and tasks operation.
- Registered DIMM (RDIMM), Load Reduced DIMM (LRDIMM) can be installed up to 8 per 1CPU.
- Mixing of RDIMM and LRDIMM is not allowed to be installed.

When install DIMMs, higher capacity memory must be installed preferentially, if this rule is ignored, it may cause failures of DIMMs. This rule applies to the factory installation.


For dual CPU system, install DIMM to CPU1 firstly and then to CPU2 alternately.

Memory population varies with number of installed DIMMs. In installation of 5, 7, 8 DIMMs per CPU, optimal performance might NOT be obtained. Other memory populations are recommended.


### Single CPU

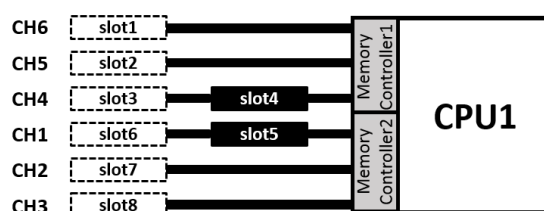


### Dual CPU

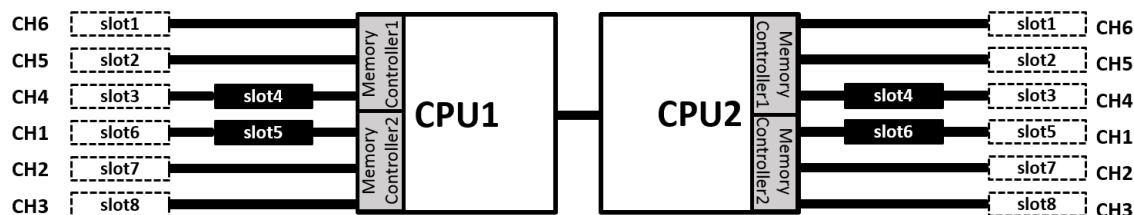

### 1-3x DIMM(s)

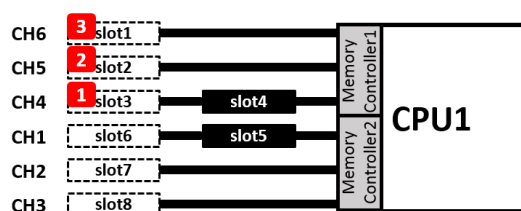

### 4-8x DIMMs

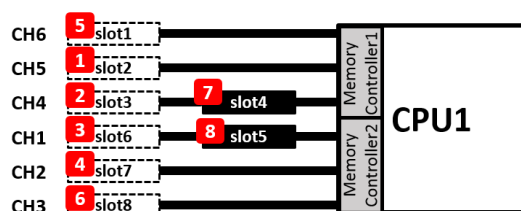

## Internal Drive Supplementary Matters

### Conditions of Internal Drives in the default factory configuration

In the default factory configuration, there are some conditions of drive types and RAID levels that can be installed as below.

#### Common

- For the shipment with a RAID array, select the drives in the same capacity as many as needed.
- In the default factory configuration, up to two types of Internal Drives can be installed in accordance with the following conditions and restrictions.

### Conditions for mixing Internal Drives in the default factory configuration

- Up to two types of Internal Drives can be installed in the default factory configuration.
- M.2 SATA SSD can be installed at the factory regardless of mixing Internal Drives.
- The type of Internal Drives is classified according to form factors (2.5"/3.5"), interfaces (SAS/SATA), devices (HDD/SSD), Data transfer speeds, and rotational speeds. The current categories are below.

- ◆ 3.5 inch SAS HDD, 12Gb/s, 7,200rpm
- ◆ 3.5 inch SATA HDD, 6Gb/s, 7,200rpm
- ◆ 2.5 inch SAS HDD, 12Gb/s, 10,000rpm
- ◆ 2.5 inch SAS HDD, 12Gb/s, 15,000rpm
- ◆ 2.5 inch SAS SSD, 12Gb/s
- ◆ 2.5 inch SATA HDD, 6Gb/s, 7,200rpm
- ◆ 2.5 inch SATA SSD, 6Gb/s

For example, 2.5 inch SATA HDD, 1TB, 7,200rpm 512n sector and 2.5 inch SATA HDD, 2TB, 7,200rpm 512n sector are regarded as the same type of Internal Drives.

### Common restrictions of mixing Internal Drives in the default factory configuration

- Internal Drives with a different sector size cannot be mixed, even if they are the same type.  
For example, a mixing of 2.5 inch SATA HDD, 1TB, 7,200rpm 512n sector and 2.5 inch SATA HDD, 2TB, 7,200rpm 512e sector is NOT supported in the default factory configuration.
- SSDs of different Endurance (ME, VE, RI) cannot be mixed, even if they are the same type.  
For example, a mixing of 2.5 inch SATA SSD, 400GB, 6Gb/s VE (Value Endurance) and 2.5 inch SATA HDD, 800GB, 6Gb/s RI (Read Intensive) is NOT supported in the default factory configuration.

### Mounting order of mixing Internal Drives in the default factory configuration

- In the default factory configuration, the drive mounting order is defined as below.
- The Internal drives is installed in the order of Front Cage, Middle Cage, Rear Cage.

2.5 inch Drives		3.5 inch Drives	
Order		Order	
1	2.5 inch SAS HDD	1	3.5 inch SAS HDD
2	2.5 inch SAS SSD	2	3.5 inch SATA HDD
3	2.5 inch SATA HDD	-	-
4	2.5 inch SATA SSD	-	-

- The Internal drives are installed in the ascending order of a slot number, when the same type of the drives are selected, the drives are installed according to the order below.

Order	Factors	Priority; high	Priority; middle	Priority; low
1	Drive capacity	Smaller	Bigger	-
2	Data transfer speed	6Gb/s	12Gb/s	-
3	Rotational speed	7,200rpm	10,000rpm	15,000rpm

## RAID controller configuration

- RAID level 0, 1, 5, 6, 10 can be installed for default factory configuration. Selectable RAID levels are depending on the RAID controller.
- Capacity of Logical drive can be within 2TB with legacy boot mode, capacity of logical drive can be within the total capacity of logical disks with UEFI boot mode.
- As factory shipment, Initial cache policy of RAID controllers is Write Through for N8103-189, Write back for N8103-190/191/193/194.

### RAID configuration for the default factory shipment

Available RAID level is determined by the RAID configurations and the number of drives as below.

RAID configuration for shipment	Number of Drives	Number of Drives in RAID levels
<b>Non RAID</b>	1-8	Non
<b>Embedded RAID configuration (RAID 0/1/10)</b>	1	RAID0 (Single drive)
	2	RAID1
	3	2 in RAID1, 1 for hot spare
	4/6/8	4/6/8 in RAID10 (up to 4 in RAID for 3.5inch model only)
	5/7	4/6/8 in RAID10, 1 for a hot spare
<b>RAID controller configuration(RAID 0/1/10)</b>	1	RAID0 (Single drive)
	2	RAID1
	3	2 in RAID1, 1 for a hot spare
	4/6/8	4/6/8 in RAID10
	5/7	4/6 in RAID10, 1 for a hot spare
<b>RAID controller configuration (RAID 0/1/5/6/10)</b>	1	RAID0 (Single drive)
	2	RAID1
	3-8	RAID5

## Condition for mixing of Internal Drives after shipment

- RAID controller is required for mixing of Internal Drives
- Mixed Internal Drives cannot be installed in the same RAID array.
- When using hot spare disk for different RAID arrays which consist of various type of drives, assign "Dedicated Hot Spare" to each RAID arrays with the same type of drive, to prevent from mixing different type of drives in a RAID array. "Global Hot Spare" cannot be used.


## Mixing of different type of drives

Two types of drive can be installed in standard drive cage (8slots) and optional drive cage (8slots), in total, up to four types of drive using both cages. There is nine "type", such as SAS HDD 10,000rpm(512n), SAS HDD 10,000rpm(512e), SAS HDD 15,000rpm(512n), SAS HDD 7,200rpm(512e), SATA HDD 7,200rpm(512n), SATA HDD 7,200rpm(512e), SATA SSD(ME/VE/RI).

### See some examples as below.


#### OK

Up to two types of drives can be installed in the drive cage. Any combination of drives is ok.  
(Ex. 2 SATA HDD and 6 SAS HDDs)




#### OK

Up to two types of drives can be installed in each drive cage (drive 1~8 as standard cage, drive 9~10 as optional cage).




#### N/A

Same type drives cannot be put in 2 places or more separately in the drive cage

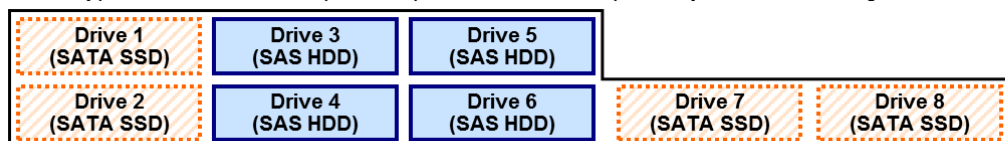

#### N/A

More than two types of drives cannot be installed in the drive cage



## Server Management

The integrated server management controller provides superior remote control and system management features listed in the table below.

	Standard	Remote Management License (Essentials)	Remote Management License (Scale-out)	Remote Management License (Advanced)
Authentication with Active Directory and LDAP	-		-	✓
Two-factor and Kerberos authentication	-		-	✓
Virtual media access via Integrated Remote Console (IRC)	-	✓	-	✓
Scripted virtual media access	-	-	-	✓
Integrated Remote Console (IRC)	Pre-OS Only	✓	Pre-OS Only	✓
Global team collaboration for up to six consoles	-	-	-	✓
Integrated Remote Console (IRC) recording and playback	-	-	-	✓
Virtual Serial Port recording and playback	-	-	✓	✓
Text-based remote console via SSH	-	-	✓	✓
Email alert	-	✓	✓	✓
Remote Syslog feature	-	-	✓	✓
Advanced power management (power history graph, power capping)	-	-	✓	✓
BMC federation management	-	-	✓	✓
BMC detection for BMC federation	✓	✓	✓	✓
Remote serial console (Virtual Serial Port)	✓	✓	✓	✓
Server Health Summary	✓	✓	✓	✓
Restart BMC form web-based management console	✓	✓	✓	✓
Redfish™ API	✓	✓	✓	✓
Agentless Management	✓	✓	✓	✓
Server Health monitoring	✓	✓	✓	✓
Web-based GUI	✓	✓	✓	✓
Virtual power buttons	✓	✓	✓	✓
SSH / SMASH Command-Line Protocol (including serial console redirection)	✓	✓	✓	✓
IPMI / DCMI (including serial console redirection)	✓	✓	✓	✓

## OS Support Matrix for PCI Cards and Embedded Controllers

Part number	Product Name	WS 2016	WS 2012 R2	RHEL 7	ESXi 6.0	ESXi 6.5	ESXi 6.7
-	Embedded SATA non-RAID Controller	✓	✓	✓	✓	✓	✓
-	Embedded SATA RAID Controller	✓	✓	-	-	-	-
-	Embedded 1Gb NIC	✓	✓	✓	✓	✓	✓
N8103-192	RAID Controller (RAID 0/1)	✓	✓	✓	✓	✓	✓
N8103-193	RAID Controller (2GB, RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓
N8103-195	RAID Controller (4GB, RAID 0/1)	✓	✓	✓	✓	✓	✓
N8103-201	RAID Controller (2GB, RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓
N8103-196	RAID Controller (4GB, RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓
N8103-197	SAS Controller	✓	✓	✓	-	-	-
N8103-E184	SAS Controller	✓	✓	✓	✓	✓	✓
N8104-193	Dual Port 1000BASE-T LOM Card	✓	✓	✓	-	✓	✓
N8104-194	Dual Port 10GBASE SFP+ LOM Card	✓	✓	✓	-	✓	✓
N8104-195	Dual Port 10GBASE-T LOM Card	✓	✓	✓	-	✓	✓
N8104-171	Quad Port 1000BASE-T LOM Card	✓	✓	✓	✓	✓	✓
N8104-172	Quad Port 1000BASE-T LOM Card	✓	-	✓	✓	✓	✓
N8104-173	Quad Port 10GBASE-T LOM Card	✓	✓	✓	✓	✓	✓
N8104-175	Dual Port 10GBASE-T LOM Card	✓	✓	✓	✓	✓	✓
N8104-176	Quad Port 10BASE SFP+ LOM Card	✓	✓	✓	-	✓	✓
N8104-177	Dual Port 25GBASE SFP28 LOM Card	✓	✓	✓	-	-	-
N8104-178	Dual Port 1000BASE-T Adapter	✓	✓	✓	✓	✓	✓
N8104-179	Quad Port 1000BASE-T Adapter	✓	✓	✓	✓	✓	✓
N8104-180	Dual Port 1000BASE-T Adapter	✓	-	✓	✓	✓	✓
N8104-181	Quad Port 1000BASE-T Adapter	✓	-	✓	✓	✓	✓
N8104-182	Dual Port 10GBASE-T Adapter	✓	✓	✓	✓	✓	✓
N8104-183	Dual Port 10GBASE-T Adapter	✓	✓	✓	✓	✓	✓
N8104-184	Dual Port 10GBASE-T Adapter	✓	✓	✓	✓	✓	✓
N8104-185	Dual Port 10GBASE SFP+ Adapter	✓	✓	✓	✓	✓	✓
N8104-186	Dual Port 10GBASE SFP+ Adapter	✓	✓	✓	✓	✓	✓
N8104-187	Dual Port 25GBASE SFP28 Adapter	✓	✓	✓	-	-	✓
N8190-165	Fibre Channel Controller (1ch)	✓	✓	-	-	-	-
N8190-166	Fibre Channel Controller (2ch)	✓	✓	-	-	-	-
N8190-171	Fibre Channel Controller (1ch)	✓	✓	✓	-	✓	✓
N8190-172	Fibre Channel Controller (2ch)	✓	✓	✓	-	✓	✓
N8190-163	Fibre Channel Controller (1ch)	✓	✓	✓	✓	✓	✓
N8190-164	Fibre Channel Controller (2ch)	✓	✓	✓	✓	✓	✓

## Supported PCI Cards and Installable Slots



Part Number	Product Name	RAID	LOM	SLOT1 (ALOM)	SLOT1 (PCI)	SLOT2	SLOT3
N8103-192	RAID Controller (RAID 0/1)	1	-	-	-	-	-
N8103-193	RAID Controller (2GB, RAID 0/1/5/6)	1	-	-	-	-	-
N8103-195	RAID Controller (4GB, RAID 0/1)	-	-	2	1	3	
N8103-201	RAID Controller (2GB, RAID 0/1/5/6)	-	-	2	1	3	
N8103-196	RAID Controller (4GB, RAID 0/1/5/6)	-	-	2	1	3	
N8103-197	SAS Controller	-	-	2	1	3	
N8104-193	Dual Port 1000BASE-T LOM Card	-	1	-	-	-	-
N8104-194	Dual Port 10GBASE SFP+ LOM Card	-	1	-	-	-	-
N8104-195	Dual Port 10GBASE-T LOM Card	-	1	-	-	-	-
N8104-171	Quad Port 1000BASE-T LOM Card	-	-	1	-	-	-
N8104-172	Quad Port 1000BASE-T LOM Card	-	-	1	-	-	-
N8104-173	Quad Port 10GBASE-T LOM Card	-	-	1	-	-	-
N8104-175	Dual Port 10GBASE-T LOM Card	-	-	1	-	-	-
N8104-176	Quad Port 10BASE SFP+ LOM Card	-	-	1	-	-	-
N8104-177	Dual Port 25GBASE SFP+ LOM Card	-	-	1	-	-	-
N8104-178	Dual Port 1000BASE-T Adapter	-	-	2	1	3	
N8104-179	Quad Port 1000BASE-T Adapter	-	-	2	1	3	
N8104-180	Dual Port 1000BASE-T Adapter	-	-	2	1	3	
N8104-181	Quad Port 1000BASE-T Adapter	-	-	2	1	3	
N8104-182	Dual Port 10GBASE-T Adapter	-	-	2	1	3	
N8104-183	Dual Port 10GBASE-T Adapter	-	-	2	1	3	
N8104-184	Dual Port 10GBASE-T Adapter	-	-	2	1	3	
N8104-185	Dual Port 10GBASE SFP+ Adapter	-	-	2	1	3	
N8104-186	Dual Port 10GBASE SFP+ Adapter	-	-	2	1	3	
N8104-187	Dual Port 25GBASE SFP28 Adapter	-	-	2	1	3	
N8190-165	Fibre Channel Controller (1ch)	-	-	2	1	3	
N8190-166	Fibre Channel Controller (2ch)	-	-	2	1	3	
N8190-171	Fibre Channel Controller (1ch)	-	-	2	1	3	
N8190-172	Fibre Channel Controller (2ch)	-	-	2	1	3	
N8190-163	Fibre Channel Controller (1ch)	-	-	2	1	3	
N8190-164	Fibre Channel Controller (2ch)	-	-	2	1	3	
N8103-184	SAS Controller	-	-	2	1	3	

## NOTE:

- PCI slot #3 is not available when a RAID controller is installed into the RAID slot.

## Expansion Slots



	Slot Name	Standard	Bus Width	Connector Width	Height	Length	Processor
Dedicated Slots	FLOM	-	-	-	-	-	-
	RAID	PCIe 3.0	x8	x8	-	-	CPU1
1st Riser Card (Optional)	Slot 1 (PCI)	PCIe 3.0	x16	x16	Full-height	Up to 168 mm	CPU1
	Slot 2	PCIe 3.0	X8	x8	Low Profile	Up to 168 mm	CPU1
1st Riser Card (Optional)	Slot 1 (PCIe SSD)	PCIe 3.0	x8	-	-	-	CPU1
	Slot 1 (ALOM)	PCIe 3.0	x8	x8	-	-	CPU1
	Slot 2	PCIe 3.0	x16	x16	Low Profile	Up to 168 mm	CPU1
2nd Riser Card (Optional)	Slot 3	PCIe 3.0	x16	x16	Low Profile	Up to 168 mm	CPU2



## Supported Tape and Removal Disk Backup Drive List

See the following table for supported tape and removal disk backup drives. An optional tape drive enclosure is needed to connect the backup drives to the server.

Category	Product Name / Description	Part Number
LTO	<b>Internal LTO (SAS)</b> LTO5, Half height, Native capacity 1.5 TB	N8151-141
	<b>Internal LTO (SAS)</b> LTO6, Half height, Native capacity 2.5 TB	N8151-142
	<b>Internal LTO (SAS)</b> LTO7, Half height, Native capacity 6 TB	N8151-143
RDX	<b>Internal RDX (USB)</b>	N8151-139

## Boot Mode Setting

The server supports Legacy mode and UEFI mode (default) as an OS Boot Mode. See the table below for the Boot Mode and X2APIC setting for each Operating System. As the default settings at the factory, UEFI mode is set as OS Boot mode and X2APIC is enabled. Refer to the User's Guide and change the settings before installing an Operating System requiring Legacy Mode.

Operating System	Supported Boot Mode	Supported X2APIC Setting
Windows Server 2012 R2	UEFI	Enabled
Windows Server 2016	UEFI	Enabled
VMware ESXi 6.0 Update3	UEFI	Enabled
VMware ESXi 6.5 Update1	UEFI	Enabled

## Guideline of Maximum Power Consumption

See the following table for the guideline of the maximum power consumption based on the TDP and Input voltage. The actual maximum power consumption differs depend on the type of processor while the TDP of processor is the same.

### 100VAC Input

CPU TDP	8x 2.5-inch	4x 3.5-inch
85 Watt	691W / 692VA	643W / 644VA
105 Watt	757W / 758VA	708W / 709VA
115 Watt	764W / 765VA	715W / 716VA
125 Watt	818W / 819VA	769W / 770VA
130 Watt	818W / 819VA	769W / 770VA
140 Watt	892W / 893VA	843W / 843VA
150 Watt	895W / 896VA	845W / 846VA

## **Copyright Notice and Liability Disclaimer**

The information contained herein is subject to change without notice.

Microsoft and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries

Intel and Xeon are registered trademarks or trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds.

Red Hat is a registered trademark of Red Hat, Inc. in the U.S.

All other products, brands, or trade names used in this document are trademarks or registered trademarks of their respective holders.

NEC shall not be liable for technical or editorial errors or omissions contained herein.

For hard drive capacity measurements, 1 GB = 1 billion bytes. Actual formatted capacity is less.

## Revision History

Revision	Date	Description
6.0	January 25, 2019	<b>New products added:</b> <ul style="list-style-type: none"> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1737</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1738</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1739</li> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-1740</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1741</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1742</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1743</li> <li>• 3.84TB Hot Plug 2.5-inch SATA SSD / N8150-1744</li> <li>• 12TB 7.2K Hot Plug 3.5-inch SATA HDD / N8150-588</li> <li>• 12TB 7.2K Hot Plug 3.5-inch SAS HDD / N8150-590</li> <li>• 400GB Hot Plug 2.5-inch SAS SSD / N8150-1750</li> <li>• 800GB Hot Plug 2.5-inch SAS SSD / N8150-1751</li> <li>• 400GB Hot Plug 2.5-inch SAS SSD / N8150-1752</li> <li>• 800GB Hot Plug 2.5-inch SAS SSD / N8150-1753</li> <li>• 960GB Hot Plug 2.5-inch SAS SSD / N8150-1754</li> <li>• 1.92TB Hot Plug 2.5-inch SAS SSD / N8150-1755</li> <li>• 900GB 15K Hot Plug 2.5-inch SAS HDD / N8150-602</li> </ul> <b>Discontinued products deleted:</b> <ul style="list-style-type: none"> <li>• Platinum 8160(24C/48T, 2.10 GHz, 33MB, TDP 150W)</li> <li>• Platinum 8164(26C/52T, 2GHz, 35.75MB, TDP 150W)</li> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-1700</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1701</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1702</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1703</li> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-1704</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1705</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1706</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1707</li> <li>• 3.84TB Hot Plug 2.5-inch SATA SSD / N8150-1708</li> <li>• 900GB 15K Hot Plug 2.5-inch SAS HDD / N8150-553</li> <li>• 10TB 7.2K Hot Plug 3.5-inch SATA HDD / N8150-571</li> <li>• 10TB 7.2K Hot Plug 3.5-inch SAS HDD / N8150-574</li> <li>• 4TB 7.2K Hot Plug 3.5-inch SAS HDD / N8150-572</li> <li>• 400GB Hot Plug 2.5-inch SAS SSD / N8150-748</li> <li>• 800GB Hot Plug 2.5-inch SAS SSD / N8150-749</li> <li>• 400GB Hot Plug 2.5-inch SAS SSD / N8150-750</li> <li>• 800GB Hot Plug 2.5-inch SAS SSD / N8150-751</li> </ul> <b>Correction of errors</b>
5.0	July 12, 2018	<b>New products added:</b> <ul style="list-style-type: none"> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-1700</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1701</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1702</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1703</li> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-1704</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-1705</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-1706</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-1707</li> <li>• 3.84TB Hot Plug 2.5-inch SATA SSD / N8150-1708</li> <li>• 2.4TB Hot Plug 2.5-inch SAS HDD / N8150-591</li> </ul> <b>Discontinued products deleted:</b> <ul style="list-style-type: none"> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-739</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-740</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-741</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-742</li> <li>• 240GB Hot Plug 2.5-inch SATA SSD / N8150-743</li> <li>• 480GB Hot Plug 2.5-inch SATA SSD / N8150-744</li> <li>• 960GB Hot Plug 2.5-inch SATA SSD / N8150-745</li> <li>• 1.92TB Hot Plug 2.5-inch SATA SSD / N8150-746</li> <li>• 3.84TB Hot Plug 2.5-inch SATA SSD / N8150-747</li> </ul> <b>Correction of errors</b>
4.0	April 27, 2018	<b>New products / service added:</b> <ul style="list-style-type: none"> <li>• 1TB 7.2K Hot Plug 2.5-inch SATA HDD / N8150-596</li> <li>• SAS Controller / N8103-E184 (Factory Installation only)</li> </ul>

		<ul style="list-style-type: none"> <li>RAID Config Option(None) / NESV16-039</li> </ul> <p><b>Others:</b></p> <ul style="list-style-type: none"> <li>Enable to mix Internal devices in the default factory configuration</li> <li>Enable to use Internal DVD-ROM drive when the Embedded SATA Controller is used</li> </ul> <p><b>Correction of errors</b></p>
3.0	January 25, 2018	<p><b>Discontinued products deleted:</b></p> <ul style="list-style-type: none"> <li>3TB 7.2K Hot Plug 3.5-inch SATA HDD / N8150-567</li> <li>1TB 7.2K Hot Plug 2.5-inch SATA HDD / N8150-544</li> <li>480GB Hot Plug 2.5-inch SAS SSD / N8150-752</li> <li>960GB Hot Plug 2.5-inch SAS SSD / N8150-753</li> <li>Quad Port 25GBASE QSFP28 Adapter / N8104-188</li> </ul> <p><b>Others:</b></p> <ul style="list-style-type: none"> <li>Updated the table of the Available Power Supplies</li> <li>License for Remote Management (Essentials) added</li> </ul> <p><b>Correction of errors</b></p>
2.0	December 22, 2017	<p><b>New products added:</b></p> <ul style="list-style-type: none"> <li>400GB Hot Plug 2.5-inch SAS SSD / N8150-748</li> <li>800GB Hot Plug 2.5-inch SAS SSD / N8150-749</li> <li>400GB Hot Plug 2.5-inch SAS SSD / N8150-750</li> <li>800GB Hot Plug 2.5-inch SAS SSD / N8150-751</li> <li>480GB Hot Plug 2.5-inch SAS SSD / N8150-752</li> <li>960GB Hot Plug 2.5-inch SAS SSD / N8150-753</li> <li>Dual Port 25GBASE SFP28 Adapter / N8104-187</li> <li>Dual Port 25GBASE SFP+ LOM Card / N8104-177</li> <li>SFP+ Module (10G-SR) / N8104-189</li> <li>SFP28 Module(25G-SR) / N8104-190</li> <li>QSFP28 Module(100G-SR4) / N8104-191</li> <li>SAS Controller / N8103-184</li> <li>500W Non-hot Plug Power Supply / N8181-168</li> <li>500W Hot Plug Power Supply / N8181-159</li> </ul> <p><b>Others:</b></p> <p>Updated the table of the Available Power Supplies</p>
1.0	November 22, 2017	Initial release