



Overview


- [Overview of the Cisco Nexus 3016 Switch, on page 1](#)
- [Overview of the Cisco Nexus 3048TP Switch, on page 3](#)
- [Overview of the Cisco Nexus 3064 Switches, on page 5](#)
- [Overview of the Cisco Nexus 3132Q Switches, on page 7](#)
- [Overview of the Cisco Nexus 3132C-Z Switch, on page 9](#)
- [Overview of the Cisco Nexus 3164Q Switch, on page 10](#)
- [Overview of the Cisco Nexus 3172 Switches, on page 12](#)
- [Overview of the Cisco Nexus 3232C Switch, on page 14](#)
- [Overview of the Cisco Nexus 3264C-E Switch, on page 15](#)
- [Overview of the Cisco Nexus 3264Q Switch, on page 20](#)
- [Overview of the Cisco Nexus 31108 Switch, on page 21](#)
- [Overview of the Cisco Nexus 31128PQ Switch, on page 23](#)

Overview of the Cisco Nexus 3016 Switch

The Cisco Nexus 3016 (N3K-C3016-40GE) is a 1 rack unit (RU) switch with 16 fixed 40-Gigabit Ethernet downlink (host-facing) and uplink (network-facing) ports, 2 fixed 100/1000 management ports, 1 RS-232 console port, and 1 USB port. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy. The switch includes Layer 3 license.


The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.

Figure 1: Fan-Side View of the Cisco Nexus 3016 Chassis

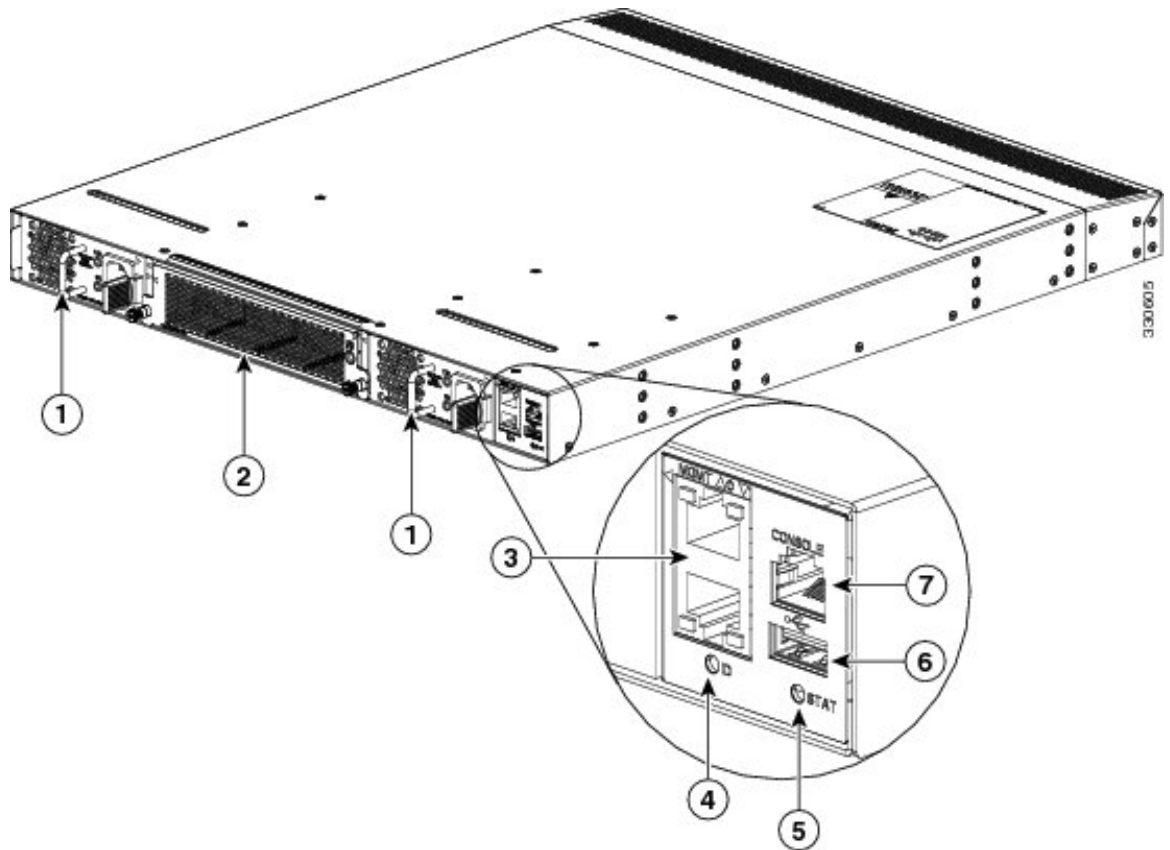

1	AC or DC power supply (1 or 2)	5	Status LED
2	Fan tray (1)	6	USB port (1)
3	Management ports (2)	7	Console port (1)
4	ID LED		

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

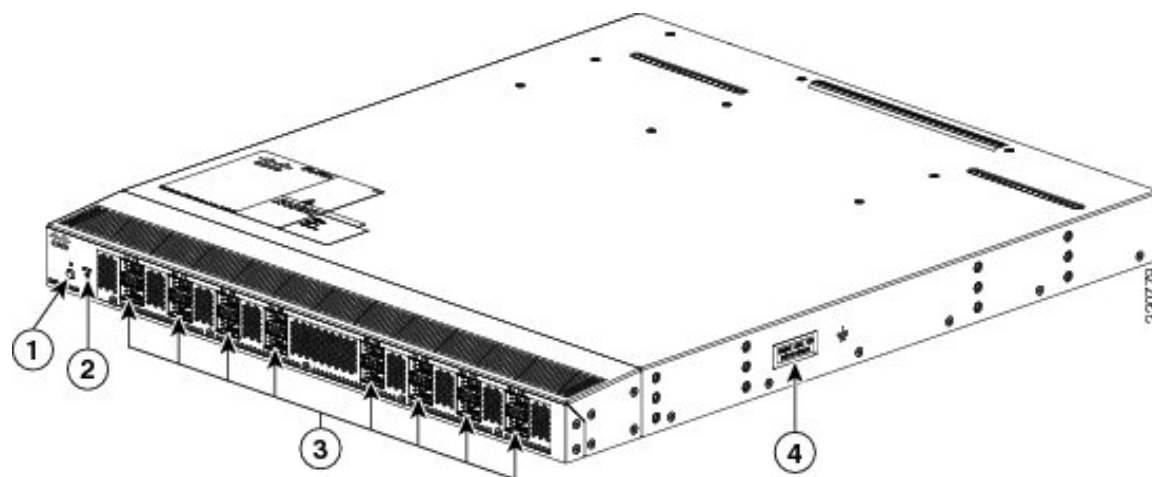
Figure 2: Port-Side View of the Cisco Nexus 3016 Chassis

1	ID LEDs	3	40-Gigabit uplink or downlink ports (16)
2	Status LED	4	Grounding pad

Overview of the Cisco Nexus 3048TP Switch


The Cisco Nexus 3048TP (N3K-C3048TP-1GE) is a 1 rack unit (RU) switch with 48 fixed 10/100/1000 Ethernet downlink ports, 4 fixed 10-Gigabit Ethernet uplink ports, 1 console port, and 1 fixed 100/1000 management port. There is also 1 disabled management port, but there are no plans to enable this port at any future date. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.

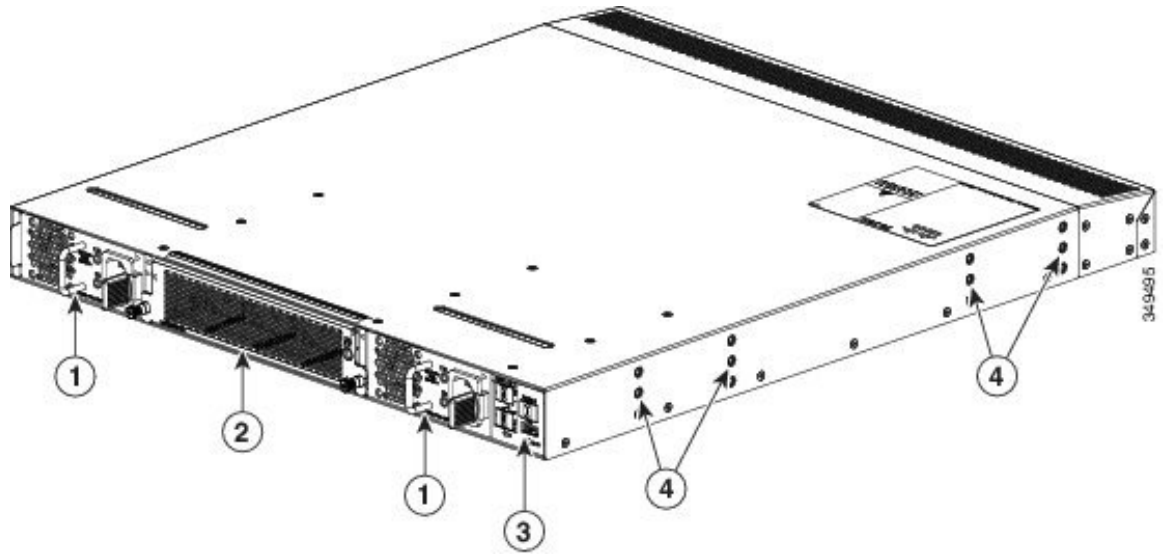Figure 3: Fan-Side View of the Cisco Nexus 3048TP Chassis

1	AC or DC power supply (1 or 2)	3	Console, Management, and USB ports
2	Fan tray (1)	4	Screw holes for mounting brackets

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

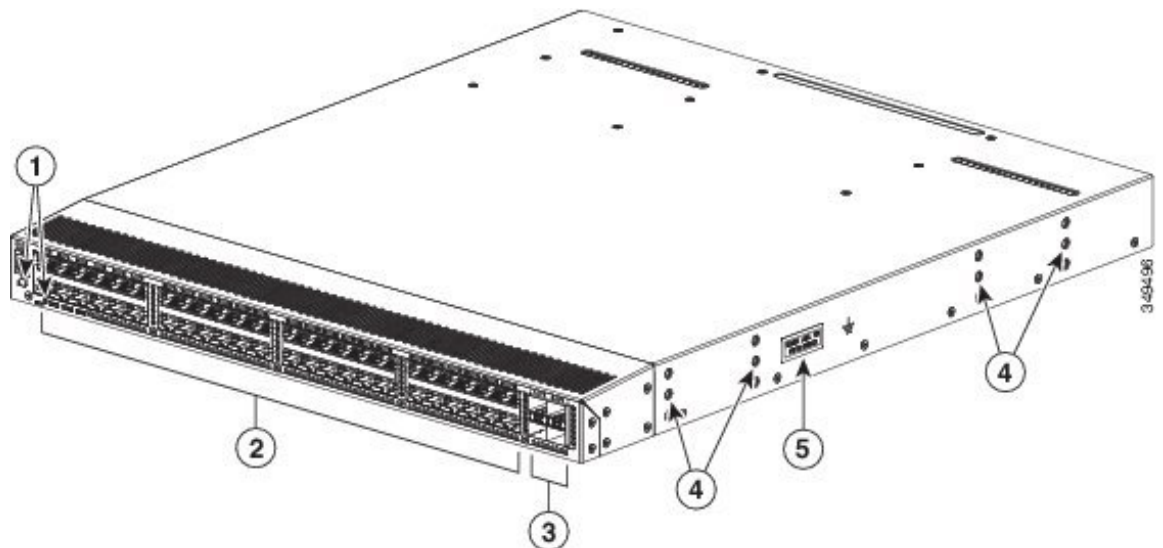Figure 4: Port-Side View of the Cisco Nexus 3048TP Chassis

1	Status LED and Beacon Button/LED (the push-button is not utilized and currently has no function)	4	Screw holes for mounting brackets
2	10/100/1000-Mbps Ethernet downlink ports (48)	5	Grounding pad
3	1- and 10-Gigabit Ethernet uplink ports (4)		

Overview of the Cisco Nexus 3064 Switches


The Cisco Nexus 3064-T (N3K-C3064TQ) and 3064-32T (N3K-C3064TQ-32T) are 1 rack unit (RU) switches with 48 or 32 fixed 1- and 10-Gigabit Ethernet downlink and uplink ports, 2 fixed 100/1000 management ports, 1 console port, and 1 USB port.

The Cisco Nexus 3064-X (N3K-C3064TQ) is a 1 rack unit (RU) switch with 48 fixed 1- and 10-Gigabit Ethernet SFP+ downlink and 4 fixed 40-Gigabit Ethernet QSFP+ uplink ports (each capable of using 40-Gigabit or 4 x 10-Gigabit mode), 2 fixed 100/1000 management ports, 1 console port, and 1 USB port.

These switches support both port-side exhaust and port-side intake airflow schemes. These switches require one AC or DC power supply for operations, but can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 5: Fan-Side View of the Cisco Nexus 3064 Chassis

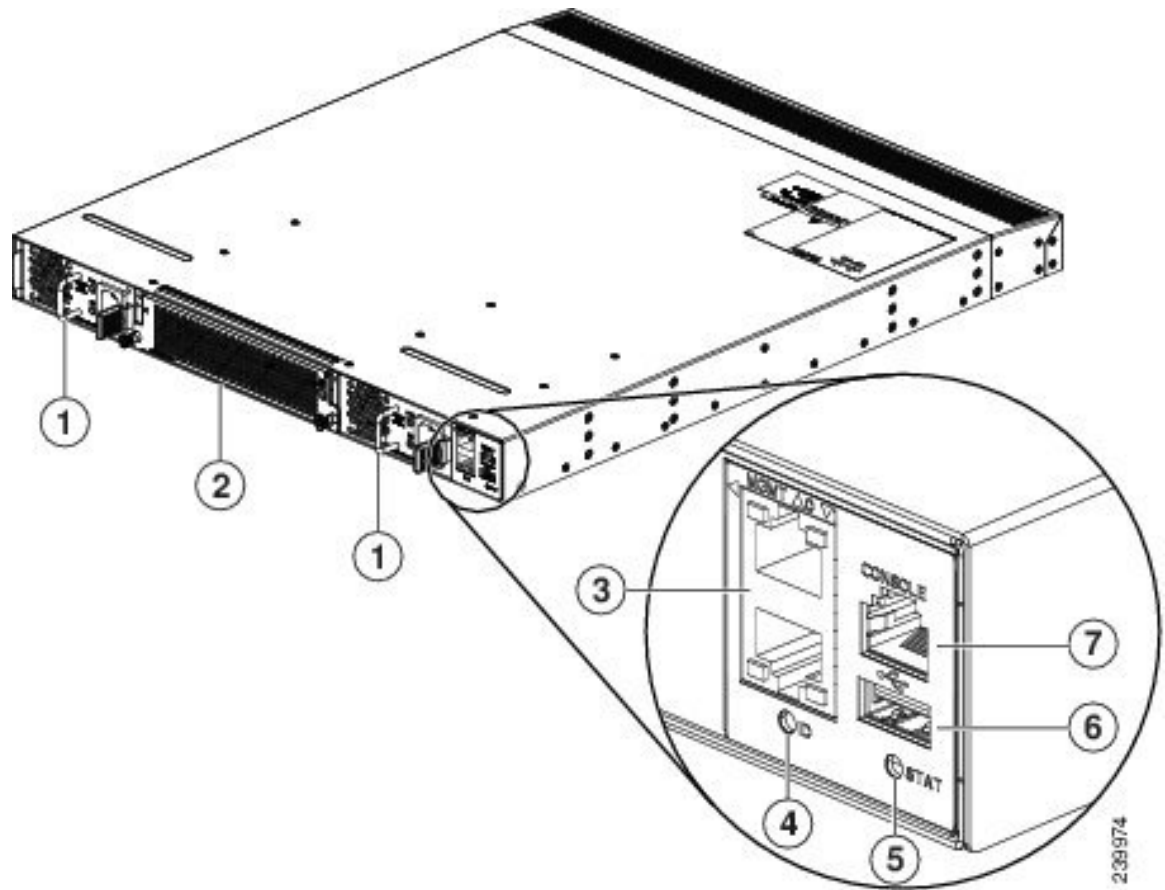

1	AC or DC power supply (2) (AC power supply shown)	5	Status LED
2	Fan tray (1)	6	USB port (1)
3	Management ports (2)	7	Console port (1)
4	ID LED		

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 6: Port-Side View of the Cisco Nexus 3064 Chassis

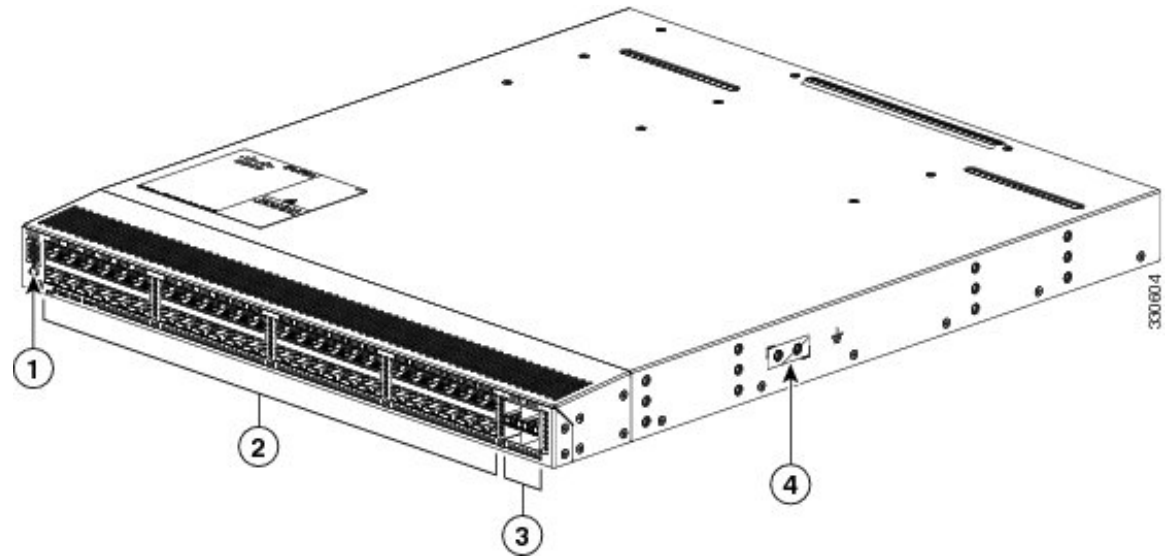

1	ID and Status LEDs	3	40-Gigabit uplink ports (4)
2	1- and 10-Gigabit Ethernet downlink ports (48)	4	Grounding pad

Overview of the Cisco Nexus 3132Q Switches

The Cisco Nexus 3132Q (N3K-C3132Q-40GE) is a 1 rack unit (RU) switch with 32 40-Gigabit enhanced quad small form-factor pluggable (QSFP+) ports and 4 SFP+ ports that are internally multiplexed with the first QSFP+ port. Each QSFP+ port can operate in native 40-Gigabit or 4 x 10-Gigabit modes.

The Cisco Nexus 3132Q-V (N3K-C3132Q-V) is a 1 rack unit (RU) switch with 32 40-Gigabit enhanced quad small form-factor pluggable (QSFP+) ports and 4 SFP+ ports that are internally multiplexed with the first QSFP+ port. Each QSFP+ port can operate in native 40-Gigabit or 4 x 10-Gigabit modes. This switch features support of VxLAN routing, 33% more packet buffer, 2x system memory for object-model programming, and 4x ingress ACL.


The Cisco Nexus 3132Q-X (N3K-C3132Q-40GX) is a 1 rack unit (RU) switch with 32 40-Gigabit enhanced quad small form-factor pluggable (QSFP+) ports and 4 SFP+ ports that are internally multiplexed with the first QSFP+ port. Each QSFP+ port can operate in native 40-Gigabit or 4 x 10-Gigabit modes.

The Cisco Nexus 3132Q-XL (N3K-C3132Q-XL) is a 1 rack unit (RU) switch with 8GB of RAM and dual-core 2.5GHz x86 CPUs and 32 40-Gigabit enhanced quad small form-factor pluggable (QSFP+) ports and 4 SFP+ ports that are internally multiplexed with the first QSFP+ port. Each QSFP+ port can operate in native 40-Gigabit or 4 x 10-Gigabit modes.

These switches each have 1 management port, 1 console port, and 1 USB port and support both port-side exhaust and port-side intake airflow schemes. These switches require one AC or DC power supply for operations, but can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 7: Fan-Side View of the Cisco Nexus 3132 Chassis

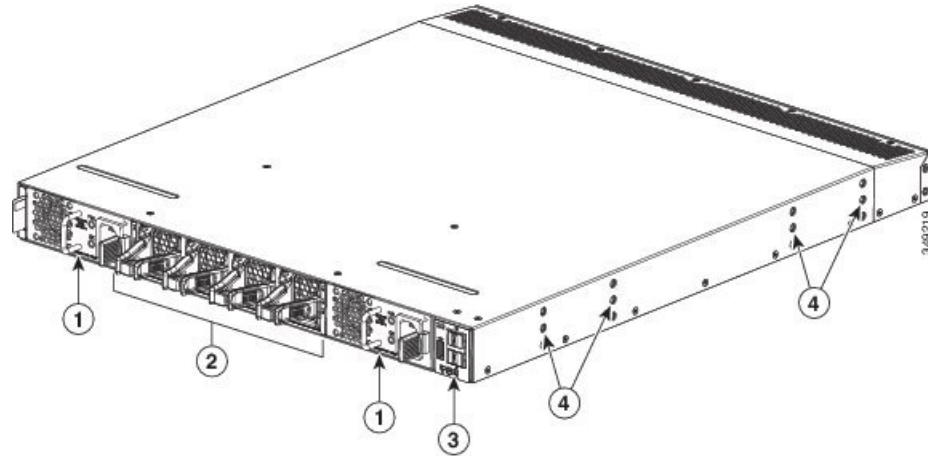

1	AC or DC power supply (1 or 2)	3	Console, Management, and USB ports
2	Fan modules (4)	4	Screw holes for mounting brackets

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 8: Port-Side View of the Cisco Nexus 3132 Chassis

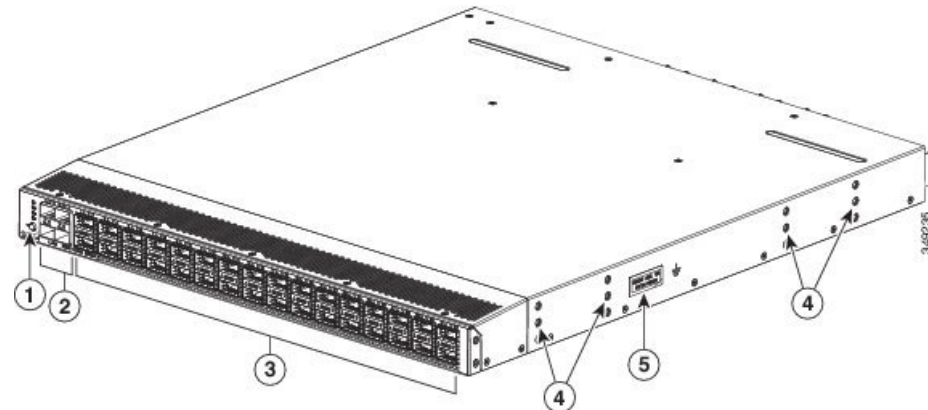


1	Selector switch, ID, and Status LEDs	4	Screw holes for mounting brackets
2	4 SFP+ ports (multiplexed internally to the first QSFP+ port)	5	Grounding pad
3	32 QSFP+ ports		

Overview of the Cisco Nexus 3132C-Z Switch

The Cisco Nexus 3132C-Z (N3K-C3132C-Z) is a 1 rack unit (RU) switch with 32 fixed 100-Gigabit QSFP28 ports, 2 SFP+ ports, 2 management ports, 1 console port, and 1 USB port. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC, DC, or HVAC/HVDC power supply for operations, but it can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 9: Fan-Side View of the Cisco Nexus 3132C-Z Chassis

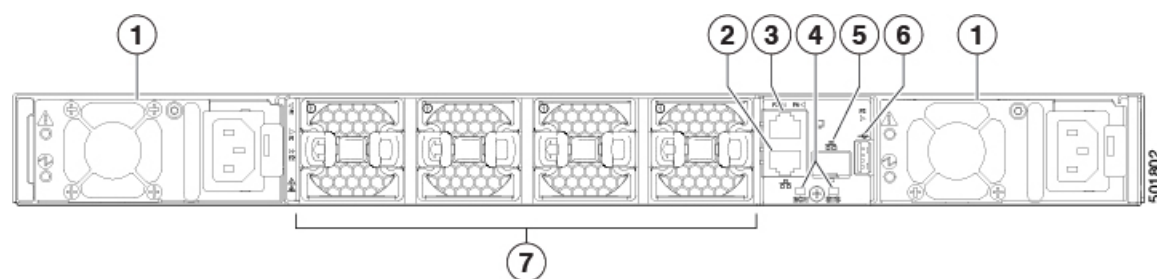

1	AC or DC power supply (1 or 2)	5	Management port (SFP)
2	Management port (RJ-45)	6	USB port (1)
3	Console port (RS-232)	7	Fan modules (4)
4	Beacon (BCN) and Status (STS) LEDs		

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 10: Port-Side View of the Cisco Nexus 3132C-Z Chassis

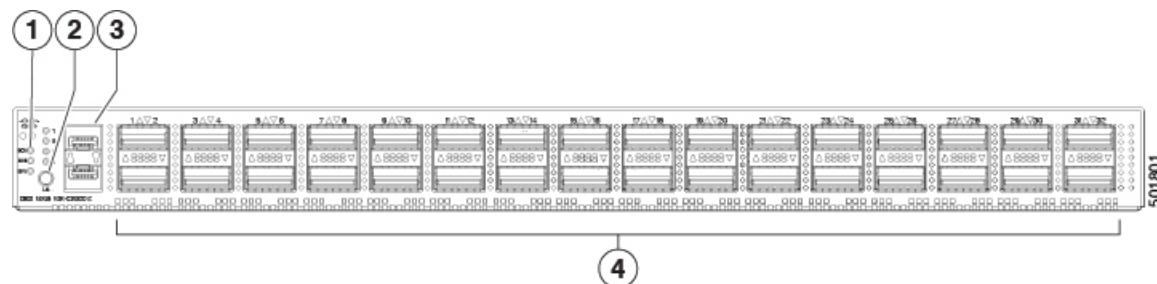


1	Beacon (BCN), Status (STS), Environment (ENV), and Lane select LEDs	3	SFP+ ports (2)
---	---	---	----------------

2	Lane select button	4	100-Gigabit QSFP28 ports (32)
---	--------------------	---	-------------------------------

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 11: Side View of the Cisco Nexus 3132C-Z Chassis

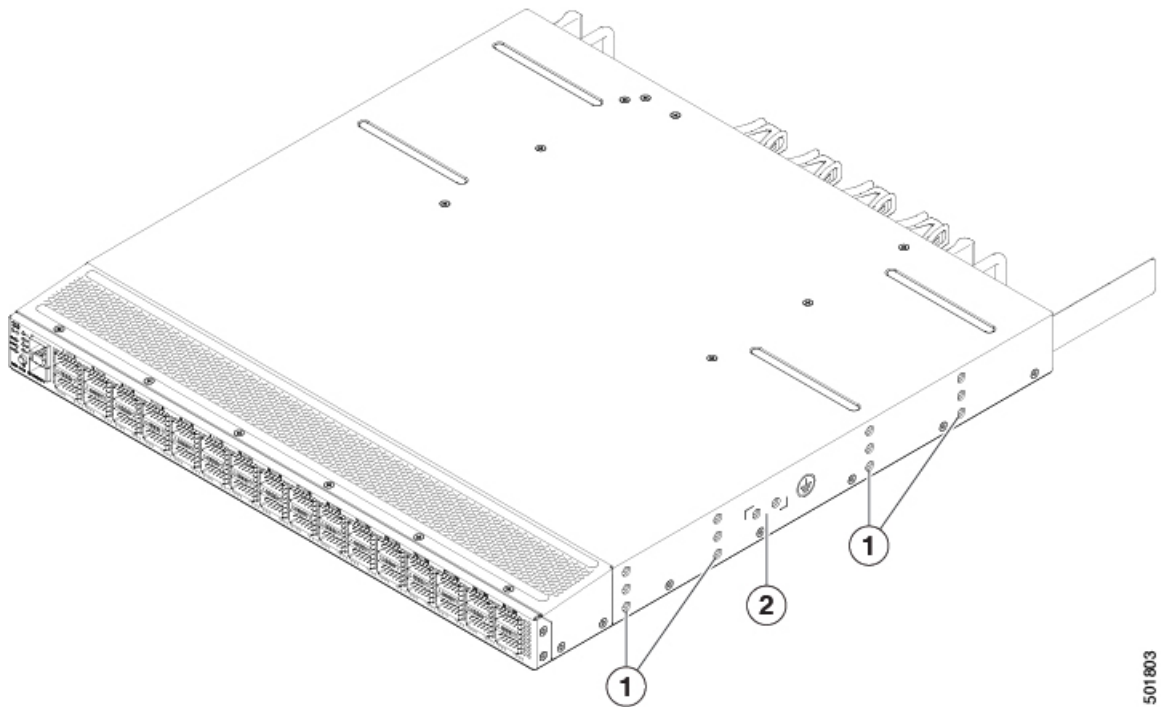


1	Screw holes for mounting brackets	2	Grounding pad
---	-----------------------------------	---	---------------

Overview of the Cisco Nexus 3164Q Switch


The Cisco Nexus 3164Q (N3K-C3164Q-40GE) is a 2 rack unit (RU) switch with 64 fixed 40-Gigabit enhanced quad small form-factor pluggable (QSFP+) ports that can run in either 40-Gigabit native mode or 4 x 10-Gigabit mode, 1 RJ-45 management port, 1 RS-232 console port, and 1 USB port. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.

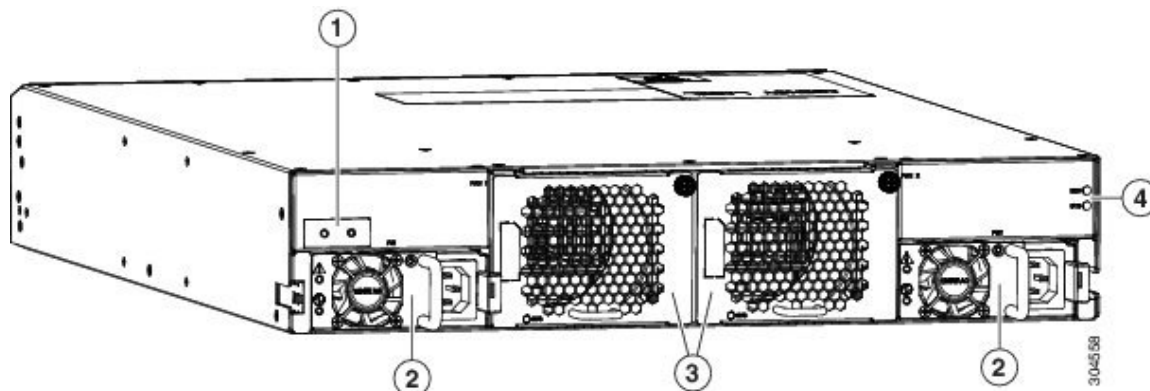Figure 12: Fan-Side View of the Cisco Nexus 3164Q Chassis

1	Grounding pad	3	Fan modules (2)
2	Power supply modules (2)	4	Beacon (BCN) and Status (STS) LEDs

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

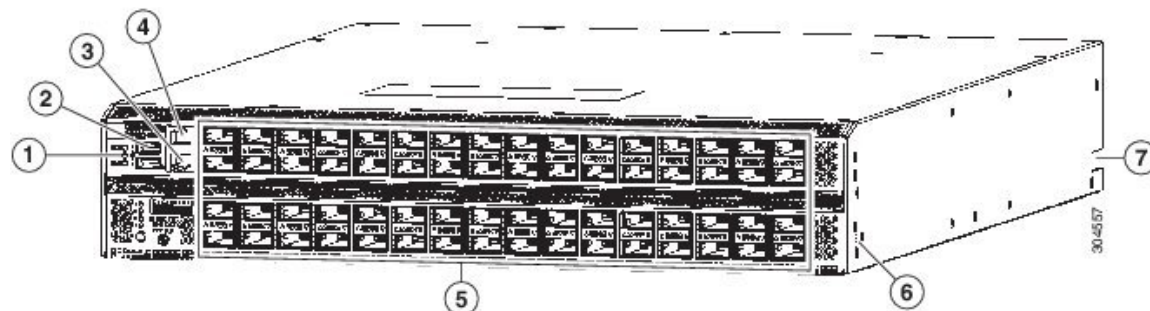Figure 13: Port-Side View of the Cisco Nexus 3164Q Chassis

1	Beacon (BCN), Status (STS), and Environment (ENV) LEDs	5	64 40-Gigabit QSFP+ ports
2	USB ports (2)	6	Screw holes for mounting brackets
3	Management port (1)	7	Notch in the chassis (2) (one each side) for locking into the bottom-support rails
4	Console port (1)		

Overview of the Cisco Nexus 3172 Switches

The Cisco Nexus 3172PQ (N3K-C3172PQ-10GE) is a 1 rack unit (RU), 10-Gigabit enhanced small form-factor pluggable (SFP+)-based switch with 48 SFP+ ports and 6 Quad SFP+ (QSFP+) ports. Each SFP+ port can operate in 100-Mbps, 1-Gbps, or 10-Gbps mode, and each QSFP+ port can operate in native 40-Gbps or 4 x 10-Gbps mode.

The Cisco Nexus 3172PQ-XL (N3K-C3172PQ-XL) is a 1 rack unit (RU) switch with 8GB of RAM and dual-core 2.5GHz x86 CPUs and 10-Gigabit enhanced small form-factor pluggable (SFP+) ports with 48 SFP+ ports and 6 Quad SFP+ (QSFP+) ports. Each SFP+ port can operate in 100-Mbps, 1-Gbps, or 10-Gbps mode, and each QSFP+ port can operate in native 40-Gbps or 4 x 10-Gbps mode.


The Cisco Nexus 3172TQ (N3K-C3172TQ-10GT) is a 1 rack unit (RU), 10GBASE-T switch with 48 10GBASE-T RJ-45 ports (each port can operate at 100-Mbps and 1-Gbps speeds) and 6 Quad SFP+ (QSFP+) ports (each QSFP+ port can support 4 x 10 Gigabit Ethernet or 40 Gigabit Ethernet).

The Cisco Nexus 3172TQ-32T is the Cisco Nexus 3172TQ with 32 10GBASE-T ports (each port can operate at 100-Mbps and 1-Gbps speeds) and 6 QSFP+ ports (each QSFP+ port can support 4 x 10 Gigabit Ethernet or 40 Gigabit Ethernet) enabled. The ports are enabled through software licensing. This switch comes with a 32-10GBASE-T port license preinstalled. To enable the remaining 16 10GBASE-T ports, the customer installs the 16-port upgrade license.

The Cisco Nexus 3172TQ-XL (N3K-C3172TQ-XL) is a 1 rack unit (RU) switch with 8GB of RAM and dual-core 2.5GHz x86 CPUs and 10GBASE-T with 48 10GBASE-T RJ-45 ports (each port can operate at 100-Mbps and 1-Gbps speeds) and 6 Quad SFP+ (QSFP+) ports (each QSFP+ port can support 4 x 10 Gigabit Ethernet or 40 Gigabit Ethernet).


These switches each have 1 management port, 1 console port, and 1 USB port and support both port-side exhaust and port-side intake airflow schemes. These switches require one AC or DC power supply for operations, but can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.

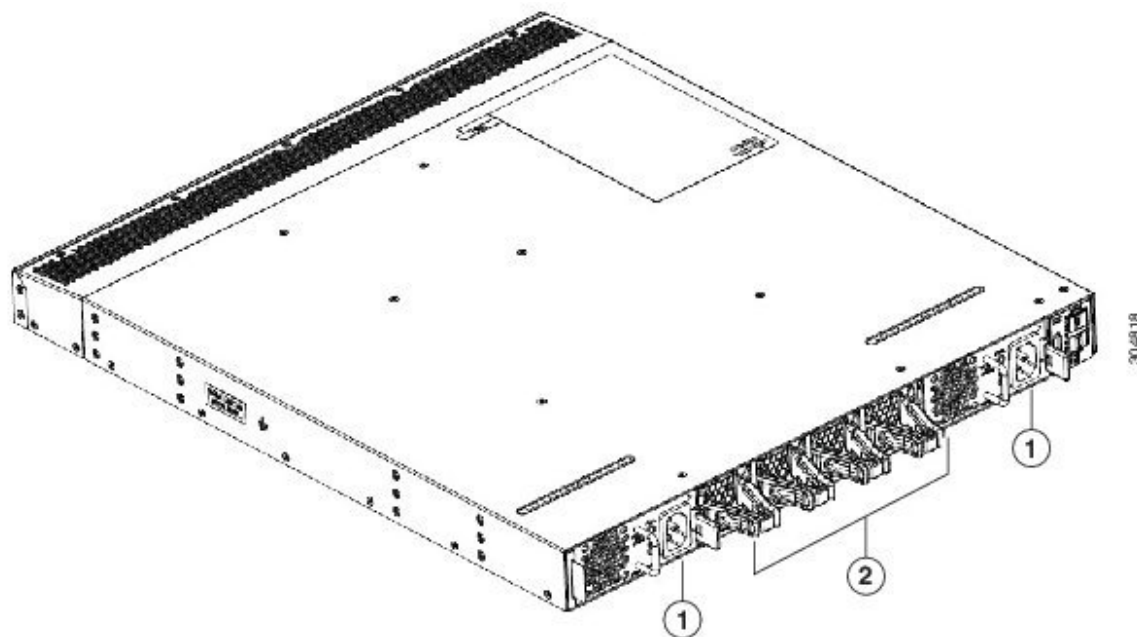Figure 14: Fan-Side View of the Cisco Nexus 3172 Chassis

1	Power Supply modules (2)	2	Fan modules (4)
---	--------------------------	---	-----------------

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

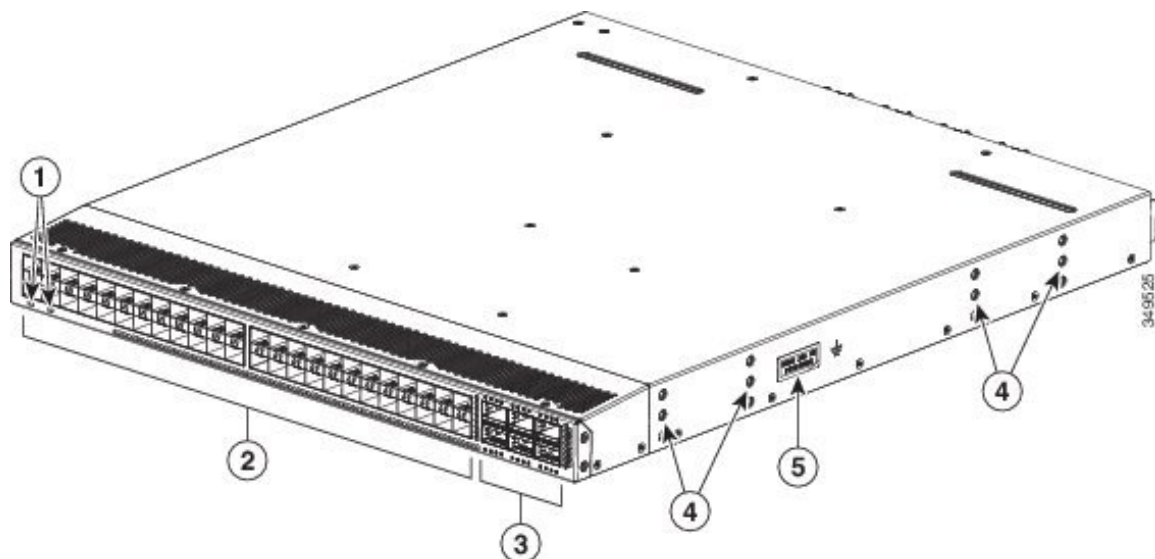Figure 15: Port-Side View of the Cisco Nexus 3172 Chassis

1	ID and Status LEDs	4	Screw holes for mounting brackets
---	--------------------	---	-----------------------------------

2	SFP+ ports (48)	5	Grounding pad
3	QSFP+ ports (6)		

Overview of the Cisco Nexus 3232C Switch

The Cisco Nexus 3232C (N3K-C3232C) is a 1 rack unit (RU) switch with 32 10- or 100-Gigabit QSFP28-100 and 2 10G SFP+ ports. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy.




Note

Each vertical pair of QSFP28 ports supports a QSFP-to-SFP adapter (such as CVR-2QSFP28-8SFP) that provides eight breakout SFP/SFP+/SFP28 ports. The top four ports connect to the upper QSFP28 port, and the bottom four ports connect to the lower QSFP28 port.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 16: Fan-Side View of the Cisco Nexus 3232C Chassis

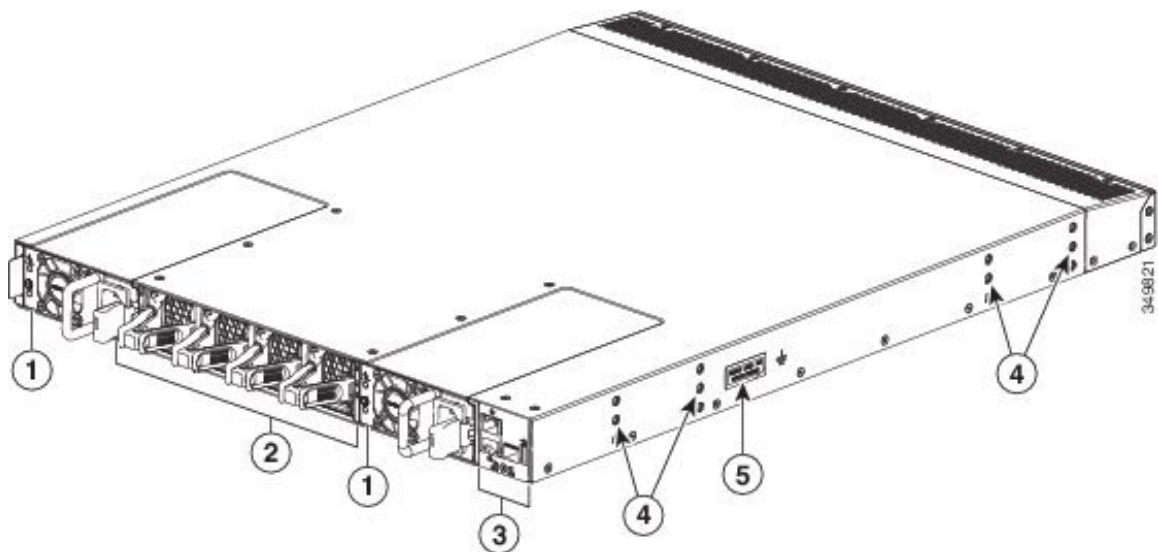

1	AC or DC power supply (1 or 2)	4	Screw holes for mounting brackets
2	Fan modules (4)	5	Grounding pad
3	Console, Management, and USB ports		

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 17: Port-Side View of the Cisco Nexus 3232C Chassis

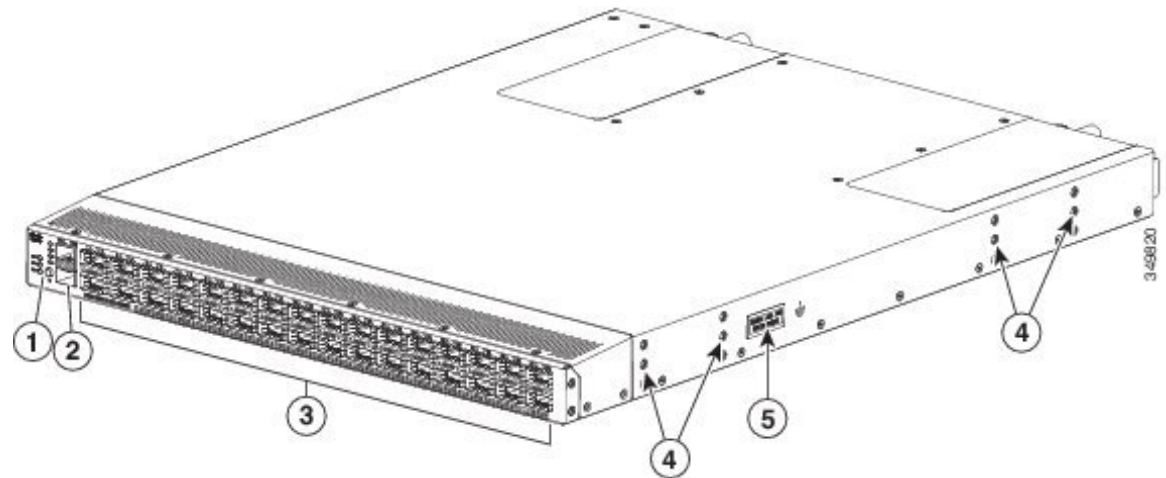

1	Selector switch, ID, and Status LEDs	4	Screw holes for mounting brackets
2	10G SPF+ ports (2)	5	Grounding pad
3	10- or 100-Gigabit QSFP28-100 ports (32) ¹		

¹ 10 Gigabits require a QSFP-to-SFP adapter [CVR-QSFP-SFP10G] and an SFP+ transceiver.

Overview of the Cisco Nexus 3264C-E Switch

The Cisco Nexus 3264C-E (N3K-C3264C-E) is a 2 rack unit (RU) switch with 64 100-Gigabit QSFP28 and 2 10-Gigabit SPF+ ports. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one power supply for operations, but it can have a second power supply for redundancy. This switch supports the following port template configurations:

Template 1: 96-ports X 50-Gigabit + 16-ports X 100-Gigabit

- All Ports are operational.
- The first 48 ports support 2X50G dynamic breakout with these combinations, 64X100-Gigabit, 64X50-Gigabit + 32X100-Gigabit, 96X50-Gigabit + 16X100-Gigabit.
- Ports 49-64 MACsec ports support 100-Gigabit and 40-Gigabit modes.

Front Ports												MACsec Ports			
1	2	3	4	5	6	7	8	9	10	11	12	49	50	51	52
13	14	15	16	17	18	19	20	21	22	23	24	53	54	55	56
25	26	27	28	29	30	31	32	33	34	35	36	57	58	59	60
37	38	39	40	41	42	43	44	45	46	47	48	61	62	63	64

	Breakout capable
	No breakout
	Inactive port

501826

Template 2: 96-ports X 25-Gigabit + 32-ports X 100-Gigabit

- Front ports 1-24, 29-32, 37-64 will be operational
- Ports 1-24 support 4X10-Gigabit and 4X25-Gigabit dynamic breakout.
- Ports 29-32 and 37-48 support 40-Gigabit and 100-Gigabit modes.
- 49-64 MACsec ports support 40-Gigabit and 100-Gigabit modes.
- SLIC adapter is supported on 1-24 ports.

Front Ports												MACsec Ports			
1	2	3	4	5	6	7	8	9	10	11	12	49	50	51	52
13	14	15	16	17	18	19	20	21	22	23	24	53	54	55	56
25	26	27	28	29	30	31	32	33	34	35	36	57	58	59	60
37	38	39	40	41	42	43	44	45	46	47	48	61	62	63	64

	Breakout capable
	No breakout
	Inactive port

501827

Template 3: 128-ports X 25-Gigabit or 128-ports X 10-Gigabit

- Ports 1-28 and 33-36 are operational.
- Ports 1-28 and 33-36 support 2X50-Gigabit, 4X25-Gigabit, and 4X100-Gigabit dynamic breakout.
- SLIC adapter is supported on 1-24 ports.

Front Ports												MACsec Ports			
1	2	3	4	5	6	7	8	9	10	11	12	49	50	51	52
13	14	15	16	17	18	19	20	21	22	23	24	53	54	55	56
25	26	27	28	29	30	31	32	33	34	35	36	57	58	59	60
37	38	39	40	41	42	43	44	45	46	47	48	61	62	63	64


	Breakout capable
	No breakout
	Inactive port

501828



Note 930W-DC PSU is supported in redundancy mode if 3.5W QSFP+ modules or Passive QSFP cables are used & the system is used in 40C ambient temp or less; for other optics or higher ambient temps, 930W-DC is supported with 2 PSUs in non-redundancy mode only.


The following figure shows the switch features on the port side of the chassis.

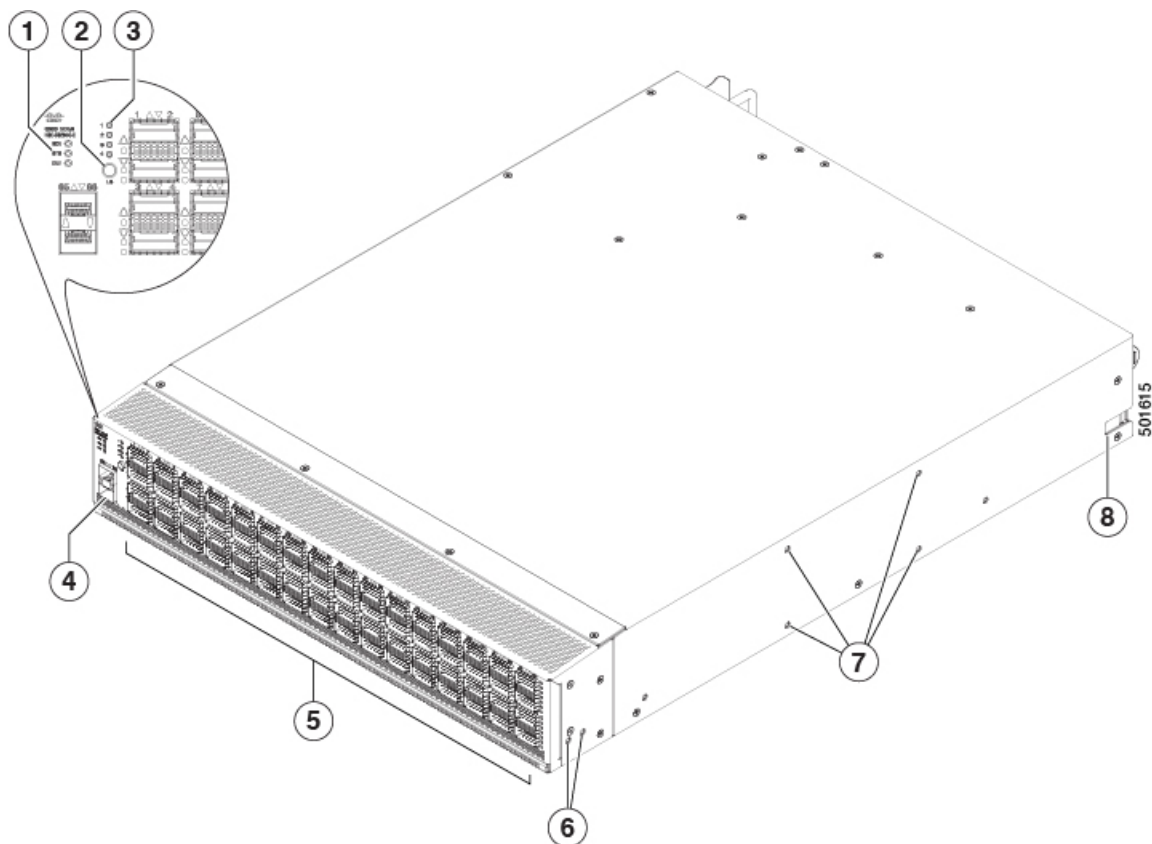

1	Beacon (BCN), Status (STS), and Environment (ENV) LEDs	5	40-/100-Gigabit QSFP28 ports (64)
2	Lane select button	6	Screw holes for front mounting brackets (four-post rack installations)
3	Lane LEDs	7	Screw holes for center-mount bracket (two-post rack installations)
4	1-/10-Gigabit SFP+ ports (2)	8	Notch on both sides of the chassis for locking the power supply end of the chassis to the bottom support rails (four-post rack installations).

To determine which transceivers, adapters, and cables are supported by this switch, see the [Cisco Transceiver Modules Compatibility Information](#) document.

The following figure shows the switch features on the power supply side of the chassis.

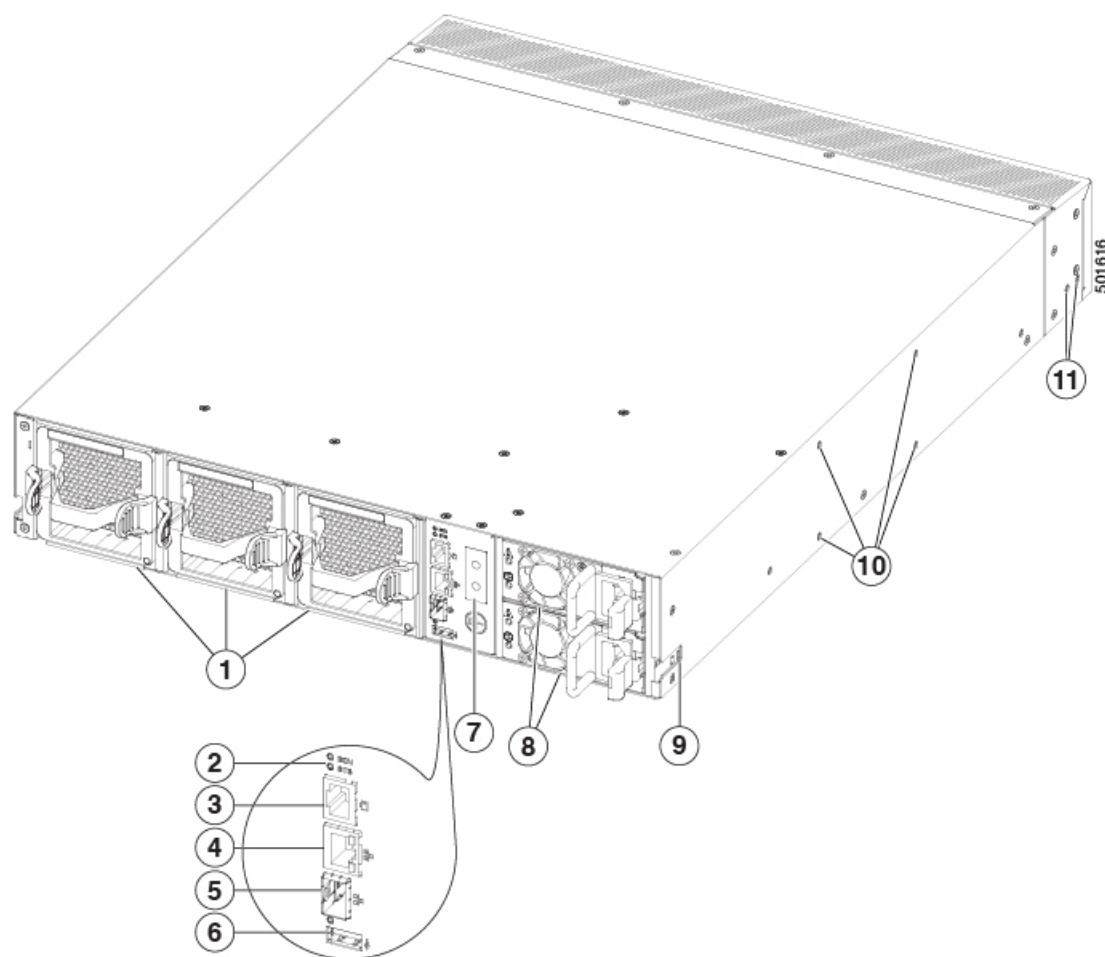

1	Fan modules (3) with slots numbered from 1 (left) to 3 (right)	7	Grounding pad
2	Beacon (BCN) and Status (STS) LEDs	8	Power supply modules (1 or 2) (AC power supplies shown) with slots numbered 1 (top) and 2 (bottom)
3	Console port (1)	9	Notch on both sides of the chassis for locking the power supply end of the chassis to the bottom support rails (four-post rack installations).
4	Management port (1—RJ-45 copper port)	10	Screw holes for center-mount bracket (two-post rack installations)


5	Management port (1—SFP optical port)	11	Screw holes for front mounting brackets (four-post rack installations)
6	USB port (1)		

Overview of the Cisco Nexus 3264Q Switch

The Cisco Nexus 3264Q (N3K-C3264Q) is a 2 rack unit (RU) switch with 64 fixed 10- or 40-Gigabit quad small form-factor pluggable (QSFP) ports, 2 SFP+ ports, 1 RJ-45 management port, 1 RS-232 console port, and 2 USB ports. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 18: Fan-Side View of the Cisco Nexus 3264Q Chassis

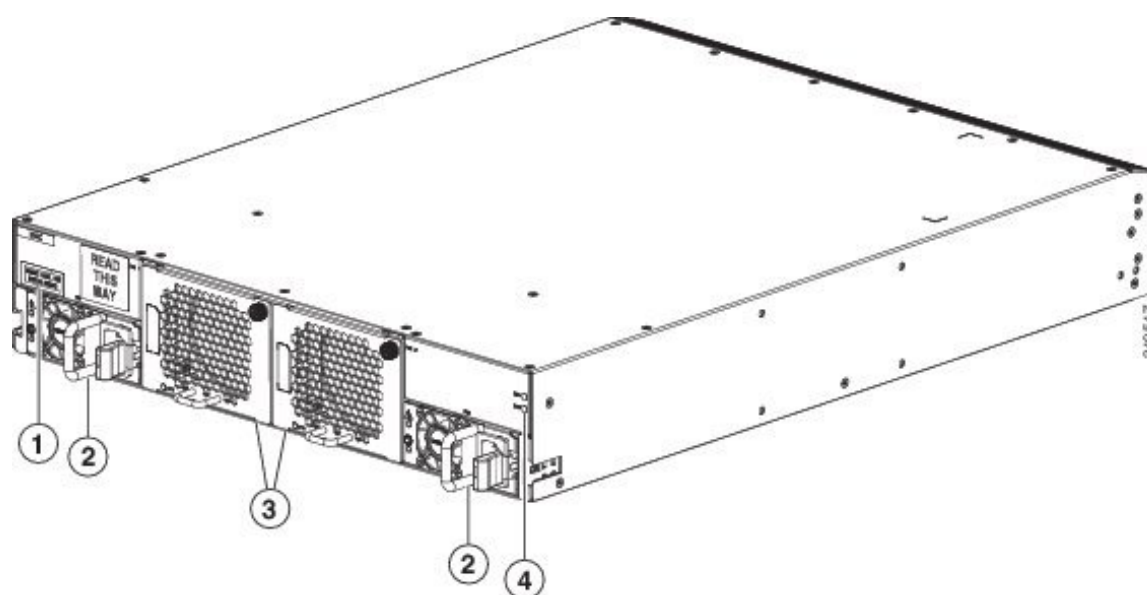

1	Grounding pad	3	Fan modules (2)
2	Power supply modules (2)	4	Beacon (BCN) and Status (STS) LEDs

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 19: Port-Side View of the Cisco Nexus 3264Q Chassis

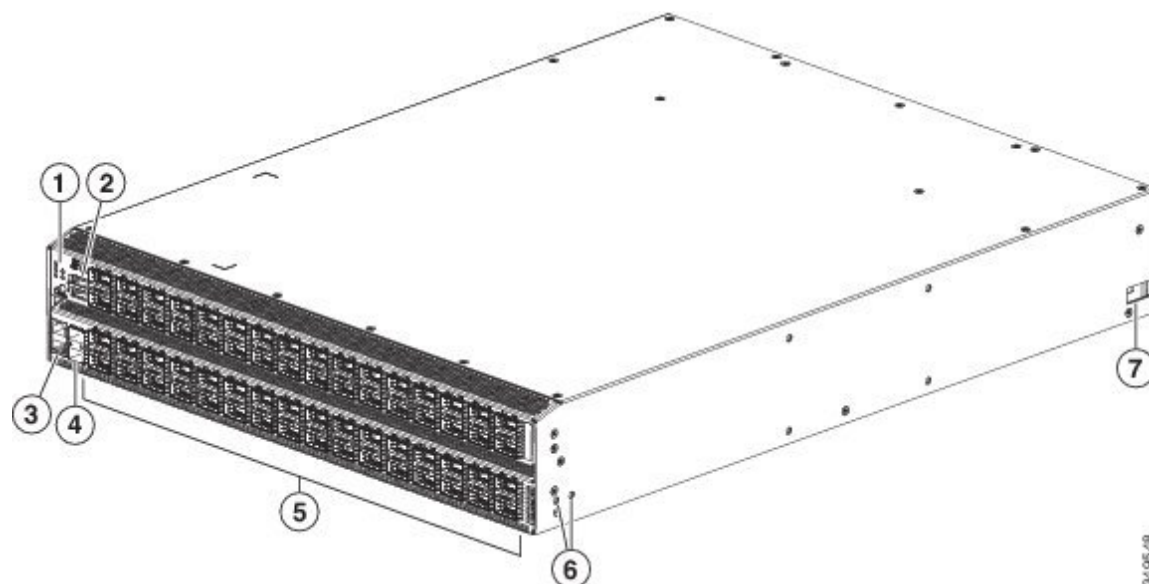

1	LEDs	5	10- or 40-Gigabit QSFP ports (64) ²
2	USB ports (2)	6	Screw holes for mounting brackets
3	Console port (1) and Management port (1)	7	Notch in the chassis (2) (1 each side) for locking into the bottom-support rails
4	SFP+ ports (2)		

² 10 Gigabits require a QSFP-to-SFP adapter [CVR-QSFP-SFP10G] and an SFP+ transceiver.

Overview of the Cisco Nexus 31108 Switch


The Cisco Nexus 31108PC-V (N3K-C31108PC-V) is a 1 rack unit (RU) top of rack (ToR) L2/L3 switch with 16-GB of RAM and dual-core 2.5-GHz x86. The switch comes with 48 10G SFP+ and 6 QSFP28 ports, 1 management port (RJ-45 or SFP), 1 console port, and 1 USB port.

The Cisco Nexus 31108TC-V (N3K-C31108TC-V) is a 1 rack unit (RU) top of rack (ToR) L2/L3 switch with 16-GB of RAM and dual-core 2.5-GHz x86. The switch comes with 48 10G Base-T and 6 QSFP28 ports, 1 management port (RJ-45 or SFP), 1 console port, and 1 USB port.

These switches support both port-side exhaust and port-side intake airflow schemes. These switches require one AC power supply for operations, but can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 20: Fan-Side View of the Cisco Nexus 31108 Chassis

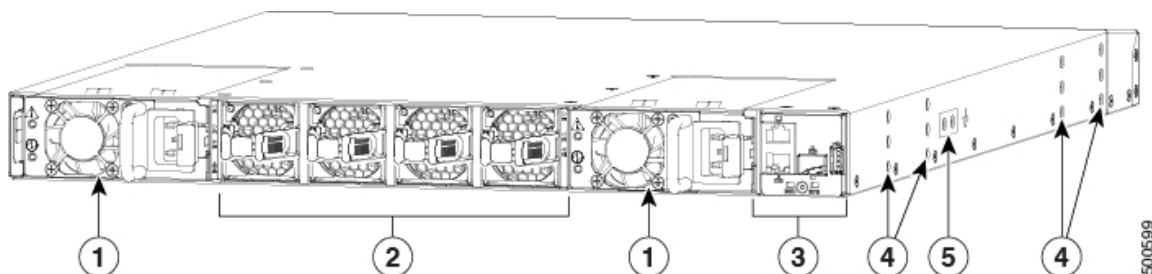

1	AC power supply (1 or 2)	4	Screw holes for mounting brackets
2	Fan modules (4)	5	Grounding pad
3	Console, Management, and USB ports		

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 21: Port-Side View of the Cisco Nexus 31108 Chassis

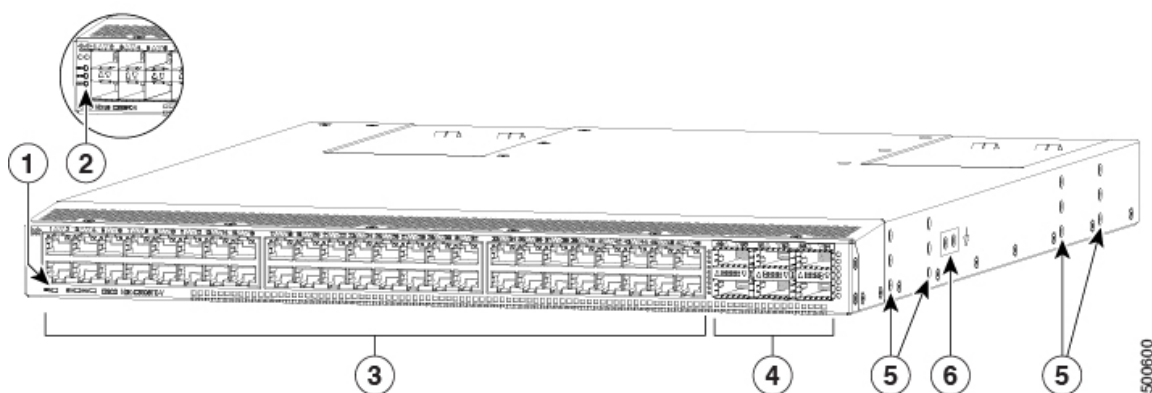


1	Beacon, Status, and Environment LEDs (N3K-C31108TC-V)	4	6 100-Gigabit QSFP28 ports
2	Beacon, Status, and Environment LEDs (N3K-C31108PC-V)	5	Screw holes for mounting brackets
3	48 10-Gigabit SFP+ ports (N3K-C31108PC-V) 48 10-Gigabit Base-T ports (N3K-C31108TC-V)		Grounding pad

Overview of the Cisco Nexus 31128PQ Switch

The Cisco Nexus 31128PQ (N3K-C31128PQ-10GE) is a 2 rack unit (RU) switch with 96 fixed 10-Gbps enhanced small form-factor pluggable (SFP+) ports and 8 fixed 40-Gbps quad small form-factor pluggable (QSFP+) ports, 1 management port, 1 console port, and 2 USB ports. This switch supports both port-side exhaust and port-side intake airflow schemes. The switch requires one AC or DC power supply for operations, but it can have a second power supply for redundancy.

The following figure shows the fan-side chassis features that you use when installing the chassis or replacing its modules.


Figure 22: Fan-Side View of the Cisco Nexus 31128PQ Chassis

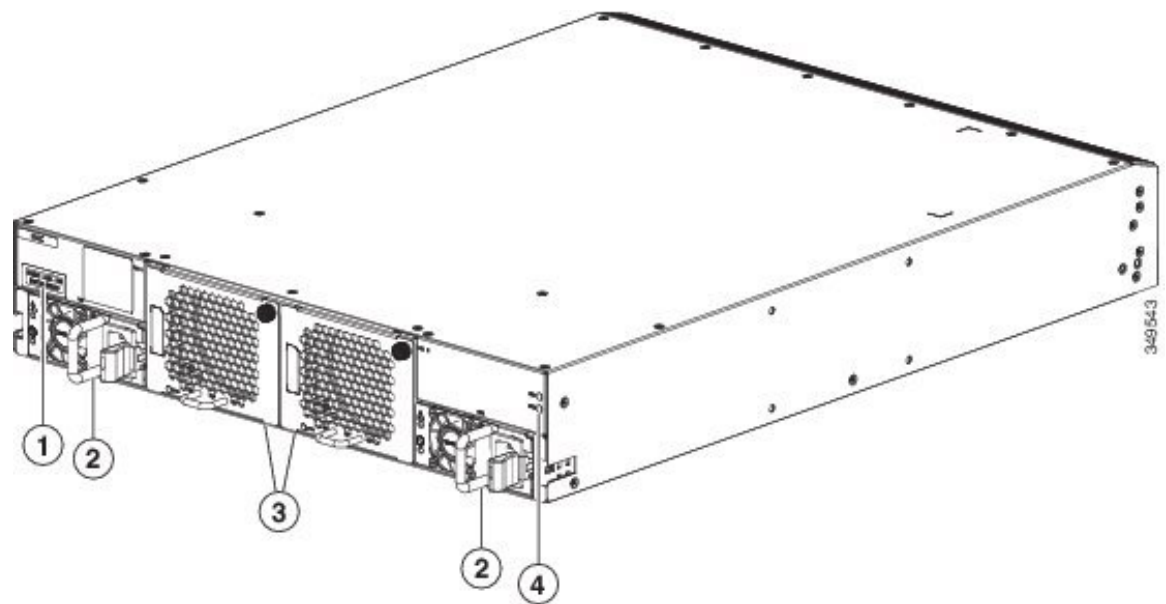

1	Grounding pad	3	Fan modules (2)
2	Power supply modules (2)	4	Beacon (BCN) and Status (STS) LEDs

The following figure shows the port-side chassis features that you use when installing the chassis or replacing its modules.

Figure 23: Port-Side View of the Cisco Nexus 31128PQ Chassis

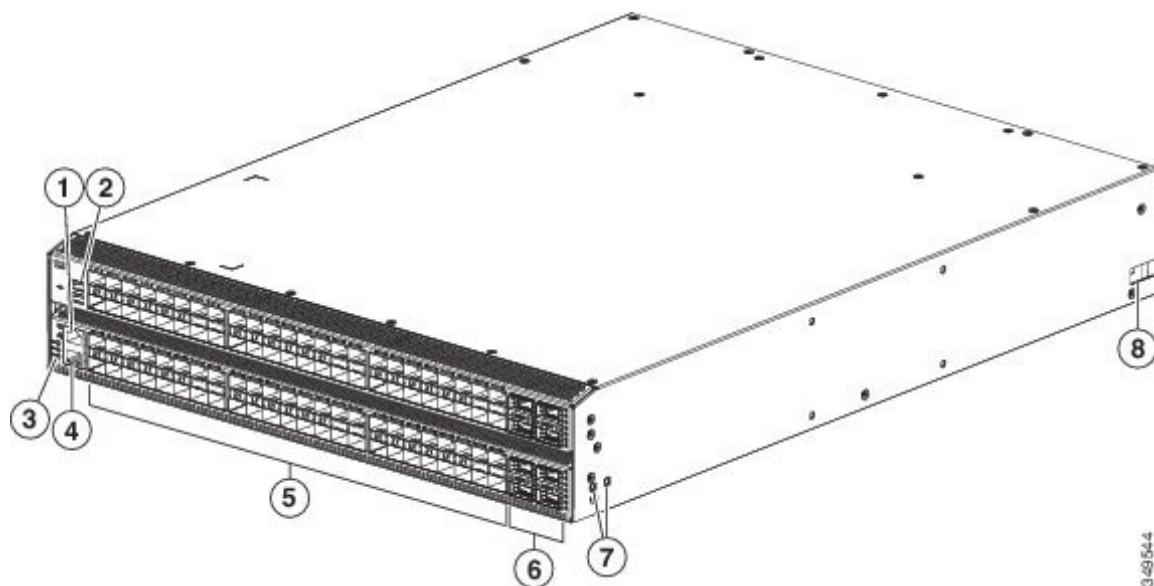

1	Console port (1)	5	10-Gigabit SFP+ ports that can operate at 1 or 10 Gigabits (96)
2	USB ports (2)	6	40-Gigabit uplink ports (8)
3	Beacon (BCN), Status (STS), and Environment (ENV) LEDs	7	Screw holes for mounting brackets
4	Management port (1)	8	Notch in the chassis (2) (one each side) for locking into the bottom-support rails