

# **NEC Express5800/R120g-2E**

## **Configuration Guide**

### Standard model



#### **Introduction**

This document contains product and configuration information that will enable you to configure your system. The guide will ensure fast and proper configuration of your NEC Express5800 server.

## Contents

<b>TECHNICAL SPECIFICATION .....</b>	<b>4</b>
Key Features.....	4
Specification.....	4
<b>EXTERNAL VIEWS .....</b>	<b>8</b>
Front and Rear Views .....	8
Dimensions (mm).....	10
<b>CONFIGURATION DIAGRAM .....</b>	<b>11</b>
<b>EXPANSION SLOT.....</b>	<b>11</b>
<b>SERVER CONFIGURATION .....</b>	<b>12</b>
<b>1 Base Models.....</b>	<b>12</b>
<b>2 Processors and Heat Sink .....</b>	<b>12</b>
<b>3 Memory .....</b>	<b>13</b>
3.1 Memory Configuration.....	13
<b>4 Internal Hard Disk Drives .....</b>	<b>16</b>
4.1 RAID Configuration .....	16
4.2 Required Components for RAID Configuration .....	17
4.3 Supported HDD/SDD .....	19
<b>5 2.5-inch PCIe SSD.....</b>	<b>21</b>
5.1 2.5-inch PCIeSSD Installation Kit .....	21
5.2 PCIe SSD.....	22
<b>6 Optical Drive.....</b>	<b>22</b>
<b>7 Internal RDX Drives .....</b>	<b>22</b>
7.1 RDX Configuration .....	22
<b>8 PCI Card.....</b>	<b>23</b>
8.1 Network Interface Controller .....	23
8.2 InfiniBand .....	24
8.3 External Storage Controller .....	25
8.4 Serial Port Adapter .....	26
<b>9 Other Add-in Components.....</b>	<b>26</b>
9.1 Redundant Power Supply Module .....	26
9.2 Redundant Fan Kit .....	26
9.3 Trusted Platform Module Kit .....	26
9.4 Internal Flash Memory .....	26
9.5 High Temperature Support Option .....	27
9.6 Flash FDD .....	27
<b>10 Add-on Components.....</b>	<b>28</b>
10.1 17-inch LCD Console Drawer .....	28
10.2 KVM Switch.....	28
10.3 Cable Management Arm .....	28
10.4 Server Management License .....	29
10.5 Medium and Cartridge .....	29
<b>REFERENCES.....</b>	<b>30</b>
Boot Mode Setting .....	30
Server Management .....	31
OS Support Matrix for PCI Cards and Embedded Controller .....	32

<b>Supported PCI Cards and Installable Slots .....</b>	<b>33</b>
<b>Copyright Notice and Liability Disclaimer .....</b>	<b>34</b>
<b>REVISION HISTORY .....</b>	<b>35</b>

# Technical Specification

## Key Features

- High performance with the latest Intel® Xeon® processor E5-2600 v4 product family
- Up to 512 GB of high speed DDR4 memory
- Up to sixteen 2.5-inch hard drives
- High energy efficiency with power capping feature and 80 PLUS® Titanium power supply
- Full manageability by integrated EXPRESSSCOPE Engine 3

## Specification

(1/2)

Model		R120g-2E				
Part Number		N8100-2464F, N8100-2465F, N8100-2466F				
Processor	Type	Intel® Xeon® processor E5-2603 v4	Intel® Xeon® processor E5-2609 v4	Intel® Xeon® processor E5-2620 v4	Intel® Xeon® processor E5-2623 v4	
	Clock speed	1.70 GHz	1.70 GHz	2.10 GHz	2.60 GHz	
	Number of Processors	1 to 2				
	Cache	15 MB	20 MB	20 MB	10 MB	
	Cores and Threads	6C-6T	8C-8T	8C-16T	4C-8T	
Chipset		Intel® C612 Chipset				
Memory	Type	DDR4-2400 Registered DIMM (4/8/16/32GB)				
	Standard Capacity	0 GB				
	Maximum Capacity	1 TB (16 x 64 GB)				
	Memory protection	ECC, x4 SDDC, Memory Mirroring, Memory Lockstep, Memory Sparring				
Internal Storage	Standard Capacity	0 GB				
	Maximum Capacity	SAS HDD: 28.8 TB (16 x 1.8 TB) SATA HDD : 32 TB (16 x 2 TB) SAS SSD: 6.4 TB ( 16 x 400 GB) SATA SSD: 25.6 TB ( 16 x 1.6 TB)				
	Disk Controller	SATA: 6Gb/s (Integrated) SAS: 12Gb/s (Optional)				
	RAID	SATA : RAID 0/1/10(Standard), RAID 5/6/50/60 (Optional) SAS : RAID 0/1/5/6/10/50/60 (Optional)				
	Hot Plug	Supported				
	Optical Disk Drive	Optional				
	Optical Drive Bays	1				
	3.5-inch Media Bays	1				
	Disk Drive Bays	16				
	Expansion Slots	Standard	Total: 5 slots available 2 PCIe 3.0 x16 (x16 connector) 1 PCIe 3.0 x8 (x8 connector) 1 PCIe 3.0 x8 (x8 connector) (Dual processor configuration only) 1 PCIe 2.0 x4 (x8 connector)			
Video		Controller (VRAM)	Integrated in Server Management Controller (32MB)			
Resolution / Color		1600 x 1200 / 16.7M <sup>1</sup>				
Interfaces		2 x VGA (15-pin mini D-sub, 1 x front, 1 x rear)				
		5 x USB3.0 (2 x front, 2 x rear, 1 x internal) 3 x USB2.0 (2 x rear, 1 x internal) 1 to 2 x Serial (9-pin mini D-sub, RS232-C, 1 to 2 x rear)				

Model		R120g-2E			
		2 x 1000BASE-T LAN connector (RJ-45, 2 x rear) 1 x Management LAN connector (RJ-45, 1 x rear)			
<b>Server Management</b>		EXPRESSSCOPE Engine 3			
<b>Redundant Fan</b>		Optional, hot plug			
<b>Redundant Power Supply</b>		Optional, hot plug			
<b>Power Supply</b>		1 to 2 x 460 Watt or 800 Watt 80 PLUS® Platinum certified hot plug PSU 100-240 VAC ± 10% 50 / 60 Hz ± 3 Hz, or 800 Watt 80 PLUS® Titanium certified hot plug PSU 200-240 VAC ± 10% 50 / 60 Hz ± 3 Hz			
<b>Power Consumption</b>	<b>(Max. Config, Idling)</b>	256 VA / 254 Watt	256 VA / 255 Watt	253VA / 252 Watt	256VA / 254 Watt
	<b>(Max. Config, Operating)</b>	561 VA / 557 Watt	619 VA / 614 Watt	661 VA / 656 Watt	703 VA / 699 Watt
<b>Acoustical Noise (Sound Pressure Level) 2</b>	<b>Max. Config, Idling</b>	52.3dB	52.3dB	52.3dB	52.3dB
	<b>Max. Config, Operating</b>	57.1dB	57.1dB	57.1dB	60.0dB
<b>Dimensions (W x D x H)</b>		448.0 x 683.8 x 87.2 mm / 17.6 x 26.9 x 3.4 in (2U)			
<b>Weight (Minimum / Maximum)</b>		18 kg / 27 kg, 39.68 lbs. / 59.52 lbs.			
<b>Temperature, Relative Humidity (non-condensing)</b>		Operating: 5° to 40° C / 41° to 104° F (Standard) or 5° to 45° C / 41° to 113° F (Optional), 20 to 80% Non-Operating: -10° to 55° C / 14° to 131° F, 20 to 80%			
<b>Regulatory and Safety</b>		FCC, UL, CB, CE, BSMI, UL(Mexico), CCC, RCM, RoHS, WEEE			
<b>Operating Systems</b>		Microsoft® Windows Server® 2008 R2 Standard Microsoft® Windows Server® 2008 R2 Enterprise Microsoft® Windows Server® 2012 Standard Microsoft® Windows Server® 2012 Datacenter Microsoft® Windows Server® 2012 R2 Standard Microsoft® Windows Server® 2012 R2 Datacenter Microsoft® Windows Server® 2016 Standard Microsoft® Windows Server® 2016 Datacenter Red Hat Enterprise Linux 6.7 or later (x86_64) 3 Red Hat Enterprise Linux 7.2 or later 3 VMware ESXi™ 5.5 Update 3 VMware ESXi™ 6.0 Update 1 VMware ESXi™ 6.5			

<sup>1</sup> Maximum resolution available via EXPRESSSCOPE Engine 3 remote console is 1280 x 1024 / 65K colors.

<sup>2</sup> Noise emission was measured in accordance with ISO 7779. The actual value may vary by the operating environment.

<sup>3</sup> For Linux support, contact your sales representative or go to the NEC website at:  
<http://www.nec.com/global/prod/express/linux/index.html>

(2/2)

Model		R120g-2E				
Part Number		N8100-2464F, N8100-2465F, N8100-2466F				
Processor	Type	Intel® Xeon® processor E5-2630 v4	Intel® Xeon® processor E5-2650 v4	Intel® Xeon® processor E5-2660 v4	Intel® Xeon® processor E5-2690 v4	
	Clock speed	2.20 GHz	2.20 GHz	2.00 GHz	2.60 GHz	
	Number of Processors	1 to 2				
	Cache	25 MB	30 MB	35 MB		
	Cores and Threads	10C-20T	12C-24T	14C-28T		
Chipset		Intel® C612 Chipset				
Memory	Type	DDR4-2400 Registered DIMM (4/8/16/32GB)				
	Standard Capacity	0 GB				
	Maximum Capacity	1 TB (16 x 64 GB)				
	Memory protection	ECC, x4 SDDC, Memory Mirroring, Memory Lockstep, Memory Sparring				
Internal Storage	Standard Capacity	0 GB				
	Maximum Capacity	SAS HDD: 28.8 TB (16 x 1.8 TB) SATA HDD : 32 TB (16 x 2 TB) SAS SSD: 6.4 TB ( 16 x 400 GB) SATA SSD: 25.6 TB ( 16 x 1.6 TB)				
	Disk Controller	SATA: 6Gb/s (Integrated) SAS: 12Gb/s (Optional)				
	RAID	SATA : RAID 0/1/10(Standard), RAID 5/6/50/60 (Optional) SAS : RAID 0/1/5/6/10/50/60 (Optional)				
	Hot Plug	Supported				
	Optical Disk Drive	Optional				
	Optical Drive Bays	1				
	3.5-inch Media Bays	1				
	Disk Drive Bays	16				
	Expansion Slots	Standard	Total: 5 slots available 2 PCIe 3.0 x16 (x16 connector) 1 PCIe 3.0 x8 (x8 connector) 1 PCIe 3.0 x8 (x8 connector) (Dual processor configuration only) 1 PCIe 2.0 x4 (x8 connector)			
Video		Controller (VRAM) Integrated in Server Management Controller (32MB)				
Resolution / Color		1600 x 1200 / 16.7M <sup>1</sup>				
Interfaces		2 x VGA (15-pin mini D-sub, 1 x front, 1 x rear)				
		5 x USB3.0 (2 x front, 2 x rear, 1 x internal)				
	3 x USB2.0 (2 x rear, 1 x internal)					
	1 to 2 x Serial (9-pin mini D-sub, RS232-C, 1 to 2 x rear)					
	2 x 1000BASE-T LAN connector (RJ-45, 2 x rear) 1 x Management LAN connector (RJ-45, 1 x rear)					
Server Management		EXPRESSSCOPE Engine 3				
Redundant Fan		Optional, hot plug				
Redundant Power Supply		Optional, hot plug				
Power Supply		1 to 2 x 460 Watt or 800 Watt 80 PLUS® Platinum certified hot plug PSU 100-240 VAC ± 10% 50 / 60 Hz ± 3 Hz, or 800 Watt 80 PLUS® Titanium certified hot plug PSU 200-240 VAC ± 10% 50 / 60 Hz ± 3 Hz				
Power Consumption	(Max. Config, Idling)	257 VA / 255 Watt	255 VA / 253 Watt	255VA / 253 Watt	257VA / 255 Watt	
	(Max. Config, Operating)	750 VA / 744 Watt	809 VA / 803 Watt	809 VA / 803 Watt	835 VA / 829 Watt	

**CONFIGURATION GUIDE – NEC Express5800/R120g-2E**

<b>Model</b>		<b>R120g-2E</b>			
<b>Acoustical Noise (Sound Pressure Level) <sup>2</sup></b>	<b>Max. Config, Idling</b>	52.3dB	52.3dB	52.3dB	52.3dB
	<b>Max. Config, Operating</b>	60.0dB	56.4dB	56.4dB	58.1dB
<b>Dimensions (W x D x H)</b>		448.0 x 683.8 x 87.2 mm / 17.6 x 26.9 x 3.4 in (2U)			
<b>Weight (Minimum / Maximum)</b>		18 kg / 27 kg, 39.68 lbs. / 59.52 lbs.			
<b>Temperature, Relative Humidity (non-condensing)</b>		Operating: 5° to 40° C / 41° to 104° F (Standard) or 5° to 45° C / 41° to 113° F (Optional), 20 to 80% Non-Operating: -10° to 55° C / 14° to 131° F, 20 to 80%			
<b>Regulatory and Safety</b>		FCC, UL, CB, CE, BSMI, UL(Mexico), CCC, RCM, RoHS, WEEE			
<b>Operating Systems</b>		Microsoft® Windows Server® 2008 R2 Standard Microsoft® Windows Server® 2008 R2 Enterprise Microsoft® Windows Server® 2012 Standard Microsoft® Windows Server® 2012 Datacenter Microsoft® Windows Server® 2012 R2 Standard Microsoft® Windows Server® 2012 R2 Datacenter Microsoft® Windows Server® 2016 Standard Microsoft® Windows Server® 2016 Datacenter Red Hat Enterprise Linux 6.7 or later (x86_64) <sup>3</sup> Red Hat Enterprise Linux 7.2 or later <sup>3</sup> VMware ESXi™ 5.5 Update 3 VMware ESXi™ 6.0 Update 1 VMware ESXi™ 6.5			

<sup>1</sup> Maximum resolution available via EXPRESSSCOPE Engine 3 remote console is 1280 x 1024 / 65K colors.


<sup>2</sup> Noise emission was measured in accordance with ISO 7779. The actual value may vary by the operating environment.

<sup>3</sup> For Linux support, contact your sales representative or go to the NEC website at: <http://www.nec.com/global/prod/express/linux/index.html>

# External Views

## Front and Rear Views


### Front View

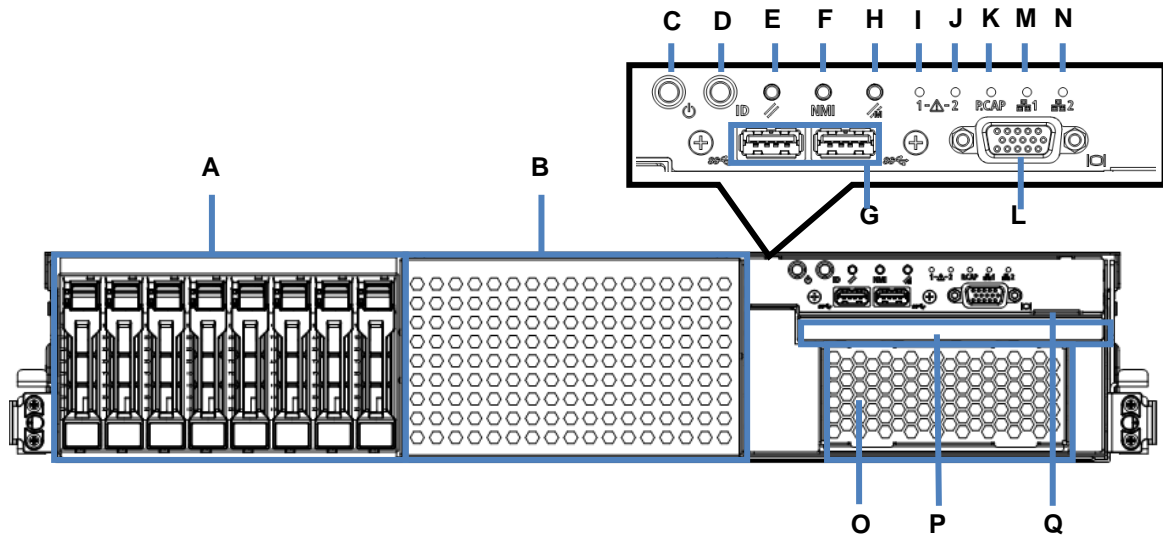

Legend	
A.	2.5-inch Drive Bays
B.	2.5-inch Additional HDD Cage Bay
C.	POWER Switch/ LED
D.	UID Switch/LED
E.	RESET Switch
F.	DUMP (NMI) Switch
G.	USB Connectors
H.	BMC RESET Switch
I.	STATUS LED 1
J.	STATUS LED 2
K.	Power Capping LED
L.	Display Connector
M.	LINK/ACT LED(LAN1)
N.	LINK/ACT LED(LAN2)
O.	Expansion Bay
P.	Optical Drive Bay
Q.	Pull-out Tab



### Rear View

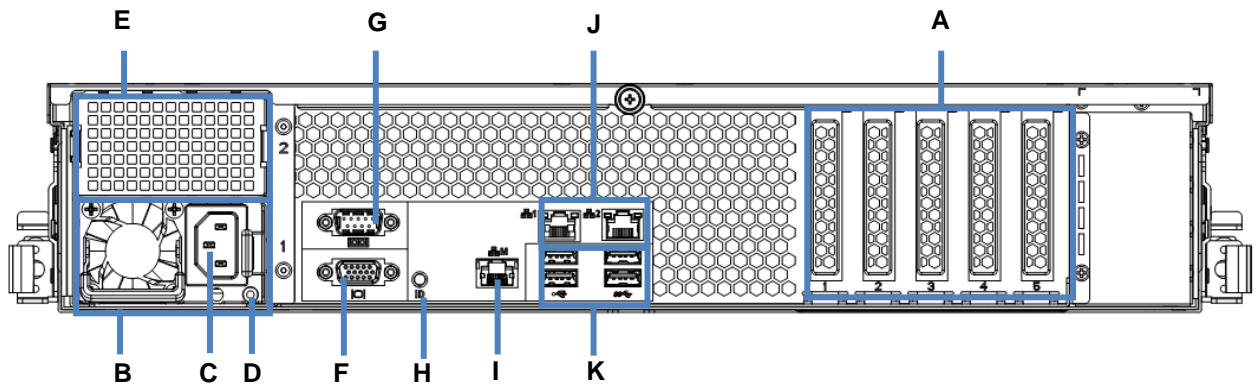


#### Legend


A.	PCI Slots (Low-Profile)	G.	Serial Port Connector
B.	Power Supply	H.	UID Switch/LED
C.	AC Inlet	I.	Management LAN Connector
D.	AC POWER LED	J.	LAN Connector
E.	Additional Power Supply Slot	K.	USB Connectors
F.	Display Connector		

## Dimensions (mm)


### Without Cable Arm

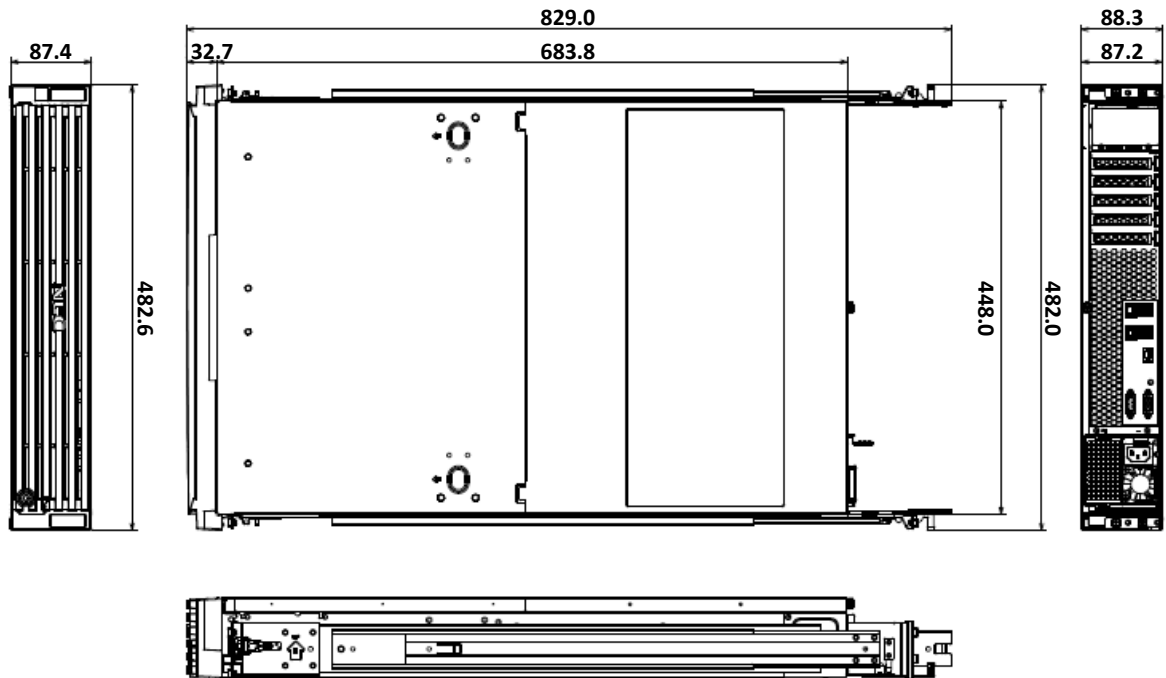


### With Cable Arm

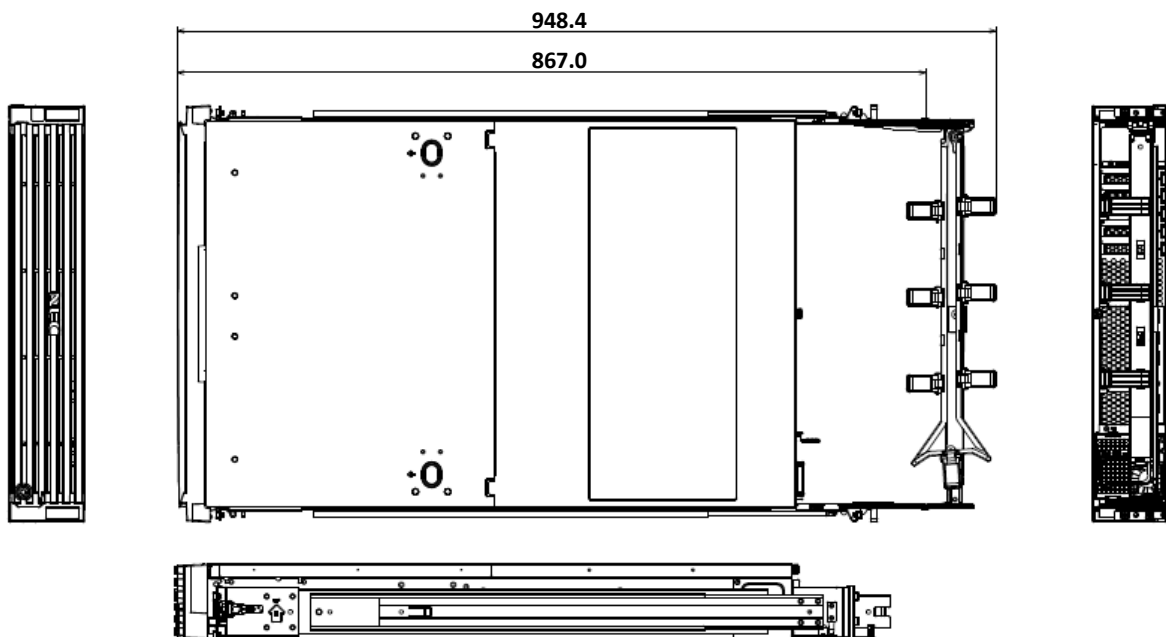

# Configuration Diagram

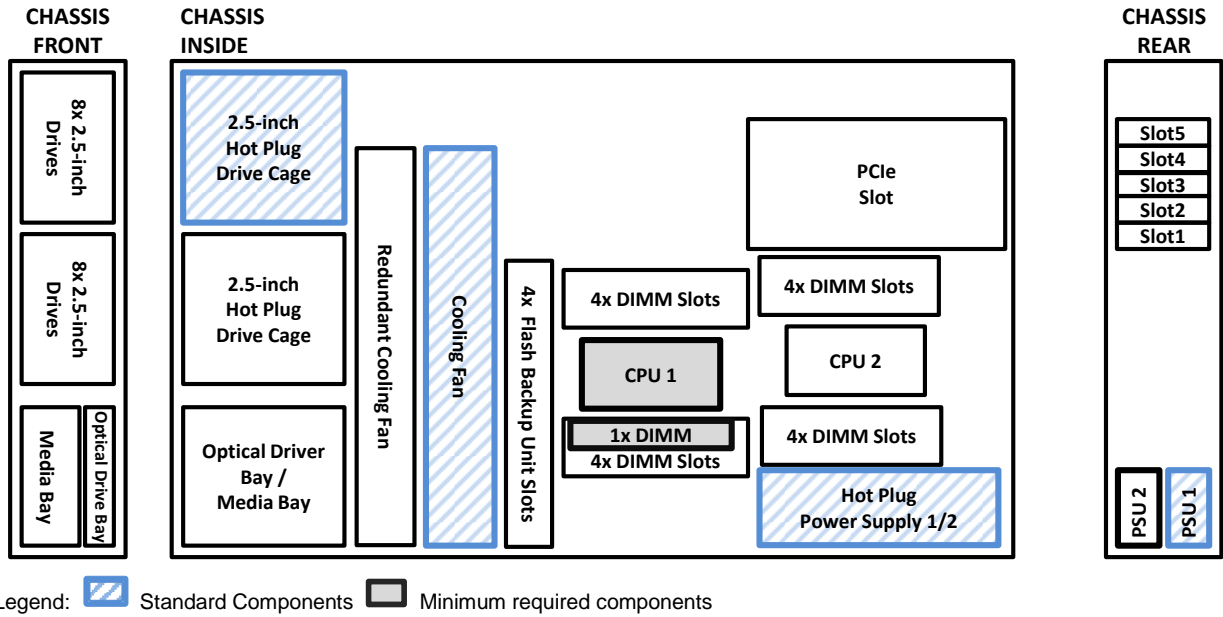

## Expansion Slot

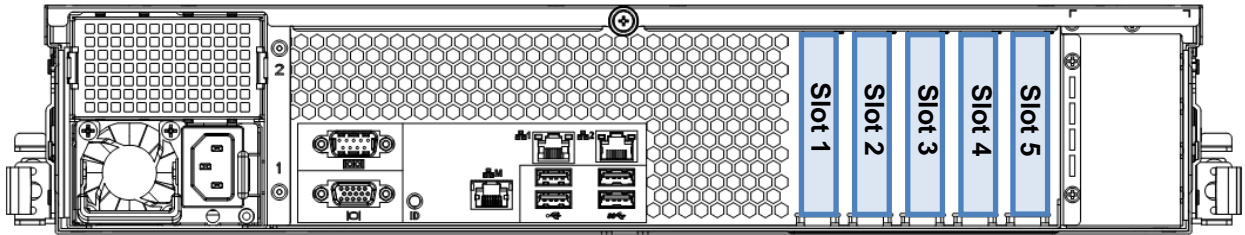

Legend	Remarks
#1	PCIe 3.0 x8, x8 connector, Low-profile, up to 168 mm length 2 CPUs required
#2	PCIe 3.0 x16, x16 connector, Low-profile, up to 200 mm length
#3	PCIe 3.0 x8, x8 connector, Low-profile, up to 200 mm length
#4	PCIe 3.0 x16, x16 connector, Low-profile, up to 200 mm length
#5	PCIe 2.0 x4, x8 connector, Low-profile, up to 168 mm length

**NOTE:**

- Slot #1 is only available in a dual processor configuration.

# Server Configuration

## 1 Base Models

Product Name / Description	Part Number
<b>NEC Express5800/R120g-2E</b> no processor, no RAM, no HDD, no ODD Including : 1 x 460 Watt 80 PLUS® Platinum Power Supply Unit, Front Bezel, 8 x 2.5-inch Drive Cage, 2 sets of Mini-SAS HD cable	N8100-2464F
<b>NEC Express5800/R120g-2E</b> no processor, no RAM, no HDD, no ODD Including : 1 x 800 Watt 80 PLUS® Platinum Power Supply Unit, Front Bezel, 8 x 2.5-inch Drive Cage, 2 sets of Mini-SAS HD cable	N8100-2465F
<b>NEC Express5800/R120g-2E</b> no processor, no RAM, no HDD, no ODD Including : 1 x 800 Watt 80 PLUS® Titanium Power Supply Unit, Front Bezel, 8 x 2.5-inch Drive Cage, 2 sets of Mini-SAS HD cable	N8100-2466F

**NOTE:**

- The base model must be ordered with a processor kit and a memory kit.
- Use the NEC Power Supply Selector to select appropriate size for power units. For details, please visit the NEC website at: [http://www.nec.com/en/global/prod/express/collateral/tools/PowerSelector\\_G01.xls](http://www.nec.com/en/global/prod/express/collateral/tools/PowerSelector_G01.xls)

## 2 Processors and Heat Sink

**Available sockets: 2**

Category	Product Name / Description	Part Number
<b>Processors</b> 1 Processor Required	<b>Xeon E5-2603 v4 Processor Kit</b> Intel® Xeon® Processor E5-2603 v4 (1.70 GHz, 6C/6T, 15 MB)	N8101-1068F
	<b>Xeon E5-2609 v4 Processor Kit</b> Intel® Xeon® Processor E5-2609 v4 (1.70 GHz, 8C/8T, 20 MB)	N8101-1069F
	<b>Xeon E5-2620 v4 Processor Kit</b> Intel® Xeon® Processor E5-2620 v4 (2.10 GHz, 8C/16T, 20 MB)	N8101-1070F
	<b>Xeon E5-2623 v4 Processor Kit</b> Intel® Xeon® Processor E5-2623 v4 (2.60 GHz, 4C/8T, 10 MB)	N8101-1071F
	<b>Xeon E5-2630 v4 Processor Kit</b> Intel® Xeon® Processor E5-2630 v4 (2.20 GHz, 10C/20T, 25 MB)	N8101-1072F
	<b>Xeon E5-2650 v4 Processor Kit</b> Intel® Xeon® Processor E5-2650 v4 (2.20 GHz, 12C/24T, 30 MB)	N8101-1073F
	<b>Xeon E5-2660 v4 Processor Kit</b> Intel® Xeon® Processor E5-2660 v4 (2.00 GHz, 14C/28T, 35 MB)	N8101-1074F
	<b>Xeon E5-2690 v4 Processor Kit</b> Intel® Xeon® Processor E5-2690 v4 (2.60 GHz, 14C/28T, 35 MB)	N8101-1075F
	<b>Heat Sink</b>	
<b>1st</b>	<b>Processor Heat Sink</b> For 1 <sup>st</sup> Processor	(Standard)
<b>2nd</b>	<b>Processor Heat Sink</b> For 2 <sup>nd</sup> Processor	N8101-1079F

**NOTE:**

- Minimum one processor kit from above must be installed.
- The processors must be the same to configure dual processor system.

## The maximum number of logical processors supported by OS

See the table below for the maximum number of logical processors that you can actually use on your system.

Number of Logical Processors Supported by Operating Systems		Maximum Available Number of Logical Processors
Microsoft Windows Server 2008 R2 Standard Microsoft Windows Server 2008 R2 Enterprise	256 <sup>1</sup>	56
Microsoft Windows Server 2012 Standard Microsoft Windows Server 2012 Datacenter Microsoft Windows Server 2012 R2 Standard Microsoft Windows Server 2012 R2 Datacenter Microsoft Windows Server 2016 Standard Microsoft Windows Server 2016 Datacenter	640 <sup>1</sup>	56
Red Hat Enterprise Linux 6 (x86_64) Red Hat Enterprise Linux 7	240	56
VMware ESXi 5.5	320	56
VMware ESXi 6.0	480	56
VMware ESXi 6.5	576	72

<sup>1</sup> The maximum numbers of logical processors when using Hyper-V are below:

- Windows Server 2008 R2 : 64
- Windows Server 2012, Windows Server 2012 R2 : 320
- Windows Server 2016: 512

## 3 Memory

### 3.1 Memory Configuration

Refer to the section in accordance with your memory configuration:

- Independent Channel: Refer to [3.1.1](#)
- Memory Sparing Configuration: Refer to [3.1.2](#)
- Memory Mirroring / Memory Lockstep Configuration: Refer to [3.1.3](#)

### Memory Configuration Feature Comparison

See the table below for feature comparisons of memory configurations supported.

	Independent Channel	Memory Sparing	Memory Lockstep	Memory Mirroring
<b>Performance</b>	Best	Better	Better	Good
<b>Data Protection</b>	No	Multiple single bit error protection	No	Multiple single bit and multi bit error protection
<b>Redundancy</b>	No	Partly	No	Fully
<b>Data Correction</b>	ECC, x4 SDDC	ECC, x4 SDDC	ECC, x8 SDDC	ECC, x4 SDDC
<b>Available Memory</b>	Full physical memory	3/4 physical memory	Full physical memory	Half physical memory
<b>Available Memory Channels</b>	4	4	4	4
<b>Notes</b>	-	All DIMMs in the system must be identical.	Paired DIMMs must be identical.	Paired DIMMs must be identical.

### 3.1.1 Independent Channel Configuration

Available slots: 8 per processor

Category	Product Name / Description	Part Number
Registered DIMM (RDIMM)	<b>4GB DDR4-2400 REG Memory Kit (1x4GB)</b> 1 x 4GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-686F
	<b>8GB DDR4-2400 REG Memory Kit (1x8GB)</b> 1 x 8GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-687F
	<b>16GB DDR4-2400 REG Memory Kit (1x16GB)</b> 1 x 16GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-688F
	<b>32GB DDR4-2400 REG Memory Kit (1x32GB)</b> 1 x 32GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-689F
<b>TSV Registered DIMM (TSV RDIMM)</b>	<b>64GB DDR4-2400 REG Memory Kit (1x64GB)</b> 1 x64GB TSV Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-690F

**NOTE:**

- Minimum one memory kit per processor must be installed.
- It is recommended to install memory kits in multiples of four (four identical DIMMs) for quad-channel symmetric memory configurations to increase memory transfer speed.
- When two processors are installed, balance the DIMMs across the two processors.
- Mix configurations of RDIMM and TSV RDIMM are not supported.
- At least 5 GB of memory is required for VMware ESXi

### 3.1.2 Memory Sparing Configuration

Available slots: 8 per processor

Product Name / Description	Part Number
<b>16GB DDR4-2400 REG Memory Kit (2x8GB)</b> 2 x 8GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-693
<b>32GB DDR4-2400 REG Memory Kit (2x16GB)</b> 2 x 16GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-694

**NOTE:**

- Minimum one memory kit per processor must be installed.
- The configured memories must be identical.
- The logical memory capacity becomes three-fourths of physical capacity.

### 3.1.3 Memory Mirroring / Memory Lockstep Configuration

Available slots: 8 per processor

Product Name / Description	Part Number
<b>16GB DDR4-2400 REG Memory Kit (2x8GB)</b> 2 x 8GB Registered ECC DIMM, DDR4-2400(PC4-2400)	N8102-691
<b>32GB DDR4-2400 REG Memory Kit (2x16GB)</b> 2 x 16GB Registered ECC DIMM, DDR4-2400 (PC4-2400)	N8102-692

**NOTE:**

- Minimum one memory kit per processor must be installed.
- The logical memory capacity becomes a half of physical capacity on memory mirroring configuration.

## Maximum Memory Speed

See the table below for the actual maximum memory transfer speed in Independent Channel / Memory Sparring Configuration.

DDR4 memory speed depends on the type of DIMMs, the native memory bus speed of the memory controller and memory configuration. All memory buses operate at the clock frequency of the DIMM with the lowest frequency.

Processor Type	Populated DIMMs	# of DIMMs per processor	DIMM Speed
E5-2603 v4 E5-2609 v4	RDIMM: 4, 8, 16, 32 GB	-	1866 MHz
E5-2620 v4 E5-2623 v4 E5-2630 v4	RDIMM: 4, 8, 16, 32 GB	-	2133 MHz
E5-2650 v4 E5-2660 v4 E5-2690 v4	RDIMM: 4, 8, 16, 32 GB	-	2400 MHz

## Maximum Available Memory

See the table below for the maximum memory size that you can actually use on your system.

Operating Systems	Maximum Memory Size Supported by Operating Systems	Maximum Available Memory
Microsoft Windows Server 2008 R2 Standard <sup>1</sup>	<b>32 GB</b>	<b>32 GB</b>
Microsoft Windows Server 2008 R2 Enterprise <sup>1</sup>	<b>2 TB</b>	<b>1 TB</b>
Microsoft Windows Server 2012 Standard <sup>1</sup> Microsoft Windows Server 2012 Datacenter <sup>1</sup> Microsoft Windows Server 2012 R2 Standard <sup>1</sup> Microsoft Windows Server 2012 R2 Datacenter <sup>1</sup>	<b>4 TB</b>	<b>1 TB</b>
Microsoft Windows Server 2016 Standard <sup>1</sup> Microsoft Windows Server 2016 Datacenter <sup>1</sup>	<b>24 TB</b>	<b>1 TB</b>
Red Hat Enterprise Linux 6 (x86_64) Red Hat Enterprise Linux 7	<b>6 TB</b>	<b>1 TB</b>
VMware ESXi 5.5 <sup>2</sup>	<b>4 TB</b>	<b>1 TB</b>
VMware ESXi 6.0 <sup>3</sup>	<b>6 TB</b>	<b>1 TB</b>
VMware ESXi 6.5 <sup>4</sup>	<b>12 TB</b>	<b>1 TB</b>

<sup>1</sup> The maximum available memory size of Hyper-V systems is below:

- Windows Server 2008 R2 Standard : 32 GB
- Windows Server 2008 R2 Enterprise : 1 TB
- Windows Server 2012, Windows Server 2012 R2 : 4 TB
- Windows Server 2016: 24 TB

<sup>2</sup> Up to 1TB of main memory is available to each virtual machine.

<sup>3</sup> Up to 4TB of main memory is available to each virtual machine.

<sup>4</sup> Up to 6TB of main memory is available to each virtual machine.

## 4 Internal Hard Disk Drives

### 4.1 RAID Configuration

Refer to the section in accordance with your OS and RAID configuration. For example, when you would like to configure RAID 0/1/10 1GB cache with Windows Server 2012 R2, refer to the section 4.2.3 for the required components and then refer to the section 4.3.4 for the hard drives.

Operating System	Supported RAID configuration		Supported HDD/SSD
	RAID and Cache	Section	
Windows Server 2008 R2	Non-RAID (Embedded SATA)	4.2.1	4.3.1
VMware ESXi 5.5	RAID 0/1 (Embedded SATA RAID)	4.2.2	4.3.2
VMware ESXi 6.0	RAID 0/1/10 1GB Cache	4.2.3	4.3.3
	RAID 5/6/50/60 1GB Cache	4.2.4	
	RAID 5/6/50/60 2GB Cache	4.2.5	
Windows Server 2012	Non-RAID (Embedded SATA)	4.2.1	4.3.1
Windows Server 2012 R2	RAID 0/1 (Embedded SATA RAID)	4.2.2	4.3.2
Windows Server 2016	(Windows only)		
Red Hat Enterprise Linux 6	RAID 0/1/10 1GB Cache	4.2.3	4.3.4
Red Hat Enterprise Linux 7			
VMware ESXi 6.5	RAID 5/6/50/60 1GB Cache	4.2.4	
	RAID 5/6/50/60 2GB Cache	4.2.5	

**NOTE:**

- Up to four hard drives can be installed in the Embedded SATA configuration.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs (512n), SAS 10K HDDs (512e), SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.
- It is recommended to set RAID array configuration drives less than eight per disk group in order to minimize the risk of becoming multiple hard drives failure.
- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.



## 4.2 Required Components for RAID Configuration

### 4.2.1 Up to four Drives with Embedded SATA Controller

Category	Product Name / Description	Part Number
Storage Controller	<b>Embedded SATA Controller</b> 4 x 6Gb/s SATA	(Standard)
Cable	<b>Internal SATA Cable</b> 2 sets of 1 x Mini SAS HD to 1 x Mini SAS HD cable	(Standard)
Drive Cage	<b>2.5-inch Drive Cage</b> 8 x 2.5-inch Hot-plug hard drive bays	(Standard)

**NOTE:**

- Up to 4 SATA drives are supported.
- For supported HDD/SSD, refer to 4.3.1
- Hot plug insertion/removal are not supported in the configuration.

### 4.2.2 Up to four Drives with Embedded SATA RAID 0/1 Controller

Category	Product Name / Description	Part Number
Storage Controller	<b>Embedded SATA Controller</b> 4 x 6Gb/s SATA	(Standard)
Cable	<b>Internal SATA Cable</b> 2 sets of 1 x Mini SAS HD to 1 x Mini SAS HD cable	(Standard)
Drive Cage	<b>2.5-inch Drive Cage</b> 8 x 2.5-inch Hot-plug hard drive bays	(Standard)

**NOTE:**

- Up to 4 SATA drives are supported.
- For supported HDD/SSD, refer to 4.3.2

### 4.2.3 Up to sixteen Drives with RAID 0/1 Controller with 1GB Cache

Category	Product Name / Description	Part Number
Storage Controller <b>Required</b>	<b>RAID Controller (1GB, RAID 0/1)</b> LSI MegaRAID SAS 9362-8i RAID 0/1/10, 1GB, Int. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s	N8103-176
Flash Backup <b>Recommended</b>	<b>Flash Backup Unit</b> for LSI MegaRAID SAS 9362-8i 650mm Cable for Flash Backup Unit included	N8103-181
Cable	<b>Internal SAS/SATA Cable</b> 1 x Mini SAS HD to 1 x Mini SAS HD, 2 sets	(Standard)
Drive Cage	<b>2.5-inch Drive Cage</b> 8 x 2.5-inch hot plug drive bays	(Standard)
Optional Drive Cage <b>(For more than 8 Drives)</b>	<b>2.5-inch Hot Plug Drive Cage Kit</b> 8 x 2.5-inch hot plug drive bays Including 4 sets of 1 x Mini SAS HD to 1 x Mini SAS HD cable, SAS expander card	N8154-74

**NOTE:**

- For Supported HDD/SSD, refer to 4.3.3 for 2008R2 or VMware. Refet to 4.3.4 for Windows Server 2012/2012R2, Red Hat Enterprise Linux 6 or Red Hat Enterprise Linux 7.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.

#### 4.2.4 Up to sixteen Drives with RAID 5/6 Controller with 1GB Cache

Category	Product Name / Description	Part Number
<b>Storage Controller</b> <b>Required</b>	<b>RAID Controller (1GB, RAID 0/1/5/6)</b> LSI MegaRAID SAS 9362-8i RAID0/1/5/6/10/50/60, 1GB, Int. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s	N8103-177
<b>Flash Backup</b> <b>Recommended</b>	<b>Flash Backup Unit</b> for LSI MegaRAID SAS 9362-8i 650mm Cable for Flash Backup Unit included	N8103-181
<b>Cable</b>	<b>Internal SAS/SATA Cable</b> 1 x Mini SAS HD to 1 x Mini SAS HD, 2 sets	(Standard)
<b>Drive Cage</b>	<b>2.5-inch Drive Cage</b> 8 x 2.5-inch hot plug drive bays	(Standard)
<b>Optional Drive Cage</b> <b>(For more than 8 Drives)</b>	<b>2.5-inch Hot Plug Drive Cage Kit</b> 8 x 2.5-inch hot plug drive bays Including 4 sets of 1 x Mini SAS HD to 1 x Mini SAS HD cable, SAS expander card	N8154-74

**NOTE:**

- For Supported HDD/SSD, refer to [4.3.3](#) for 2008R2 or VMware. Refet to [4.3.4](#) for Windows Server 2012/2012R2, Red Hat Enterprise Linux 6 or Red Hat Enterprise Linux 7.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.

#### 4.2.5 Up to sixteen Drives with RAID 5/6 Controller with 2GB Cache

Category	Product Name / Description	Part Number
<b>Storage Controller</b> <b>Required</b>	<b>RAID Controller (2GB, RAID 0/1/5/6)</b> LSI MegaRAID SAS 9362-8i RAID0/1/5/6/10/50/60, 2GB, Int. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s	N8103-178
<b>Flash Backup</b> <b>Recommended</b>	<b>Flash Backup Unit</b> for LSI MegaRAID SAS 9362-8i 650mm Cable for Flash Backup Unit included	N8103-181
<b>Cable</b>	<b>Internal SAS/SATA Cable</b> 1 x Mini SAS HD to 1 x Mini SAS HD, 2 sets	(Standard)
<b>Drive Cage</b>	<b>2.5-inch Drive Cage</b> 8 x 2.5-inch hot plug drive bays	(Standard)
<b>Optional Drive Cage</b> <b>(more than 8 Drive)</b>	<b>2.5-inch Hot Plug Drive Cage Kit</b> 8 x 2.5-inch hot plug drive bays Including 4 sets of 1 x Mini SAS HD to 1 x Mini SAS HD cable, SAS expander card	N8154-74

**NOTE:**

- For Supported HDD/SSD, refer to [4.3.3](#) for 2008R2 or VMware. Refet to [4.3.4](#) for Windows Server 2012/2012R2, Red Hat Enterprise Linux 6 or Red Hat Enterprise Linux 7.
- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.

## 4.3 Supported HDD/SDD

### 4.3.1 For Embedded SATA Controller

Category	Product Name / Description		Part Number
Drive 4 slots available	2.5-inchS ATA HDD	<b>500GB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 500 GB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-488
		<b>1TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-489
		<b>2TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-527

**NOTE:**

- Hot plug insertion/removal are not supported in the configuration.

### 4.3.2 For Embedded SATA RAID 0/1 Controller

Category	Product Name / Description		Part Number
Drive 4 slots available	2.5-inchS ATA HDD	<b>500GB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 500 GB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-488
		<b>1TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-489
		<b>2TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-527

**NOTE:**

- For RAID 10 on Windows Server 2008 R2, choose 1TB or less capacity HDDs.

### 4.3.3 For RAID Controller Configuration (1)

For Windows Server 2008R2 or VMware

Category	Product Name / Description		Part Number
Drive Standard :8 slots available Max : 16 slots available	SAS HDD (512n)	<b>300GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-479
		<b>450GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 450 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-480
		<b>600GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-481
		<b>900GB 10K Hot Plug 2.5-inch SAS HDD</b> 1x 900 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-482
		<b>1.2TB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 1.2TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-483
		<b>300GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-485
		<b>450GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 450 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-486

	<b>600GB 15K Hot Plug 2.5-inch SAS HDD</b> 1 x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-518
<b>SATA HDD (512n)</b>	<b>500GB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 500 GB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-488
	<b>1TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-489
	<b>2TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-527
<b>SAS SSD (ME)</b>	<b>200GB Hot Plug 2.5-inch SAS SSD</b> 1 x 200 GB SAS SSD, eMLC, 2.5-inch, 12Gb/s, 512n sector	N8150-721
	<b>400GB Hot Plug 2.5-inch SAS SSD</b> 1 x 400 GB SAS SSD, eMLC, 2.5-inch, 12Gb/s, 512n sector	N8150-722
<b>SATA SSD (ME)</b>	<b>200GB Hot Plug 2.5-inch SATA SSD</b> 1 x 200 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-779
	<b>400GB Hot Plug 2.5-inch SATA SSD</b> 1 x 400 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-780
	<b>800GB Hot Plug 2.5-inch SATA SSD</b> 1 x 800 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-781
<b>SATA SSD (VE)</b>	<b>200GB Hot Plug 2.5-inch SATA SSD</b> 1 x 200 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-782
	<b>400GB Hot Plug 2.5-inch SATA SSD</b> 1 x 400 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-783
	<b>800GB Hot Plug 2.5-inch SATA SSD</b> 1 x 800 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-784
	<b>1.6TB Hot Plug 2.5-inch SATA SSD</b> 1 x 1.6 TB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-785

**NOTE:**

- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs, SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.
- For monitoring SATA SSD life on VMware, NEC ESM PRO Manager Ver.6.05 or later is required. Please download the latest version on the NEC web site.
- The 2.5-inch SAS/SATA SSDs have limited lifetime. Refer to エラー! 参照元が見つかりません。 for details.

### 4.3.4 For RAID Controller Configuration (2)

For Windows Server 2012/2012R2, Red Hat Enterprise Linux 6 or Red Hat Enterprise Linux 7

Category	Product Name / Description	Part Number
<b>Drive</b> <b>Standard :8 slots available</b> <b>Max : 16 slots available</b>	<b>SAS HDD (512n)</b> <b>300GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-479
	<b>450GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 450 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-480
	<b>600GB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-481
	<b>900GB 10K Hot Plug 2.5-inch SAS HDD</b> 1x 900 GB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-482
	<b>1.2TB 10K Hot Plug 2.5-inch SAS HDD</b> 1 x 1.2TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512n sector	N8150-483
	<b>300GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 300 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-485

	<b>450GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 450 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-486
	<b>600GB 15K Hot Plug 2.5-inch SAS HDD</b> 1x 600 GB SAS HDD, 2.5-inch, 12Gb/s, 15,000 rpm, 512n sector	N8150-518
<b>SAS HDD (512e)</b>	<b>1.8TB 10K Hot Plug 2.5-inch SAS HDD</b> 1x 1.8TB SAS HDD, 2.5-inch, 12Gb/s, 10,000 rpm, 512e sector	N8150-541
<b>SATA HDD (512n)</b>	<b>500GB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 500 GB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-488
	<b>1TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 1 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-489
	<b>2TB 7.2K Hot Plug 2.5-inch SATA HDD</b> 1 x 2 TB SATA HDD, 2.5-inch, 6Gb/s, 7,200 rpm, 512n sector	N8150-527
<b>SAS SSD (ME)</b>	<b>200GB Hot Plug 2.5-inch SAS SSD</b> 1 x 200 GB SAS SSD, eMLC, 2.5-inch, 12Gb/s, 512n sector	N8150-721
	<b>400GB Hot Plug 2.5-inch SAS SSD</b> 1 x 400 GB SAS SSD, eMLC, 2.5-inch, 12Gb/s, 512n sector	N8150-722
<b>SATA SSD (ME)</b>	<b>200GB Hot Plug 2.5-inch SATA SSD</b> 1 x 200 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-779
	<b>400GB Hot Plug 2.5-inch SATA SSD</b> 1 x 400 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-780
	<b>800GB Hot Plug 2.5-inch SATA SSD</b> 1 x 800 GB SATA SSD, MLC, 2.5-inch, 6b/s, 512n sector, ME	N8150-781
<b>SATA SSD (VE)</b>	<b>200GB Hot Plug 2.5-inch SATA SSD</b> 1 x 200 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-782
	<b>400GB Hot Plug 2.5-inch SATA SSD</b> 1 x 400 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-783
	<b>800GB Hot Plug 2.5-inch SATA SSD</b> 1 x 800 GB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-784
	<b>1.6TB Hot Plug 2.5-inch SATA SSD</b> 1 x 1.6 TB SATA SSD, 2.5-inch, 6b/s, 512n sector, VE	N8150-785

**NOTE:**

- All drives within a RAID array should be of the same type, capacity and rotation speed.
- Up to two kinds of drives selected from SAS 10K HDDs (512n), SAS 10K HDDs (512e), SAS 15K HDDs, SATA HDDs, SAS SSDs, SATA SSDs (ME) and SATA SSDs (VE) can be mixed in each drive cage.
- For 512e sector HDD, the supported operating systems of virtual machines on Hyper-V are:
  - Windows Server 2008 R2 SP1 or later
  - Windows 7 SP1 or later
- The 2.5-inch SAS/SATA SSDs have limited lifetime. Refer to エラー! 参照元が見つかりません。 for details.

## 5 2.5-inch PCIe SSD

### 5.1 2.5-inch PCIeSSD Installation Kit

Product Name / Description	Part Number
<b>2.5-inch PCIeSSD Installation Kit</b> 2.5-inch Drive Cage for 4 x SDDs, PCIe SSD switch card, and PCIe cable	N8118-303

**NOTE:**

- One PCIe slot is required to install the PCIe SSD switch card.
- 2.5-inch Additional HDD Cage Bay is used to install 2.5-inch PCIeSSDs. Therefore, the 2.5-inch Hot Plug Drive Cage Kit N8154-74 cannot be installed at the same time.



- The PCIe SSD slots do not support hot-plug.
- Operating system cannot be installed on any PCIe SSD.

## 5.2 PCIe SSD

Category	Product Name / Description	Part Number
<b>PCIe SSD</b> 4 slots available	<b>800GB Non-Hot Plug 2.5-inch PCIe SSD</b> - 1x 800 GB PCIe SSD, 2.5-inch	N8118-500

**NOTE:**

- 2.5-inch PCIeSSD Installation Kit is required to install this product.
- Warranty period is 3 years (36 months) or until the total bytes of written value (TBW) exceeds the limit value, whichever occurs first. It is recommended to check the TBW periodically.
- Operating system cannot be installed on any PCIe SSD.

## 6 Optical Drive

Category	Product Name / Description	Part Number
<b>Internal</b> 1 slot available	<b>Internal Slim DVD-ROM drive</b> Slim DVD-ROM drive  <b>Internal DVD Super Multi Drive</b> Slim DVD Super Multi drive, not including writing software	N8151-134  N8151-135F
<b>NOTE:</b>		
- Not supported for Linux or VMware.		
<b>External</b>	<b>External DVD Dual drive</b> DVD Dual drive, Bus powered, 1.5A required, not including writing software	N8160-101F

**NOTE:**

- Up to 1 optical drive can be connected.

## 7 Internal RDX Drives

### 7.1 RDX Configuration

Category	Product Name / Description	Part Number
<b>Controller</b>	<b>Internal USB Controller</b> 1 x USB port	(Standard)
<b>Cable</b>	<b>Internal USB cable</b> 1 x Internal USB to 1 x USB device, USB 3.0	K410-353(00)
<b>Drive</b> 1 bay available	<b>Internal RDX (USB)</b> <b>NOTE:</b> - Not supported for VMware.	N8151-125

## 8 PCI Card

Please refer to [Supported PCI Cards and Installable Slots](#) with regard to the position of PCI slot which can mount PCI card supported.

### 8.1 Network Interface Controller

Category	Product Name / Description	Part Number
Adapter	<b>1GbE</b>	
	<b>1000BASE-T Adapter</b> Broadcom ® BCM5718 Gigabit Ethernet Controller PCIe 2.0 x1	N8104-150
	<b>Dual Port 1000BASE-T Adapter</b> Broadcom ® BCM5718 Gigabit Ethernet Controller PCIe 2.0 x1	N8104-151
	<b>Dual Port 1000BASE-T Adapter</b> Intel® 82580 Gigabit Ethernet Controller PCIe 2.0 x4	N8104-145
	<b>NOTE:</b> - PXE boot is not supported on UEFI environment.	
	<b>Quad Port 1000BASE-T Adapter</b> Broadcom ® BCM5719 Gigabit Ethernet Controller PCIe 2.0 x4	N8104-152
	<b>NOTE:</b> - Network cables with RJ-45 plug covers cannot be used.	
10GbE	<b>10GBASE SFP+ Adapter (SFP+/2ch)</b> Qlogic NetXtreme II BCM57810S PCIe 2.0 x8, Low Profile / Full Height	N8104-149
	<b>NOTE:</b> - N8104-129 SFP+ Module is required to connect with an optical cable.	
	<b>10GBASE Adapter (SFP+/2ch)</b> Intel Ethernet Converged Network Adapters X710 PCIe 3.0 x8	N8104-158
	<b>NOTE:</b> - N8104-129 SFP+ Module is required to connect with an optical cable.	
	<b>Dual Port 10GBASE-T Adapter</b> Intel® Ethernet Controller X540 PCIe 2.0(x8) , Low Profile / Full Height	N8104-153
	<b>Dual Port 10GBASE-T Adapter</b> Intel® Ethernet Controller X550 PCIe 3.0 x4, Low Profile / Full Height	N8104-157
<b>SFP+ Module</b>	<b>SFP+ Module (10G-SR)</b> 1 x SFP+ Module	N8104-129

**NOTE:**

- Supports up to three 10GbE network adapters in a single-processor configuration, and up to five in a dual-processor configuration.
- Network performance may be reduced depending on the applications and memory performance when three or more 10Gb Network Adapters are installed.
- For VMware ESXi, there are some limitations concerning the number of installable PCI cards. Refer to [Supported PCI Cards and Installable Slots](#) for details.

### NIC Teaming feature – NIC Teaming and bonding features

See the table below for supported network interfaces and OS combinations.

Windows Server 2008 R2 supports BASP (Broadcom Advanced Server Program) or Intel PROSet teaming while Windows Server 2012 (and later) and Linux support teaming with bonding function supported by OS.

Network Interface	Team	Operating Systems
1GbE NIC		Windows Server 2008 R2



Embedded/N8104-150/-151/-152	Up to four ports per one team	Windows Server 2012 Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux
N8104-145	Up to four ports per one team	Windows Server 2008 R2
<b>10GbE NIC (10GBASE-SR)</b> N8104-149	Up to four ports per one team	Windows Server 2008 R2 Windows Server 2012 Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux
N8104-158	Up to four ports per one team	Red Hat Enterprise Linux 7.2 or later
<b>10GbE NIC (10GBASE-T)</b> N8104-153/-157	Up to four ports per one team	Windows Server 2012 Windows Server 2012 R2 Windows Server 2016 Red Hat Enterprise Linux

**NOTE:**

- NIC Teaming feature is not supported on iSCSI interfaces.
- The network interfaces for each team must be the same.
- When 10GbE NIC teaming and 1GbE NIC teaming are mixed, the teams must be up to five per one system. However, the teams must be up to four per one system when using Windows Server 2008 R2.

## Using iSCSI

See the table below for supported network interfaces and OS combinations.

Category	Network Interface	Operating Systems
<b>1GbE</b>	<b>Embedded 1GbE NIC/ N8104-150/-151/-152</b>	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Red Hat Enterprise Linux, VMware
	<b>N8104-145</b>	Windows Server 2008 R2, VMware
<b>10GbE (10GBASE-SR)</b>	<b>N8104-149</b>	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Red Hat Enterprise Linux, VMware
	<b>N8104-158</b>	Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Red Hat Enterprise Linux, VMware
<b>10GbE (10GBASE-T)</b>	<b>N8104-153</b>	Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Red Hat Enterprise Linux
	<b>N8104-157</b>	Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Red Hat Enterprise Linux, VMware

**NOTE:**

- NIC Teaming feature is not supported on iSCSI interfaces.

## 8.2 InfiniBand

Category	Product Name / Description	Part Number
<b>Controller</b>	<b>Single Port InfiniBand Adapter</b> Mellanox ConnectX-3 VPI, MCX353A-FCBT, FDR, PCIe 3.0(x8)	N8104-146
	<b>Dual Port InfiniBand Adapter</b> Mellanox ConnectX-3 VPI, MCX354A-FCBT, FDR, PCIe 3.0(x8)	N8104-147
<b>Cable</b>	<b>InfiniBand Cable 2m/FRD</b> Copper	K410-304(02)
	<b>InfiniBand Cable 3m/FRD</b> Copper	K410-304(03)
<b>Switch</b>	<b>Unit</b> <b>InfiniBand Switch 36 ports/FDR</b>	NE3707-061



	Mellanox MSX6036F-1SFR 36 ports, FDR, One power supply module included, no power cord	
<b>Power Supply</b>	<b>Redundant Power Supply Unit</b> Power supply module for 36 ports InfiniBand switch, no power cord	NE3707-063

**NOTE:**

- Up to two InfiniBand adapters can be installed into the system and two adapters should be of the same type.
- The InfiniBand adapters and other options are make-to-order products. Please consult our sales representative in regards to production lead time.

## 8.3 External Storage Controller

### 8.3.1 RAID Controller

Category	Product Name / Description	Part Number
<b>Controller</b>	<b>RAID Controller (2GB, RAID0/1/5/6)</b> LSI MegaRAID SAS 9380-8e RAID0/1/5/6/10/50/60, 2GB, Ext. 8, PCIe 3.0 x8, SAS 12Gb/s, SATA 6Gb/s, Flash cache protection modules included	N8103-179

**NOTE:**

- To configure a large-capacity RAID array, it is recommended to configure in RAID 6 or RAID 60 in order to minimize the risk of becoming multiple hard drives failure during the RAID rebuilding process.
- It is recommended to set RAID array configuration drives less than eight in order to minimize the risk of becoming multiple hard drives failure.
- For VMware ESXi, there are some limitations concerning the number of installable PCI cards. Refer to [Supported PCI Cards and Installable Slots](#) for details.

### 8.3.2 Fibre Channel / SAS Controller

Category	Product Name / Description	Part Number
<b>Fibre Channel</b>	<b>Fibre Channel Controller (1ch)</b> Emulex LightPulse LPe1250-F8 Host Bus Adapter 8Gb/s, Optical, PCIe 2.0 x8	N8190-159
	<b>Fibre Channel Controller (2ch)</b> Emulex LightPulse LPe12002-M8 Host Bus Adapter 8Gb/s, Optical, PCIe 2.0 x8	N8190-160
	<b>Fibre Channel Controller (1ch)</b> Emulex LightPulse LPe16000B-M6 Host Bus Adapter 16Gb/s, Optical, PCIe 3.0 x8	N8190-157A
	<b>Fibre Channel Controller (2ch)</b> Emulex LightPulse LPe16002B-M6 Host Bus Adapter 16Gb/s, Optical, PCIe 3.0 x8	N8190-158A
	<b>Fibre Channel Controller (1ch)</b> QLogic, QLE2690 Host Bus Adapter 16Gb/s, Optical, PCIe 3.0(x8)	N8190-161
	<b>Fibre Channel Controller (2ch)</b> QLogic, QLE2692 Host Bus Adapter 16Gb/s, Optical, PCIe 3.0(x8)	N8190-162
	<b>SAS</b>	<b>SAS Controller</b> LSI SAS9212-4i4e Host Bus Adapter 6Gb/s SAS, Int. 4 / Ext. 4, 7-pin SATA / SFF-8088, PCIe 2.0 x8
<b>SAS Controller</b> LSI SAS9300-8e Host Bus Adapter 12Gb/s SAS, ext. 8(SFF-8644 x2), PCIe 3.0 x8		N8103-184

**NOTE:**

- With regard to 16Gb/s Fiber Channel Controllers, up to two ports in a single processor configuration with Xeon E5-2603 v4, and up to six ports in a dual processor configuration with Xeon E5-2603 v4 are allowed in the system.
- Up to three SAS Controllers can be installed.
- For VMware ESXi, there are some limitations concerning the number of installable PCI cards. Refer to [Supported PCI Cards](#)

and Installable Slots for details.

## 8.4 Serial Port Adapter

Product Name / Description	Part Number
<b>Serial Port Adapter</b> Serial port fixed to PCI bracket	N8117-01A

**NOTE:**

- Up to one Serial Port Adapter can be installed.

## 9 Other Add-in Components

### 9.1 Redundant Power Supply Module

Product Name / Description	Part Number
<b>460W Hot Plug Power Supply</b> 1 x 460 Watt 80 PLUS® Platinum	N8181-121F
<b>800W Hot Plug Power Supply</b> 1 x 800 Watt 80 PLUS® Platinum	N8181-122F
<b>800W Hot Plug Power Supply</b> 1 x 800 Watt 80 PLUS® Titanium - <b>NOTE:</b> 200 VAC input only supported	N8181-118F

**NOTE:**

- The power units must be the same to configure redundancy.
- Use the NEC Power Supply Selector to select appropriate size for power units. For details, please visit the NEC website at: [http://www.nec.com/en/global/prod/express/collateral/tools/PowerSelector\\_G01.xls](http://www.nec.com/en/global/prod/express/collateral/tools/PowerSelector_G01.xls)

### 9.2 Redundant Fan Kit

Product Name / Description	Part Number
<b>Redundant Fan Kit</b> hot plug redundant cooling fans for R120g-2E	N8181-126

### 9.3 Trusted Platform Module Kit

Product Name / Description	Part Number
<b>Trusted Platform Module Kit</b> TPM 2.0 module	N8115-26

**NOTE:**

- Supported for Windows Server 2012 or later only.

**NOTE:**

- The kit is not available in China.
- The kit is not removable after attachment.
- "TPM Support" in BIOS setup menu must be activated prior to use of this kit.
- To use Windows BitLocker drive encryption, be sure to keep the "recovery password" of BitLocker function. The recovery password is required to restore data for hardware replacement during a system error.

### 9.4 Internal Flash Memory

Product Name / Description	Part Number
<b>VMware ESXi support kit</b>	N8106-009

---

Internal USB flash memory to install VMware ESXi system

---

**NOTE:**

- The kit does not include VMware ESXi installation media and license.

## 9.5 High Temperature Support Option

Product Name / Description	Part Number
<b>High temperature resistant Kit</b> Required for high temperature operation over 40°C (up to 45°C)	N8181-147F

**NOTE:**

- To apply this option, there are some configuration limitations below.

**Required System Configuration:**

- Up to two Flash backup units for RAID controller can be installed.
- Do not install N8151-125 Internal RDX (USB)

## 9.6 Flash FDD

Choose the Flash FDD if you need to prepare an alternative device for a floppy drive.

Product Name / Description	Part Number
<b>Flash FDD</b> USB flash emulating USB floppy disk, Native capacity 1.44 MB	N8160-96

**NOTE:**

- Up to one drive can be connected.
- Not supported when VMware is running on the server.

## 10 Add-on Components

### 10.1 17-inch LCD Console Drawer

Category		Product Name / Description	Part Number
Drawer w/ KVM	Drawer	<b>17-inch LCD Console Drawer (8port)</b> 17-inch LCD, US 83-keys Keyboard, Optical mouse, 8 port KVM switch, 1U height	N8143-106F
	Cable	<b>Switch Unit Connection Cable Set (USB, 1.8m)</b> 1.8 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(1A)
		<b>Switch Unit Connection Cable Set (USB, 3m)</b> 3 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(03)
		<b>Switch Unit Connection Cable Set (USB, 5m)</b> 5 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(05)
Drawer w/o KVM	Drawer	<b>17inch LCD Console Unit 1U</b> 17-inch LCD, US 83-keys Keyboard, Optical mouse, 1U height, 4-pin USB B to 4-pin USB A cable 2 m, PS/2 Y-splitter cable 2m, 15-pin mini D-sub VGA cable 2 m	N8143-105F
		<b>17inch LCD Console Drawer (1port)</b> 17-inch LCD, US 103-keys Keyboard with 10-key, Touch pad with 3-button, 1U height, 4-pin USB B to 4-pin USB A cable 1.8 m, Two PS/2 cable 1.8 m, 15-pin mini D-sub VGA cable 1.8 m	N8143-108F
	Keypad	<b>Keyboard Unit (JP)</b> JP 108-keys Keyboard with 10-key for N8143-108F 17inch LCD Console Drawer (1port)	N8143-109
		<b>Keyboard Unit (UK)</b> UK 104-keys Keyboard with 10-key, for N8143-108F 17inch LCD Console Drawer (1port)	N8143-111

**NOTE:**

- There are two VGA connectors on R120g-2E, one on the front side and one on the rear side. However, the front side only works when both are connected at the same time.

### 10.2 KVM Switch

Category		Product Name / Description	Part Number
KVM Switch		<b>Server Switch Unit (8 server)</b> 1U USB 8 port KVM switch	N8191-14F
Cable	KVM	<b>Switch Unit Connection Cable Set (USB,1.8m)</b> 1.8 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(1A)
		<b>Switch Unit Connection Cable Set (USB,3m)</b> 3 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(03)
		<b>Switch Unit Connection Cable Set (USB,3m)</b> 5 m, 1 x 15-pin mini D-sub to 1 x 15-pin mini D-sub / 1 x 4-pin USB A	K410-118(05)
		<b>Cascading Switch Unit Connection Cable 1.8 m</b> 1.8 m, 1 x 15-pin mini D-sub - 1x 15-pin mini D-Sub / 2x PS/2	K410-119(1A)

**NOTE:**

- There are two VGA connectors on R120g-2E, one on the front side and one on the rear side. However, the front side only works when both are connected at the same time.

### 10.3 Cable Management Arm

Product Name / Description	Part Number
<b>Cable Management Arm 2U Kit</b> for R120g-2E	N8143-95

## 10.4 Server Management License

The server integrates the EXPRESSSCOPE Engine 3 as standard. Refer to [Server Management](#) for the standard management features. For more extensive remote KVM and remote media features, choose the following kit.

Product Name / Description	Part Number
<p><b>Remote KVM and Media License Kit</b></p> <p>License for one server.                      Remote KVM and remote media are enabled regardless of OS status.                      Remote KVM:</p> <ul style="list-style-type: none"> <li>- Displays a graphics console on the web browser of the remote terminal (PC/server).</li> <li>- Controls keyboard and mouse via the remote terminals' web browser</li> </ul> <p>Remote media:</p> <ul style="list-style-type: none"> <li>- Enables the user to use the CD / DVD / FD / Flash memory of the remote terminals (PC/server) as if accessing the local drives.</li> </ul>	N8115-04

**NOTE:**

- Remote KVM and remote media features are not available for virtual machines.

## 10.5 Medium and Cartridge

Category	Product Name	Drive supported	Part Number
RDX	<b>RDX Cartridge (500GB)</b>	N8151-125	N8153-02
	<b>RDX Cartridge (1TB)</b>	N8151-125	N8153-03
	<b>RDX Cartridge (2TB)</b>	N8151-125	N8153-09
	<b>RDX Cartridge (3TB)</b>	N8151-125	N8153-10
	<b>RDX Cartridge (4TB)</b>	N8151-125	N8153-11

# References

## Boot Mode Setting

The server supports Legacy mode and UEFI mode (default) as an OS Boot Mode. See the table below for the Boot Mode and X2APIC setting for each Operating System. As the default settings at the factory, UEFI mode is set as OS Boot mode and X2APIC is enabled. Refer to the User's Guide and change the settings before installing an Operating System requiring Legacy Mode.

Operating System	Supported Boot Mode	Supported X2APIC Setting
Windows Server 2008 R2 (x64)	Legacy	Disabled
Windows Server 2012	UEFI	Enabled
Windows Server 2012 R2	UEFI	Enabled
Windows Server 2016	UEFI	Enabled
Red Hat Enterprise Linux 6(x86_64)	UEFI	Enabled
Red Hat Enterprise Linux 7	UEFI	Enabled
VMware ESXi 5.5 Update3	Legacy	Disabled
VMware ESXi 6.0 Update 1	Legacy	Disabled
VMware ESXi 6.5	UEFI / Legacy	Enabled (UEFI) / Disabled (Legacy)

## Server Management

The EXPRESSSCOPE Engine 3, integrated into the server, provides superior remote control and system management features listed in the table below.

		Standard	With Remote KVM and Media License kit
<b>Hardware monitoring</b>	Temperature/voltage/power/RAID/standard LANfan /degeneration (memory/hard drive)	✓	✓
	Hardware configuration information collection	✓	✓
	Hardware event log collection	✓	✓
<b>Boot monitoring</b>	BIOS/POST stall, Booting, OS stall, shutdown	✓ <sup>1</sup>	✓ <sup>1</sup>
<b>Alerting</b>	HW error, Boot error , and OS panic (by SNMP, E-Mail)	✓	✓
<b>Remote KVM (via LAN)</b>	POST/BIOS setup, ROM utility	✓ <sup>2</sup>	✓
	Panic screen, Boot screen	✓ <sup>2, 3, 4</sup>	✓
	CUI-based screen (OS console)	✓ <sup>2, 4</sup>	✓
	GUI-based screen (OS console)	-	✓
	Remote console recording function	-	✓
	Manual Video recording	-	✓
	Automatic video recording	-	✓ <sup>1</sup>
<b>Remote control (via LAN)</b>	Remote reset/power on-off/ dump	✓	✓
	Remote power capping	✓	✓
	BIOS/BMC FW update	✓	✓
	Remote BIOS setup(partial configuration only)	✓	✓
	OS shutdown	✓ <sup>1</sup>	✓ <sup>1</sup>
	Remote media (CD/DVD/FD/USB)	-	✓
	CLP (Command Line Protocol) (DMTF compliant)	✓	✓
	Remote control via Web browser (multi user login at the same time)	✓	✓
	Scheduling (without UPS)	✓ <sup>1</sup>	✓ <sup>1</sup>
	BIOS setting by using XML file	✓	✓
<b>Maintenance</b>	EXPRESSSCOPE® Profile key (Backup/restore BIOS/BMC setup information)	✓	✓
<b>Others</b>	Set automatic IP address via DNS/DHCP	✓	✓
	LDAP/Active Directory verification/user control	✓	✓
	Clock synchronization of main unit and the RTC	✓	✓
	Access log collection	✓	✓
	IPMI	2.0	2.0
	IPv6(Web console/CLP only)	✓	✓

<sup>1</sup> The feature is not supported on VMware ESXi systems.

<sup>2</sup> The optional serial port is not available for the feature.

<sup>3</sup> Monitoring boot screens is not supported on VMware systems.

<sup>4</sup> In VMware systems, only the direct console user interface is supported.

## OS Support Matrix for PCI Cards and Embedded Controller

Part number	Product Name	WS 2016	WS 2012 R2	WS 2012	WS 2008 R2	RHEL 7	RHEL 6 x64	ESXi 6.5	ESXi 6.0	ESXi 5.5
-	Embedded SATA non-RAID Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓
-	Embedded SATA RAID Controller	✓	✓	✓	✓	-	-	-	-	-
-	Embedded 1GbE NIC	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-176	RAID Controller (1 GB, RAID 0/1)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-177	RAID Controller (1 GB, RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-178	RAID Controller (2 GB,RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-179	RAID Controller (2 GB,RAID 0/1/5/6)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8118-303	2.5-inch PCIeSSD Installation Kit	✓	✓	✓	-	-	✓	-	-	-
N8190-162	Fibre Channel Controller (2ch)	✓	-	-	-	-	-	-	-	-
N8190-161	Fibre Channel Controller (1ch)	✓	-	-	-	-	-	-	-	-
N8190-158A	Fibre Channel Controller (2ch)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8190-157A	Fibre Channel Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8104-147	Dual Port InfiniBand Adapter	-	✓	✓	-	✓	✓	-	-	-
N8104-146	Single Port InfiniBand Adapter	-	✓	✓	-	✓	✓	-	-	-
N8104-158	10GBASE Adapter (SFP+/2ch)	-	-	-	-	✓	-	-	-	-
N8104-157	Dual Port 10GBASE-T Adapter	✓	✓	✓	-	✓	✓	-	-	-
N8103-184	SAS Controller	-	✓	✓	-	✓	✓	✓	✓	✓
N8190-160	Fibre Channel Controller (2ch)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8190-159	Fibre Channel Controller	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8104-153	Dual Port 10GBASE-T Adapter	✓	✓	✓	-	✓	✓	✓	✓	✓
N8104-149	10GBASE SFP+ Adapter (SFP+/2ch)	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8103-142	SAS Controller	✓	✓	✓	✓	✓	✓	-	✓	✓
N8104-152	Quad Port 1000BASE-T Adapter	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8104-145	Dual Port 1000BASE-T Adapter	-	-	-	✓	✓	✓	-	-	✓
N8104-151	Dual Port 1000BASE-T Adapter	✓	✓	✓	✓	✓	✓	✓	✓	✓
N8104-150	1000BASE-T Adapter	✓	✓	✓	✓	✓	✓	✓	✓	✓



## Supported PCI Cards and Installable Slots

Priority	Part Number	Product Name	Slots				
			#1 <sup>1</sup>	#2	#3	#4	#5
(1)	N8103-176	RAID Controller (1 GB, RAID 0/1)	(4)	(2)	(1)	(3)	-
(2)	N8103-177	RAID Controller (1 GB, RAID 0/1/5/6)	(4)	(2)	(1)	(3)	-
(3)	N8103-178	RAID Controller (2 GB,RAID 0/1/5/6)	(4)	(2)	(1)	(3)	-
(4)	N8103-179	RAID Controller (2 GB,RAID 0/1/5/6)	(4)	(2)	(1)	(3)	-
(5)	N8118-303	2.5-inch PCIeSSD Installation Kit	-	-	-	(2)	-
(6)	N8190-162	Fibre Channel Controller (2ch)	(4)	(2)	(1)	(3)	-
(7)	N8190-161	Fibre Channel Controller (1ch)	(4)	(2)	(1)	(3)	-
(8)	N8190-158A	Fibre Channel Controller (2ch)	(4)	(2)	(1)	(3)	-
(9)	N8190-157A	Fibre Channel Controller	(4)	(2)	(1)	(3)	-
(10)	N8104-147	Dual Port InfiniBand Adapter	(4)	(2)	(1)	(3)	-
(11)	N8104-146	Single Port InfiniBand Adapter	(4)	(2)	(1)	(3)	-
(12)	N8104-158	10GBASE Adapter (SFP+/2ch)	(4)	(2)	(1)	(3)	-
(13)	N8104-157	Dual Port 10GBASE-T Adapter	(4)	(2)	(1)	(3)	-
(14)	N8103-184	SAS Controller	(4)	(2)	(1)	(3)	-
(15)	N8190-160	Fibre Channel Controller (2ch)	(4)	(2)	(1)	(3)	-
(16)	N8190-159	Fibre Channel Controller	(4)	(2)	(1)	(3)	-
(17)	N8104-153	Dual Port 10GBASE-T Adapter	(4)	(2)	(1)	(3)	(5)
(18)	N8104-149	10GBASE SFP+ Adapter (SFP+/2ch)	(4)	(2)	(1)	(3)	(5)
(19)	N8103-142	SAS Controller	(4)	(2)	(1)	(3)	(5)
(20)	N8104-152	Quad Port 1000BASE-T Adapter	(4)	(2)	(1)	(3)	(5)
(21)	N8104-145	Dual Port 1000BASE-T Adapter	(4)	(2)	(1)	(3)	(5)
(22)	N8104-151	Dual Port 1000BASE-T Adapter	(4)	(2)	(1)	(3)	(5)
(23)	N8104-150	1000BASE-T Adapter	(4)	(2)	(1)	(3)	(5)
(24)	N8117-01A	Serial Port Adapter	-	-	(1)	(2)	(3)

<sup>1</sup> The slot #1 is not available when a single processor configuration.

**NOTE:**

- The number between parentheses shows the population priority (recommendation). For example, install N8103-176 (1) in the slot #3, N8190-160 (13) in the slot #2 and N8104-153 (15) in the slot #4 when you have those cards.
- For VMware ESXi 5.5, there are some limitations as follows:
  - When any of N8104-149/-153/-157 is installed, N8104-152 cannot be installed and the number of installable N8104-150/-151 is limited up to one.
  - Up to two cards of N8104-152 can be installed.
  - Up to four cards of N8104-150/-151 can be installed.
  - Up to three cards of N8104-149/-153/-157 can be installed.
  - Up to four cards of N8190-158A/N8190-160/N8103-184 can be installed.
  - When the above four groups are mixed (N8104-152, N8104-150/-151, N8104-149/-153/-157, and N8190-158A/N8190-160/N8103-184), the number of installable cards among them becomes up to three.
  - When configured with Xeon E5-2660 v4/2690 v4, up to one card of N8103-176/-177/-178/-179 can be installed
  - When configured with Xeon E5-2650 v4, up to two cards of N8103-176/-177/-178/-179 can be installed
- For VMware ESXi 6.0, there are some limitations as follows:
  - When any of N8104-149/-153/-157 is installed, N8104-152 cannot be installed and the number of installable N8104-150/-151 is limited up to one.
- For the configuration limitation for VMware ESXi, refer to the following documents.

VMware ESXi5.5

<https://www.vmware.com/pdf/vsphere5/r55/vsphere-55-configuration-maximums.pdf>

VMware ESXi6.0

<https://www.vmware.com/pdf/vsphere6/r60/vsphere-60-configuration-maximums.pdf>

## Copyright Notice and Liability Disclaimer

The information contained herein is subject to change without notice.

Microsoft and Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries

Intel and Xeon are registered trademarks or trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds.

Red Hat is a registered trademark of Red Hat, Inc. in the U.S.

All other products, brands, or trade names used in this document are trademarks or registered trademarks of their respective holders.

NEC shall not be liable for technical or editorial errors or omissions contained herein.

For hard drive capacity measurements, 1 GB = 1 billion bytes. Actual formatted capacity is less.

## Revision History

Revision	Date	Description
7.0	August 24, 2017	<p><b>New products added:</b>                      200GB Hot Plug 2.5-inch SATA SSD / N8150-779                      400GB Hot Plug 2.5-inch SATA SSD/ N8150-780                      800GB Hot Plug 2.5-inch SATA SSD/ N8150-781                      200GB Hot Plug 2.5-inch SATA SSD / N8150-782                      400GB Hot Plug 2.5-inch SATA SSD / N8150-783                      800GB Hot Plug 2.5-inch SATA SSD / N8150-784                      1.6TB Hot Plug 2.5-inch SATA SSD / N8150-785</p> <p><b>Discontinued product deleted:</b>                      200GB Hot Plug 2.5-inch SATA SSD / N8150-725                      400GB Hot Plug 2.5-inch SATA SSD/ N8150-726                      800GB Hot Plug 2.5-inch SATA SSD/ N8150-727                      200GB Hot Plug 2.5-inch SATA SSD / N8150-732                      400GB Hot Plug 2.5-inch SATA SSD / N8150-733                      800GB Hot Plug 2.5-inch SATA SSD / N8150-734                      1.6TB Hot Plug 2.5-inch SATA SSD / N8150-735</p> <p><b>Others:</b>                      Removed the description of the Endurance of SSD</p>
6.0	April 26, 2017	<p><b>New products added:</b>                      External DVD Dual drive / N8160-101F</p> <p><b>Discontinued product deleted:</b>                      External DVD Super Multi Drive / N8160-98F</p>
5.0	February 24, 2017	<p><b>New products added:</b>                      Fibre Channel Controller(1ch) / N8190-161                      Fibre Channel Controller(2ch) / N8190-162</p> <p><b>Others:</b>                      Added VMware ESXi 6.5 to the list of operating system supported                      Updated OS support matrix</p>
4.0	January 31, 2017	<p><b>New products added:</b>                      RDX Cartridge (4TB) / N8153-11</p> <p><b>Others:</b>                      Added Windows Server 2016 to the list of operating system supported                      Updated OS support matrix</p>
3.0	October 12, 2016	<p><b>New products added:</b>                      1.8TB 10K Hot Plug 2.5-inch SAS HDD / N8150-541                      10GBASE Adapter (SFP+/2ch) / N8104-158</p> <p><b>Discontinued product deleted:</b>                      1.8TB 10K Hot Plug 2.5-inch SAS HDD / N8150-490</p> <p><b>Others:</b>                      Removed 4Kn sector HDD descriptions</p>
2.0	July 20, 2016	<p><b>New products added:</b>                      64GB DDR4-2400 REG Memory Kit (1x64GB) / N8102-690F                      External DVD Super Multi Drive / N8160-98F</p> <p><b>Discontinued product deleted:</b>                      External DVD Super MULTI Drive / N8160-97F</p> <p><b>Others:</b>                      Added a note for the HDDs for Embedded SATA RAID 0/1 Controller</p>
1.1	May 26, 2016	Corrected the part number of Internal USB cable for RDX
1.0	April 25, 2016	Initial release