

Overview

HPE StoreEasy 1000 Storage with the HPE StoreEasy Management Console Sixth generation (1460, 1560, 1660, 1660 Expanded, 1860)

Whether you are a small, medium, or large distributed organization with remote offices, you need reliable, cost-efficient storage that can keep pace with users and growing volumes of file data without getting in the way of how your organization operates.

If you need an easy-to-manage centralized space for securely storing documents, images, audio, and video files, look no further than HPE StoreEasy 1000 Storage: flexible, efficient, and reliable network-attached storage, right-sized for your organization's needs and budget, without compromising on quality or capabilities.

Built from the foundation of the most secure industry-standard servers and running Microsoft's Windows Server IoT 2019 for Storage Standard Edition operating system, HPE StoreEasy 1000 Storage appliances deliver a radically simplified administration experience through HPE StoreEasy Management Console, lower-cost internal capacity expansion, and better performance options for resource-intensive workloads. More security protections built-in and included as standard help you better protect your customers, employees, and organization against loss, corruption, and breaches.

Start by choosing which operating system is the best fit for your IT environment. Then pick from a variety of pre-configured models that include the compute, capacity, and connectivity options most organizations need in a NAS solution, or tailor your performance and options with one of the configure-to-order models.

What's New

- All HPE StoreEasy 1000 Storage models are now shipping exclusively with the Microsoft Windows Server IoT 2019 for Storage Standard Edition operating system.
 - The new StoreEasy 1660 and StoreEasy 1860 models are built from ProLiant DL380 Gen10 Plus technologies including HPE MegaRAID Gen10 Plus Controllers. The SKUs are R7G22B, R7G23B, R7G24B, and R7G28B. Please refer to StoreEasy 1660 and StoreEasy 1860 sections for configuration details.
 - The new affordable StoreEasy 1460 and StoreEasy 1560 models are available now. The new affordable models R7G16B, R7G17B, R7G18B, R7G19B, and R7G20B use software RAID controller. Please refer to StoreEasy 1460 and StoreEasy 1560 sections for configuration details.
 - HPE StoreEasy Management Console adds simplified storage provisioning and more intelligent consumption monitoring.
 - Most sixth generation StoreEasy 1000 Storage models that shipped with the previous Microsoft Windows Storage Server 2016 Standard Edition can now be upgraded to the Microsoft Windows Server IoT 2019 for Storage Standard Edition operating system via upgrade kit.
-

Overview

HPE StoreEasy 1460 Storage

HPE StoreEasy 1460 Storage solutions deliver multi-protocol file serving and application storage in a compact and affordable 1U rack-mount form factor that's perfect for a small workgroup, small business, or remote office. All HPE StoreEasy 1460 models come with the operating system pre-installed on the four internal LFF drives.



HPE StoreEasy 1460 Storage

Models

Description

HPE StoreEasy 1460 8TB SATA Storage with Microsoft Windows Server IoT 2019

HPE StoreEasy 1460 16TB SATA Storage with Microsoft Windows Server IoT 2019

HPE StoreEasy 1460 32TB SATA Storage with Microsoft Windows Server IoT 2019

HPE StoreEasy 1460 8TB SATA Performance Storage with Microsoft Windows Server IoT 2019

HPE StoreEasy 1460 16TB SATA Performance Storage with Microsoft Windows Server IoT 2019

HPE StoreEasy 1460 32TB SATA Performance Storage with Microsoft Windows Server IoT 2019

SKU

R7G16B

R7G17B

R7G18B

R7G16A

R7G17A

R7G18A



Overview

HPE StoreEasy 1560 Storage

HPE StoreEasy 1560 Storage solutions are built on a compact and affordable tower form factor package and deliver multi-protocol file serving and application storage to environments that don't have rack space, including small workgroups, small businesses, and remote offices. All HPE StoreEasy 1560 models come with the operating system pre-installed on the four internal LFF drives.



HPE StoreEasy 1560 Storage

Models

Description


| Description | SKU |
|---|--------|
| HPE StoreEasy 1560 8TB SATA Storage with Microsoft Windows Server IoT 2019 | R7G19B |
| HPE StoreEasy 1560 16TB SATA Storage with Microsoft Windows Server IoT 2019 | R7G20B |
| HPE StoreEasy 1560 8TB SATA Performance Storage with Microsoft Windows Server IoT 2019 | R7G19A |
| HPE StoreEasy 1560 16TB SATA Performance Storage with Microsoft Windows Server IoT 2019 | R7G20A |



Overview

HPE StoreEasy 1660 Storage

HPE StoreEasy 1660 Storage solutions deliver high internal capacity (with up to 16 LFF hot-plug drive slots) and external expandability in a 2U rack-mount form factor for small, medium, or large IT environments. All HPE StoreEasy 1660 models come with the operating system pre-installed on mirrored solid state drives.

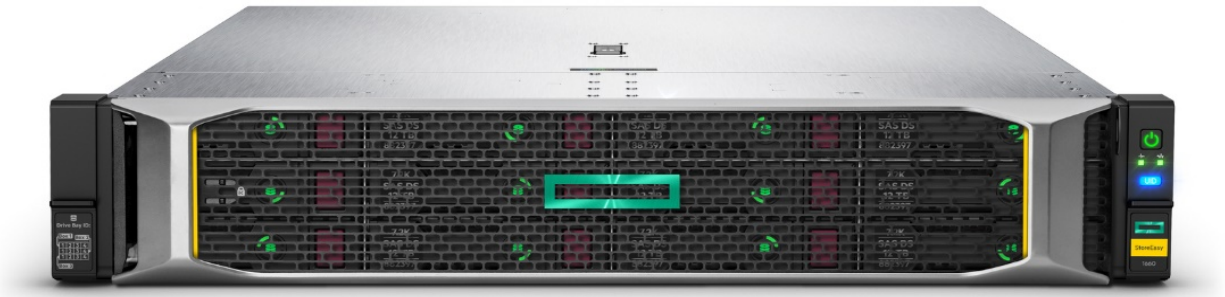

HPE StoreEasy 1660 Storage

Models

Description

| Description | SKU |
|---|--------|
| HPE StoreEasy 1660 Storage with Microsoft Windows Server IoT 2019 | R7G24B |
| HPE StoreEasy 1660 32TB SAS Storage with Microsoft Windows Server IoT 2019 | R7G22B |
| HPE StoreEasy 1660 64TB SAS Storage with Microsoft Windows Server IoT 2019 | R7G23B |
| HPE StoreEasy 1660 Performance Storage with Microsoft Windows Server IoT 2019 | R7G25A |
| HPE StoreEasy 1660 Storage with Microsoft Windows Server IoT 2019 | R7G24A |
| HPE StoreEasy 1660 16TB SAS Storage with Microsoft Windows Server IoT 2019 | R7G21A |
| HPE StoreEasy 1660 32TB SAS Storage with Microsoft Windows Server IoT 2019 | R7G22A |
| HPE StoreEasy 1660 64TB SAS Storage with Microsoft Windows Server IoT 2019 | R7G23A |



Overview

HPE StoreEasy 1660 Expanded Storage

The HPE StoreEasy 1660 Expanded Storage is a density-optimized (with 28 LFF hot-plug drive slots) 2U rack-mount form factor platform ideal for bulk file and secondary storage workloads. All StoreEasy 1660 Expanded models come with the operating system pre-installed on mirrored solid state drives.



HPE StoreEasy 1660 Expanded Storage

Model

Description

HPE StoreEasy 1660 Expanded Storage with Microsoft Windows Server IoT 2019

SKU


R7G46A



Overview

HPE StoreEasy 1860 Storage

HPE StoreEasy 1860 Storage solutions deliver enterprise-class performance (with up to 26 SFF hot-plug drive slots in a 2U rack-mount form factor) for hybrid flash configurations and latency-sensitive file share or application workloads. All HPE StoreEasy 1860 models come with the operating system pre-installed on mirrored solid state drives.

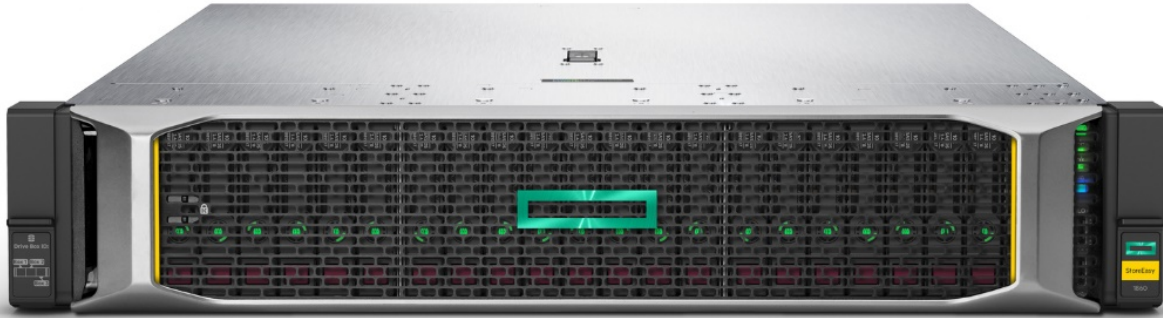

HPE StoreEasy 1860 Storage

Models

Description

SKU

| | |
|---|--------|
| HPE StoreEasy 1860 Storage with Microsoft Windows Server IoT 2019 | R7G28B |
| HPE StoreEasy 1860 Performance Storage with Microsoft Windows Server IoT 2019 | R7G29A |
| HPE StoreEasy 1860 Storage with Microsoft Windows Server IoT 2019 | R7G28A |



Standard Features

HPE StoreEasy 1000 Storage lets you focus on your business, not your file storage

- HPE StoreEasy 1000 Storage systems come with pre-configured hardware and the Microsoft Windows Server IoT 2019 for Storage Standard Edition operating system for purpose-built file serving.
- All HPE StoreEasy 1000 Storage models feature HPE StoreEasy Management Console, which centralizes management workflows and helps you save time and effort.
 - HPE StoreEasy Management Console enables IT administrators to quickly and easily monitor and manage their HPE StoreEasy 1000 appliance, regardless of familiarity with the underlying Windows Server operating system.
 - Use the web-based interface to manage and monitor system health, capacity, performance, hardware events, quotas, snapshots, authentication, network services, and more.
 - Easily identify maintenance windows with both point-in-time and historical utilization views of throughput and traffic.
 - Simplify capacity planning with a granular historical utilization dashboard that helps predict when expansion is needed and provides a clear view of growth rate and usage trends.
 - Updates to the latest version through the HPE Support Center at any time during the warranty period of your HPE StoreEasy 1000 Storage system. You can leverage automatic updates within the application to take advantage of new features as soon as they are available, or you can stage updates for your next system maintenance window.
- The HPE-enhanced Initial Configuration Tasks Wizard simplifies installation and helps prevent network configuration errors for even faster deployment.
- HPE StoreEasy 1000 Storage accessories and adapters are industry-standard and are often the same as those in the HPE servers in your environment, and HPE StoreEasy hard drive bundles are the most efficient way to buy, deploy, and provision additional storage capacity over the life of the system.

The pre-installed operating system is tailored for file storage

HPE StoreEasy 1000 Storage comes with a specially-licensed Microsoft Windows Server operating system: Microsoft Windows Server IoT 2019 Standard Edition. It includes a robust range of file serving and storage capabilities while leveraging your Windows Server management skill set and tools, including Active Directory, PowerShell and System Center. It addresses heterogeneous environments with support for CIFS/SMB (2.0, 2.1, 3.0, 3.02 and 3.1.1), NFS (v2, v3, v4.1), WebDAV, HTTP/HTTPS, FTP/FTPS, and iSCSI protocols. And it enables more efficient storage utilization and protection with support for file quotas, screening, and classification, plus built-in deduplication and replication engines.

New features introduced in Microsoft Windows Server IoT 2019 for Storage are focused on bridging on-premises environments with Azure services, enabling HPE StoreEasy 1000 Storage to complement cloud applications and storage. With Windows Server IoT 2019 for Storage, you can integrate Azure services such as Azure Backup, Azure File Sync, disaster recovery, and much more. Windows Server IoT 2019 for Storage also introduces new storage migration and analytics tools, updated threat protection, and enhanced security capabilities. Finally, HPE StoreEasy 1000 Storage systems with Windows Server IoT 2019 for Storage can host DNS and DHCP services, increasing the number of roles the system can perform vs. previous operating system editions and adding even more solution value to small / remote and medium business environments.

When installed on HPE StoreEasy 1000 Storage systems, Microsoft Windows Server IoT 2019 Standard Edition includes an unlimited Client Access License (CAL), but does come with some restrictions vs. mainstream Microsoft Windows Server versions.



Standard Features

The following summarizes HPE StoreEasy 1000 Storage supported features and roles:

| Microsoft Windows Server IoT 2019 for Storage Standard Edition | |
|---|--|
| Maximum CPU cores and VM* Rights | 16 cores per system + 2 VM |
| # Disks per controller (see HPE Product Specifications for Specific constraints for each controller) | 238 |
| Maximum SMB Connections | 16,777,216 |
| File Server Resource Manager (FSRM) | Yes |
| Domain Join | Yes |
| File Classification Infrastructure (FCI) | Yes |
| Windows Server Backup | Yes |
| DFS-Replication | Yes (100TB maximum) |
| Storage Replica | Yes (limited to 1 x 2TB volume, 1 partnership, 1 resource group) |
| Azure File Sync | Yes |
| Azure Backup | Yes |
| Shared block storage (iSCSI Target Server / Storage Provider) | Yes |
| Storage Spaces, Storage Spaces Direct, and Volume Replication | No |
| Deduplication | Yes |
| Deduplication for ReFS | Yes |
| BranchCache - Hosted Cache | Yes |
| Hyper-V Virtualization | Host + 2VM* (Shielded VMs not included) |
| Clustering (including AD/DNS) | Not supported on StoreEasy 1000 Storage |
| Networking Infrastructure Roles (DHCP & DNS) | Yes |
| Active Directory roles including Domain Controller (RODC) | No |
| Active Directory (Domain Controller, Certificate Services, Federation services, Rights Management) | No |
| Application Server, Network Policy, Remote Desktop Broker, WDS and Fax Server | No |
| Windows Server Migration Tools | Yes |
| Windows Storage Migration Service | Yes |
| Windows Server System Insights | Yes |
| Enhanced Windows Defender Advanced Threat Protection (ATP) | Yes |
| Notes: *Requires separate software license for each VM | |



Standard Features

Notes:

- Microsoft Windows Server 2019 and Microsoft Windows Server IoT 2019 for Storage are built on the same code base. Storage-centric (backup, replication, antivirus, etc.) applications certified for Windows Server 2019 are expected to have the same application compatibility profile on Windows Server IoT 2019 for Storage. Windows Server IoT for Storage and Windows Server have the same application frameworks, services, and plumbing to support running the full breadth of Windows-compatible applications but do have unique licensing features and restrictions. Customers should review the End User License Agreement (EULA) to see what server roles are listed as unsupported and the types of applications that are permitted for installation on HPE StoreEasy 1000 Storage systems. Applications that rely upon certain roles that are removed from (or are listed in the EULA as unsupported on) Windows Server IoT 2019 for Storage, such as fax server, terminal services, Application Server, Network Policy Server, Remote Desktop Broker, Windows Deployment Services, and Active Directory domain controller (all HPE StoreEasy 1000 Storage systems can join an Active Directory domain, but they cannot be a domain controller or perform Certificate Services, Federation Services, or Rights Management) will not be able to leverage those roles. Independent Software Vendors (ISVs) ultimately decide what versions and editions of Windows are supported by their products and users should review ISV compatibility and support information before purchasing.
- Microsoft Windows Server IoT 2019 for Storage is currently scheduled to remain under Microsoft Mainstream Support (which includes incident support, security update support, and the ability to request non-security updates) until January 2024. Learn more about Microsoft's Fixed Lifecycle and support policy at <https://docs.microsoft.com/en-us/lifecycle/policies/fixe>

More Information on Microsoft Windows Server IoT 2019 for Storage can be found here:

<https://docs.microsoft.com/en-us/windows/iot-core/windows-server>

Protect your data and your investment

- HPE StoreEasy 1000 Storage protects data while at rest with file system encryption and BitLocker Drive Encryption, and while it is being transferred with SMB encryption and signing.
- Use built-on file classification, Volume Shadow Copy Service snapshots, and Distributed File System Replication (DFS-R) to keep your files safe and accessible.
- Install and run endpoint protection (such as an antivirus) on the system itself, reducing the cost and complexity of connecting to an external endpoint protection server.
- Increase uptime with standard features such as near-continuous health monitoring with HPE Active Health System, redundant OS drives, redundant fans (not available on all models) and power, and advanced memory protection.
- Confidently deploy large file systems leveraging file system online self-healing, online verification, and precise and rapid repair that massively reduces downtime from file corruption.
- Get support from file storage experts with 3-Year Parts, 3-Year Labor, and 3-Year Onsite support with next business day response. All HPE StoreEasy Storage systems also include one year of 9x5 software telephone support for the Windows Server for Storage operating system.

Archiving with iTernity Compliant Archive Software

Get open, flexible, and expandable long-term archiving with iTernity Compliant Archive Solution (iCAS). iTernity iCAS is validated to meet the United States Securities and Exchange Commission (SEC) 17a-4(f) requirements. Together, HPE StoreEasy 1000 Storage and iCAS are your key to legally-compliant data archiving.

For more information on how to obtain the iCAS for archiving visit the [HPE Complete iTernity iCAS](#) product page.

Expansion with HPE MSA SAN Storage or D3X10 / D6020 Disk Enclosures

All HPE StoreEasy models support external storage using HPE MSA SAN Storage or D3X10 / D6020 Disk Enclosure product families. A Fibre Channel, SAS, or iSCSI connection must be added to support MSA SAN Storage (note that high-availability clustering is not supported) while a Smart Array controller with external ports must be added to support external Disk Enclosures. The maximum number of disk enclosures supported is 8, a limit imposed by the disk enclosures and controllers. See the MSA SAN Storage, D3X10 Disk Enclosure, and D6020 Disk Enclosure, [QuickSpecs](#) for more information.



Service and Support

Warranty

HPE StoreEasy 1460, 1560, 1660, 1660 Expanded, and 1860 Storage systems come with a standard 3-3-3 warranty (3 years parts exchange, 3 years labor and 3 years onsite, next business day response). Software media is warranted to be free of physical defects for a period of 90 days from delivery.

Services Included with the Product

One year of Hewlett Packard Enterprise Software Support for the Microsoft Windows Server IoT 2019 for Storage Standard Edition operating system, standard 9x5 business hours (software advisory and remedial software telephone support, and media and documentation distribution service).

Microsoft Operating System Support Statement

Standard support for the Microsoft Windows Server IoT 2019 for Storage Standard Edition operating system installed on HPE StoreEasy 1000 Storage includes (but is not limited to) initial configuration, troubleshooting of operating system installation and/or recovery issues, hardware and driver problems, and system-specific / storage-centric features (Volume / File system creation; File/Folder/Share Permissions; Active Directory integration; DFS-R; DFS-N; quotas; deduplication; NFS, SMB, iSCSI protocols; performance tuning; etc.). Microsoft Clustering Services is not supported on HPE StoreEasy 1000 Storage. HPE Support Services will also not troubleshoot a Microsoft Operating System feature that has been deprecated or has limited functionality as per design by Microsoft. HPE Support Services will not troubleshoot third-party software or issues related to Microsoft Active Directory Services that are external to the HPE StoreEasy system that may be hindering implementation of Active Directory integration. In those cases, customers should resolve issues with their third-party software vendor and/or by opening a support case with Microsoft directly.

HPE Pointnext - Service and Support

Get the most from your HPE Products. Get the expertise you need at every step of your IT journey with **HPE Pointnext Services**. We help you lower your risks and overall costs using automation and methodologies that have been tested and refined by HPE experts through thousands of deployments globally. HPE Pointnext **Advisory Services** focus on your business outcomes and goals, partnering with you to design your transformation and build a roadmap tuned to your unique challenges. Our **Professional** and **Operational Services** can be leveraged to speed up time-to-production, boost performance and accelerate your business. HPE Pointnext specializes in flawless and on-time implementation, on-budget execution, and creative configurations that get the most out of software and hardware alike.

Consume IT on your terms

HPE GreenLake brings the cloud experience directly to your apps and data wherever they are—the edge, colocations, or your data center. It delivers cloud services for on-premises IT infrastructure specifically tailored to your most demanding workloads. With a pay-per-use, scalable, point-and-click self-service experience that is managed for you, HPE GreenLake accelerates digital transformation in a distributed, edge-to-cloud world.

- Get Faster time to market
- Save on TCO, align costs to business
- Scale quickly, meet unpredictable demand
- Simplify IT operations across your data centers and clouds

Managed services to run your IT operations

HPE GreenLake Management Services provides services that monitor, operate, and optimize your infrastructure and applications, delivered consistently and globally to give you unified control and let you focus on innovation.



Service and Support

Discover, plan, and design

Choose from a rich portfolio of services to make the most of HPE StoreEasy Storage, so you can efficiently and affordably consolidate, manage, and extract value from unstructured data.

Hewlett Packard Enterprise Services can help you discover needs and create a plan for simplifying the environment, reducing risk, and maximizing your storage investments

HPE Backup Recovery Impact Analysis

Focus placed on service requirements and design as the key to success for gaining a clear understanding of the role of increasingly diverse data protection strategies.

HPE Storage Cloud Design Service

Build a scalable, low-cost enterprise storage environment with inherent cloud benefits to meet big data needs.

Deploy and integrate

We can help you configure, set up, and efficiently use your HPE StoreEasy Storage, as well as help migrate data, improve capacity utilization, and establish information management standards used across backup, replication, and archiving needs.

HPE StoreEasy 1000 Storage Installation and Startup Service

Expert system installation and setup by a Hewlett Packard Enterprise technical specialist designed to reduce implementation time and cost, with your basic questions about the service answered during the included orientation session. <https://h20195.www2.hpe.com/v2/Getdocument.aspx?docname=4AA2-6112ENW>

HPE File Data Migration Services

Available in convenient packaged offerings, HPE File Data Migration Service is designed to help facilitate the file migration process when migrating data to eligible HPE File Storage solutions and provide a flexible way to migrate your organization's critical data and minimize impact on your operations.

<https://www.hpe.com/us/en/collaterals/collateral.4aa6-7249enw.html>

HPE Service Credits

Offer flexible services and technical skills to meet your IT demands as your business evolves. With a menu of services, you can access additional resources and specialist skills to help you maintain peak performance of your IT. HPE Service Credits help you proactively respond to your dynamic IT and business needs.

Free up resources with Operational Services from HPE Pointnext

HPE delivers services for IT by using proven best practices as well as automation and methodologies that have been tested and refined by HPE experts and artificial intelligence through thousands of deployments globally. Choose from the recommended services for customers purchasing from Hewlett Packard Enterprise or an authorized reseller. Services are quoted using Hewlett Packard Enterprise order configuration tools.

Recommended Services

HPE Pointnext Tech Care.

HPE Pointnext Tech Care is the new operational service experience for HPE products. Tech Care goes beyond traditional support by providing access to product specific experts, an AI driven digital experience, and general technical guidance to not only reduce risk but constantly search for ways to do things better. HPE Pointnext Tech Care has been reimaged from the ground up to support a customer-centric, AI driven, and digitally enabled customer experience to move your business forward. HPE Pointnext Tech Care is available in three response levels. Basic, which provides 9x5 business hour availability and a 2 hour response time. Essential which provides a 15-minute response time 24x7 for most enterprise level customers, and Critical which includes a 6 hour repair commitment where available and outage management response for severity 1 incidents.

<https://www.hpe.com/us/en/services/tech-care.html>



Service and Support

HPE Pointnext Complete Care

HPE Pointnext Complete Care is a modular, edge-to-cloud IT environment service that provides a holistic approach to optimizing your entire IT environment and achieving agreed upon IT outcomes and business goals through a personalized and customer-centric experience. All delivered by an assigned team of HPE Pointnext Services experts. HPE Pointnext Complete Care provides:

- A complete coverage approach -- edge to cloud
- An assigned HPE team
- Modular and fully personalized engagement
- Enhanced Incident Management experience with priority access
- Digitally enabled and AI driven customer experience

<https://www.hpe.com/us/en/services/complete-care.html>

Other related services from HPE Pointnext Services

Defective Media Retention

Is an option available with HPE Complete Care, HPE Tech Care, Tech Care Advanced, and HPE Tech Care and applies only to Disk or eligible SSD/Flash Drives replaced by HPE due to malfunction.

HPE Education Services

Keep your IT staff trained making sure they have the right skills to deliver on your business outcomes. Book on a class today and learn how to get the most from your technology investment. <http://www.hpe.com/ww/learn>

Consult your HPE Sales Representative or Authorized Channel Partner of choice for any additional questions and support options.

Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

The HPE Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Support Center is available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

Notes: *HPE Support Center Mobile App is subject to local availability



Service and Support

For more information

- <http://www.hpe.com/services>
- <https://www.hpe.com/us/en/services/operational.html>

To learn more about HPE Storage Services, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. HPE Pointnext operational services are sold by Hewlett Packard Enterprise and Hewlett Packard Enterprise Authorized Service Partners:

Contact information for a representative in your area can be found at "Contact HPE"

<https://www.hpe.com/us/en/contact-hpe.html>

- Services for customers purchasing from Hewlett Packard Enterprise or an enterprise reseller are quoted using Hewlett Packard Enterprise order configuration tools.
 - Customers purchasing from a commercial reseller can find HPE Pointnext operational services at <http://ssc.hpe.com/portal/site/ssc/>
-



Configuration Information

HPE StoreEasy 1460 Storage

Common Specifications (all HPE StoreEasy 1460 Storage models)

| | |
|-------------------------------|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Processor | 1 x Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor; 2 nd processor optional |
| Memory Standard | 16GB |
| Memory Type | 1 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |
| Internal Drive Support | 4 x LFF (3.5") hot-plug front drive bays standard |
| Network Ports Standard | 4 x 1GbE |
| Network Adapter | HPE Ethernet 1Gb 4-port 366FLR FlexLOM Adapter; PCIe NIC optional |
| Expansion Slots | 2 x PCIe; secondary riser with one additional PCIe slot optional |
| Power | 1 x 500W Platinum standard; optional 2 nd redundant power supply |
| Cooling | 5 hot-plug redundant fans (single processor), 7 hot-plug redundant fans (dual processors) |
| Form Factor | 1U rackmount |
| Security | 1U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |

R7G16B, R7G17B, and R7G18B

Storage Controller | HPE Smart Array S100i SR Gen10 SW RAID

R7G16A, R7G17A, and R7G18A

Storage Controller | HPE Smart Array P408i-a SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller

Notes: Options listed in the steps below are limited to those recommended for use with StoreEasy 1460 Storage models.

For more information on the complete set of compatible options, please reference the ProLiant DL360 Gen10 QuickSpecs at:

<https://www.hpe.com/psnow/doc/a00008159enw.pdf>



Configuration Information

Step 1: Choose your HPE StoreEasy 1460 Storage model

All HPE StoreEasy 1460 SKUs are pre-configured Build-to-Order (BTO) models with a small RAID10 partition across the four factory-installed drives for the pre-installed operating system (remaining space is available to be configured as file storage capacity). All models can be factory-racked, but all options in the configuration steps below are not factory integrated and are shipped separately.

Notes:

- All SKU descriptions are based on raw storage capacity, not available user storage.
- The new StoreEasy 1460 Storage models (R7G16B, R7G17B, and R7G18B) feature software RAID for better economics.
- The existing StoreEasy 1460 Storage models (R7G16A, R7G17A, and R7G18A) now described as Performance models, use hardware RAID for higher performance.
- As a best practice, HPE recommends only RAID10 or RAID6 for data partitions.

Description

| | SKU |
|--|------------|
| HPE StoreEasy 1460 8TB SATA Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 2TB SATA 6G Midline 7.2K LFF HDDs) | R7G16B |
| HPE StoreEasy 1460 16TB SATA Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 4TB SATA 6G Midline 7.2K LFF HDDs) | R7G17B |
| HPE StoreEasy 1460 32TB SATA Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 8TB SATA 6G Midline 7.2K LFF HDDs) | R7G18B |
| HPE StoreEasy 1460 8TB SATA Performance Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 2TB SATA 6G Midline 7.2K LFF HDDs) | R7G16A |
| HPE StoreEasy 1460 16TB SATA Performance Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 4TB SATA 6G Midline 7.2K LFF HDDs) | R7G17A |
| HPE StoreEasy 1460 32TB SATA Performance Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 8TB SATA 6G Midline 7.2K LFF HDDs) | R7G18A |

Step 2: Choose a second processor (optional)

| | |
|---|------------|
| Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL360 Gen10 | P02565-B21 |
|---|------------|

Step 3: Choose additional memory kit(s) (optional)

| | |
|---|------------|
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-K21 |
|---|------------|

Notes:

- There are 12 DIMM slots per processor for a total maximum of 24 DIMM slots. All HPE StoreEasy 1460 models come with one processor and one 16GB DIMM standard.
- Dual-processor HPE StoreEasy 1460 systems must have the same number and type of memory DIMMs installed for each processor.

Step 4: Choose a riser kit to add a PCIe slot (optional)

| | |
|---------------------------------------|------------|
| HPE DL360 Gen10 Low Profile Riser Kit | 867982-B21 |
|---------------------------------------|------------|

Notes: Expands the number of available PCIe slots from 2 to 3, and also requires addition of a second processor.



Configuration Information

Step 5: Choose an external storage controller to connect to external enclosures (optional)

Description

SKU

HPE Smart Array SAS Controllers

| | |
|---|------------|
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |

Notes:

- If you wish to enable Data at Rest Encryption on the HPE StoreEasy 1460 using with an optional Smart Array P408e-p listed above, you must order the optional HPE Smart Array SR Secure Encryption E-LTU (SKU Q2F26AAE).
- HPE Smart Array SR SmartCache is optional and must be licensed separately. Since it requires at least one SSD (and HPE recommends at least two SSDs), an external storage controller plus external storage would also be required to enable it on StoreEasy 1460 Storage. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>

HPE Special Reminder

Before enabling encryption on the Smart Array controller module on this system, you must ensure that your intended use of the encryption complies with relevant local laws, regulations and policies, and approvals or licenses must be obtained if applicable.

For any compliance issues arising from your operation/usage of encryption within the Smart Array controller module which violates the above-mentioned requirement, you shall bear all the liabilities wholly and solely. Hewlett Packard Enterprise will not be responsible for any related liabilities.

For more information see the [HPE Smart Array SR Secure Encryption QuickSpecs](#).

Step 6: Choose additional network adapter(s) (optional)

Notes: SFP and SFP+ Adapters do not include a transceiver by default.

SFP transceiver(s) or direct connect cable(s) should be ordered according to the transceiver and cable compatibility matrix found at:

<https://www.hpe.com/us/en/pdfViewer.html?resource=/content/hpe/country/us/en/resources/servers/reference-guide/transceiver-networking-server&parentPage=/us/en/products/servers/networking>

Description

SKU

PCIe Network Adapters

| | |
|--|------------|
| HPE StoreEasy 10GbE 2-port 530T Adapter | Q2P91A |
| HPE StoreEasy 10GbE 2-port 530SFP+ Adapter | Q2P92A |
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter | 647594-B21 |

Step 7: Choose the HPE Trusted Platform Module (optional)

| | |
|--|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option | 864279-B21 |
|--|------------|

Notes: HPE StoreEasy systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

Step 8: Choose second power supply (optional)

| | |
|---|------------|
| HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit | 865408-B21 |
|---|------------|



Configuration Information

Step 9: Choose a System Recovery Media Kit (optional)

HPE StoreEasy 1X60 Recovery Software Media Kit with Microsoft Windows Server IoT 2019

R7G47B

Notes:

- HPE StoreEasy 1X60 Recovery Software Media Kits contain a System Recovery USB key that is used to re-install the factory operating system image. Booting the system from the System Recovery media will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the HPE StoreEasy 1X60 Administrator Guide for more information on performing a System Recovery.
 - Alternatively, the HPE StoreEasy 1X60 Recovery Software image can be downloaded from the HPE's Software Depot at no charge. More information is available here: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.
 - For more information on how to perform a system recovery on a HPE StoreEasy 1460 refer to the HPE StoreEasy 1X60 Administrator's Guide. The guide can be downloaded from <http://www.hpe.com/support>. Select HPE Support Center and search for the HPE StoreEasy system model in the drivers and download section.
 - All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.
-



Configuration Information

HPE StoreEasy 1560 Storage

Common Specifications (all HPE StoreEasy 1560 Storage models)

| | |
|-------------------------------|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Processor | 1 x Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor |
| Memory Standard | 16GB |
| Memory Type | 1 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |
| Internal Drive Support | 4 x LFF (3.5") hot-plug drive bays standard 4 x LFF second drive cage (optional) |
| Network Ports Standard | 2 x 1GbE |
| Network Adapter | Embedded 2-Port 1GbE HPE Ethernet 332i Adapter; PCIe NICs optional |
| Expansion Slots | 6 x PCIe |
| Power | 1 x 500W Platinum standard; optional 2nd redundant power supply |
| Cooling | 2 non hot-plug redundant fans |
| Form Factor | 4.5U tower |
| Security | Lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |

R7G19B, and R7G20B

| | |
|---------------------------|--|
| Storage Controller | HPE Smart Array S100i SR Gen10 SW RAID |
|---------------------------|--|

R7G19A, and R7G20A

| | |
|---------------------------|--|
| Storage Controller | HPE Smart HPE Smart Array P408i-p SR Gen10 (8 Internal Lanes/2GB Cache) 12G SAS Modular Controller |
|---------------------------|--|

Notes: Options listed in the steps below are limited to those recommended for use with StoreEasy 1560 Storage models.

For more information on the complete set of compatible options, please reference the ProLiant ML110 Gen10 QuickSpecs at: <https://www.hpe.com/psnow/doc/a00021851enw.pdf>



Configuration Information

Step 1: Choose your HPE StoreEasy 1560 Storage model

All HPE StoreEasy 1560 SKUs are pre-configured Build-to-Order (BTO) models with a small RAID10 partition across the four factory-installed drives for the pre-installed operating system (remaining space is available to be configured as file storage capacity). All options in the configuration steps below are not factory integrated and are shipped separately.

Notes:

- All SKU descriptions are based on raw storage capacity, not available user storage.
- The new StoreEasy 1560 Storage models (R7G19B and R7G20B) feature software RAID for better economics
- The existing StoreEasy 1460 Storage models (R7G19A and R7G20A) now described as Performance models, use hardware RAID for higher performance
- As a best practice, HPE recommends only RAID10 or RAID6 for data partitions.

| Description | SKU |
|--|--------|
| HPE StoreEasy 1560 8TB SATA Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 2TB SATA 6G Midline 7.2K LFF HDDs) | R7G19B |
| HPE StoreEasy 1560 16TB SATA Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 4TB SATA 6G Midline 7.2K LFF HDDs) | R7G20B |
| HPE StoreEasy 1560 8TB SATA Performance Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 2TB SATA 6G Midline 7.2K LFF HDDs) | R7G19A |
| HPE StoreEasy 1560 16TB SATA Performance Storage with Microsoft Windows Server IoT 2019 Notes: (4 x 4TB SATA 6G Midline 7.2K LFF HDDs) | R7G20A |

Step 2: Choose additional memory kit(s) (optional)

| | |
|--|------------|
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit Notes: There are 6 DIMM slots available on the HPE StoreEasy 1560. All HPE StoreEasy 1560 models come with one processor and one 16GB DIMM standard. | P00922-K21 |
|--|------------|

Step 3: Choose a second drive cage (optional)

| | |
|---|------------|
| HPE ML110 Gen10 4LFF Drive Backplane Cage Kit Notes: Adding the 2 nd LFF drive cage requires adding the 2 nd power supply (865408-B21). | 869491-B21 |
|---|------------|

Step 4: Choose drives for the second drive cage (optional)

HPE single drive options

| | |
|---|------------|
| HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861686-K21 |
| HPE 2TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861681-K21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861683-K21 |
| HPE 6TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 861742-K21 |
| HPE 8TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 834028-K21 |
| HPE 12TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | 881787-K21 |

Notes: As a best practice, HPE recommends ordering and installing 4 LFF drives for the 2nd drive cage that match the same capacity and type already installed in the first drive cage.



Configuration Information

HPE Special Reminder

Before enabling encryption on the Smart Array controller module on this system, you must ensure that your intended use of the encryption complies with relevant local laws, regulations and policies, and approvals or licenses must be obtained if applicable.

For any compliance issues arising from your operation/usage of encryption within the Smart Array controller module which violates the above-mentioned requirement, you shall bear all the liabilities wholly and solely. Hewlett Packard Enterprise will not be responsible for any related liabilities.

For more information see the [HPE Smart Array SR Secure Encryption QuickSpecs](#).

Step 5: Choose additional network adapter(s) (optional)

Notes: SFP and SFP+ Adapters do not include a transceiver by default.

SFP transceiver(s) or direct connect cable(s) should be ordered according to the transceiver and cable compatibility matrix found at:

<https://www.hpe.com/us/en/pdfViewer.html?resource=/content/hpe/country/us/en/resources/servers/reference-guide/transceiver-networking-server&parentPage=/us/en/products/servers/networking>

Description

SKU

PCIe Network Adapters

| | |
|--|------------|
| HPE StoreEasy 10GbE 2-port 530T Adapter | Q2P91A |
| HPE StoreEasy 10GbE 2-port 530SFP+ Adapter | Q2P92A |
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter | 647594-B21 |

Step 6: Choose the HPE Trusted Platform Module (optional)

HPE Trusted Platform Module 2.0 Gen10 Option 864279-B21

Notes: HPE StoreEasy systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

Step 7: Choose a second power supply (optional)

HPE 500W Flex Slot Platinum Hot Plug Low Halogen Power Supply Kit 865408-B21

Step 8: Choose a System Recovery Media Kit (optional)

HPE StoreEasy 1X60 Recovery Software Media Kit with Microsoft Windows Server IoT 2019 R7G47B

Notes:

- HPE StoreEasy 1X60 Recovery Software Media Kits contain a System Recovery USB key that is used to re-install the factory operating system image. Booting the system from the System Recovery media will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the HPE StoreEasy 1X60 Administrator Guide for more information on performing a System Recovery.
- Alternatively, the HPE StoreEasy 1X60 Recovery Software image can be downloaded from the HPE's Software Depot at no charge. More information is available here: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.
- For more information on how to perform a system recovery on a HPE StoreEasy 1560 refer to the HPE StoreEasy 1X60 Administrator's Guide. The guide can be downloaded from <http://www.hpe.com/support>. Select HPE Support Center and search for the HPE StoreEasy system model in the drivers and download section.
- All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.



Configuration Information

HPE StoreEasy 1660 Storage

| Common Specifications for R7G22B, R7G23B, and R7G24B | |
|--|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Processor | Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE; 2nd processor optional |
| Memory Standard | 16GB |
| Memory Type | 1 x HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart |
| Storage Controllers | HPE Broadcom MegaRAID MR416i-a/p x16 lanes 4 GB Cache NVMe/SAS 12G Controller for data drives; HPE Smart Array S100i SR Gen10 Plus SW RAID for mirrored OS drives only |
| Internal Drive Support | 12 x LFF (3.5") hot-plug front drive bays standard; 2 x SFF hot-plug rear-chassis drive cage standard; 4 x LFF hot-plug drive cage optional |
| Network Ports Standard | 4 x 1GbE |
| Network Adapter | HPE Ethernet 1Gb 4 port I350 Base-T OCP3 Adapter; PCIe NIC(s) optional |
| Expansion Slots | 3 x PCIe; 3-slot secondary riser optional |
| Power | 2 x 800W Platinum hot-plug redundant |
| Cooling | 6 hot-plug, high-performance redundant fans |
| Form Factor | 2U rackmount |
| Security | 2U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |

Common Specifications of R7G21A, R7G22A, R7G23A, and R7G24A, and R7G25A. These SKUs being replaced by R7G22B, R7G23B, and R7G24B

| | |
|-------------------------------|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Storage Controllers | HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller (for data drives); HPE Smart Array S100i SR Gen10 SW RAID (for mirrored OS drives only) |
| Internal Drive Support | 12 x LFF (3.5") hot-plug front drive bays standard; 4 x LFF hot-plug mid-chassis drive cage optional |
| Network Ports Standard | 4 x 1GbE |
| Network Adapter | HPE Ethernet 1Gb 4-port 366FLR FlexLOM Adapter; PCIe NIC(s) optional |
| Expansion Slots | 3 x PCIe; 3-slot secondary riser optional |
| Power | 2 x 800W Platinum hot-plug redundant |
| Cooling | 6 hot-plug, high-performance redundant fans |
| Form Factor | 2U rackmount |
| Security | 2U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |



Configuration Information

R7G25A (Performance model)

| | |
|------------------------|---|
| Processor | 1 x Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor; 2 nd processor optional |
| Memory Standard | 32GB |
| Memory Type | 2 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |

R7G21A, R7G22A, R7G23A, and R7G24A

| | |
|------------------------|---|
| Processor | 1 x Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor; 2 nd processor optional |
| Memory Standard | 16GB |
| Memory Type | 1 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |

Notes: Options listed in the steps below are limited to those recommended for use with StoreEasy 1660 Storage models.

For more information on the complete set of compatible options, please reference the ProLiant DL380 Gen10 Plus QuickSpecs at: <https://www.hpe.com/psnow/doc/a50002553enw.pdf> OR the ProLiant DL380 Gen10 QuickSpecs at: <https://www.hpe.com/psnow/doc/a00008180enw.pdf>



Configuration Information

Step 1: Choose your HPE StoreEasy 1660 Storage model

Fixed configuration models

These HPE StoreEasy 1660 SKUs are pre-configured Build-to-Order (BTO) models with the operating system pre-installed on mirrored solid state drives and include eight data drives factory-installed in front slots (leaving four open front LFF slots for expansion). These models can be factory-racked, but all options in the configuration steps below (including additional data drives) are not factory integrated and are shipped separately.

Notes:

- All SKUs descriptions are based on raw storage capacity, not available user storage.
- The new StoreEasy 1660 models R7G22B, R7G23B, and R7G24B are built from HPE ProLiant DL380 Gen10 Plus technologies including the HPE MegaRAID Gen10 Plus Controller.
- The existing StoreEasy 1660 models R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A are built from HPE ProLiant DL380 Gen10 technologies including the HPE Smart Array SR Gen10 Controller.
- Hewlett Packard Enterprise recommends as a best practice that data drives added to LFF slots be the same type and capacity.
- The operating system is mirrored on two SFF (2.5”) solid state drives in a rear drive cage, leaving all three standard PCIe slots available for expansion.

Description

| Description | SKU |
|---|--------|
| HPE StoreEasy 1660 32TB SAS Storage with Microsoft Windows Server IoT 2019 Notes: (8 x 4TB SAS 12G Midline 7.2K LFF HDDs) | R7G22B |
| HPE StoreEasy 1660 64TB SAS Storage with Microsoft Windows Server IoT 2019 Notes: (8 x 8TB SAS 12G Midline 7.2K LFF HDDs) | R7G23B |
| HPE StoreEasy 1660 16TB SAS Storage with Microsoft Windows Server IoT 2019 Notes: (8 x 2TB SAS 12G Midline 7.2K LFF HDDs) | R7G21A |
| HPE StoreEasy 1660 32TB SAS Storage with Microsoft Windows Server IoT 2019 Notes: (8 x 4TB SAS 12G Midline 7.2K LFF HDDs) | R7G22A |
| HPE StoreEasy 1660 64TB SAS Storage with Microsoft Windows Server IoT 2019 Notes: (8 x 8TB SAS 12G Midline 7.2K LFF HDDs) | R7G23A |

Configurable models

These HPE StoreEasy 1660 SKUs are Configure-to-Order (CTO) models with the operating system pre-installed on mirrored solid state drives and do not include data drives standard. These models can be factory-racked, and most added options (including data drives) can be factory integrated.

Notes: Hewlett Packard Enterprise recommends as a best practice that the internal data drives for the CTO models be the same type and capacity.

| | |
|---|--------|
| HPE StoreEasy 1660 Storage with Microsoft Windows Server IoT 2019 | R7G24B |
| HPE StoreEasy 1660 Performance Storage with Microsoft Windows Server IoT 2019 | R7G25A |
| HPE StoreEasy 1660 Storage with Microsoft Windows Server IoT 2019 | R7G24A |

Notes: The operating system is mirrored on two SFF (2.5”) solid state drives in a rear drive cage, leaving all three standard PCIe slots available for expansion.



Configuration Information

Step 1A: Choose boot drives (only for R7G24B)

Description

| | SKU |
|---|------------|
| HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40502-K21 |
| HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40503-K21 |

Step 1B: Choose a network card (only for R7G24B)

| | |
|--|------------|
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10097-B21 |
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10115-B21 |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE | P26259-B21 |
| Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10103-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P08449-B21 |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10097-B21 |

Step 2: Choose a second processor (optional)

R7G22B, R7G23B, and R7G24B only

| | |
|--|------------|
| Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE | P36920-B21 |
|--|------------|

R7G25A only

| | |
|---|------------|
| Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL380 Gen10 | P02491-B21 |
|---|------------|

R7G21A, R7G22A, R7G23A, and R7G24A only

| | |
|---|------------|
| Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL380 Gen10 | P02489-B21 |
|---|------------|

Step 3: Choose additional memory kit(s) (optional)

R7G22B, R7G23B, and R7G24B only

| | |
|---|------------|
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06031-K21 |
|---|------------|

R7G21A, R7G22A, R7G23A, R7G25A, and R7G24A only

| | |
|---|------------|
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-K21 |
|---|------------|

Notes:

- All HPE StoreEasy 1660 models come with one processor standard. R7G22B, R7G23B, and R7G24B come with 16 DIMM slot per processor for a total maximum of 32 DIMM slots, while all other StoreEasy 1660 SKUs come with 12 DIMM slots per processor for a total maximum of 24 DIMM.
- R7G25A comes with 2 x 16GB DIMMs standard, while all other HPE StoreEasy 1660 SKUs come with one 16GB DIMM standard.
- Dual-processor HPE StoreEasy 1660 systems must have the same number and type of memory DIMMs installed for each processor.

Step 4: Choose a riser kit to add PCIe slots (optional)

R7G22B, R7G23B, and R7G24B only

| | |
|--|------------|
| HPE DL38X Gen10 Plus x8/x16/x8 Secondary Riser Kit | P14587-B21 |
|--|------------|

R7G21A, R7G22A, R7G23A, R7G24A and R7G25A only

| | |
|----------------------------------|------------|
| HPE DL Gen10 x8/x16/x8 Riser Kit | 870548-B21 |
|----------------------------------|------------|

Notes: Adds three PCIe slots; also requires addition of a second processor.



Configuration Information

Step 5: Choose a drive cage to add LFF slots (optional)

Description

SKU

R7G22B, R7G23B, and R7G24B only

HPE ProLiant DL38X Gen10 Plus 4LFF SAS/SATA 12G LP Midplane Drive Cage Kit

P26919-B21

R7G21A, R7G22A, R7G23A, R7G24A and R7G25A only

HPE StoreEasy 1660 4LFF Midplane Drive Cage

Q2P93A

Notes: Expands the total number of Large Form Factor (3.5") drive slots from 12 to 16.

Step 6: Choose internal storage drives (optional)

Drive Options

Maximum number of internal LFF drives supported

- 12 (in standard configuration)
- 16 (with optional mid-chassis 4LFF drive cage in step 5)

HPE StoreEasy 1660 LFF Drive Bundles

Business Critical (Midline) - 12G SAS

R7G22B, R7G23B, and R7G24B only

HPE StoreEasy 8TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

S0E04A

Notes: Contains 4 x HPE 2TB SAS 12G 7.2K LFF LP HDDs (reference SKU 833926-K21)

HPE StoreEasy 16TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

S0E05A

Notes: Contains 4 x HPE 4TB SAS 12G 7.2K LFF LP HDDs (reference SKU 833928-K21)

HPE StoreEasy 24TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

S0E06A

Notes: Contains 4 x HPE 6TB SAS 12G 7.2K LFF LP HDDs (reference SKU 861746-K21)

HPE StoreEasy 32TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

N9Y45A

Notes: Contains 4 x HPE 8TB SAS LFF LP HDDs (reference SKU 834032-B21)

HPE StoreEasy 40TB SAS LFF (3.5in) Low Profile 4-pack HDD Bundle

Q0F61A

Notes: Contains 4 x HPE 10TB SAS LFF LP HDDs (reference SKU P09150-B21)

HPE StoreEasy 48TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

S0E07A

Notes: Contains 4 x HPE 12TB SAS 12G 7.2K LFF LP HDDs (reference SKU 881781-K21)

HPE StoreEasy 56TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty 4-pack HDD Bundle

R0R66A

Notes: Contains 4 x HPE 14TB SAS LFF LP HDDs (reference SKU P09155-K21)

HPE StoreEasy 64TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle

S0E08A

Notes: Contains 4 x HPE 16TB SAS 12G 7.2K LFF LP HDDs (reference SKU P23608-K21)

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

HPE StoreEasy 8TB SAS LFF (3.5in) Smart Carrier 4-pack HDD Bundle

Q2P80A

Notes: Contains 4 x HPE 2TB SAS 12G 7.2K LFF HDDs (reference SKU 872485-K21)

HPE StoreEasy 16TB SAS LFF (3.5in) Smart Carrier 4-pack HDD Bundle

Q2P81A

Notes: Contains 4 x HPE 4TB SAS 12G 7.2K LFF HDDs (reference SKU 861756-K21)

HPE StoreEasy 24TB SAS LFF (3.5in) Smart Carrier 4-pack HDD Bundle

Q2P82A

Notes: Contains 4 x HPE 6TB SAS 12G 7.2K LFF HDDs (reference SKU 861754-K21)



Configuration Information

Description

HPE StoreEasy 32TB SAS LFF (3.5in) Smart Carrier 4-pack HDD Bundle SKU
N9Y12A

Notes: Contains 4 x HPE 8TB 12G SAS 7.2K LFF HDDs (reference SKU 861590-K21)

HPE StoreEasy 40TB SAS LFF (3.5in) Smart Carrier 4-pack HDD Bundle Q0F60A

Notes: Contains 4 x HPE 10TB 12G SAS 7.2K LFF HDDs (reference SKU 857644-K21)

HDDs

Business Critical (Midline) - 12G SAS

R7G22B, R7G23B, and R7G24B only

| | |
|---|------------|
| HPE 2TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 833926-K21 |
| HPE 4TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 833928-K21 |
| HPE 8TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 834031-K21 |
| HPE 6TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty 512e Multi Vendor HDD | 861746-K21 |
| HPE 10TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09149-K21 |
| HPE 12TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | 881781-K21 |
| HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09155-K21 |
| HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23608-K21 |
| HPE 18TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37669-K21 |

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

| | |
|---|------------|
| HPE 2TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872485-K21 |
| HPE 4TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872487-K21 |
| HPE 6TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 861754-K21 |
| HPE 8TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 819201-K21 |
| HPE 10TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 857644-K21 |
| HPE 12TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 881779-K21 |
| HPE 14TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | P09153-K21 |
| HPE 16TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23863-K21 |
| HPE 18TB SAS 12G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37664-K21 |

Business Critical (Midline) - 6G SATA

R7G22B, R7G23B, and R7G24B only

| | |
|--|------------|
| HPE 1TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861686-K21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Multi Vendor HDD | 861683-K21 |

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

| | |
|---|------------|
| HPE 1TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 861691-K21 |
| HPE 2TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872489-K21 |
| HPE 4TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Multi Vendor HDD | 872491-K21 |
| HPE 6TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 861750-K21 |
| HPE 8TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty 512e Multi Vendor HDD | 819203-K21 |
| HPE 10TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 857648-K21 |
| HPE 12TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | 881785-K21 |
| HPE 14TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e Multi Vendor HDD | P09163-K21 |
| HPE 16TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23857-K21 |
| HPE 18TB SATA 6G Business Critical 7.2K LFF SC 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37673-K21 |



Configuration Information

SSDs

Description

SKU

R7G22B, R7G23B, and R7G24B only

| | |
|--|------------|
| HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD | P47808-K21 |
| HPE 7.68TB SAS 24G Read Intensive LFF LPC Multi Vendor SSD | P49040-K21 |

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

Mixed Use - 12G SAS

| | |
|---|------------|
| HPE 1.92TB SAS 12G Mixed Use LFF SCC Value SAS Multi Vendor SSD | P37013-K21 |
|---|------------|

Mixed Use - 6G SATA

| | |
|--|------------|
| HPE 960GB SATA 6G Mixed Use LFF SCC Multi Vendor SSD | P47419-K21 |
|--|------------|

Read Intensive - 6G SATA

| | |
|---|------------|
| HPE 480GB SATA 6G Read Intensive LFF SCC Multi Vendor SSD | P47807-K21 |
|---|------------|

Notes:

(Only for **R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A**):

- HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller. With the addition of at least one SSD (HPE recommends two 12G SAS Mixed Use SSDs), it can add a flash acceleration tier to the HPE StoreEasy 1660 to help increase performance for the most frequently accessed files. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>
- The recommended maximum number of data SSDs for the HPE StoreEasy 1660 is 8; however, there is nothing architecturally that prevents the use of more than 8 SSDs.

Step 7: Choose an external storage controller to connect to external enclosures for R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only (optional)

HPE Smart Array SAS Controllers

| | |
|---|------------|
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |

Notes:

- If you wish to enable Data at Rest Encryption on the HPE StoreEasy 1660 using the included Smart Array P816i-a or with an optional Smart Array P408e-p listed above, you must order the optional HPE Smart Array SR Secure Encryption E-LTU (SKU Q2F26AAE).
- While HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller, it must be licensed separately for additional controllers. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>

HPE Special Reminder: Before enabling encryption on the Smart Array controller module on this system, you must ensure that your intended use of the encryption complies with relevant local laws, regulations and policies, and approvals or licenses must be obtained if applicable.

For any compliance issues arising from your operation/usage of encryption within the Smart Array controller module which violates the above-mentioned requirement, you shall bear all the liabilities wholly and solely. Hewlett Packard Enterprise will not be responsible for any related liabilities.

For more information see the [HPE Smart Array SR Secure Encryption QuickSpecs](#).



Configuration Information

Step 8: Choose additional network adapter(s) (optional)

Notes: SFP and SFP+ Adapters do not include a transceiver by default.

SFP transceiver(s) or direct connect cable(s) should be ordered according to the transceiver and cable compatibility matrix found at: <https://www.hpe.com/us/en/pdfViewer.html?resource=/content/hpe/country/us/en/resources/servers/reference-guide/transceiver-networking-server&parentPage=/us/en/products/servers/networking>

PCIe Network Adapters

| Description | SKU |
|---|------------|
| R7G22B, R7G23B, and R7G24B only | |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE | P26253-B21 |
| Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P22702-B21 |
| Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE | P10094-B21 |
| R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only | |
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| HPE StoreEasy 10GbE 2-port 530T Adapter | Q2P91A |
| HPE StoreEasy 10GbE 2-port 530SFP+ Adapter | Q2P92A |

Step 9: Choose the HPE Trusted Platform Module (optional)

R7G22B, R7G23B, and R7G24B only

HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit P13771-B21

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

HPE Trusted Platform Module 2.0 Gen10 Option 864279-B21

Notes: HPE StoreEasy systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

Step 10: Choose a System Recovery Media Kit (optional)

HPE StoreEasy 1X60 Recovery Software Media Kit with Microsoft Windows Server IoT 2019 R7G47B

Notes:

- HPE StoreEasy 1X60 Recovery Software Media Kits contain a System Recovery USB key that is used to re-install the factory operating system image. Booting the system from the System Recovery media will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the HPE StoreEasy 1X60 Administrator Guide for more information on performing a System Recovery.
- Alternatively, the HPE StoreEasy 1X60 Recovery Software image can be downloaded from the HPE's Software Depot at no charge. More information is available here: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.
- For more information on how to perform a system recovery on a HPE StoreEasy 1660 refer to the HPE StoreEasy 1X60 Administrator's Guide. The guide can be downloaded from <http://www.hpe.com/support>. Select HPE Support Center and search for the HPE StoreEasy system model in the drivers and download section.
- All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.



Configuration Information

HPE StoreEasy 1660 Expanded Storage

| Specifications (single HPE StoreEasy 1660 Expanded Storage model) | |
|---|---|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Processor | 1 x Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W); 2 nd processor optional |
| Memory Standard | 32GB |
| Memory Type | 2 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |
| Storage Controllers | HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller (for data drives) HPE Smart Array S100i SR Gen10 SW RAID (for mirrored OS drives only) |
| Internal Drive Support | 24 x LFF (3.5") hot-plug front drive bays standard 4 x LFF hot-plug rear drive cage standard |
| Network Ports Standard | 2 x 1GbE |
| Network Adapter | Embedded 2-Port 1GbE HPE Ethernet 332i Adapter; PCIe NIC(s) optional |
| Expansion Slots | 5 x PCIe (one available in 1P configuration; four available in 2P configuration) Notes: One PCIe slot occupied by M.2 SSD card used for boot drives (half-height, half-length riser). |
| Power | 2 x 1600W Platinum hot-plug redundant Notes: 1600W Flex Slot Platinum power supplies must be used with high-line input (200V - 240V AC). |
| Cooling | 10 fans |
| Form Factor | 2U rackmount |
| Security | 2U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |

Notes: Options listed in the steps below are limited to those recommended for use with StoreEasy 1660 Expanded Storage models.

For more information on the complete set of compatible options, please reference the Apollo 4200 Gen10 QuickSpecs at: <https://www.hpe.com/psnow/doc/a00056091enw.pdf>



Configuration Information

Step 1: Choose your HPE StoreEasy 1660 Expanded Storage model

HPE StoreEasy 1660 Expanded Storage SKUs are Configure-to-Order (CTO) models with the operating system pre-installed on mirrored solid state drives and do not include data drives standard. They can be factory-racked, and most added options (including data drives) can be factory integrated.

Notes:

- Hewlett Packard Enterprise recommends as a best practice that data drives added to the LFF slots be the same type and capacity.

Description

| | |
|--|----------------------|
| HPE StoreEasy 1660 Expanded Storage with Microsoft Windows Server IoT 2019 | SKU R7G46A |
|--|----------------------|

Step 2: Choose a second processor (optional)

| | |
|--|------------|
| Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE Apollo 4200 Gen10 | P07903-B21 |
|--|------------|

Step 3: Choose additional memory kit(s) (optional)

| | |
|---|------------|
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-K21 |
|---|------------|

Notes: There are 8 DIMM slots per processor for a total maximum of 16 DIMM slots. HPE StoreEasy 1660 Expanded models come with one processor and two 16GB DIMMs standard.

Step 4: Choose internal storage drives (optional)

Drive Options

Maximum number of internal LFF drives supported: 28

HPE StoreEasy 1660 Expanded LFF LP Drive Bundles

Business Critical (Midline) - 12G SAS

| | |
|--|--------|
| HPE StoreEasy 16TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle | N9Y43A |
|--|--------|

Notes: Contains 4 x HPE 4TB SAS LFF LP HDDs

| | |
|--|--------|
| HPE StoreEasy 32TB SAS LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle | N9Y45A |
|--|--------|

Notes: Contains 4 x HPE 8TB SAS LFF LP HDDs

| | |
|--|--------|
| HPE StoreEasy 40TB SAS LFF (3.5in) Low Profile 4-pack HDD Bundle | Q0F61A |
|--|--------|

Notes: Contains 4 x HPE 10TB SAS LFF LP HDDs

| | |
|--|--------|
| HPE 56TB SAS 12G Midline 7.2K LFF (3.5in) LP 1yr Wty 4-pack HDD Bundle | R0R66A |
|--|--------|

Notes: Contains 4 x HPE 14TB SAS LFF LP HDDs

Business Critical (Midline) - 6G SATA

| | |
|---|--------|
| HPE StoreEasy 32TB SATA LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle | N9Y46A |
|---|--------|

Notes: Contains 4 x HPE 8TB SATA LFF LP HDDs

| | |
|---|--------|
| HPE StoreEasy 40TB SATA LFF (3.5in) Low Profile 4-pack HDD Bundle | Q0F62A |
|---|--------|

Notes: Contains 4 x HPE 10TB SATA LFF LP HDDs

| | |
|---|--------|
| HPE StoreEasy 48TB SATA LFF (3.5in) Low Profile Carrier 4-pack HDD Bundle | Q2S06A |
|---|--------|

Notes: Contains 4 x HPE 12TB SATA LFF LP HDDs

| | |
|--|--------|
| HPE 56TB SATA 6G Midline 7.2K LFF (3.5in) LP 1yr Wty 4-pack HDD Bundle | R0R65A |
|--|--------|

Notes: Contains 4 x HPE 14TB SATA LFF LP HDDs

| | |
|--|--------|
| HPE 64TB SATA 6G Midline 7.2K LFF LP 1-year Warranty 4-pack HDD Bundle | R7G98A |
|--|--------|

Notes: Contains 4 x HPE 16TB SATA LFF LP HDDs



Configuration Information

HPE single drive options

HDDs

Description

SKU

Business Critical (Midline) - 12G SAS

| | |
|---|------------|
| HPE 14TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09155-K21 |
| HPE 16TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23608-K21 |
| HPE 18TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37669-K21 |
| HPE 20TB SAS 12G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53553-K21 |

Business Critical (Midline) - 6G SATA

| | |
|---|------------|
| HPE 14TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e Multi Vendor HDD | P09165-K21 |
| HPE 16TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P23449-K21 |
| HPE 18TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P37678-K21 |
| HPE 20TB SATA 6G Business Critical 7.2K LFF LP 1-year Warranty Helium 512e ISE Multi Vendor HDD | P53554-K21 |

SSDs

Mixed Use - SAS

| | |
|--|------------|
| HPE 960GB SAS 12G Mixed Use LFF LPC Value SAS Multi Vendor SSD | P37009-K21 |
|--|------------|

Read Intensive - 6G SATA

| | |
|---|------------|
| HPE 960GB SATA 6G Read Intensive LFF LPC Multi Vendor SSD | P47808-K21 |
|---|------------|

Notes:

- HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller. With the addition of at least one SSD (HPE recommends two 12G SAS Mixed Use SSDs), it can add a flash acceleration tier to the HPE StoreEasy 1660 Expanded to help increase performance for the most frequently accessed files. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>
- For options outside of those listed above, carefully select LFF low profile carrier (LP) hard disk drives and Low Profile Converter (LPC) solid state drives.

Step 5: Choose an external storage controller to connect to external enclosures (optional)

HPE Smart Array SAS Controllers

| | |
|---|------------|
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |

Notes:

- If you wish to enable Data at Rest Encryption on the HPE StoreEasy 1660 Expanded using the included Smart Array P816i-a or with an optional Smart Array P408e-p listed above, you must order the optional HPE Smart Array SR Secure Encryption E-LTU (SKU Q2F26AAE).
- While HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller, it must be licensed separately for additional controllers. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>



Configuration Information

HPE Special Reminder

Before enabling encryption on the Smart Array controller module on this system, you must ensure that your intended use of the encryption complies with relevant local laws, regulations and policies, and approvals or licenses must be obtained if applicable.

For any compliance issues arising from your operation/usage of encryption within the Smart Array controller module which violates the above-mentioned requirement, you shall bear all the liabilities wholly and solely. Hewlett Packard Enterprise will not be responsible for any related liabilities. For more information see the [HPE Smart Array SR Secure Encryption QuickSpecs](#).

Notes: For additional details and Smart Array controller options, please see [HPE Smart Array Gen10 Controllers Data Sheet](#).

Step 6: Choose additional network adapter(s) (optional)

Notes: SFP and SFP+ Adapters do not include a transceiver by default.

SFP transceiver(s) or direct connect cable(s) should be ordered according to the transceiver and cable compatibility matrix found at: <https://www.hpe.com/us/en/pdfViewer.html?resource=/content/hpe/country/us/en/resources/servers/reference-guide/transceiver-networking-server&parentPage=/us/en/products/servers/networking>

| Description | SKU |
|---|------------|
| PCIe Network Adapters | |
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| HPE Ethernet 1Gb 4-port BASE-T BCM5719 Adapter | 647594-B21 |
| HPE Ethernet 10Gb 2-port SFP+ 57810S Adapter | 652503-B21 |
| HPE Ethernet 10Gb 2-port SFP+ X710-DA2 Adapter | 727055-B21 |
| HPE Ethernet 10Gb 2-port BASE-T BCM57416 Adapter | 813661-B21 |
| HPE Ethernet 10Gb 2-port BASE-T X550-AT2 Adapter | 817738-B21 |
| HPE Ethernet 10/25Gb 2-port SFP28 BCM57414 Adapter | 817718-B21 |
| HPE Ethernet 10/25Gb 2-port SFP28 MCX4121A-ACUT Adapter | 817753-B21 |
| HPE Ethernet 10/25Gb 2-port SFP28 QL41401-A2G Adapter | 867328-B21 |
| HPE Ethernet 100Gb 1-port QSFP28 MCX515A-CCAT Adapter | 874253-B21 |

Notes: If more than one PCIe card is added, a second processor is required to provide access to the remaining PCIe slots.

Step 7: Choose the HPE Trusted Platform Module (optional)

| | |
|--|------------|
| HPE Trusted Platform Module 2.0 Gen10 Option | 864279-B21 |
|--|------------|

Notes: HPE StoreEasy systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

Step 8: Choose a System Recovery Media Kit (optional)

| | |
|---|--------|
| HPE StoreEasy 1X60 Recovery Software Media Kit with Microsoft Windows Server IoT 2019 | R7G47B |
|---|--------|

Notes:

- HPE StoreEasy 1X60 Recovery Software Media Kits contain a System Recovery USB key that is used to re-install the factory operating system image. Booting the system from the System Recovery media will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the HPE StoreEasy 1X60 Administrator Guide for more information on performing a System Recovery.
- Alternatively, the HPE StoreEasy 1X60 Recovery Software image can be downloaded from the HPE's Software Depot at no charge. More information is available here: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.
- For more information on how to perform a system recovery on a StoreEasy 1660 Expanded refer to the HPE StoreEasy 1X60 Administrator's Guide. The guide can be downloaded from <http://www.hpe.com/support>. Select HPE Support Center and search for the HPE StoreEasy system model in the drivers and download section.
- All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.



Configuration Information

HPE StoreEasy 1860 Storage

| Specifications of R7G28B | |
|-------------------------------|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Processor | Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE; 2nd processor optional |
| Memory Standard | 32GB |
| Memory Type | 1 x HPE 32GB Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit |
| Storage Controllers | HPE Broadcom MegaRAID MR416i-a/p x16 lanes 4 GB Cache NVMe/SAS 12G Controller for data drives; HPE Smart Array S100i SR Gen10 Plus SW RAID for mirrored OS drives only |
| Internal Drive Support | 16 x SFF (2.5") hot-plug front drive bays standard; up to 32 x SFF (2.5") hot-plug drive bays with the optional drive cages; standard 2 x SFF hot-plug rear-chassis drive cage standard |
| Network Ports Standard | 2 x 10GbE |
| Network Adapter | Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE (option to change); PCIe NIC(s) optional |
| Expansion Slots | 3 x PCIe; 3-slot secondary riser optional |
| Power | 2 x 800W Platinum hot-plug redundant |
| Cooling | 6 hot-plug, high-performance redundant fans |
| Form Factor | 2U rackmount |
| Security | 2U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |

| Common Specifications for R7G28A and R7G29A are being replaced by R7G28B | |
|--|--|
| Operating System | Microsoft® Windows Server IoT 2019 for Storage Standard Edition with HPE StoreEasy Management Console |
| Storage Controllers | HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache/SmartCache) 12G SAS Modular Controller (for data drives); HPE Smart Array S100i SR Gen10 SW RAID (for mirrored OS drives only) |
| Internal Drive Support | 24 x SFF (2.5") hot-plug front drive bays standard; 2 x SFF hot-plug rear-chassis drive cage optional |
| Network Ports Standard | 4 x 1GbE |
| Network Adapter | HPE Ethernet 1Gb 4-port 366FLR FlexLOM Adapter; PCIe NIC(s) optional |
| Expansion Slots | 3 x PCIe (two available); 3-slot secondary riser optional Notes: One PCIe slot is occupied by a SAS Expander |
| Power | 2 x 800W Platinum hot-plug redundant |
| Cooling | 6 hot-plug, high-performance redundant fans |
| Form Factor | 2U rackmount |
| Security | 2U lockable security bezel; Trusted Platform Module 2.0 optional |
| Additional Licenses | HPE iLO Advanced Premium Security Edition License with 1yr Support on Licensed Features Notes: For more information, visit: iLO Supported Servers and Features |



Configuration Information

R7G29A (Performance model) is being replaced by R7G28B

| | |
|------------------------|---|
| Processor | 1 x Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor; 2 nd processor optional |
| Memory Standard | 32GB |
| Memory Type | 2 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |

R7G28A is being replaced by R7G28B

| | |
|------------------------|---|
| Processor | 1 x Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor; 2 nd processor optional |
| Memory Standard | 16GB |
| Memory Type | 1 x HPE 16GB Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory |

Notes: Options listed in the steps below are limited to those recommended for use with StoreEasy 1860 Storage models.

For more information on the complete set of compatible options, please reference the ProLiant DL380 Gen10 QuickSpecs at: **Error!**
Hyperlink reference not valid.<https://www.hpe.com/psnow/doc/a00008180enw.pdf>



Configuration Information

Step 1: Choose your HPE StoreEasy 1860 Storage model

Configurable models

These HPE StoreEasy 1860 SKUs are Configure-to-Order (CTO) models with the operating system pre-installed on mirrored solid state drives and do not include data drives standard. These models can be factory-racked, and most added options (including data drives) can be factory integrated.

Notes:

- Hewlett Packard Enterprise recommends as a best practice that the internal data drives for the CTO models be the same type and capacity.
- The new StoreEasy 1860 model R7G28B is built from ProLiant DL380 Gen10 Plus technologies including the HPE MegaRAID Gen10 Plus Controller
- The existing StoreEasy 1860 models R7G28A and R7G29A are built from ProLiant DL380 Gen10 technologies including the HPE Smart Array SR Gen10 Controller

Description

| | SKU |
|---|------------|
| HPE StoreEasy 1860 Storage with Microsoft Windows Server IoT 2019 | R7G28B |
| HPE StoreEasy 1860 Performance Storage with Microsoft Windows Server IoT 2019 | R7G29A |
| HPE StoreEasy 1860 Storage with Microsoft Windows Server IoT 2019 | R7G28A |

Step 1A: Choose boot drives (only for R7G28B)

| | |
|---|------------|
| HPE 480GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40502-K21 |
| HPE 960GB SATA 6G Mixed Use SFF BC Multi Vendor SSD | P40503-K21 |

Step 1B: Choose a network card (only for R7G28B)

| | |
|--|------------|
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10097-B21 |
| Broadcom BCM57414 Ethernet 10/25Gb 2-port SFP28 OCP3 Adapter for HPE | P10115-B21 |
| Broadcom BCM57412 Ethernet 10Gb 2-port SFP+ Adapter for HPE | P26259-B21 |
| Marvell QL41132HQRJ Ethernet 10Gb 2-port BASE-T OCP3 Adapter for HPE | P10103-B21 |
| Intel I350-T4 Ethernet 1Gb 4-port BASE-T OCP3 Adapter for HPE | P08449-B21 |

Notes:

- The operating system is mirrored on two SFF (2.5") solid state drives in a rear drive cage
- R7G28B all three standard PCIe slots are available for expansion
- R7G28A and R7G29A two standard PCIe slots are available for expansion (one PCIe slot is occupied by a SAS Expander).

Step 2: Choose a second processor (optional)

R7G28B only

| | |
|--|------------|
| Intel Xeon-Silver 4309Y 2.8GHz 8-core 105W Processor for HPE | P36920-B21 |
|--|------------|

R7G29A only

| | |
|---|------------|
| Intel Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor Kit for HPE ProLiant DL380 Gen10 | P02491-B21 |
|---|------------|

R7G28A only

| | |
|---|------------|
| Intel Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor Kit for HPE ProLiant DL380 Gen10 | P02489-B21 |
|---|------------|

Step 3: Choose additional memory kit(s) (optional)

R7G28B only

| | |
|---|------------|
| HPE 32GB (1x32GB) Dual Rank x4 DDR4-3200 CAS-22-22-22 Registered Smart Memory Kit | P06033-K21 |
|---|------------|



Configuration Information

| Description | SKU |
|---|------------|
| R7G28A and R7G29A | |
| HPE 16GB (1x16GB) Dual Rank x8 DDR4-2933 CAS-21-21-21 Registered Smart Memory Kit | P00922-K21 |

Notes:

- All HPE StoreEasy 1860 models come with one processor standard. R7G28B comes with 16 DIMM slots per processor for a total maximum of 32 DIMM slots. R7G29A and R7G28A come with 12 DIMM slots per processor for a total maximum of 24 DIMM slots
- R7G28B comes with 1 x 32GB DIMM standard.
- R7G29A comes with 2 x 16GB DIMMs standard, while R7G28A comes with one 16GB DIMM standard.
- Dual-processor HPE StoreEasy 1860 systems must have the same number and type of memory DIMMs installed for each processor.

Step 4: Choose a riser kit to add PCIe slots (optional)

R7G28B only

| | |
|--|------------|
| HPE DL38X Gen10 Plus x8/x16/x8 Secondary Riser Kit | P14587-B21 |
|--|------------|

R7G29A and R7G28A only

| | |
|----------------------------------|------------|
| HPE DL Gen10 x8/x16/x8 Riser Kit | 870548-B21 |
|----------------------------------|------------|

Notes:

- Adds three PCIe slots; also requires addition of a second processor.
- For R7G28A and R7G29A if the riser kit is selected, the optional rear HDD cage (826688-B21) cannot be selected.

Step 5: Choose a drive cage to add SFF slots (optional)

R7G28B only

| | |
|---|------------|
| HPE ProLiant DL300 Gen10 Plus 2U 8SFF x1 Tri-Mode 24G U.3 BC Front Drive Cage Kit | P27194-B21 |
| HPE ProLiant DL38X Gen10 Plus 8SFF x1 Tri-Mode 24G U.3 BC Midplane Drive Cage Kit | P27193-B21 |

Notes: If the optional drive cages are selected, the optional MegaRAID MR416-i-p controller is required

R7G29A and R7G28A only

Notes: If the drive cage is selected, the optional riser kit (870548-B21) cannot be selected.

| | |
|---|------------|
| HPE DL38X Gen10 2SFF HDD SAS/SATA Riser Kit | 826688-B21 |
|---|------------|

Notes: Expands the number of Small Form Factor (2.5”) drive slots from 24 to 26 and adds a PCIe slot.

Step 6: Choose internal storage drives (optional)

Drive Options

R7G28B only: Maximum number of internal SFF drives supported

- 16 (in standard configuration)
- 32 (with optional 1xSFF front drive cage and 1xSFF mid drive cage in step 5)

R7G29A and R7G28A only: Maximum number of internal SFF drives supported

- 24 (in standard configuration)
- 26 (with optional 2xSFF drive cage in step 5)



Configuration Information

HPE StoreEasy 1860 SFF Drive Bundles

Mission Critical (Enterprise) - 12G SAS

Description

SKU

R7G28B only

HPE StoreEasy 4.8TB SAS SFF (2.5in) Basic Carrier 4-pack HDD Bundle S0E01A

Notes: Contains 4 x HPE 1.2TB SAS 12G Enterprise 10K SFF HDDs (reference SKU P28586-K21)

HPE StoreEasy 9.6TB SAS SFF (2.5in) Basic Carrier 4-pack HDD Bundle S0E02A

Notes: Contains 4 x HPE 2.4TB SAS 12G Enterprise 10K SFF HDDs (reference SKU P28352-K21)

HPE StoreEasy 8TB SAS SFF (2.5in) Basic Carrier 4-pack HDD Bundle S0E03A

Notes: Contains 4 x HPE 2TB SAS 12G Business Critical 7.2K SFF 512e HDD (reference SKU P28505-K21)

R7G28A and R7G29A only

HPE StoreEasy 4.8TB SAS SFF (2.5in) Smart Carrier 4-pack HDD Bundle Q2P84A

Notes: Contains 4 x HPE 1.2TB SAS 12G Enterprise 10K SFF HDDs (reference SKU 872479-K21)

HPE StoreEasy 7.2TB SAS SFF (2.5in) Smart Carrier 4-pack HDD Bundle Q2P85A

Notes: Contains 4 x HPE 1.8TB SAS 12G Enterprise 10K SFF HDDs (reference SKU 872481-K21)

HDDs

Mission Critical (Enterprise) - 12G SAS

R7G28B only

HPE 300GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD P28028-K21

HPE 2.4TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty 512e Multi Vendor HDD P28352-K21

HPE 1.2TB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD P28586-K21

HPE 300GB SAS 12G Mission Critical 10K SFF BC 3-year Warranty Multi Vendor HDD P40430-K21

HPE 900GB SAS 12G Mission Critical 15K SFF BC 3-year Warranty Multi Vendor HDD P40432-K21

R7G28A and R7G29A only

HPE 300GB SAS 12G Mission Critical 15K SFF SC 3-year Warranty Multi Vendor HDD 870753-K21

HPE 300GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD 872475-K21

HPE 600GB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD 872477-K21

HPE 1.2TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty Multi Vendor HDD 872479-K21

HPE 1.8TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD 872481-K21

HPE 2.4TB SAS 12G Mission Critical 10K SFF SC 3-year Warranty 512e Multi Vendor HDD 881457-K21

SSDs

Mixed Use - 12G SAS

HPE 960GB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37005-K21

HPE 1.92TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37011-K21

HPE 3.84TB SAS 12G Mixed Use SFF SC Value SAS Multi Vendor SSD P37017-K21



Configuration Information

| Description | SKU |
|---|------------|
| Read Intensive - 12G SAS | |
| HPE 960GB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD | P36997-K21 |
| HPE 1.92TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD | P36999-K21 |
| HPE 3.84TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD | P37001-K21 |
| HPE 7.68TB SAS 12G Read Intensive SFF SC Value SAS Multi Vendor SSD | P37003-K21 |

Notes:

- HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller. With the addition of at least one SSD (HPE recommends two 12G SAS Mixed Use SSDs), it can add a flash acceleration tier to the HPE StoreEasy 1860 to help increase performance for the most frequently accessed files. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>
- The recommended maximum number of SAS SSDs for the HPE StoreEasy 1860 is 8; however, there is nothing architecturally that prevents the use of more than 8 SSDs. HPE recommends the use of SAS SSDs as the HPE StoreEasy 1860 includes a SAS expander, which may impact SATA SSD performance.

Step 7: Only for R7G28A and R7G29A: Choose an external storage controller to connect to external enclosures (optional)

HPE Smart Array SAS Controllers

| | |
|---|------------|
| HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller | 804398-B21 |
| HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller | 804405-B21 |
| HPE Smart Array SR Secure Encryption (Data at Rest Encryption/per Server Entitlement) E-LTU | Q2F26AAE |

Notes:

- If you wish to enable Data at Rest Encryption on the HPE StoreEasy 1860 using the included Smart Array P816i-a or with an optional Smart Array P408e-p listed above, you must order the optional HPE Smart Array SR Secure Encryption E-LTU (SKU Q2F26AAE).
- While HPE Smart Array SR SmartCache is included with the standard HPE Smart Array P816i-a SR Gen10 Storage Controller, it must be licensed separately for additional controllers. For more detailed information about HPE Smart Array SR SmartCache go to: <https://www.hpe.com/us/en/product-catalog/detail/pip.5364342.html>

HPE Special Reminder

Before enabling encryption on the Smart Array controller module on this system, you must ensure that your intended use of the encryption complies with relevant local laws, regulations and policies, and approvals or licenses must be obtained if applicable. For any compliance issues arising from your operation/usage of encryption within the Smart Array controller module which violates the above-mentioned requirement, you shall bear all the liabilities wholly and solely. Hewlett Packard Enterprise will not be responsible for any related liabilities.

For more information see the [HPE Smart Array SR Secure Encryption QuickSpecs](#).

Step 8: Choose additional network adapter(s) (optional)

Notes: SFP and SFP+ Adapters do not include a transceiver by default.

SFP transceiver(s) or direct connect cable(s) should be ordered according to the transceiver and cable compatibility matrix found at:

<https://www.hpe.com/us/en/pdfViewer.html?resource=/content/hpe/country/us/en/resources/servers/reference-guide/transceiver-networking-server&parentPage=/us/en/products/servers/networking>



Configuration Information

PCIe Network Adapters

| Description | SKU |
|---|------------|
| R7G28B | |
| Broadcom BCM57416 Ethernet 10Gb 2-port BASE-T Adapter for HPE | P26253-B21 |
| Marvell QL41232HLCU Ethernet 10/25Gb 2-port SFP28 Adapter for HPE | P22702-B21 |
| Marvell QL41134HLCU Ethernet 10Gb 4-port SFP+ Adapter for HPE | P10094-B21 |
| R7G28A and R7G29A only | |
| HPE Ethernet 1Gb 2-port BASE-T BCM5720 Adapter | 615732-B21 |
| HPE StoreEasy 10GbE 2-port 530T Adapter | Q2P91A |
| HPE StoreEasy 10GbE 2-port 530SFP+ Adapter | Q2P92A |

Step 9: Choose the HPE Trusted Platform Module (optional)

R7G22B, R7G23B, and R7G24B only

HPE Trusted Platform Module 2.0 Gen10 Plus Black Rivets Kit P13771-B21

R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A only

HPE Trusted Platform Module 2.0 Gen10 Option 864279-B21

Notes: HPE StoreEasy systems can have a TPM module (of any type) installed only once. It cannot be replaced with any other TPM module.

Step 10: Choose a System Recovery Media Kit (optional)

HPE StoreEasy 1X60 Recovery Software Media Kit with Microsoft Windows Server IoT 2019 R7G47B

Notes:

- HPE StoreEasy 1X60 Recovery Software Media Kits contain a System Recovery USB key that is used to re-install the factory operating system image. Booting the system from the System Recovery media will restore the operating system image and logical drive to the factory default state. This enables recovery of the system if all other means to boot the system fail. Refer to the HPE StoreEasy 1X60 Administrator Guide for more information on performing a System Recovery.
- Alternatively, the HPE StoreEasy 1X60 Recovery Software image can be downloaded from the HPE's Software Depot at no charge. More information is available here: <https://myenterpriselicense.hpe.com/cwp-ui/free-software/>.
- For more information on how to perform a system recovery on a HPE StoreEasy 1860 refer to the HPE StoreEasy 1X60 Administrator's Guide. The guide can be downloaded from <http://www.hpe.com/support>. Select HPE Support Center and search for the HPE StoreEasy system model in the drivers and download section.
- All data on the original operating system logical drive is erased during the System Recovery process. Back up any data on the operating system drives before performing the System Recovery if possible. While the System Recovery process makes every attempt to preserve the existing data volumes, you should have a backup of your data before recovering the system.



Configuration Information

HPE StoreEasy 1X60 Storage Upgrade Kit to Microsoft Windows Server IoT 2019 for Storage Standard Edition Operating System

| Specifications | |
|----------------------|---|
| Contents | New Microsoft Certificate of Authenticity (COA) sticker plus documentation containing directions for downloading the bootable image for installing Microsoft Windows Server IoT 2019 for Storage Standard Edition. Notes: Physical media is not included. |
| Compatibility | Sixth generation StoreEasy 1000 Storage models (1460, 1560, 1660, 1660 Expanded, and 1860) that shipped with Microsoft Windows Storage Server 2016 Standard Edition are eligible for upgrade. Notes: Since the kit includes a new COA sticker and requires its application to the StoreEasy model being upgraded, only one StoreEasy unit may be upgraded with the kit. |

List of HPE StoreEasy 1X60 Storage System Products Compatible with the Upgrade Kit

Obsolete Products*

Notes: *No longer available for purchase, informational only

- HPE StoreEasy 1460 8TB SATA Storage (Q2R92B and Q2R92A)
- HPE StoreEasy 1460 16TB SATA Storage (Q2R93B and Q2R93A)
- HPE StoreEasy 1460 32TB SATA Storage (Q2R94B and Q2R94A)
- HPE StoreEasy 1560 8TB SATA Storage (Q2R96B and Q2R96A)
- HPE StoreEasy 1560 16TB SATA Storage (Q2R97B and Q2R97A)
- HPE StoreEasy 1660 Performance Storage (Q2P71B and Q2P71A)
- HPE StoreEasy 1660 Storage (Q2P72B and Q2P72A)
- HPE StoreEasy 1660 16TB SAS Storage (Q2P73B and Q2P73A)
- HPE StoreEasy 1660 32TB SAS Storage (Q2P74B and Q2P74A)
- HPE StoreEasy 1660 64TB SAS Storage (Q2P75B and Q2P75A)
- HPE StoreEasy 1660 Expanded Storage (R7L72A and R0R67A)
- HPE StoreEasy 1860 Performance Storage (Q2P76B and Q2P76A)
- HPE StoreEasy 1860 Storage (Q2P77B and Q2P77A)
- HPE StoreEasy 1860 9.6TB SAS Storage (Q2P78B and Q2P78A)
- HPE StoreEasy 1860 14.4TB SAS Storage (Q2P79B and Q2P79A)

Notes:

- The Microsoft Windows Server IoT 2019 for Storage Standard Edition upgrade kit contains directions to download bootable software (physical media is not included) that will re-image the operating system and revert the StoreEasy system to a factory default state. User data on the operating system partition will be destroyed in the upgrade process, so backup / migration / restore planning should be executed manually.
- The Microsoft Windows Server IoT 2019 for Storage Standard Edition upgrade kit also contains a new Microsoft Certificate of Authenticity (COA) sticker that must be physically applied to the StoreEasy system as part of the upgrade process (limit one system per upgrade kit).

Description

HPE StoreEasy Standard Edition Upgrade Kit with Microsoft Windows Server IoT 2019

SKU

R7G45B



Technical Specifications

| Processors | | | | |
|---|--------------------|--|---|--|
| HPE StoreEasy 1460 | HPE StoreEasy 1560 | HPE StoreEasy 1660 | HPE StoreEasy 1660 Expanded | HPE StoreEasy 1860 |
| Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor | | R7G22B, R7G23B, and R7G24B Intel® Xeon-Silver 4309Y (2.8GHz/8-core/105W) Processor | Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor | R7G28B Intel® Xeon-Silver 4309Y (2.8GHz/8-core/105W) Processor |
| | | R7G21A, R7G22A, R7G23A, and R7G24A Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor | | R7G28A Intel® Xeon-Bronze 3204 (1.9GHz/6-core/85W) Processor |
| | | R7G25A Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor | | R7G29A Intel® Xeon-Silver 4208 (2.1GHz/8-core/85W) Processor |

| Memory | | | | | |
|---------------------|--|--------------------|---|-----------------------------|--|
| | HPE StoreEasy 1460 | HPE StoreEasy 1560 | HPE StoreEasy 1660 | HPE StoreEasy 1660 Expanded | HPE StoreEasy 1860 |
| Type | DDR4-3200 CAS-22-22-22 Registered (RDIMM) Smart Memory (for R7G22B, R7G23B, R7G24B, and R7G28B only) and DDR4-2933 CAS-21-21-21 Registered (RDIMM) Smart Memory (all other SKUs) | | | | |
| Standard | 16GB (1 x 16GB) | 16GB (1 x 16GB) | R7G22B, R7G23B, R7G24B, R7G21A, R7G22A, R7G23A, and R7G24A: 16GB (1 x 16GB) OR R7G25A: 32GB (2 x 16GB) | 32GB (2 x 16GB) | R7G28B: 32GB (1 x 32GB), R7G29A: 32GB (2 x 16GB), or R7G28A: 16GB (1 x 16GB) |
| DIMM Sockets | 24(12 per processor) | 6 | 32 (16 per processor) for R7G22B, R7G23B, R7G24B) OR 24 (12 per processor) for R7G21A, R7G22A, R7G23A, R7G24A, R7G25A | 16 | 32 (16 per processor) for R7G28B or 24(12 processor) for R7G28A and R7G29A |
| Maximum | 24TB (limit based on operating system license) | | | | |



Technical Specifications

| Networking | | | | | |
|-------------------|------------------------------------|---------------------|--|-----------------------------|--|
| | HPE StoreEasy 1460 | HPE StoreEasy 1560 | HPE StoreEasy 1660 | HPE StoreEasy 1660 Expanded | HPE StoreEasy 1860 |
| NIC Ports | 4 | 2 | 2 or 4 | 2 | 2 or 4 |
| Controller | 1Gb Ethernet 4-port 366FLR FlexLOM | 1Gb Ethernet 2-port | R7G22B and R7G23B: HPE Ethernet 1Gb 4-port I350 Base-T OCP3 Adapter, Only R7G24B: Option to choose. See the StoreEasy 1660 configuration section R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A: 1Gb Ethernet 4-port 366FLR FlexLOM | 1Gb Ethernet 2-port | R7G28B: Option to choose. See the StoreEasy 1860 configuration section. R7G28A and R7G29A: 1Gb Ethernet 4-port 366FLR FlexLOM |

| HPE StoreEasy 1460 | | | | | |
|--|------------|-----------|-----------------|---|--------|
| Primary PCIe Riser | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 1 | PCIe 3.0 | X16 | X16 | Full-height, 3/4-length (up to 9.5in) slot | Proc 1 |
| 2 | PCIe 3.0 | X8 | X8 | Low-Profile slot | Proc 1 |
| HPE StoreEasy 1460 - Secondary PCIe Riser (optional) | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 3 | PCIe 3.0 | X16 | X16 | Low Profile or Full-height; 3/4 length (up to 9.5") | Proc 2 |

| HPE StoreEasy 1560 | | | | | |
|--------------------|------------|-----------|-----------------|---|---|
| PCIe slots | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 1 | PCIe 3.0 | X16 | X16 | Full-height, ¾ length (up to 9.5") Slot | Proc 1 |
| 2 | PCIe 3.0 | X4 | X8 | Full-height, half-length slot | Proc 1 |
| 3 | PCIe 3.0 | x8 | x8 | Full-height, half-length slot | Proc 1 (occupied by Smart Array P408i-p Controller) |
| 4 | PCIe 3.0 | X16 | X16 | Full-height, full-length slot | Proc 1 |
| 5 | PCIe 3.0 | X4 | x8 | Full-height, half-length slot | PCH |



Technical Specifications

| HPE StoreEasy 1660/1860 (R7G22B, R7G23B, R7G24B, R7G28B) | | | | | |
|--|------------|-----------|-----------------|-------------------------------|--------|
| Primary PCIe Riser | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 1 | PCIe 4.0 | x8 | X16 | Full-height, full-length slot | Proc 1 |
| 2 | PCIe 4.0 | X16 | x16 | Full-height, full-length slot | Proc 1 |
| 3 | PCIe 4.0 | x8 | X16 | Full-height, half-length slot | Proc 1 |

| HPE StoreEasy 1660/1860 (R7G22B, R7G23B, R7G24B, R7G28B) | | | | | |
|--|------------|-----------|-----------------|-------------------------------|--------|
| Secondary PCIe Riser | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 4 | PCIe 4.0 | x8 | X16 | Full-height, full-length slot | Proc 2 |
| 5 | PCIe 4.0 | X16 | x16 | Full-height, full-length slot | Proc 2 |
| 6 | PCIe 4.0 | x8 | X16 | Full-height, half-length slot | Proc 2 |

| HPE StoreEasy 1660/1860 (R7G21A, R7G22A, R7G23A, R7G24A, R7G25A, R7G28A, and R7G29A) | | | | | |
|--|------------|-----------|-----------------|-------------------------------|--|
| Primary PCIe Riser | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 1 | PCIe 3.0 | x8 | X8 | Full-height, full-length slot | Proc 1 |
| 2 | PCIe 3.0 | X16 | x16 | Full-height, full-length slot | Proc 1 (Occupied by SAS Expander on HPE StoreEasy 1860 models) |
| 3 | PCIe 3.0 | x8 | x8 | Full-height, half-length slot | Proc 1 |

| HPE StoreEasy 1660/1860 (R7G21A, R7G22A, R7G23A, R7G24A, R7G25A, R7G28A, and R7G29A) | | | | | |
|--|------------|-----------|-----------------|-------------------------------|--------|
| Secondary PCIe Riser | | | | | |
| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
| 4 | PCIe 3.0 | x8 | x8 | Full height, full length slot | Proc 2 |
| 5 | PCIe 3.0 | x16 | x16 | Full height, full length slot | Proc 2 |
| 6 | PCIe 3.0 | x8 | x8 | Full-height, half-length slot | Proc 2 |



Technical Specifications

HPE StoreEasy 1660 Expanded -

PCIe slots

| Expansion Slots # | Technology | Bus Width | Connector Width | Form Factor | Notes |
|-------------------|------------|-----------|-----------------|-------------|-------------------------------------|
| 1 | PCIe 3.0 | x16 | x16 | Low profile | Proc 1 (Occupied by M.2 riser card) |
| 2 | PCIe 3.0 | x24 | x24 | Low profile | Proc 1 |
| 5 | PCIe 3.0 | x8 | x8 | Low profile | Proc 2 |
| 6 | PCIe 3.0 | x24 | x24 | Low profile | Proc 2 |
| 7 | PCIe 3.0 | x16 | x16 | Low profile | Proc 2 |



Technical Specifications

| Storage Controller | | | | | |
|--|--|---|---|--|---|
| | HPE StoreEasy 1460 | HPE StoreEasy 1560 | HPE StoreEasy 1660 | HPE StoreEasy 1660 Expanded | HPE StoreEasy 1860 |
| Controller(s) | R7G16B, R7G17B, R7G18B, R7G19B, and R7G20B: Embedded S100i controller for S/W RAID | | R7G22B, R7G22B, R7G23B, R7G24B, and R7G28B SKUs: HPE Broadcom MegaRAID MR416i-a/p x16 Lanes 4GB Cache NVMe/SAS 12G Controller for data drives; HPE Smart Array S100i SR Gen10 SW RAID for OS drives only | | |
| | R7G16A, R7G17A, and R7G18A: HPE Smart HPE Smart Array P408i-a SR Gen10 | R7G19A and R7G20A: HPE Smart HPE Smart Array P408i-p SR Gen10 | R7G21A, R7G22A, R7G23A, R7G24A, R7G25A, R7G28A, and R7G29A: HPE Smart Array P816i-a SR Gen10 (16 Internal Lanes/4GB Cache / SmartCache) 12G SAS Modular Controller for data drives; HPE Smart Array S100i SR Gen10 SW RAID for OS drives only | | |
| RAID (for data drives) | RAID 0, 1, 5, 10, 50 | | RAID 0, 1, 5, 6, 10, 50, 60, 1 ADM, 10 ADM (Advanced Data Mirroring) | | |
| | Not all RAID levels recommended or supported on HPE StoreEasy | | | | |
| Internal SAS connectors | None | | 16 SAS lanes across 4 x4 internal Mini-SAS ports | | |
| External SAS connectors | None | | | | |
| Data at Rest Encryption Support | Optional HPE Smart Array SR Secure Encryption E-LTU (SKU Q2F26AAE) | | | | |
| Internal Drive Slots | 4 LFF (3.5") hot-plug bays in front | 4 LFF (3.5") hot-plug bays standard and 4 additional LFF (3.5") hot-plug bays optional (total of 8 internal LFF bays maximum) | 12 LFF (3.5") hot-plug bays in front and optional 4 LFF hot-plug bays in mid-chassis drive cage (total of 16 internal LFF bays maximum) | 24 LFF (3.5") hot-plug bays in front and 4 LFF hot-plug bays in rear (total of 28 internal LFF bays maximum) | Only for R7G28B: 16 SFF (2.5") hot-plug bays in front and optional upto 16 SFF hot-plug bays with optional drive cages (total of 32SFF internal bays maximum) |
| | | | | | Only for R7G28A and R7G29A: 24 SFF (2.5") hot-plug bays in front and optional 2 SFF hot-plug bays in rear drive cage (total of 26 SFF internal bays maximum) |
| Carrier type | Smart Carrier (SC) | Low Profile (LP) | Low Profile (LP) (for R7G22B, R7G23B, R7G28B only) for all SKUs Smart Carrier LFF (SC) | Low Profile (LP) | Basic Carrier SFF (BC) for R7G28B only Smart Carrier SFF (SC) for R7G28A and R7G29A |
| External Storage | Support for external D3X10 and D6020 Disk Enclosures requires optional Smart Array controller with external port | | | | |
| Pre-installed Operating | RAID10 partition across the four | RAID10 partition across the four factory-installed HDDs | Mirrored SFF SSDs | Mirrored M.2 SSDs | Mirrored SFF SSDs |



Technical Specifications

| | | | | | |
|--|------------------------|--|--|---------------------------------|--|
| System Location | factory-installed HDDs | | | | |
| Maximum Internal Capacity (raw) | 32TB | 64TB (with optional 4LFF drive cage and 4 x 12TB HDDs) | 288TB (with optional 4LFF mid-chassis cage and 16 x 18TB LFF HDDs) | 504TB (with 28 x 18TB LFF HDDs) | 76.8TB (with optional 16SFF front and mid cage 32 x 2.4TB SFF HDDs) 62.4TB (with optional 2SFF rear cage and 26 x 2.4TB SFF HDDs) |

| Power & Cooling | | | | | |
|---|---|--|--|--|--|
| Power Supplies | 1 x 500 Watts Platinum, hot-plug (2 nd redundant power supply optional) | 1 x 500 Watts Platinum, hot-plug (2 nd redundant power supply optional) | 2 x 800 Watts Platinum, hot-plug | 2 x 1600 Watts Platinum hot-plug (high-line input 200V - 240V AC only) | 2 x 800 Watts Platinum, hot-plug |
| Power Cords | One high voltage power cords (IEC C13 to C14) standard; two if second power supply added | One 6-foot 10A, C13 U.S. Power cord; see notes | Two high voltage power cords (IEC C13 to C14) standard | Two high voltage power cords (IEC C13 to C14) standard | Two high voltage power cords (IEC C13 to C14) standard |
| Notes: <ul style="list-style-type: none"> – HPE StoreEasy 1460, 1660, 1660 Expanded and 1860 models ship with a standard 6-foot IEC C-13/C-14 jumper cord. This jumper cord is also included with each standard AC power supply option kit. – The HPE StoreEasy 1560 model comes with a standard 6-foot 10A, C13—U.S. power cord (AF556A). If you order the optional 2nd power supply you must order also order AF556A to get the above power cord. – If different power cords are required for any HPE StoreEasy 1000 model, please check ProLiant Power Cables to determine what power cord options are available. | | | | | |
| System Fans | Single processor system includes 5 hot-plug, redundant fans, standard Dual processor system includes 7 hot-plug redundant fans | 2 non hot-plug redundant fans, standard | 6 hot-plug, high-performance, redundant fans, standard | 10 hot-plug, high-performance redundant fans standard | 6 hot-plug, high-performance, redundant fans, standard |



Technical Specifications

Additional options

See the corresponding ProLiant and Apollo 4000 QuickSpecs for additional compatible options.

- HPE StoreEasy 1460 (ProLiant DL360 Gen 10)
<https://www.hpe.com/psnow/doc/a00008159enw.pdf>
- HPE StoreEasy 1560 (ProLiant ML110 Gen 10)
<https://www.hpe.com/psnow/doc/a00021851enw.pdf>
- New HPE StoreEasy 1660 (ProLiant DL380 Gen10 Plus LFF) R7G22B, R7G23B, and R7G24B:
- New HPE StoreEasy 1860 (ProLiant DL380 Gen10 Plus SFF) R7G28B:
<https://www.hpe.com/psnow/doc/a50002553enw.pdf>
- HPE StoreEasy 1660 (ProLiant DL380 Gen10 LFF) R7G21A, R7G22A, R7G23A, R7G24A, and R7G25A,
- HPE StoreEasy 1860 (ProLiant DL380 Gen10 SFF) R7G28A and R7G29A:
- HPE StoreEasy 1660 Expanded (Apollo 4200 Gen10 LFF)
<https://www.hpe.com/psnow/doc/a00056091enw.pdf>

Notes: Options offered in the HPE ProLiant and Apollo servers listed above will work in respective HPE StoreEasy products if supported on Windows Server 2019 Standard Edition.

Because HPE StoreEasy is a storage system, not every possible option available in the equivalent ProLiant server is listed in the HPE StoreEasy 1000 QuickSpecs. Options that are shown in this document are the most common and recommended ones needed for the primary HPE StoreEasy usage model as a file storage system.



Technical Specifications

| HPE StoreEasy 1000 Storage Common System Specifications | | |
|---|---|---|
| System Inlet Temperature | Standard Operating Support | <p>10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed.</p> <p>System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).</p> <p>For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae</p> |
| | Extended Ambient Operating Support | <p>For approved hardware configurations, the supported system inlet range is extended to be: 40° to 45°C (104° to 113°F) at sea level with an altitude derating of 1.0°C per every 125 m (1.8°F per every 410 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: http://www.hpe.com/servers/ashrae</p> <p>System performance may be reduced if operating in the extended ambient operating range or with a fan fault.</p> |
| | Non-operating | -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr). |
| Relative Humidity (non-condensing) | Operating | 8% to 90% - Relative humidity (Rh), 28°C maximum wet bulb temperature, non-condensing. |
| | Non-operating | 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing. |
| Altitude | Operating | 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). Fine at 38.441889, -105.220891. |
| | Non-operating | 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min). |
| Emissions Classification (EMC) | To view the regulatory information for your product, view the Safety and Compliance Information for Server, Storage, Power, Networking, and Rack Products, available at the Hewlett Packard Enterprise Support Center: http://www.hpe.com/support/Safety-Compliance-EnterpriseProducts | |



Technical Specifications

| HPE StoreEasy 1460 Storage | | | |
|---|--|---|------------------------------|
| Dimensions | 4.29 x 43.46 x 74.98 cm 1.69 x 17.11 x 29.5 in | | |
| Weight (approximate) | 16.78 kg 37 lb | Four LFF drives, two processors, two power supplies, two heatsinks, and seven fans. | |
| Input Requirements (per power supply) | Rated Line Voltage | 100 to 120 VAC 200 to 240 VAC | |
| | Rated Input Frequency | 50 to 60 Hz | |
| | Rated Input Power | < 557 W (at 100 VAC); < 537 W (at 240 VAC) | |
| BTU Rating | Maximum | 1902 BTU/hr (at 100 VAC); 1832 BTU/hr (at 240 VAC) | |
| Power Supply Output (per power supply) | Maximum Rated Output Wattage Rating (Watts) | 500W (at 100 VAC); 500W (at 240 VAC) | |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below. | | |
| | | Minimum (Entry) | Maximum (Performance) |
| | Idle | | |
| | LWAd | 5.1 B | 5.2 B |
| | LpAm | 35 dBA | 36 dBA |
| | Operating | | |
| | LWAd | 5.3 B | 5.9 B |
| | LpAm | 36 dBA | 45 dBA |
| Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only. | | | |



Technical Specifications

| HPE StoreEasy 1560 Storage | | |
|--|--|--|
| Tower Dimensions | 44 x 19.5 x 48.05 cm 17.32 x 7.68 x 18.92 in | |
| Tower Weight (approximate) | Maximum: | 55.0 lbs (25.0 kg) |
| Input Requirements (per power supply) | Rated Line Voltage | 100 to 120 VAC 200 to 240 VAC |
| | Rated Input Frequency | 50 to 60 Hz |
| | Rated Input Power | < 557 W (at 100 VAC); < 537 W (at 240 VAC) |
| BTU Rating | Maximum | 1902 BTU/hr (at 100 VAC); 1832 BTU/hr (at 240 VAC) |
| Power Supply Output (per power supply) | Maximum Rated Output Wattage Rating (Watts) | 500W (at 100 VAC); 500W (at 240 VAC) |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (L_{WAd}) and declared average bystander position A-Weighted sound pressure levels (L_{pAm}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your HPE representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below. | |
| | Idle | |
| | LWAd | 4.0 Bels Entry 4.0 Bels Perf |
| | LpAm | 24.8 dBA Entry 24.1 dBA Perf |
| | Operating | |
| | LWAd | 4.0 Bels Entry 4.0 Bels Perf |
| | LpAm | 25.1 dBA Entry 24.1 dBA Perf |
| | Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only. | |



Technical Specifications

| HPE StoreEasy 1660 Storage and 1860 Storage | | | |
|---|--|-----------------------|--|
| Dimensions (R7G22B, R7G23B, and R7G24B) | 8.75 x 44.54 x 74.9 cm 3.44 x 17.54 x 29.5 in | | StoreEasy 1660 (LFF Drives) |
| | Maximum | 33.99 kg 74.94 lbs | 12 LFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x HPE MegaRAID, 2x Risers installed) |
| Dimensions (R7G28B) | 8.75 x 44.54 x 71 cm 3.44 x 17.54 x 28 in | | StoreEasy 1860 (SFF Drives) |
| | Maximum | 28.77 kg 63.43 lbs | 8 SFF hard drives (no rear drives), 2x processors, 2x power supplies, 1x HPE MegaRAID, 2x Risers installed) |
| Dimensions (R7G21A, R7G22A, R7G23A, R7G24A, R7G25A, R7G28A, and R7G29A) | 8.73 x 44.54 x 73.02 cm 3.44 x 17.54 x 28.75 in | | StoreEasy 1660 (LFF Drives) |
| | 8.73 x 44.54 x 67.94 cm 3.44 x 17.54 x 26.75 in | | StoreEasy 1860 (SFF Drives) |
| Input Requirements (per power supply) | Rated Line Voltage | | 100 to 120 VAC 200 to 240 VAC |
| | Rated Input Frequency | | 50 to 60 Hz |
| | Rated Input Power | | < 899 W (at 100 VAC); < 864 W (at 240 VAC) |
| BTU Rating | Maximum | | 3067 BTU/hr (at 100 VAC); 2949 BTU/hr (at 240 VAC) |
| Power Supply Output (per power supply) | Maximum Rated Output Wattage Rating (Watts) | | 800W (at 100 VAC); 800W (at 240 VAC) |
| Acoustic Noise | | | |
| Listed are the declared A-Weighted sound power levels (L_{WAg}) and declared average bystander position A-Weighted sound pressure levels (L_{pAm}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your Hewlett Packard Enterprise representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below. | | | |
| Configuration | Minimum (Entry) | | Maximum (Performance) |
| Idle | | | |
| LWAd | 4.8 B | | 4.6 B |
| LpAm | 37 dBA | | 31 dBA |
| Operating | | | |
| LWAd | 4.8 B | | 4.6 B |
| LpAm | 37 dBA | | 31 dBA |
| Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only. | | | |

Technical Specifications

| HPE StoreEasy 1660 Expanded Storage | | |
|---|--------------------------|--|
| Dimensions | 8.75 x 44.80 x 82.55 cm | |
| | 3.44 x 17.63 x 32.50 in | |
| Weight (approximate) | Maximum | 40.6 kg 89.51 lb |
| | | |
| Input Requirements (per power supply) | Rated Line Voltage | 200 to 240 VAC |
| | Rated Input Frequency | 50 to 60 Hz |
| | Rated Input Power | < 1734 W (at 200 VAC); < 1725 W (at 240 VAC) |
| BTU Rating | Maximum | 5918 BTU/hr (at 200 VAC); 5884 BTU/hr (at 240 VAC) |
| Power Supply Output (per power supply) | Rated Steady-State Power | 1600W (at 200 VAC); 1600W (at 240 VAC) |
| Acoustic Noise | | |
| Listed are the declared A-Weighted sound power levels (L_{WAd}) and declared average bystander position A-Weighted sound pressure levels (L_{pAm}) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). The listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels. Please have your Hewlett Packard Enterprise representative provide information from the HPE EMESC website for further technical details regarding the configurations listed below. | | |
| Configuration | Minimum (Entry) | Maximum (Performance) |
| Idle | | |
| LWAd | 5.1 B | 5.2 B |
| LpAm | 35 dBA | 36 dBA |
| Operating | | |
| LWAd | 5.3 B | 5.26 B |
| LpAm | 36 dBA | 45 dBA |
| Notes: Acoustics levels presented here are generated by the test configuration only. Acoustics levels will vary depending on system configuration. Values are subject to change without notification and are for reference only. | | |

HPE Smart Array

For latest information on **HPE Smart Array Gen10 Controllers for HPE ProLiant DL, ML and Apollo Servers** please refer to their QuickSpecs. (E208i-a,E208i-p,E208e-p,P408i-a,P408i-p,P408e-p,P816i-a)

Environment-friendly Products and Approach - End-of-life Management and Recycling

Hewlett Packard Enterprise offers **end-of-life product return, trade-in, and recycling programs**, in many geographic areas, for our products. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site. These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|--|
| 03-Oct-2022 | Version 35 | Changed | Configuration Information and Technical Specifications sections were updated. |
| 06-Sep-2022 | Version 34 | Changed | Overview, Configuration Information and Technical Specifications sections were updated. |
| 18-Jul-2022 | Version 33 | Changed | Standard Features and Configuration Information sections were updated. SKUs |
| 05-Jul-2022 | Version 32 | Changed | Added StoreEasy 1460 and 1560 new "B" SKUs |
| 07-Mar-2022 | Version 31 | Changed | Standard Features, Configuration Information and Technical Specifications sections were updated. Obso SKUs were removed. |
| 07-Feb-2022 | Version 30 | Changed | Configuration Information and Technical Specifications sections were updated. Obso SKUs were removed. |
| 15-Nov-2021 | Version 29 | Changed | Overview, Standard Features, Configuration Information and Technical Specifications sections were updated. Obso SKUs were removed. |
| 18-Oct-2021 | Version 28 | Changed | Service and Support section was updated. |
| 07-Sep-2021 | Version 27 | Changed | Service and Support and Configuration Information sections were updated. |
| 02-Aug-2021 | Version 26 | Changed | Standard Features and Configuration Information sections were updated. |
| 06-Jul-2021 | Version 25 | Changed | Standard Features and Configuration Information sections were updated. |
| 07-Jun-2021 | Version 24 | Changed | Overview and Configuration Information sections were updated. |
| 04-May-2021 | Version 23 | Changed | Standard Features section was updated. |
| 06-Apr-2021 | Version 22 | Changed | Standard Features, Configuration Information and Technical Specifications sections were updated. |
| 01-Mar-2021 | Version 21 | Changed | Overview, Service and Support, Configuration Information and Technical Specifications sections were updated. |
| 01-Feb-2021 | Version 20 | Changed | Configuration Information section was updated |
| 07-Dec-2020 | Version 19 | Changed | Overview, Service and Support, Configuration Information and Technical Specifications sections were updated. |
| 05-Oct-2020 | Version 18 | Changed | Overview, and Configuration Information sections were updated. |
| 03-Aug-2020 | Version 17 | Changed | Overview, Standard Features, Features and Benefits, Configuration Information and Service and Support sections were updated. |
| 06-Jul-2020 | Version 16 | Changed | Overview, Configuration Information and Technical Specifications sections were updated |
| 01-Jun-2020 | Version 15 | Changed | Overview, Configuration Information and Technical Specifications sections were updated |
| 06-Apr-2020 | Version 14 | Changed | Configuration Information Section was updated |
| 02-Mar-2020 | Version 13 | Changed | Overview, Configuration Information and Technical Specifications sections were updated. |
| 02-Dec-2019 | Version 12 | Changed | Configuration Information section was updated. |
| 07-Oct-2019 | Version 11 | Changed | Overview and Configuration Information sections were updated |
| 03-Sep-2019 | Version 10 | Added | Added HPE StoreEasy 1660 Expanded Storage including configuration information. |
| 10-Jun-2019 | Version 9 | Changed | Overview, Features and Benefits and Configuration Information sections were updated. |
| 06-May-2019 | Version 8 | Changed | Configuration Information section was updated |
| 04-Mar-2019 | Version 7 | Changed | Configuration Information Section was updated. |



Summary of Changes

| Date | Version History | Action | Description of Change |
|-------------|-----------------|---------|---|
| 04-Feb-2019 | Version 6 | Changed | Overview, Standard Features, Features and Benefits, Configuration Information and Service and Support sections were updated. |
| 03-Dec-2018 | Version 5 | Changed | Standard Features, Configuration Information and Service and Support sections were revised. |
| 04-Jun-2018 | Version 4 | Changed | Overview, Standard Features, HPE StoreEasy 1660 configuration information, HPE StoreEasy 1860 configuration information, and Technical Specifications were updated. |
| 16-Apr-2018 | Version 3 | Changed | Optimized: Tailored for file storage and Optional Software were revised. |
| 02-Apr-2018 | Version 2 | Changed | Overview and multiple SKU description were updated. |
| 05-Mar-2018 | Version 1 | New | New QuickSpecs. |



Copyright

Make the right purchase decision.
Contact our presales specialists.



© Copyright 2022 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Windows is a US registered trademark of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.

a00041171enw - 16156 - Worldwide - V35 - 03-October-2022