

# Latitude 5420

## Setup and Specifications

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

# Contents

<b>Chapter 1: Set up your Latitude 5420</b> .....	<b>4</b>
<b>Chapter 2: Views of Latitude 5420</b> .....	<b>6</b>
Right.....	6
Left.....	7
Palm rest .....	7
Front.....	8
Bottom.....	9
Back.....	9
System board layout.....	10
Keyboard shortcuts.....	10
Battery charge and status LED .....	11
<b>Chapter 3: Specifications of Latitude 5420</b> .....	<b>12</b>
Dimensions and weight.....	12
Processors.....	13
Chipset.....	13
Operating system.....	13
Memory.....	14
Ports and connectors.....	14
Communications.....	15
Audio.....	16
Storage.....	16
Media-card reader.....	17
Keyboard.....	17
Camera.....	18
Clickpad.....	18
Power adapter.....	18
Battery.....	19
Display.....	20
Fingerprint reader (optional).....	21
Video.....	22
Multiple display support matrix.....	22
Hardware security.....	22
Operating and storage environment.....	23
Sensor and control.....	23
<b>Chapter 4: Dell low blue light display</b> .....	<b>24</b>
<b>Chapter 5: Getting help and contacting Dell</b> .....	<b>25</b>

# Set up your Latitude 5420

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



**NOTE:** The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.


2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:



- Connect to a network for Windows updates.
  - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 1. Locate Dell apps**

Resources	Description
	<p><b>SupportAssist</b></p> <p>Proactively checks the health of your computer's hardware and software. The SupportAssist OS Recovery tool troubleshoots issues with the operating system. For more information, see the SupportAssist documentation at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p> <p><b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

**Table 1. Locate Dell apps (continued)**


Resources	Description
	<p><b>Dell Update</b></p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article <a href="https://www.dell.com/support">SLN305843</a> at <a href="https://www.dell.com/support">www.dell.com/support</a>.</p>
	<p><b>Dell Digital Delivery</b></p> <p>Download software applications, which are purchased but not pre-installed on your computer. For more information about using Dell Digital Delivery, see the knowledge base article <a href="https://www.dell.com/support">153764</a> at <a href="https://www.dell.com/support">www.dell.com/support</a>.</p>

## Views of Latitude 5420

### Topics:


- [Right](#)
- [Left](#)
- [Palm rest](#)
- [Front](#)
- [Bottom](#)
- [Back](#)
- [System board layout](#)
- [Keyboard shortcuts](#)
- [Battery charge and status LED](#)

## Right

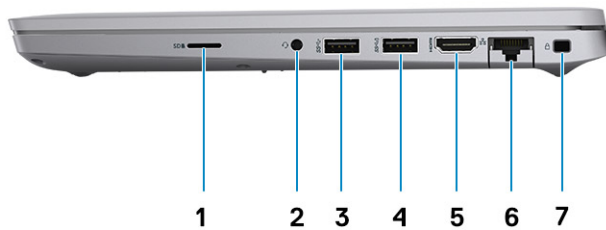


1. microSD-card slot
2. Universal audio port
3. USB 3.2 Gen 1 port
4. USB 3.2 Gen 1 port with PowerShare
5. HDMI 2.0 port
6. RJ45 Ethernet port
7. Wedge-shaped lock slot

# Left

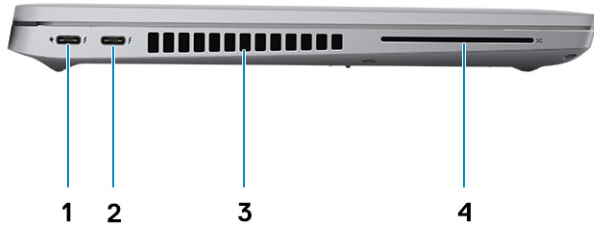

- 1. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
- 2. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
- 3. Air vents
- 4. Smart card reader slot (optional)


# Palm rest

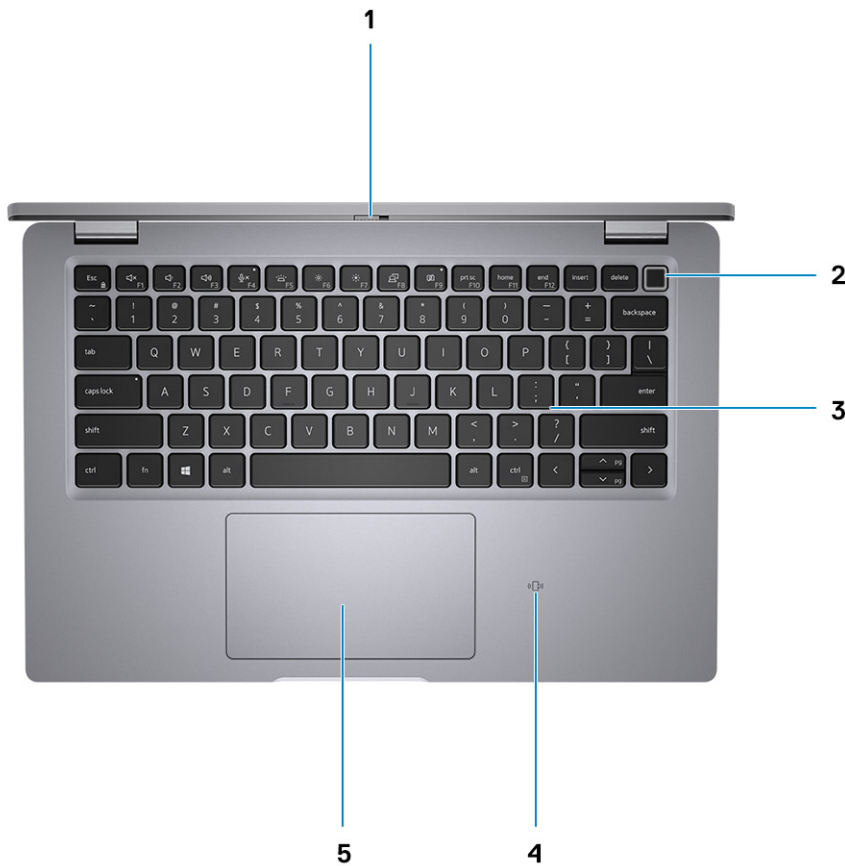

1. Privacy shutter
3. Keyboard
5. Clickpad

2. Power button (with optional fingerprint reader)
4. NFC/Contactless smart card reader—(optional)

## Front

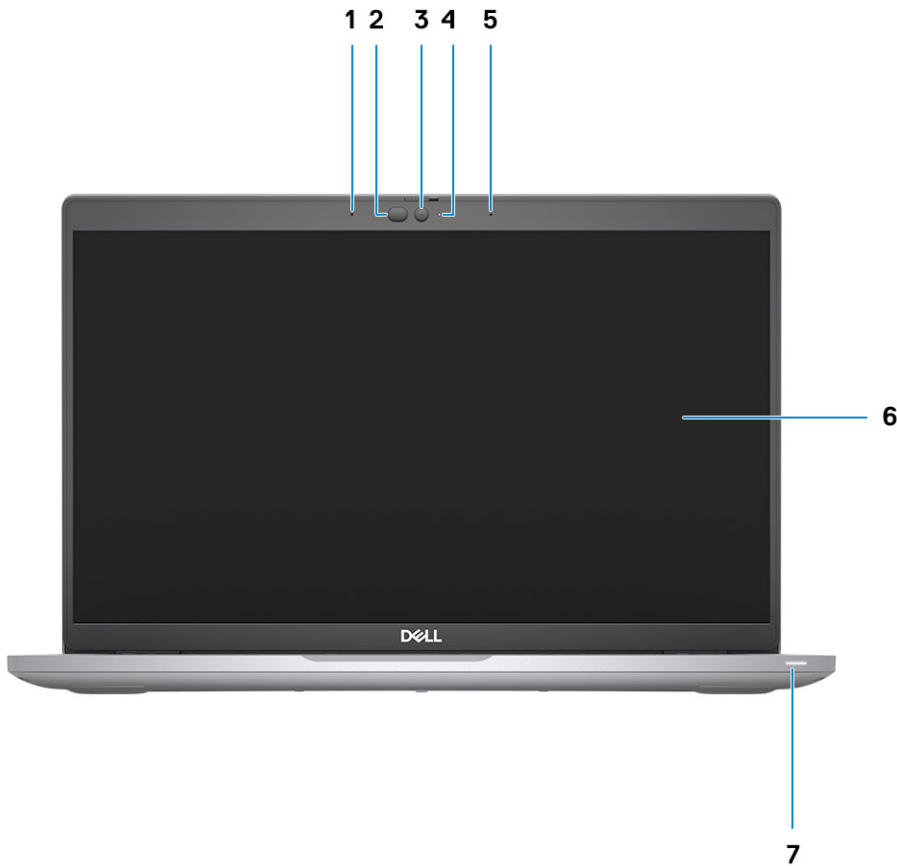


1. Dual-array microphones
3. Camera (FHD RGB IR/HD RGB IR/HD RGB)
5. Dual-array microphones
7. Battery diagnostic LED

2. IR emitter/Ambient Light Sensor (ALS)—(optional)
4. Camera status LED
6. Display panel



# Bottom

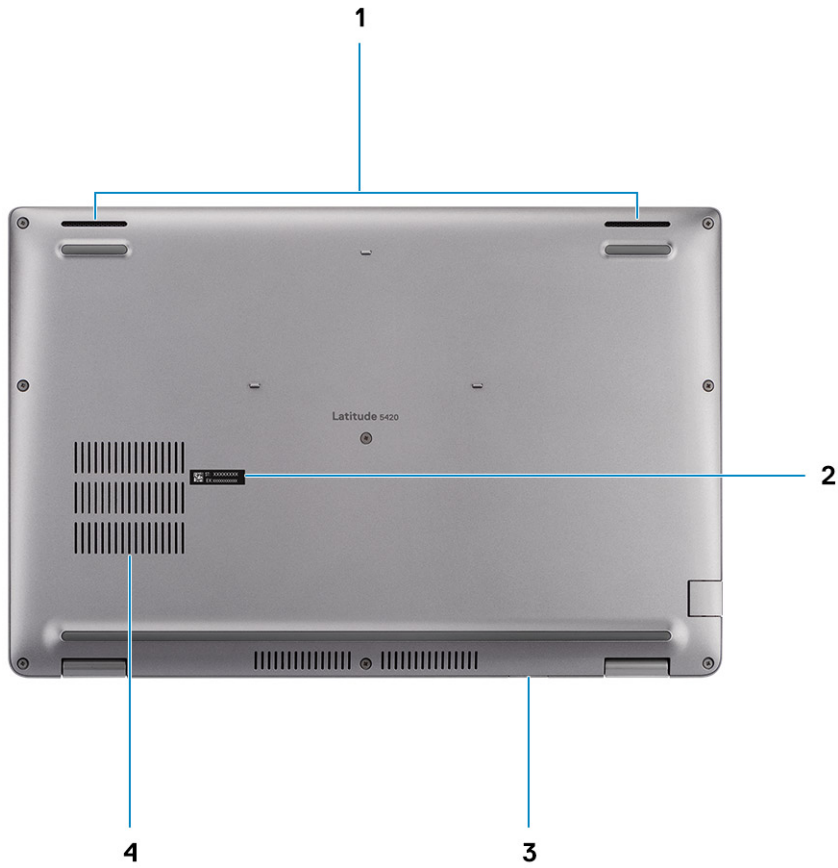


- 1. Speakers
- 2. Service tag label
- 3. MicroSim-card slot (optional)
- 4. Air vent

# Back



- 1. SIM card tray

# System board layout

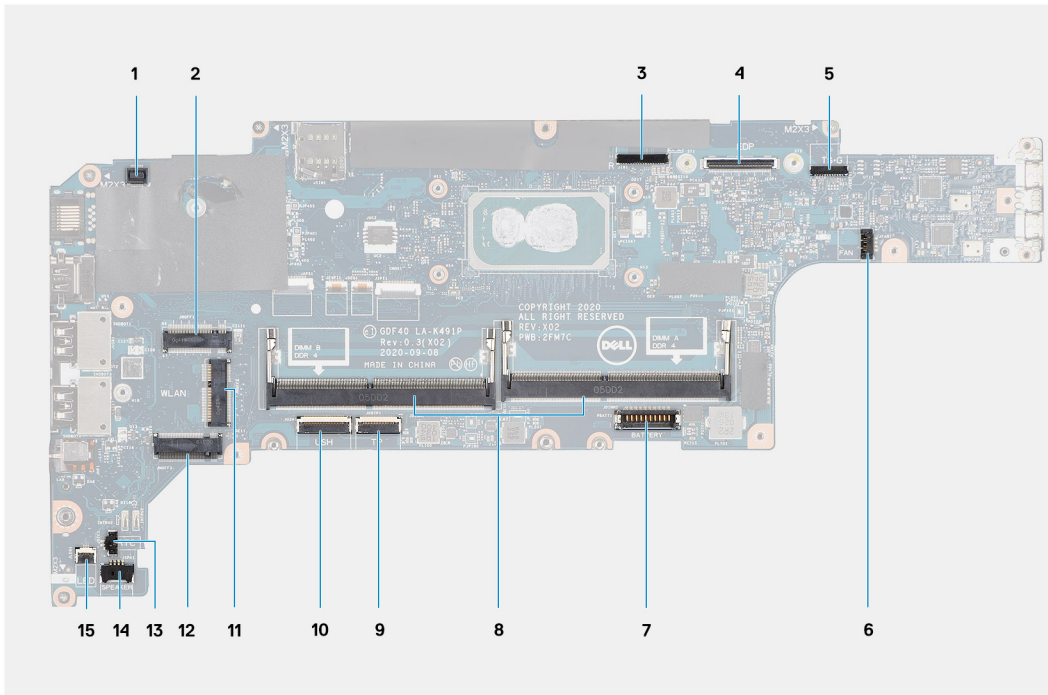

1. Fingerprint reader connector
2. WWAN connector
3. Camera/IR cable connector
4. eDP/display cable connector
5. Touch and sensor cable connector
6. System fan connector
7. Battery cable connector
8. Memory modules
9. Clickpad cable connector
10. USH board connector
11. WLAN connector
12. Solid-state drive slot
13. Coin-cell battery cable connector
14. Speaker cable connector
15. Battery LED cable connector


## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

**Table 2. List of keyboard shortcuts**

Keys	Primary Behavior	Secondary Behavior (Fn + Key)
Fn + Esc	Escape	Toggle Fn-key lock
Fn + F1	Mute audio	F1 behavior
Fn + F2	Decrease volume	F2 behavior
Fn + F3	Increase volume	F3 behavior

**Table 2. List of keyboard shortcuts (continued)**

Keys	Primary Behavior	Secondary Behavior (Fn + Key)
Fn + F4	Mic Mute	F4 behavior
Fn + F5	Keyboard backlight  <b>NOTE:</b> Not applicable for non-backlight keyboard.	F5 behavior
Fn + F6	Decrease screen brightness	F6 behavior
Fn + F7	Increase screen brightness	F7 behavior
Fn + F8	Switch to external display	F8 behavior
Fn + F9	Disable camera	F9 behavior
Fn + F10	Print Screen	F10 behavior
Fn + F11	Home	F11 behavior
Fn + F12	End	F12 behavior
Fn + Left Arrow	Left Arrow	Home
Fn + Right Arrow	Right Arrow	End
Fn + Right Ctrl	Emulates right click	--
Fn + P	SafeScreen (e-Privacy)	--

## Battery charge and status LED

**Table 3. Battery charge and status LED Indicator**

Power Source	LED Behavior	computer Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - Computer is turned on.
- S4 (Hibernate) - The computer consumes the least power compared to all other sleep states. The computer is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The computer is in a shutdown state.


# Specifications of Latitude 5420

## Topics:

- Dimensions and weight
- Processors
- Chipset
- Operating system
- Memory
- Ports and connectors
- Communications
- Audio
- Storage
- Media-card reader
- Keyboard
- Camera
- Clickpad
- Power adapter
- Battery
- Display
- Fingerprint reader (optional)
- Video
- Multiple display support matrix
- Hardware security
- Operating and storage environment
- Sensor and control

## Dimensions and weight

**Table 4. Dimensions and weight**

Description	Values
Height:	
Front	0.76 in. (19.30 mm)
Rear	0.82 in. (20.90 mm)
Width	12.65 in. (321.35 mm)
Depth	8.35 in. (212.00 mm)
Weight (maximum)	3.03 lb (1.37 kg)
	 <b>NOTE:</b> The weight of your computer depends on the configuration ordered and the manufacturing variability.

# Processors

**NOTE:** Processor numbers are not a measure of performance. Processor availability subject to change and may vary by region/country.

**Table 5. Processors**

Processors	Wattage	Core count	Thread count	Speed	Cache	Integrated graphics
10 <sup>th</sup> Generation Intel Core i5-10310U	15 W	4	8	1.70 GHz to 4.40 GHz	6 MB	Intel UHD Graphics
11 <sup>th</sup> Generation Intel Core i3-1125G4	17.50 W	4	8	2.00 GHz to 3.70 GHz	8 MB	Intel UHD Graphics
11 <sup>th</sup> Generation Intel Core i5-1135G7	17.50 W	4	8	2.40 GHz to 4.20 GHz	8 MB	Intel Iris X <sup>e</sup> Graphics
11 <sup>th</sup> Generation Intel Core i5-1145G7	17.50 W	4	8	2.60 GHz to 4.40 GHz	8 MB	Intel Iris X <sup>e</sup> Graphics
11 <sup>th</sup> Generation Intel Core i7-1165G7	17.50 W	4	8	2.80 GHz to 4.70 GHz	12 MB	Intel Iris X <sup>e</sup> Graphics
11 <sup>th</sup> Generation Intel Core i7-1185G7	17.50 W	4	8	3.00 GHz to 4.80 GHz	12 MB	Intel Iris X <sup>e</sup> Graphics

# Chipset

The following table lists the details of the chipset supported by your Latitude 5320.

**Table 6. Chipset**

Description	Values
Chipset	Intel PCH-LP
Processor	<ul style="list-style-type: none"> <li>10<sup>th</sup> Generation Intel Core i5 processors</li> <li>11<sup>th</sup> Generation Intel Core i3/i5/i7 processors</li> </ul>
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen 3

# Operating system

Your Latitude 5420 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Home National Academic, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Pro Education, 64-bit

- Windows 10 Enterprise, 64-bit
- Ubuntu 20.04 LTS, 64-bit

## Memory

The following table lists the memory specifications of your Latitude 5420:

**Table 7. Memory specifications**

Description	Values
Slots	Two SO-DIMM slots
Type	DDR4, Dual-channel
Speed	3200 MHz
Maximum memory	64 GB
Minimum memory	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB, 32 GB
Configurations supported	<ul style="list-style-type: none"> <li>• 4 GB, 1 x 4 GB, DDR4, 3200 MHz</li> <li>• 8 GB, 2 x 4 GB, DDR4, 3200 MHz</li> <li>• 8 GB, 1 x 8 GB, DDR4, 3200 MHz</li> <li>• 16 GB, 2 x 8 GB, DDR4, 3200 MHz</li> <li>• 16 GB, 1 x 16 GB, DDR4, 3200 MHz</li> <li>• 32 GB, 2 x 16 GB, DDR4, 3200 MHz</li> <li>• 64 GB, 2 x 32 GB, DDR4, 3200 MHz</li> </ul>

## Ports and connectors

**Table 8. External ports and connectors**

External:	
USB	<ul style="list-style-type: none"> <li>• One USB 3.2 Gen 1 port</li> <li>• One USB 3.2 Gen 1 port with PowerShare</li> <li>• Two Thunderbolt 4 ports with DisplayPort Alt Mode/USB4/Power Delivery</li> </ul>
Audio	One universal audio port
Video	One HDMI 2.0 port
Media card reader	One micro SD-card slot
Docking port	Supported through USB Type-C
Power adapter port	Type-C power input
Security	One wedge-shaped lock slot
Communication	<ul style="list-style-type: none"> <li>• RJ45 port</li> <li>• microSIM card (optional)</li> </ul>
Card slot	Smart card reader slot (optional)

**Table 9. Internal ports and connectors**

Internal:	
M.2	<ul style="list-style-type: none"> <li>• M.2 2230 slot for Wi-Fi and Bluetooth combo card</li> <li>• M.2 3042 for WWAN</li> <li>• Two M.2 2280/2230 slot for solid-state drive</li> </ul> <p><b>NOTE:</b> To learn more about the features of different types of M.2 cards, see the knowledge base article <a href="#">SLN301626</a>.</p>

## Communications

### Ethernet

**Table 10. Ethernet specifications**

Description	Values
Model number	<ul style="list-style-type: none"> <li>• Intel I219-LM</li> <li>• Intel I219-V</li> </ul>
Transfer rate	10/100/1000 Mbps

### Wireless module

**Table 11. Wireless module specifications**

Description	Option one	Option two	Option Three
Model number	Intel Wi-Fi 6 AX201	Intel Wi-Fi 6 AX210	MediaTek MT792
Transfer rate	Up to 2400 Mbps	Up to 2400 Mbps	Up to 1.2 Gbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> <li>• Wi-Fi 802.11a/b/g</li> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> <li>• Wi-Fi 6 (Wi-Fi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>• Wi-Fi 802.11a/b/g</li> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> <li>• Wi-Fi 6 (Wi-Fi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>• Wi-Fi 802.11ax</li> <li>• Wi-Fi 802.11ac</li> </ul>
Encryption	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>
Bluetooth	Bluetooth 5.1	Bluetooth 5.2	Bluetooth 5.2

### WWAN module

**Table 12. Wireless module specifications**

Description	Values
Model number	Intel XMM 7360 Global LTE-Advanced, CAT9
Transfer rate	Up to 450 Mbps DL/50 Mbps UL (Cat 9)

**Table 12. Wireless module specifications (continued)**

Description	Values
Frequency bands supported	(1,2,3,4,5,7,8,11,12,13,17,18,19,20,21,26,28,29,30,38,39,40,41,66), HSPA+ (1, 2, 4,5, 8)
Wireless standards	Not Applicable
Encryption	Not Applicable
Bluetooth	Not Applicable

**i** **NOTE:** For instructions on how to find your computer's IMEI (International Mobile Station Equipment Identity) number, see the knowledge base article [000143678](https://www.dell.com/support/000143678) at [www.dell.com/support](https://www.dell.com/support).

## Audio

**Table 13. Audio specifications**

Description	Values	
Controller	REALTEK ALC3204	
Stereo conversion	Supported	
Internal interface	High definition audio interface	
External interface	Universal audio port	
Speakers	Two	
Internal speaker amplifier	Supported (audio codec integrated)	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average	2 W
	Peak	2.5 W
Subwoofer output	Not supported	
Microphone	Dual-array microphones	

## Storage

Your computer supports one of the following configurations:

- One M.2 2230, Gen 3 PCIe x4 NVMe, Class 35 SSD (slot 1)
- One M.2 2280, Gen 3 PCIe x4 NVMe, Class 40 SSD (slot 1)
- One M.2 2280, Gen 3 PCIe x4 NVMe, Class 40 SSD, Self-encrypting drive (slot 1)

The primary drive of your computer varies with the storage configuration.

**Table 14. Storage specifications**

Form factor	Interface type	Capacity
M.2 2230, Class 35 solid-state drive	Gen 3 PCIe x4 NVMe	Up to 512 GB



**Table 14. Storage specifications (continued)**

Form factor	Interface type	Capacity
M.2 2280, Class 40 solid-state drive	Gen 3 PCIe x4 NVMe	Up to 1 TB
M.2 2280, Class 40 solid-state drive	Gen 4 PCIe x4 NVMe	Up to 2 TB
M.2 2280, Class 40 solid-state drive, Self-encrypting drive	Gen 3 PCIe x4 NVMe	Up to 512

## Media-card reader

**Table 15. Media-card reader specifications**

Description	Values
Type	One microSD-card
Cards supported	<ul style="list-style-type: none"> <li>• Micro Secure Digital (mSD)</li> <li>• Micro Secure Digital High Capacity (mSDHC)</li> <li>• Micro Secure Digital Extended Capacity (mSDXC)</li> </ul>

## Keyboard

**Table 16. Keyboard specifications**

Description	Values
Type	<ul style="list-style-type: none"> <li>• Extended single-point non-backlit keyboard</li> <li>• Extended single-point backlit keyboard</li> </ul>
Layout	QWERTY
Number of keys	<ul style="list-style-type: none"> <li>• United States and Canada: 79 keys</li> <li>• United Kingdom: 80 keys</li> <li>• Japan: 83 keys</li> </ul>
Size	<p>X=18.05 mm key pitch</p> <p>Y=18.05 mm key pitch</p>
Shortcut keys	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) by changing the <b>Function Key Behavior</b> in system setup program. <a href="#">Keyboard shortcuts</a></p>

# Camera

The following table lists the camera specifications of your Latitude 5420.

**Table 17. Camera specifications**

Description		Option one	Option two	Option three
Number of cameras		One	One	One
Camera type		Integrated 6 mm HD RGB Webcam	Integrated 6 mm HD RGB + IR Webcam	Integrated 6 mm FHD RGB + IR Webcam with proximity sensor and ALS (Optional)
Camera location		Front camera	Front camera	Front camera
Camera sensor type		CMOS sensor technology	CMOS sensor technology	CMOS sensor technology
Camera resolution:				
	Still image	0.92 megapixels	0.92 megapixels	0.92 megapixels
	Video	1280 x 720 (HD) at 30 fps	1280 x 720 (HD) at 30 fps	1920 x 1080 (FHD) at 30 fps
Infrared camera resolution:				
	Still image	NA	0.23	0.23
	Video	NA	640 x 360	640 x 360
Diagonal viewing angle:				
	Camera	78.60 degrees	87 degrees	87.60 degrees
	Infrared camera	NA	87 degrees	87.60 degrees

# Clickpad

The following table lists the clickpad specifications of your Precision 3560.

**Table 18. Clickpad specifications**

Description		Values
Clickpad resolution		>=300 dpi
Clickpad dimensions:		
	Horizontal	115 mm (4.53 inch)
	Vertical	67 mm (2.64 inch)

# Power adapter

**Table 19. Power adapter specifications**

Description	Values	
Type	65 W	90 W

**Table 19. Power adapter specifications (continued)**

Description		Values	
Diameter (connector)		USB-C	USB-C
Input voltage		100 VAC x 240 VAC	100 VAC x 240 VAC
Input frequency		50 Hz to 60 Hz	50 Hz to 60 Hz
Input current (maximum)		1.7 A	1.5 A
Output current (continuous)		<ul style="list-style-type: none"> <li>• 20 V/3.25 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9.0 V/3 A (Continuous)</li> <li>• 5.0 V/3 A (Continuous)</li> </ul>	<ul style="list-style-type: none"> <li>• 20 V/4.5 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9.0 V/3 A (Continuous)</li> <li>• 5.0 V/3 A (Continuous)</li> </ul>
Rated output voltage		20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:			
	Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

## Battery

The following table lists the battery specifications of your Latitude 5420.

**Table 20. Battery specifications**

Description		Values			
Battery type		3-cell lithium-ion 42 WHr, ExpressCharge Boost	4-cell lithium-ion 63 WHr, ExpressCharge Boost	3-cell lithium-ion 42 WHr LCL	4-cell lithium-ion 63 WHr LCL
Battery voltage		11.40 VDC	15.20 VDC	11.40 VDC	15.20 VDC
Battery weight (maximum)		0.18 kg ( 0.40 lb)	0.25 kg ( 0.55 lb)	0.18 kg ( 0.40 lb)	0.25 kg ( 0.55 lb)
Battery dimensions:					
	Height	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)
	Width	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)	95.90 mm (3.78 in.)
	Depth	207.90 mm (8.19 in.)	238.00 mm (9.37 in.)	207.90 mm (8.19 in.)	238.00 mm (9.37 in.)
Temperature range:					
	Operating	<ul style="list-style-type: none"> <li>• Charge: 0 °C to 50 °C (32 °F to 122 °F)</li> <li>• Discharge: 0 °C to 70 °C (32 °F to 158 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Charge: 0 °C to 50 °C (32 °F to 122 °F)</li> <li>• Discharge: 0 °C to 70 °C (32 °F to 158 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Charge: 0 °C to 50 °C (32 °F to 122 °F)</li> <li>• Discharge: 0 °C to 70 °C (32 °F to 158 °F)</li> </ul>	<ul style="list-style-type: none"> <li>• Charge: 0 °C to 50 °C (32 °F to 122 °F)</li> <li>• Discharge: 0 °C to 70 °C (32 °F to 158 °F)</li> </ul>
	Storage	-20 °C to 60 °C (4 °F to 140 °F)	-20 °C to 60 °C (4 °F to 140 °F)	-20 °C to 60 °C (4 °F to 140 °F)	-20 °C to 60 °C (4 °F to 140 °F)

**Table 20. Battery specifications (continued)**

Description	Values			
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)	From 0% up to 35% in 20 minutes (ExpressCharge Boost), 2 hr ( Express charge ), 3 hr (Standard charge) (when the computer is off) <b>i</b> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, on <a href="http://www.dell.com/">www.dell.com/</a>	From 0% up to 35% in 20 minutes (ExpressCharge Boost), 2 hr ( Express charge ), 3 hr (Standard charge) (when the computer is off) <b>i</b> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, on <a href="http://www.dell.com/">www.dell.com/</a>	2 hr ( Express charge ), 3 hr (Standard charge) (when the computer is off). <b>i</b> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, on <a href="http://www.dell.com/">www.dell.com/</a>	2 hr ( Express charge ), 3 hr (Standard charge) (when the computer is off). <b>i</b> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, on <a href="http://www.dell.com/">www.dell.com/</a>
Life span (approximate)	1 year	1 year	3 years	3 years
Coin-cell battery	CR-2032	CR-2032	CR-2032	CR-2032

## Display

The following table lists the display specifications of your Latitude 5420.

**Table 21. Display specifications**

Description	Option one	Option two	Option three	Option four	Option five
Display type	High Definition (HD)	Full High Definition (FHD)	Full High Definition (FHD)	Full High Definition (FHD)	Full High Definition (FHD)
Display-panel technology	Twisted Nematic (TN)	Wide Viewing Angle (WVA)	Wide Viewing Angle (WVA), Low Blue Light (LBL)	Wide Viewing Angle (WVA)	Wide viewing angle (WVA)
Display-panel dimensions (active area):					
Height	173.95 mm	173.95 mm	173.95 mm	173.95 mm	173.95 mm
Width	309.4 mm	309.4 mm	309.4 mm	309.4 mm	309.4 mm
Diagonal	355.6 mm	355.6 mm	355.6 mm	355.6 mm	355.6 mm
Display-panel native resolution	1366 x 768	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080

**Table 21. Display specifications (continued)**

Description	Option one	Option two	Option three	Option four	Option five
Luminance (typical)	220 nits	250 nits	400 nits	300 nits	300 nits
Megapixels	1.049	2.07	2.07	2.07	2.07
Color gamut	NTSC 45%	NTSC 45%	sRGB 100%	NTSC 72%	sRGB 100% typ
Pixels Per Inch (PPI)	112	157	157	157	157
Contrast ratio (typ)	300:1	600:1	1000:1	600:1	600:1
Response time (max)	25 ms	35 ms	35 ms	35 ms	35 ms
Refresh rate	60 Hz	60 Hz	60 Hz	60 Hz	60 Hz
Horizontal view angle	40 +/-degrees	80 +/-degrees	80 +/-degrees	80 +/-degrees	80 +/- degrees
Vertical view angle	<ul style="list-style-type: none"> <li>Top: 10 +/-degrees</li> <li>Bottom: 30 +/-degrees</li> </ul>	80 +/-degrees	80 +/-degrees	80 +/-degrees	80 +/- degrees
Pixel pitch	0.2265 mm x 0.2265 mm	0.161 mm x 0.161 mm	0.161 mm x 0.161 mm	0.161 mm x 0.161 mm	0.161 mm x 0.161 mm
Power consumption (maximum)	2.4 W	3.2 W	2.5 W	4.51W	3.5 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare	Anti-glare	Anti-glare
Touch options	No	No	No	Yes	Yes

## Fingerprint reader (optional)

**Table 22. Fingerprint reader specifications**

Description	Power button option	FIPS option
Sensor technology	Capacitive	Capacitive
Sensor resolution	500 dpi	508 dpi
Sensor pixel size, X	108	256
Sensor pixel size, Y	88	360

# Video

**Table 23. Integrated graphics specifications**

Integrated graphics			
Controller	External display support	Memory size	Processor
Intel Iris X <sup>e</sup> Graphics	HDMI 2.0, DisplayPort over USB Type-C	Shared system memory	11 <sup>th</sup> Generation Intel Core i5/i7 Processors <i>i</i> <b>NOTE:</b> System with single-channel memory is shown as <b>Intel UHD Graphics</b> in Intel Graphics Command Center (IGCC).
Intel UHD Graphics	HDMI 2.0, DisplayPort over USB Type-C	Shared system memory	11 <sup>th</sup> Generation Intel Core i3 Processors
Intel UHD Graphics	HDMI 1.4, DisplayPort over USB Type-C	Shared system memory	10 <sup>th</sup> Generation Intel Core i5/i7 Processors

## Multiple display support matrix

The following table lists the multiple display support matrix of your Latitude 5420.

**Table 24. Multiple display support matrix for 11th Generation Intel Core**

Graphics Card	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Integrated GPU	Up to 3	Up to 4

**Table 25. Multiple display support matrix for 10th Generation Intel Core**

Graphics Card	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Integrated GPU	Up to 2	Up to 3

## Hardware security

The following table lists the hardware security options supported by your .

**Table 26. Hardware security**

Hardware security options
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
TCG (Trusted Computing Group) Certification for TPM
Fingerprint reader in power button tied to ControlVault 3

**Table 26. Hardware security (continued)**


Hardware security options
ControlVault 3 Advanced Authentication with FIPS 140-2 Level 3 Certification
Contacted Smart Card and ControlVault 3
Contactless Smart Card, NFC, and ControlVault 3
SED SSD NVMe, SSD and HDD (Opal and non-Opal) per SDL
FIPS 201 Full Scan FPR and ControlVault 3

## Operating and storage environment

This table lists the operating and storage specifications of your Latitude 5420.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

**Table 27. Computer environment**

Description	Operating	Storage
Temperature range	0°C to 40°C (32°F to 104°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	140 G†	160 G†
Altitude range	-15.2 m to 3048 m (-50 ft to 10000 ft)	-15.2 m to 10668 m (-50 ft to 35000 ft)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>		

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.


## Sensor and control

The following table lists the location of the sensor and control available in your .

**Table 28. Sensor and control**

Sensor support	
Sensor	Ambient Light Sensor on the hinge-up (optional)
	P-sensor on the hinge-up (optional)
	Accelerometer (G sensor): One on the base (system board) and another on the hinge-up (optional)

## Dell low blue light display

 **WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.**

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.




# Getting help and contacting Dell

## Self-help resources


You can get information and help on Dell products and services using these self-help resources:


**Table 29. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a> <a href="http://www.dell.com/support/linux">www.dell.com/support/linux</a>
Troubleshooting information, user manuals, setup instructions, product specifications, technical help blogs, drivers, software updates, and so on.	<a href="http://www.dell.com/support">www.dell.com/support</a>
Dell knowledge base articles for a variety of computer concerns.	<ol style="list-style-type: none"> <li>1. Go to <a href="https://www.dell.com/support/home/?app=knowledgebase">https://www.dell.com/support/home/?app=knowledgebase</a>.</li> <li>2. Type the subject or keyword in the <b>Search</b> box.</li> <li>3. Click <b>Search</b> to retrieve the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

 **NOTE:** Availability varies by country and product, and some services may not be available in your country.

 **NOTE:** If you do not have an active internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.