

manual

BT-office headset

Item no: 94612




LINOCELL®

Contents:

Headset
USB charging cable
Manual

Overview

Bluetooth headset for phone calls and internet conversations.

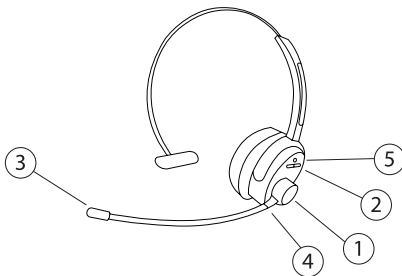

1. Multifunctional button
2. Volume up / volume down
3. Microphone
4. Charging port
5. LED-indicator

Using the Linocell Bluetooth Headset

Charging the battery:

Linocell Bluetooth Headset comes with a built-in chargeable battery to be charged with the included USB cable. Insert the USB cable in a free USB port on a computer or use a USB phone charger (5V, 500 mA). The battery is fully charged after approximately three hours and can be charged even if the headset is turned on.

Do not interrupt the charging during the first few times - it can hurt the battery's lifetime. When the battery has about 20% charge left the LED indicator will flash red and a tone will warn you before the headset shuts down.

Turning the headset on and off:

Press and hold the multifunctional button for about three seconds until the LED indicator flashes blue to turn the headset on.

Press and hold the multifunctional button for about three seconds until you hear a tone and the LED indicator flashes red to turn the headset off.

Pairing the headset with Bluetooth devices:

Press and hold the multifunctional button while the headset is turned off. After about five seconds the LED indicator will flash in red and blue and the headset is ready for pairing. Enable Bluetooth in your device, for example a smartphone. Search for nearby units and choose "Office HS" in the list. If asked for a password, enter "0000".

The headset is now paired with the device and will remember it so that you only have to turn the headset on to connect next time. You can now make and accept calls.

A USB Bluetooth device is normally required if the headset is to be connected to a computer. The device manual will tell you how to pair, connect and enable Bluetooth sound in your computer.

Call features:

Answer calls

Press the multifunctional button once to answer an incoming call.

End calls

Press the multifunctional button once during an ongoing call to end the call.

Deny call

Press and hold the multifunctional button for about two seconds to deny an incoming call.

Change volume

Use the volume buttons to change the sound level during a conversation.

Voice call

Press the multifunctional button once. A tone is heard and you can now call a contact by voice call. Speak into the microphone and clearly say the name of the contact you want to call. Note that not all phones support voice calls.

Redial

Press and hold the multifunctional button for about a second. A tone is heard and you can release the button. The last number called will now be called again.

Divert a call to the phone

Press and hold the multifunctional button for two seconds during a call to divert the call from the headset to the phone.

Specifications:

Bluetooth version:	3.0
Maximum range:	10 m
Charging time:	3 h
Call time:	8 h
Standby:	275 h
Size:	155 x 140 x 50 mm
Weight:	42 g

