

BTRUSH

MESH & BLUETOOTH CONFERENCE SYSTEM



HIGH DEFINITION SOUND BY 



Index

Main features	2
Technical specifications of Midland BT Rush	2
Charging batteries	2
Unit and fixing system description	3
BT Rush description	3
Fixing the RCF HiFi stereo speakers	3
Fixing the microphone	3
Speakers.....	4
RCF cushion	5
Microphones	5
Lock/unlock	5
Using your Midland BT Rush	6
Switching the unit on.....	6
Switching the unit off	6
Operative “mode”	6
Volume	6
BT Rush group communication mode.....	7
Midland BT Rush ID number Setup Mode	7
How to open the Mesh communication	7
How to close the Mesh communication	7
BT Rush Guest	8
Create a “secure” Mesh communication with Dynamic Repeat	8
Bluetooth Intercom compatibility.....	9
Bridge function: Bluetooth Intercom and Mesh together.....	10

Bluetooth Intercom maximum distance	10
Universal Intercom with different brand units.....	10
Pairing the Midland BT Rush to phone and GPS navigator/TFT Dashboard.....	11
Background feature	11
Pairing with one or two phones.....	11
How to pair the Midland BT Rush to a Phone.....	11
How to use a Phone	12
Using the MP3 player feature of the Smart phone.....	13
Music Share.....	13
GPS Navigator	14
How to listen to the FM Radio.....	14
Setup and special configurations	15
Resetting all paired devices.....	15
Back to factory setting.....	15
Adjusting/ Disabling the VOX feature (Intercom and telephone)	16
Setup and Firmware update	16
Use at your own risk	16
Warranty	16
European CE Notice Certification and Safety Approval Information.....	16

BT Rush

Dual core Mesh and Bluetooth intercom system

*BT Rush is Motorbike intercom system solution with Dual Core communication system: Mesh group communication with real background stereo audio and Bluetooth Intercom communication for Bluetooth solution and Downward compatibility with other device in the market. The design is very slim and aerodynamic, all the main functions are easy to operate thanks to the three big buttons placed on the front of the unit. Midland **BT Rush** uses the new "MAGic Lock" magnetic fixing system with adhesive plate or clip mounting clamp.*

Main features

- › There is no need to perform a pairing procedure to start a Mesh communication, you only need to be sure that each unit has a different ID number. All the main configuration can be done using the BTPro Set APP for iOS and Android.
- › Mesh Conference mode, for group communication up to 10 people talking in full duplex and 99 people or more listening. Max distance up to 1.4Km (the riders must be always in sight).
- › Mesh Dynamic Repeat mode for group communication up to 6 people talking in full duplex and 99 or more people listening. Max distance: up to 3.5Km (the riders must be always in sight).
- › Unlimited Guest users only listening in the Mesh group.
- › Bluetooth Intercom communication system for downward compatibility.
- › "Bridge" function, to have the Mesh communication together with the Bluetooth Intercom.
- › When the "Bridge" is on, the Bluetooth Intercom is limited to Driver and Passenger communication
- › Mesh communication is simply open pressing the Control (CTRL) button on your device. Every user must open the Mesh communication on each own unit
- › Bluetooth communication can be opened either with VOX or pressing Upward or Downward button (depending on which button the pairing has been done).
- › It is possible to pair two Bluetooth devices on **Vol+** and **Vol-**. For example two phones or one phone and one GPS.
- › The pairing on **Vol+** supports mono and stereo (A2DP) audio protocol and is best indicated for the phone or motorbike dash board system. The pairing on **Vol-** supports only mono protocol (HFP) and is indicated for the GPS.

- › Firmware update via USB type C connection to PC and Mac
- › All the main configuration of the unit is done using the app "BTSetAPP" for iOS and Android.

Midland BT Rush is available in two versions:

- › Single Midland **BT Rush** Intercom kit with one unit only
- › Twin Midland **BT Rush** Intercom kit with with two units

The units included in the TWIN kit are already set for Mesh communication therefore can be immediately used in Intercom.

Technical specifications of Midland BT Rush

General:

- › Bluetooth ver. 4.2/5.0 Stereo (Handsfree/A2DP/AVRCP protocol)
- › Frequency 2.4GHz - Max power 100 mW
- › Dual core for real Stereo Background over Mesh communication
- › AGC to automatically control the volume in relation to background noise
- › Voice (VOX) or manual communications activation on Bluetooth Intercom
- › FM Radio with RDS
- › Lithium battery with 20 hours talk time in Bluetooth intercom and 15 hours in Mesh mode
- › Recharge time: app. 2 hours
- › Recharging and updating through USB type C port
- › Fully waterproof

Charging batteries

Attention: Make sure that the unit is fully charged before use. Allow at least 3 hours for a full charge before using the unit for the first time.

Charge the unit by inserting the USB charger cable into the charging socket (lift the rubber cover to insert the plug). The **Red** LED on the unit will start flashing when charging begins.

Allow the headset to charge until the unit stops flashing and the **Blue** LED turns on. When the charge is complete (the Blu LED is on), release the headset from the charger. Normally, after the first time, it takes 2 hours for a full charge.


Attention: Midland BT Rush is designed to withstand rain and water. However, if it is raining, always verify that the rubber cap protecting the recharging sockets is fully fitted.

Attention: every time the USB type C recharging plug is inserted, the device is automatically turned off. To use it while it is in charge, you should turn the device on with the plug already inserted.


Unit and fixing system description

BT Rush description

The **BT Rush** has 3 multi functions buttons on the front of the unit: **Control (CTRL)**, **Upward (Up)** and **Downward (Down)**. In addition 2 more buttons on the top of the unit: **Volume + (Vol+)** and **Volume - (Vol-)**.

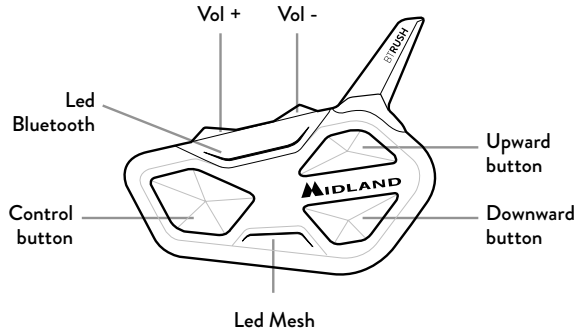


On the bottom of the unit you can find the **Charger jack** that enables to recharge the unit using a standard USB type C.



Description of the audio kit

The audio system includes two RCF 40 mm speakers and two interchangeable microphones, which are both supplied with a bracket and wired connection. The mini connector on the microphone allows you to choose the microphone that best suits the helmet you are using.

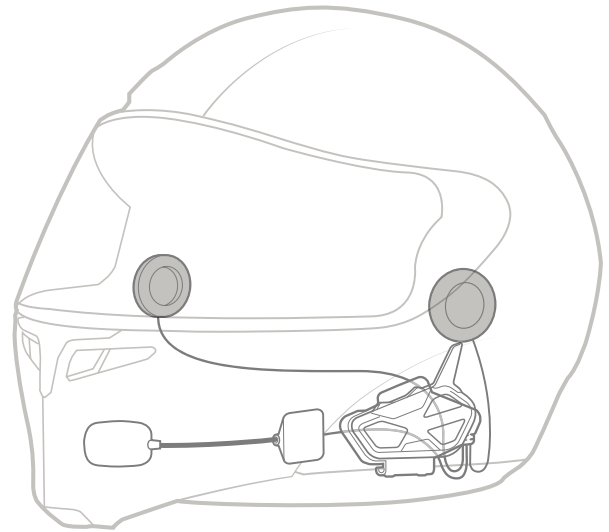

Fixing the RCF HiFi stereo speakers

The two stereo speakers have a Velcro/adhesive strip that aids their fixing into your helmet. Beware not to keep the volume too high, you must always be able to listen to the traffic sound.

Fixing the microphone

Boom Microphone

Place the section with the Velcro/adhesive strip between the padding and the rigid cover of the helmet, so that the microphone is correctly positioned in front of your mouth and that the white symbol is facing your mouth. This type of microphone is suited for Open Faced and Flip Front helmets.

Wired microphone


Using the Velcro/adhesive strip, place the microphone inside the helmet in front of your mouth. This type of microphone is more suited for Full Faced helmets. The mini connector on the microphone allows you choose the microphone that best suits the helmet you are using.

Description of the MAGNETIC mounting kit

The Midland **BT Rush** can be fixed onto the helmet, installing the Magnetic mounting kit in two different ways: By either using the plate with Adhesive strip, or the Clip Clamp. These methods allow you to safely “fix” the **BT Rush** unit onto your helmet and to remove it at any time in order to recharge or store it.


Plate with Adhesive strip

The Adhesive plate is already assembled on the Magnetic mounting kit. Clean the application area on the left side of the helmet surface, fold the two little wings to better stick to the curved surface of the helmet, remove the bi-adhesive film and place the fixing plate on the helmet by keeping it contact with the surface for 10 seconds.




How to change the mounting kit system.

Remove the Adhesive plate from the Magnetic mount by pressing the two levers (with a small tool) and slide it out upward.



Clip Clamp

Place the clip clamp on the back of the Magnetic mount, insert the 4 fixing point in the appropriate holes and slide downward.

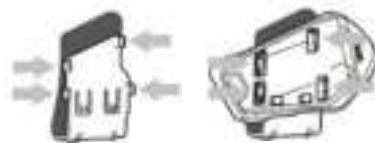


Insert the Clip Clamp between the helmet and the inner padding on the left side of the helmet.



Speakers

The speakers' positioning is the most important point of the installation procedure.


Attention: for the best sound clarity it is very important to place the speakers in correspondance with the centre of your ears and as close as possible (the speakers must almost touch your ears). In case of need, use the supplied spacers to better fit the speakers closer to your ears. The recesses of the speakers designed into the helmets are not always placed in the best location for you. Please be sure to fix speakers properly.

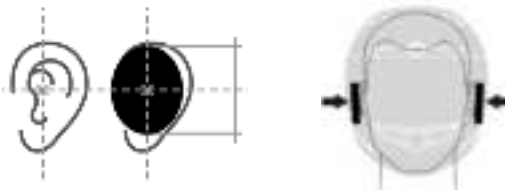

RCF cushion

To improve the sound experience, you can use the RCF cushions supplied in the package. They can be installed or removed afterwards.


Attention: although the RCF cushions have been designed to guarantee a high-level comfort, please verify that there's enough space into your helmet and that they can fit well.

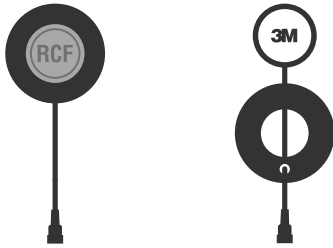

Microphones

Wired microphone for full face helmets: place the microphone in front of your mouth.


Boom microphone for modular/jet helmets: fix the mike on the left side and keep the sponge as closely as possible to your mouth (white symbol in front of your mouth).

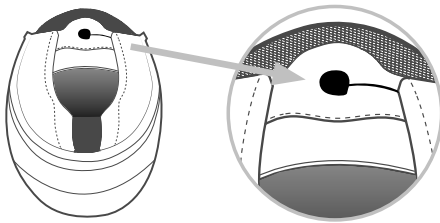

Lock/unlock


To fix MIDLAND BT RUSH to the MAGic LOCK mount:

Insert at first the rear side of BT RUSH into the mount by tilting the unit of 45° and then bring nearer the fore side: the strong magnet will lock safely BT Rush.



To unlock MIDLAND BT RUSH:

press the bottom on the bottom side of the clip (A) and pull out the device.



Using your Midland BT Rush

Switching the unit on

Press and hold **Control** button for approximately 3 seconds until the **Blue** indicator lights. You will hear a beep sound of the speakers.

Switching the unit off

Press and hold both **Control** and **Downward** buttons together for approximately 3 seconds until the **Red** indicator flashes 3 times, thus lessening the chances that you might turn off the unit accidentally (especially if you are wearing gloves).

Operative “mode”

The **BT Rush** can operate in three main “modes”: Intercom, Phone and FM Radio.

The 3 multi function buttons can have different functionality depending on which mode the unit is at that moment.

- › In “**Intercom mode**” the three buttons let you manage the Mesh and Bluetooth Intercom communications between driver and passenger or bike to bike.
- › In “**Phone mode**” you can manage your Bluetooth mobile phone to place/answer a phone call or to listen to the music. The Phone mode is available only if it was previously paired to a phone.
- › In “**FM Radio mode**” you can listen to your favourite radio station in stereo, seek for a specific radio station and save it (6 memories are available).

You can switch (toggle) from one mode to the other simply pressing the

Control button for 3 seconds. A voice announcement will tell in which mode you are on.

The toggle sequence is the following:

- › **Intercom mode**
- › **FM Radio**
- › **Phone mode (if a phone has been paired)**

Every time you turn on the unit, the default mode is the latest used.

*If you need to know in which mode the unit currently is, just short press the **Vol+** and **Vol-** button together. A voice announcement will tell you the current mode.*

Volume

Adjusting the volume

The volume setting is independent for each audio source: intercom, stereo music, phone call, FM radio.

It is possible to manually adjust the volume of each audio source by means of the **Vol+** and **Vol-** buttons while a single audio is active.

While riding the **BT Rush** uses AGC technology, to automatically adjust the listening volume in relation to background noises.

Set up of the AGC system

You can enable/disable or adjust the sensitivity (High-Medium-Low) of the AGC system using the smartphone “BT SET-APP” application. You can choose different sensitivity based on your motorbike type (naked, touring, sport). You can disable the AGC system also pressing **Vol+** and **Vol-** together for 3 sec on your unit.

Here is an example of the main functionality of the buttons based on which mode is active.


Mode	Upward	Control button	Downward
Mesh	Open/close the BT intercom to a rider	Open/close the Mesh group communication	Open/close BT intercom to a rider
Phone	Start Voice dial, accept or reject incoming call on “ Vol+ ”		Start Voice dial, accept or reject incoming call on “ Vol- ”
Phone (while music play)	Forward the song	Play/pause	Downward the song
FM Radio	Scan up	FM Radio On/off	Scan down

BT Rush group communication mode

BT Rush allows two different group communication modes: “Mesh Conference group” and “Mesh Dynamic Repeat group”.

Mesh Conference group


Allows the possibility to talk in 10 people at the same time with any **BT Rush** unit just out of the box. No special pairing is required. You can have 10 people talking at the same time and reach 1.4 Km diameter Mesh distance if you are in line of sight without obstructions and interferences (the riders must be always in sight).



Mesh Dynamic Repeat group

This is a special setting that allows the possibility to extend the distance range but only for 6 people talking at the same time. No special pairing is required.

You can have 6 people talking at the same time and reach 3.5 Km Mesh distance because each unit can relay to each other and extend the maximum distance.



Attention: the unit in Conference mode can not talk to the unit in Dynamic Repeat mode.

Midland BT Rush ID number Setup Mode

There is no need to perform a pairing procedure to start a Mesh communication, you only need to be sure that each unit has a different ID number.

Follow this simple procedure:

1. Turn on the unit.
2. Be sure to be in **Intercom mode**
3. Press shortly together **Vol+** and **Vol-** buttons (the LED light will flash in **Green** color).
4. You will hear a voice telling you “Mesh” and your ID number.

5. Now you have 5 sec to press **Vol+** or **Vol-** to change the number from 1 to 10 when you are in Conference mode or from 1 to 6 when you are in Dynamic Repeat mode.
6. Change each ID number and be sure that all users in the group have different ID number

Now you can start the Mesh communication.

How to open the Mesh communication

To use the Mesh feature, be sure that all units have a different ID number and you are in **Intercom mode**, then you need to press shortly the **Control** button and you will hear the voice “Mesh on”. Now you can talk with all other units in range that have the Mesh active as well.

- When the Mesh is active in “Conference” mode the LED light will toggle between **Green** and **Blue**
- When the Mesh is active in “Dynamic Repeat” mode the LED light will toggle between **Green** and **Red**

How to close the Mesh communication

Be sure you are in **Intercom mode**, just press again the **Control** button and the mesh communication will be closed a voice will tell “Mesh disable”.

Attention: In order to communicate in Mesh mode, each user needs to open the Mesh on his own unit. If the Mesh communication is closed, it is not possible for the other users of the group to talk to you until you reopen it again.

Toggle between “Conference” group and “Dynamic Repeat” group

1. Be sure you are in Mesh mode
 2. Press **Upward** and **Control** buttons together
 3. The voice will tell you “Conference”
 4. Press again **Upward** and **Control** buttons together
 5. The voice will tell you “Dynamic Repeat”
- When the unit is in “Conference group”, the LED light will flash **Blue** and **Green** color.
 - When the unit is in “Dynamic Repeat group”, the LED light will flash **WHITE** color.
 - When you toggle from Conference mode to Dynamic Repeat mode, remember that only the unit with ID number from 1 to 6 can switch to the new mode.

Attention: If one unit is in Dynamic Repeat group and the other is in Conference group, they can not talk together. Be sure that both of them are in the same group mode. If you are not sure, just press together **Vol+ and **Vol-** buttons, and you will hear the voice “Conference group” or “Dynamic Repeat group” according to the current status mode.**

BT Rush Guest

In addition to the 10 people talking in a Mesh Conference group, or the 6 people talking in a Dynamic Repeat group, it is possible to add an unlimited number of **BT Rush** users only in listening mode (Guest user).

You can follow the same procedure explained in the “**BT Rush** ID number Setup” and instead of choosing one of the available numbers, you must choose “Mesh guest”. The voice “Mesh guest” is available either at the end or at the beginning of the number list.

Create a “secure” Mesh communication with Dynamic Repeat

If you want to be sure that nobody else will be able to enter your Mesh Dynamic Repeat group communication, you need to follow a specific pairing procedure to exchange a “secure key” to all units in the Dynamic Repeat group.

As first step you need to define one unit as “Master”. This is the unit that will generate the “key” and distribute it to all other users of the group.

It is not important which is the master unit, it can be any unit in the group. After the pairing procedure is done, all units will share the same “key”.

1. Turn off all units of the group.
2. Take the unit one by one and press and hold down the Control button about 7 sec., until the **Red** light is on permanently in all the units.
3. On the unit you choose as “Master” press for 6 seconds the **Control** button, the **Green** lights will flash SLOWLY.
4. Now take all the other units of the group, press for 3 seconds the **Control** button, the **Green** and **Blue** lights will flash FAST.
5. The Master unit and all other units in range (10m distance) will now exchange the “key”. When the procedure is finished, the user unit will exit the pairing mode and go back to **Red** light. If you have no other pairing to do (like phone or GPS) you can make a double click on the **Control** button to exit and go to working mode (**Blue** LED flashing).
6. The master unit will keep blinking **Green**, in case other units need to be paired.
7. If no more unit needs the pairing, just make a double click on **Control** button of the Master unit to exit the pairing procedure, the **Red** light will be on permanently. Make a double click again on the **Control** button to exit and go to working mode (**Blue** LED flashing).

When the pairing procedure is finished and the “Secure” group is created, there is no need of the “Master” unit anymore, so it can be part of the group or missing (turned off) and the Dynamic Repeat group can still work.

Only the units in the “Dynamic Repeat” mode that share the same “secure key” can talk together.

Other units “out of the box” can NOT be part of this “Secure” group anymore, unless you pair that unit with a “Master” unit as explained below.

How to add a new unit to an existing Dynamic Repeat secure Mesh group

If you have a new unit which needs to be part of an existing “Dynamic Repeat” secure group, just take one unit from the existing secure group (any unit is good), consider it as a “Master” unit and perform the same pairing procedure explained above only with the new unit. No need to make the pairing procedure again with all units in the group.

Attention: the “secure key” is not used (ignored) when you are in Conference mode.

Reset the “secure” key


If you want to delete the Secure key, for example because you have several units and you are not sure which key they have, you must perform a reset and clean up the secure key stored in the unit:

1. Turn off the unit
2. Press and hold down the Control button about 7 sec., until the **Red** light is on permanently.
3. Now press the **Upward** and **Downward** buttons together for 3 seconds, the **Green** lights will turn on steady and then go back to **Red** light.
4. Now the “Secure” key is deleted.
5. Make a double click on the **Control** button to exit and go to working mode (**Blue** LED flashing).
6. Now you are back to factory default and you don't have a “secure key” anymore. All units in Dynamic Repeat mode can now talk each other.

Bluetooth Intercom compatibility

The **BT Rush** is also compatible with Bluetooth Intercom devices.

One Midland **BT Rush** unit can be paired to maximum two other Midland BT units and one Universal Intercom (that means in total 4 units via Bluetooth including your self).

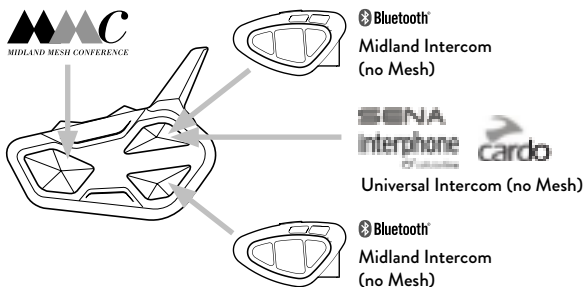

For example you have all Mesh groups active on the **Control** button and at the same time you can have your passenger paired via Bluetooth to the **Upward** or to the **Downward** button.

Depending on the setting of the “Bridge” function, you can decide if the Bluetooth Intercom is part of the Mesh communication or not. Please refer to the Bridge setting information in the following pages.

Pair the Midland BT Rush to another Midland BT via Bluetooth

To pair the Midland **BT Rush** to another Midland BT unit, you must first enter the **Setup Mode** mode:

1. Turn off the unit
2. On the **BT Rush** press and hold down the Control button about 7 sec.,

until the **Red** light is on permanently.

3. Now press one of the two buttons (**Upward** or **Downward**) for 3 seconds depending on which button you would like to use to open the intercom on the other units. The **Blue** and **Red** lights will flash.
4. On the other Midland BT unit repeat the same procedure using any button available depending on the model (BTPro/BTPro S/BT Rush)
5. When successfully paired, each unit will have the **Blue** light on for one second and then go back to the **Setup Mode** mode (**Red** light always on).
6. Now the unit is ready for another pairing procedure, and you can pair another Midland BT unit following the same procedure, but using a different button.

If you don't have more devices to be paired, you must exit the **Setup Mode** mode before you can use the units:

- › Double click on the **Control** button, the **Red** light will turn off and the **Blue** light will start flashing. You can use now your Midland unit

How to use the Bluetooth Intercom

To use the intercom feature, be sure that all units are turned on and correctly paired together.

Manual activation in Bluetooth Intercom communication

When in **Intercom mode** press the button corresponding to the unit you would like to communicate with (**Upward** and **Downward** buttons).

After some seconds the intercom communication will open. The communication remains active until you press again the same button. To quickly open the intercom to another person, just press the button corresponding to the other unit, the previous intercom will be automatically closed and the new connection will be open (see Table A).

Voice activation (VOX)

The VOX feature allows you to open the Intercom communication simply by saying something. You can use a simple word like “Intercom” or “Hello Midland” and when the voice will be detected, you will hear the announcement “VOX”.

A- Manual activation

Mode	Upward button	Control button	Downward button
Mesh	Short press: Open/Close Bluetooth intercom to paired rider	Short press: Open/Close Mesh communication to the group Long press: Change mode Double click: Play music	Short press: Open/Close Bluetooth intercom to paired rider

After some seconds the communication will be opened and will remain active for the time you are talking. If there is no conversation the intercom will be closed after 40 seconds. If needed you can close the intercom manually without waiting 40 seconds (just press the **Downward** button).

Attention: The Voice activation (VOX) can open the intercom communication only to the unit that was paired with the **Downward** button and only if the Mesh is not already open.

If needed, you can disable the VOX feature simply by pressing the **Downward** button for 7 sec. (when you are in Intercom or Phone mode). A voice announcement will advise you when the VOX is disabled. To turn the VOX on again, just press the same button and a voice announcement will advise you that the VOX is now active. This setting is saved also if you turn off the unit.

Hint: this feature is very useful when you have a Passenger that has a Midland Bluetooth intercom unit (not a BT Rush) and you like to talk to this person without pressing any button to open the communication.


Unit already busy in a conversation

If you try to open a Bluetooth intercom connection to another person that is already talking with someone else (or busy in a phone conversation), you will hear a “busy” double beep tone. Just wait sometime and try again, maybe this time the “line” is not busy.

Bridge function: Bluetooth Intercom and Mesh together

When you have a **BT Rush** unit connected, for example, to the Passenger unit via Bluetooth, the Mesh communication can not be opened together with the Bluetooth Intercom communication.

Thanks to the “Bridge” function, it is possible to make the Bluetooth Intercom user part of the Mesh group and allow all of them to talk together. The **BT Rush** units that have also the Bluetooth connected, act as a “bridge” between Bluetooth and Mesh communication.

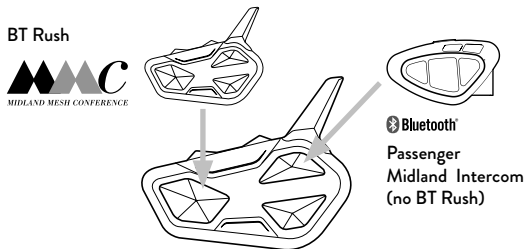

Bridge mode on

Press **Vol+** button for 3 sec., you will hear the voice “Bridge on”. Now all units in the Mesh group and Bluetooth Intercom can talk together.

Bridge mode disable

Press again the **Vol+** button and you will hear the voice “Bridge disable”. Now Mesh and Intercom are separate and you can not have both audio active together.

By default is “Bridge on”.

Bluetooth Intercom maximum distance

When the “Bridge” function is on, the maximum distance of the Bluetooth Intercom is limited to “Driver and Passenger”. In this way the **BT Rush** is compatible with all Bluetooth Midland Intercom devices with less interference to the Mesh communication.

Universal Intercom with different brand units

Thanks to the “Talk2 All - Universal Intercom” feature it is now possible to pair your Midland **BT Rush** to a different brand intercom available on the market.

You can pair non-Midland Intercom devices on the **Downward** button.


- › On the Midland **BT Rush** enter the **Setup Mode** mode: (with the unit OFF press and hold down the button about 7 sec. until the **Red** light is on permanently).
- › Keep pressed the **Upward** button for 7 seconds: the **Red** and **Blue** LED lights will start flashing fast, then (while you still keep the button pressed) the **Red** and **Blue** LED lights will change to slow flashing. Now you can release the button.

On the other intercom (non-Midland brand) follow the procedure to pair to a phone, because the **BT Rush** is paired as a Phone.

If successfully paired the **Red/Blue** lights will stop flashing and the **Blue** light will slowly flash instead.

Attention: remember to switch OFF all the other Bluetooth devices during the pairing procedure, only the two devices involved in the pairing must be turned on.

To open the “Universal Intercom” communication on the Midland **BT Rush** while you are in “Mesh Mode”, press long (3 sec) the Upward button. On the other intercom just press the phone redial or voice dial button. Maybe it will be necessary to press the Voice dial button twice times, depending on the model.

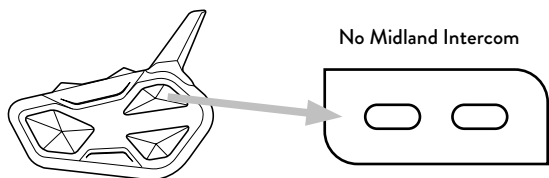

Attention: In order to use the “Universal Intercom” feature the pairing on the other unit must be done as a phone. The other intercom (non-Midland brand) will be able to use a phone only if two phones are supported.


You can pair also a Midland unit as Universal Intercom, that means the pairing must be done as a phone (one unit use the Universal Intercom procedure and the other unit use the pairing to “Phone” procedure).

Pairing the Midland BT Rush to phone and GPS navigator/TFT Dashboard

The Midland **BT Rush** unit can be paired to other Bluetooth devices, like Phone, GPS Navigator. The pairing procedure must be done using the **Vol+** or the **Vol-** buttons.

- › **Pairing to the Vol+ button:** for Phone with music A2DP stereo, GPS Navigator with A2DP audio or Bluetooth TFT system integrated in the motorbike.
- › **Pairing to the Vol- button:** for Phone or GPS Navigator only with mono HFP audio.

When a device is paired to the **Vol+** or **Vol-** buttons the “Phone” mode is activated.

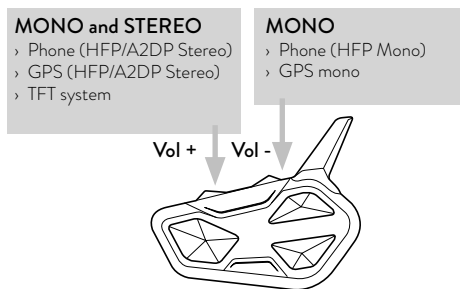

Background feature

The **BT Rush** unit keeps always any audio coming from **Vol+** or **Vol-** pairing always in background to the Mesh communication. In case of Bluetooth Intercom communication instead, you need to take advantage of the “Background” feature to have the audio from the device paired on **Vol-** in background.

Background audio on Bluetooth intercom communication

When the Bluetooth Intercom communication is active only the audio source paired to the **Vol-** can be in background to the Bluetooth Intercom conversation.

All devices paired to **Vol-** button have higher priority over the Bluetooth Intercom communication and will interrupt all other audio communications (including FM Radio and Music).

Background setting for Vol- audio over Bluetooth Intercom

1. Keep pressed **Vol-** button, you will hear the voice “Background on”. Now the audio from the **Vol-** pairing is available in background to the Bluetooth intercom.
2. Press again the **Vol-** button and you will hear the voice “Background disable”. Now the audio from the **Vol-** pairing will interrupt the Bluetooth intercom communication.

Attention: By default the background is enabled..

Pairing with one or two phones

The cellular phone can be paired to the **Vol+** or to the **Vol-**.

When a phone is paired to the **Vol+** or “Vol-” the “Phone” mode is activated.

An incoming call has always the higher priority, that means all other communications will be closed (Intercom, FM Radio, Music).

If another incoming call will arrive on the second phone, an alert sound will notify it.

WARNING! In order to have the best performance with your mobile phone, it is suggested to keep it as close as possible to your **BT Rush** unit, on the left side of your body and in the upper pocket of your jacket if it’s possible.

How to pair the Midland BT Rush to a Phone

To pair the Midland **BT Rush** to a Phone, you must first enter the **Setup Mode** mode:

1. Turn off the unit
2. Press and hold down the Control button about 7 sec., until the **Red**

Vol- Long press
On/off Background


Background on
Audio from Vol-in
background to
intercom BT

Background off
Audio from Vol- has
higher priority and
close intercom BT.

Vol+ Long press
On/off Bridge

Bridge on
Mesh and Intercom
Bluetooth can talk
together

Bridge disabled
Mesh and Intercom
Bluetooth can not talk
together

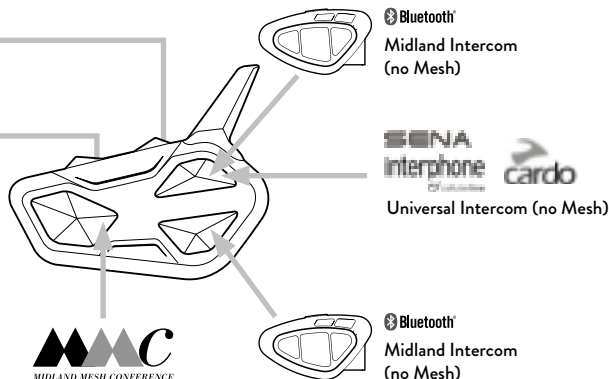

light is on permanently.

- Now press for 3 seconds the **Vol+ (to pair a phone with also A2Dp)** or **Vol-** button (only mono audio), the **Blue** and **Red** lights will flash.
- Enable the Bluetooth device search feature on your mobile phone
- After some seconds, "Midland **BT Rush**" will be displayed on your mobile phone. Follow the pairing procedure of your Phone. If a pin code is requested you must enter "0000" (four time zero).

When successfully paired, the **Blue** light of the unit will be on for one second and then the unit will exit the **Setup Mode** mode and switch to the working mode (the **Blue** light will start flashing).

You can use now your Midland **BT Rush** together with the Phone.

How to use a Phone

After pairing your phone to the Midland **BT Rush** unit you must switch to the "Phone" mode in order to use it. Press the Control button until you hear "Phone" from the voice announcement. Now all the three main buttons are dedicated to the phone (see Table B)

Answering a call

When you hear the phone ring, you can answer in two different ways:

Vocally:

Simply say one word just after the first ring to answer the call and start talking.

Manually:

Tap the **Upward** or **Downward** button and start talking.

Rejecting a call

If you don't want to answer, you can let the mobile phone ring or press the **Upward** or **Downward** button for 3 seconds (you will hear one audio confirmation tone).

Making a call

There are several ways to make a phone call.

To redial the latest number:

Go to Phone Mode

- Phone on "**Vol+**": Press **Upward** button for 3 seconds in order to redial the latest number (you will hear one audio confirmation tone).
- Phone on "**Vol-**": Press **Downward** button for 3 seconds in order to redial the latest number (you will hear one audio confirmation tone).

To make a voice call:

- Phone on "**Vol+**": Briefly press **Upward** button. If your mobile phone supports voice calls, you will be asked to say the name of the contact you wish to call.
- Phone on "**Vol-**": Briefly press **Downward** button. If your mobile phone supports voice calls, you will be asked to say the name of the contact you wish to call.

Priority: Calls have a high priority, which means that all other communications are temporarily disabled when you receive an incoming call.

Ending a call

There are several ways to end a call:

- Press the **Upward** button (you will hear an audio confirmation tone).

- › Press “End” button on the mobile phone.

Speed dial


Only for the phone paired on “Vol+” is possible to store one phone number in the unit memory and use it when needed. You must first save the number using the smartphone “BT SET-APP” application. Then when you are in phone mode, just press 7 sec. the **Upward** button.

Using the MP3 player feature of the Smart phone

The smart phone, when paired on **Vol+** or **Vol-** can be used as stereo MP3 players. The Midland **BT Rush** device fully supports the A2DP and AVR-CP protocols that enable you to listen to stereo music and remotely control your mobile phone’s MP3 player. You can even use the buttons on the Midland **BT Rush** unit to control the following play options: Play, Pause, Forward and **Backward** the songs.

Available controls:

- › To play/pause music: click on the **Control** button.
- › To skip forward to the next song: press the **Upward** button.
- › To skip backward to the previous song: press the **Downward** button.

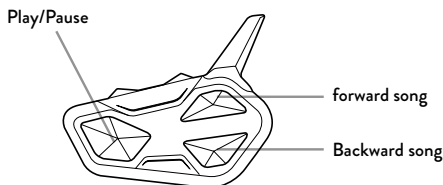

Priority: the music listening mode has the lowest priority. Therefore, it will always be disabled when another audio communication comes in.

To change the priority behaviour you can use the ”smartphone “BT SET-APP” application.

Attention: It is possible to have all the controls (Play/Pause, FWD, BWD) of the A2DP music only in “Phone mode”.

If you are listening to A2DP music and you move from “Phone” mode to “FM Radio” or “Intercom” mode, you can still listening to A2DP music but you don’t have all the controls buttons available.

Music Share

Music Share feature allows to share the same music from **Driver to Passenger**.

For example the driver can play the music from his phone and share the same music to the passenger.

Share the music when both units are connected in Mesh

If the Driver and Passenger are both **BT Rush** units and are connected only with Mesh, it is possible to share the music following the same procedure used to pair two units in **Intercom mode**:

1. Turn off both the unit
2. On both **BT Rush** press and hold down the Control button about 7 sec., until the **Red** light is on permanently.
3. Now press **Downward** long (3 sec.) , the **Blue** and **Red** lights will flash fast. Now release the button.
4. On the other **BT Rush** unit repeat the same procedure using **Downward** very long, the **Blue** and **Red** lights will flash fast. Now release the button.
5. The two units will search for each other
6. When successfully paired, each unit will have the **Blue** light on for one second and then go back to the **Setup Mode** mode (**Red** light always on).

B - Phone mode

Mode	Upward button (Phone on “Vol+”)	Control button	Downward button (Phone on “Vol-”)
Phone	Short press: Voice dial /accept or close if it is in progress Long press: redial latest number/ or reject	Long press: Change mode Double click: Open/Close Mesh	Short press: Voice dial /accept or close if it is in progress Long press: redial latest number/ or reject
Phone (when music is playing and paired on Vol+)	Short press: Forward the song	Short press: Play/pause Long press: Change mode Double click: Open/Close Mesh	Short press: Downward the song

7. On both units, double click on the **Control** button, the **Red** light will turn off and the **Blue** light will start flashing. You can use now your Midland unit.

Share the music when both units are already connected via Bluetooth intercom

If the Driver and Passenger are already connected with Bluetooth Intercom (the passenger is paired on the **BWD** button of the **BT Rush**), it is possible to share to the Passenger the music of the Driver, no additional pairing procedure is needed.

Start Music Share

To start sharing your A2DP music with the passenger (maximum distance 10m), you must press the **Downward** button long (3 sec.) while you are in Phone mode and the music is playing. You will hear the voice “MusicShare” and the music will start on the Passenger unit.

The passenger can only stop the music share pressing short the Control button (but cannot control the music). The driver can start again the music sharing just pressing the **Downward** button for 3 seconds.

With music share active you can not keep open the Intercom communication, (The Music share will be paused when you open the intercom and will be resumed as soon as the Intercom will be closed).

Attention: be sure that the phone is paired on the **Vol+ button** and to use the play command from the Intercom device (**Control button**).

Hint: while in Music Share, the driver can keep the Mesh open to talk with the Passenger and at the same time listen to the music.

GPS Navigator

The GPS Navigator can be paired using the **Vol+** or the “**Vol-**” button.

- › **Volume + button** (support for stereo A2DP audio and HFP mono). All devices paired to **Vol+** button are always active in background during the Mesh communication, but will interrupt all other communications (like Bluetooth Intercom, and FM Radio).
- › **Volume - button** (support for HFP mono audio). All devices paired on “**Vol-**” button are always active in background during the Mesh communication.

GPS Stereo (A2DP) voice announcement

BT Rush supports Stereo (A2DP) voice announcement from GPS Navigators or smartphone application only on “**Vol+**” connection. When connected on **Vol+** button, the GPS street voice announcements are always active in background during the Mesh communication (and FM Radio).

How to pair the Midland BT Rush to a GPS

In general it is possible to pair the Midland **BT Rush** to all GPS for motor-bike that support Bluetooth headset connection.

To pair the Midland **BT Rush** to a GPS, you must first enter the **Setup Mode** mode:

1. Turn off the unit
2. Press and hold down the **Control** button about 7 sec., until the **Red** light is on permanently.
3. Now press firmly (3 sec) the **Vol+** or **Vol-** button, the **Blue** and **Red** lights will flash.
4. Enable the Bluetooth device search feature on your GPS
5. After some seconds, “Midland **BT Rush**” will be displayed on your GPS.
6. Follow the pairing procedure of your GPS. If a pin code is requested you must enter “0000” (four times zero).

When successfully paired, the **Blue** light of the unit will be on for one second and then the unit will exit the **Setup Mode** mode and switch to the working mode (the **Blue** light will start flashing).

You can now use your Midland **BT Rush** with the GPS for street voice announcement.

How to listen to the FM Radio

The FM Radio receiver is integrated inside the unit. You just need to switch to the “FM Radio” mode in order to use it.

Long press the Control button until you hear “FM radio” from the voice announcement. Now all the three main buttons are dedicated to the FM Radio (See Table C).

Press short the **Upward** or the **Downward** button to seek the FM Radio station. When you press long the **Upward** or the **Downward** button, you can scan up or down the 6 recorded stations.

A voice announcement will tell you the number of which memory you are entering.

To save the station you are listening to, press the **Upward** and **Downward** buttons together for 3 sec. You will hear a beep tone for confirmation.

The station is saved over the latest recorded station used.

Thanks to the RDS system, the FM Radio will choose the strongest signal available for the radio station you like to listen to.

The RDS system is OFF by default, if needed you can toggle on/off the RDS pressing together the **Vol+** and **Vol-** buttons for 3 sec when the radio is on. A voice announcement will tell you the RDS status.

How to Disable/Enable the FM Radio

By default the FM radio is on.

Disabling:

- › Enter the **Setup Mode**: turn off the unit and hold down the **Control** button about 7 sec., until the **Red** light is on permanently.
- › Press **Control** and **Vol+** buttons together for 3 seconds. The **Blue** LED will flash three times.
- › Double click on the **Control** button to exit the **Setup Mode** and use the Midland **BT Rush**.

Enabling:

- › Follow the same procedure just described; now the **Blue** LED will flash once.

To exit the **Setup Mode**, double click the **Control** button.

FM Radio and intercom

When you are in “FM Radio” mode it is possible to manually open the intercom, just Double clicking on the **Upward** or **Downward** button depending where you made the pairing. You can also open it using the VOX feature (just talk) to the unit paired on the **Downward** button.

FM Radio and Mesh

When you are in “FM Radio” mode it is possible to manually open/close the Mesh, just Double clicking on the **Control** button .

FM Radio in background to Mesh

If you turn on the FM radio when the Mesh communication is open (just open the Mesh and then move to FM radio mode), the FM radio and Mesh are both available. In this way you can always be in touch with your group while you enjoy the FM radio. In case you need to have the Mesh audio alone, just turn off the FM radio with one click on the **Control** button.

FM Radio in background to Intercom

If you move to FM Radio mode when an Intercom communication is

open, the Intercom will be closed. If you are already in FM radio mode and you open the Intercom by VOX (or with double click on the **Upward** or **Downward** button) or someone will open the Intercom to you, the FM will be available together with the Intercom.

In case you need, while the Intercom is open, you can always turn off the FM radio with one click on the **Control** button.

Attention: Any active audio coming from the “Vol+” or “Vol-” connection, will always pause temporary the FM radio.

Setup and special configurations

Resetting all paired devices

Sometimes you may find it necessary to delete all the pairing references stored in the Midland **BT Rush** unit (reset operation).

To perform this operation you must first enter the **Setup Mode** mode:

- › Turn off the unit.
- › Press and hold down the **Control** button about 7 sec., until the **Red** light is on permanently.
- › Then simultaneously press and hold down the **Vol+** and **Vol-** buttons for 3 seconds. The **Blue** Light will be lit on for 1 sec and then goes back to steady **Red**.
- › Double click on the **Control** button to exit the **Setup Mode** and use the Midland **BT Rush**.

This procedure deletes all paired Bluetooth devices stored in the memory and it is therefore possible to start a new “clean” pairing session.

Back to factory setting

Sometimes you may find it necessary to go back to the factory setting, to reset all the changes/**Setup Mode** already made and have a “clean” unit.

To perform this operation you must first enter the **Setup Mode** mode:

- › Turn off the unit.
- › Press and hold down the **Control** button about 7 sec., until the **Red**

C - Radio FM mode

Mode	Upward button	Control button	Rear button
FM Radio	Short press: seek station up Long press: Scan recorded Double click: Open/Close Intercom	Short press: On/off Long press: Change mode Double click: Open/Close Mesh	Short press: seek station up Long press: Scan recorded Double click: Open/Close Intercom

light is on permanently.

- › Then simultaneously press and hold down all the three buttons **Upward-Control-Downward** for 3 seconds. The **Blue** Light will be lit on for 1 sec and then back to steady **Red**.
- › Double click on the **Control** button to exit the **Setup Mode** and use the Midland **BT Rush**

Adjusting/ Disabling the VOX feature (Intercom and telephone)

The Intercom feature can be enabled both manually and vocally (VOX). The VOX activation is influenced by the helmet type, the background noise and therefore by the speed.

For optimum results, it is possible to choose the sensitivity levels. It is also possible to disable the VOX feature in order to activate the Intercom and phone call answering features in manual mode only.

These adjustments can be set through the BTPro SetAPP for iOS or Android.

Setup and Firmware update

To configure your Midland **BT Rush** you need to use the BTPro SetAPP smartphone application. To update the firmware, you need download the BTPro Updater on the Midland web site www.midlandeurope.com, in the Midland **BT Rush** page.

ATTENTION: DO NOT CONNECT THE UNIT TO THE PC BEFORE you DOWNLOAD AND INSTALL THE SOFTWARE

Use at your own risk

- › The use of the device will impair your ability to hear other sounds and others around you.
- › Listening to music or speaking on a telephone may prevent you from hearing others around you and distract you from riding safely. The use of such device while riding may endanger you and others, and its use, in some areas, could not be allowed.
- › Using this device at a high volume may result in permanent hearing loss.
- › If you experience ringing in your ear or any other hearing related pain, reduce the volume or discontinue using this device. With continued use at high volume, your ears may become accustomed to the sound level, which may result in permanent damage to your hearing.
- › Please use this device at a safe volume level.

Warranty

The warranty lasts 24 months for the main device and 6 months for the accessories (batteries, chargers, antennas, headsets, microphones).

For further information about the warranty, please visit:

www.midlandeurope.com.

European CE Notice Certification and Safety Approval Information

This product is CE marked according to the **Red** Directive 2014/53/UE and is free use in all the EU countries. Users are not permitted to make any changes or modifications to the device. Modifications which are not expressly approved by the producer invalidate the warranty card. For further information, please go to our website: www.midlandeurope.com.

Red

IT / RSM

Midland Europe Srl dichiara che il prodotto è conforme ai requisiti essenziali e alle disposizioni della Direttiva 2014/53/EU. La Dichiarazione di conformità si può scaricare dal sito <http://www.midlandeurope.com/it/pagina/10090-certifications>

IE / CY / MT

Hereby Midland Europe Srl declares that this product is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. The declaration of conformity is available on the web site <http://www.midlandeurope.com/it/pagina/10090-certifications>

AT / DE / CH / LI

Hiermit erklärt Midland Europe Srl, dass das Produkt die grundlegenden Anforderungen und anderen relevanten Bestimmungen der Richtlinie 2014/53/EU. Die Konformitätserklärung ist unter folgendem Link verfügbar: <http://www.midlandeurope.com/it/pagina/10090-certifications>

ES

Midland Europe Srl declara, bajo su responsabilidad, que este aparato cumple con lo dispuesto en la Directiva 2014/53/EU, del Parlamento Europe. La Declaración de Conformidad está disponible en <http://www.midlandeurope.com/it/pagina/10090-certifications>

FR / LU / CH

Par la présente Midland Europe Srl déclare que le modèle est conforme aux exigences essentielles et autres dispositions pertinentes de la directive 2014/53/EU. La déclaration de conformité est disponible sur le site internet <http://www.midlandeurope.com/it/pagina/10090-certifications>

PT

A Midland Europe Srl declara que este aparelho cumpre com o disposto na Directiva 2014/53/EU do Parlamento Europeu. A Declaração de Conformidade está disponível no sitio na Internet em <http://www.midlandeurope.com/it/pagina/10090-certifications>

EL

Με το παρών, η Midland Europe Srl δηλώνει ότι το όνομα του μοντέλου συμμορφώνεται ως προς τις βασικές απαιτήσεις και άλλες σχετικές διατάξεις του Κανονισμού 2014/53/EU. Η δήλωση συμμόρφωσης είναι διαθέσιμη στην ιστοσελίδα

<http://www.midlandeurope.com/it/pagina/10090-certifications>

NL

Hierbij verklaard Midland Europe Srl dat dit model voldoet aan de essentiële eisen en andere relevante bepalingen van richtlijn 2014/53/EU.

De verklaring van conformiteit is beschikbaar op de website <http://www.midlandeurope.com/it/pagina/10090-certifications>

BE

Midland Europe Srl verklaart dat het product overeenstemt met de voorschriften en andere bepalingen van de richtlijn 2014/53/EU. De conformiteitsverklaring is voorhanden op de website <http://www.midlandeurope.com/it/pagina/10090-certifications>

PL

Midland Europe Srl deklaruje, że ten model jest zgodny z wymaganiami zasadniczymi i innymi istotnymi postanowieniami Dyrektywy 2014/53/EU. Deklaracja Zgodności jest dostępna na stronie <http://www.midlandeurope.com/it/pagina/10090-certifications>

RO

Midland Europe Srl declara ca acest model este in conformitate cu cerintele esentiale si alte prevederi ale Directivei 2014/53/EU. Declaratia de conformitate este disponibila si pe site-ul <http://www.midlandeurope.com/it/pagina/10090-certifications>.

BG

С настоящото Midland Europe Srl декларира, че продукта е в съответствие с основните изисквания и съответните модификации на ОДиректива 2014/53/EU. Декларацията за съвместимост е налична на сайта: <http://www.midlandeurope.com/it/pagina/10090-certifications>

NO

Midland Europe Srl erklærer at produktet er i overensstemmelse med de viktigste kravene og andre relevante betingelser i Direktivet 2014/53/EU. Samsvarserklæringen finnes tilgjengelig på nettstedet <http://www.midlandeurope.com/it/pagina/10090-certifications>

DK

Hermed erklærer Midland Europe Srl, at dette apparat er i overensstemmelse med kravene og andre relevante bestemmelser i direktiv 2014/53/EU. Overensstemmelseserklæringen findes på webstedet <http://www.midlandeurope.com/it/pagina/10090-certifications>

SE

Midland Europe Srl förkunnar att produkten överensstämmer med de väsentliga kraven och övriga bestämmelser i direktiv 2014/53/EU. Denna försäkran om överensstämmelse finns på webbplatsen <http://www.midlandeurope.com/it/pagina/10090-certifications>

FI

Midland Europe Srl vakuuttaa, että tuote täyttää direktiivin 2014/53/EU. Vaatimuksenmukaisuusvakuutus on saatavilla <http://www.midlandeurope.com/it/pagina/10090-certifications> – verkkosivuilla.

HR

Midland Europe Srl ovime izjavljuje da je ime ovog modela u suglasnosti sa bitnim zahtjevima te ostalim relevantnim odredbama Propisa 2014/53/EU. Ova Izjava o suglasnosti je dostupna na web stranici <http://www.midlandeurope.com/it/pagina/10090-certifications>

EE

Käesolevaga kinnitab Midland Europe Srl selle mudeli vastavust direktiivi 2014/53/EU. Vastavusdeklaratsioon on kättesaadav veebilehel <http://www.midlandeurope.com/it/pagina/10090-certifications>

LT

CTE International patvirtina, kad šis modelis atitinka visus esminius Direktyvos 2014/53/EU. Atitikties deklaracija yra pateikiama internetinėje svetainėje <http://www.midlandeurope.com/it/pagina/10090-certifications>

LV

Midland Europe Srl deklarē, ka produkts atbilst pamatprasībām un citiem ar to saistītajiem Direktīvas 2014/53/EU. Atbilstības deklarācija ir pieejama mājas lapā: <http://www.midlandeurope.com/it/pagina/10090-certifications>

SK

Týmto Midland Europe Srl prehlasuje, že tento názov model je v zhode so základnými požiadavkami a ďalšími príslušnými ustanoveniami smernice 2014/53 /UE. Vyhlásenie o zhode je k dispozícii na webových stránkach <http://www.midlandeurope.com/it/pagina/10090-certifications>

SI

Midland Europe Srl deklarira da je ta model skladen z bistvenimi zahtevami in drugimi relevantnimi določili EU direktive 2014/53/EU. Deklaracija o skladnosti je na voljo na spletni strani <http://www.midlandeurope.com/it/pagina/10090-certifications>

CZ

Midland Europe Srl prohlašuje, že výrobek je v souladu s 2014/53/EU. Prohlášení o shodě je k dispozici na webových stránkách <http://www.midlandeurope.com/it/pagina/10090-certifications>

H

Mi, a Midland Europe Srl saját felelősségre kijelentjük, hogy ezen elnevezésű termék megfelel az 2014/53/EU. A megfelelőségi nyilatkozat elérhető weboldalunkon a <http://www.midlandeurope.com/it/pagina/10090-certifications> címen.




INFORMAZIONE AGLI UTENTI: i sensi dell'art. 13 del decreto legislativo 25 luglio 2005, n.151 "Attuazione delle Direttive 2002/95/CE, 2002/96/CE e 2003/108/CE, relative alla riduzione dell'uso di sostanze pericolose nelle apparecchiature elettriche ed elettroniche, nonché allo smaltimento dei rifiuti". Il simbolo del cassonetto barrato riportato sull'apparecchiatura indica che il prodotto alla fine della propria vita utile deve essere raccolto separatamente dagli altri rifiuti. L'utente dovrà, pertanto, conferire l'apparecchiatura giunta a fine vita agli idonei centri di raccolta differenziata dei rifiuti elettronici ed elettrotecnici, oppure riconsegnarla al rivenditore al momento dell'acquisto di una nuova apparecchiatura di tipo equivalente, in ragione di uno a uno. L'adeguata raccolta differenziata per l'avvio successivo dell'apparecchiatura dismessa al riciclaggio, al trattamento e allo smaltimento ambientalmente compatibile contribuisce ad evitare possibili effetti negativi sull'ambiente e sulla salute e favorisce il ciclo dei materiali di cui è composta l'apparecchiatura. Lo smaltimento abusivo del prodotto da parte dell'utente comporta l'applicazione delle sanzioni amministrative di cui al dlgs. n.22/1997 (articolo 50 e seguenti del dlgs. n.22/1997).

All articles displaying this symbol on the body, packaging or instruction manual of same, must not be thrown away into normal disposal bins but brought to specialised waste disposal centres. Here, the various materials will be divided by characteristics and recycles, thus making an important contribution to environmental protection.

Alle Artikel, die auf der Verpackung oder der Gebrauchsanweisung dieses Symbol tragen, dürfen nicht in den normalen Mülltonnen entsorgt werden, sondern müssen an gesonderten Sammelstellen abgegeben werden. Dort werden die Materialien entsprechend ihrer Eigenschaften getrennt und, um einen Beitrag zum Umweltschutz zu liefern, wiederverwertet.

Todos los artículos que exhiban este símbolo en el cuerpo del producto, en el embalaje o en el manual de instrucciones del mismo, no deben ser desechados junto a los residuos urbanos normales sino que deben ser depositados en los centros de recogida especializados. En estos centros, los materiales se dividirán en base a sus características y serán reciclados, para así poder contribuir de manera importante a la protección y conservación del medio ambiente.

Tous les articles présentant ce symbole sur le corps, l'emballage ou le manuel d'utilisation de celui-ci ne doivent pas être jetés dans des poubelles normales mais être amenés dans des centres de traitement spécialisés. Là, les différents matériaux seront séparés par caractéristiques et recyclés, permettant ainsi de contribuer à la protection de l'environnement.



Prodotto o importato da/Produced or imported by:

Midland Europe srl

Via. R.Sevardi 7 42124 Reggio Emilia - Italy.

Prima dell'uso leggere attentamente le istruzioni

Read the instructions carefully before installation and use.

Vertrieb durch:

Alan Electronics GmbH

Daimlerstraße 1g - D 63303 Dreieich - Deutschland.

Vor Benutzung Bedienungsanleitung beachten.

Importado por:

Midland Iberia, SA

C/Cobalt, 48 - 08940 Cornellà de Llobregat, Barcelona - España.

Antes de utilizar, lea atentamente el manual de uso.

Distributed by:

Motodirect Limited Company Euro House

The Nursery, 1 Wincobank Way, South Normanton, Derbyshire.


DE55 2FX - UK.

Read the instructions carefully before installation and use.

Distribué par:

BIHR S.A.S. - www.bih.eu.

Avant l'utilisation, lire les instructions.



www.midlandeuropa.com

