

## RE200-5T 2GIG™ Compatible Keyfob

**Keyfob** is a portable device used to remotely control a security panel. The buttons can be configured to arm, disarm, trigger panic alarms, or control automation functions.

### Features





- Support for up to 5 button functions
- Low battery indication
- 2 year warranty

**Enroll** by placing the panel into system configuration mode and answering the panel questions.

Panel Questions	Keyfob Selections
Q3: Select fob #	[1] - [8]
Enabled	[1] Enabled
Equipment Code	[0866] 2GIG keyfob
Serial Number	Type in serial number OR Press Shift+Learn and press a keyfob button
Equipment Age	[0] New
Emergency Key	[0] Disabled [1] Auxiliary Alarm [2] Audible Alarm [3] Silent Panic [4] Fire
Key 2 Can Disarm (Disarm Button)	[0] Disabled, [1] Enabled
Arm No Delay	[0] Disabled, [1] Enabled
Key 4 Output (Aux Button)	[0] Disabled, [1] Toggle Output, [2] Momentary Output

**Panic alarm** can be sent by pressing and holding any of the below button combinations if the emergency key is enabled in the panel.

- Arm Away + Arm Stay
- Arm Away + Disarm
- Arm Stay + Disarm

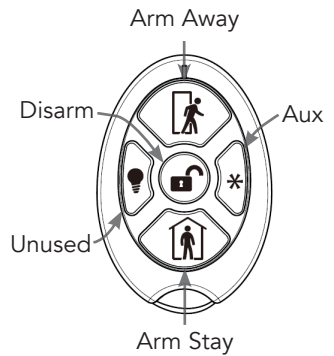

Verify proper enrollment and operation using your security panel's installation manual.

**To replace the battery**, remove the screw on the back of the keyfob and unsnap the back from the cover.

**Pro Tips**

- LED blinks** when a button press is transmitted.
- Garage door openers** connected to a 2GIG-GDR1-345 can be set up to be controlled by a keyfob button. Typically the Aux button is used for automation functions.

**Specifications**

Physical	
Housing Dimensions	2.2 x 1.5 x 0.6 inches (5.6 x 3.8 x 1.4 centimeters)
Weight with Battery	0.66 ounces (19 grams)
Environmental	
Operating Temperature	32°F to 120°F (0°C to 49°C)
Maximum Humidity	85% non-condensing relative humidity
Sensor Specifications	
Frequency	345 MHz
Replacement Battery	One Panasonic CR2032
Nominal Battery Life	5 years
Transmitted Indications	Low Battery
Certification	
RE200-5T	FCC, IC

*Specifications subject to change without notice*

**WARRANTY**

Resolution Products, Inc. will replace products that are defective in their first two (2) years.

**IC NOTICE**

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:  
(1) This device may not cause interference, and  
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux cnr d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) L'appareil ne doit pas produire de brouillage, et
- (2) L'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE2005

**FCC NOTICE**

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference.  
(2) This device must accept any interference that may be received, including interference that may cause undesired operation.  
Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.  
FCC ID: U5X-RE200-5

**TRADEMARKS**

"2GIG" is a trademark owned by Nortek Security & Control, LLC.  
Resolution Products, Inc. products will function with 2GIG systems. However, no Resolution product is produced by, endorsed by, or is officially associated with Nortek.  
Resolution recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.