## Soundcore

## **Soundcore Trance / Mega**

### **User Manual**

## 1 Important Safety Instructions


- Please read this user manual carefully and save it for future reference.
- Do not place naked flame sources, such as lighted candles, on or near the product.
- Do not install near any heat sources, such as radiators, heat registers, stoves, or other apparatus.
- Clean only with a dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Protect the power supply or cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the product.
- Only use attachments/accessories specified by the manufacturer.
- Unplug this product during lightning storms or when unused for long periods of time.
- The maximum ambient temperature during use of the product must not exceed 45°C.
- Suitable for safe use in tropical and non-tropical areas.
- Only suitable for safe use in areas below 2000m above sea level.
- Do not make unauthorized alterations to the product; doing so may compromise safety, regulatory compliance, system performance, and may void the warranty.
- Refer all servicing to qualified service personnel. Servicing is required when the product has been damaged in any way.
- The product contains battery pack, so should not be exposed to excessive heat such as sunshine, fire or the like.

# 2 What's Included



# 3 At a Glance

## 3.1 Top Panel

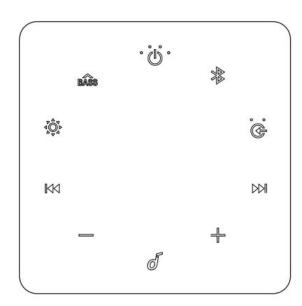



Press and hold for 2 seconds to power on / off.



- Press to enter Bluetooth pairing mode.
- Press and hold to enter True Wireless Stereo (TWS) mode while pairing.
- ③ (Source input button)
  - Press repeatedly to select source input.
  - Press and hold for 2 seconds to enter Bluetooth pairing mode.

# (4) Idd , **>>**I

• Press to skip to previous / next track.


## (5) **-**/**+**

- Press to decrease / increase volume.
- ⑥ **(**Multi-function button)
  - Press to play / pause music.
  - Press to answer or end a call.
- ⑦ (Light effect button)
  - Press to turn on / off and adjust the light mode.

# ® BÂSS

- Press to turn on or off the BassUP mode.
- Press and hold for 2 seconds to switch between indoor / outdoor sound mode.

## **3.2 Connectors (A3392)**

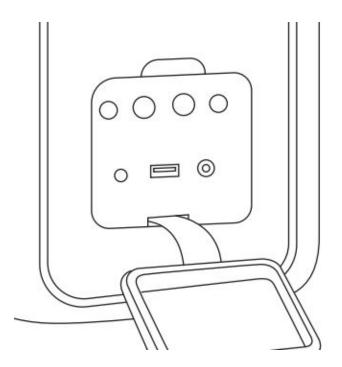

## 1) DC IN

• Connect to the provided power adaptor.

#### **2** USB

- Connect to a USB storage device.
- Charge a USB device.

#### ③ AUX

• Connect to an external audio device through a 3.5mm aux cable (not provided).


### 4 Guitar / Mic port

• Connect to a guitar / microphone (not provided).

#### **(5) Guitar / Mic volume knob**

• Rotate to adjust guitar / microphone volume.

## **3.3 Connectors (A3393)**

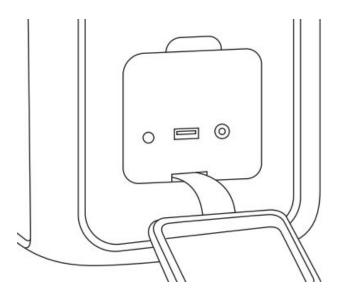

#### (1) **DC IN**

• Connect to the provided power adaptor.

#### **② USB**

- Connect to a USB storage device.
- Charge a USB device.

#### ③ AUX

• Connect to an external audio device through a 3.5mm aux cable (not provided).


# 4 Charging

## **4.1 Charging your Soundcore Speaker**



• Fully charge this speaker when using for the first time, which prolongs the lifespan of the built-in battery.

Use the provided power adaptor to charge this speaker.

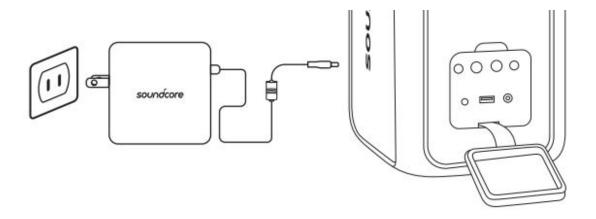

## LED behaviour ( • ° ° •)

∞ <del>0</del> 0	Battery level <10%
-\(\frac{1}{2}\)- \(\cap \)	Battery level 25% - 50%
÷00	Battery level 50% - 75%
÷000	Battery level 75% - 100%
0000	Fully charged

## **4.2 Checking Battery Level**

Press any button to check the remaining battery level when it is powered on.


## LED behaviour ( • ° ° •)

	Battery level <10%
0	Battery level 10% - 25%
00	Battery level 25% - 50%
000	Battery level 50% - 75%
0000	Battery level 75% - 100%

## 4.3 Charging your USB Devices

Use this speaker as an external battery to charge your USB devices.


Connect your USB device to the USB port on the rear of this speaker.

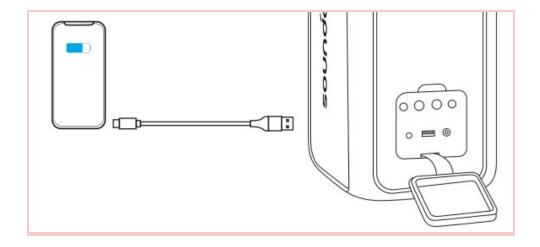

# 5 Powering On / Off

Connect the provided power adaptor to the **DC IN** power jack of this speaker, and then to an AC mains outlet.

Press and hold  $\mathbf{0}$  for 2 seconds to power on or off.

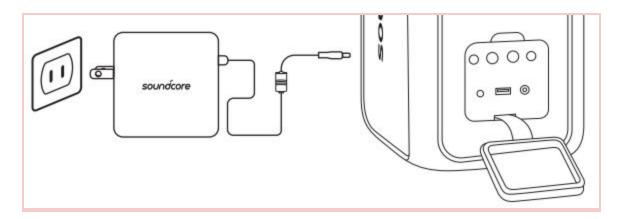




- Built-in battery can be used as power supply of this speaker.
- Unplug the power adaptor from the AC mains outlet when not in use for an extended period of time.
- If this speaker is powered by built-in battery, it will power off automatically after 30 minutes of button inactivity or no audio playback.
- If this speaker is connected to AC power and the built-in battery is fully charged, it will power off automatically after 30 minutes of button inactivity or no audio playback.

# **6 Using your Soundcore**

### **6.1 Bluetooth Mode**

With this speaker, you can enjoy music through your Bluetooth-enabled devices.

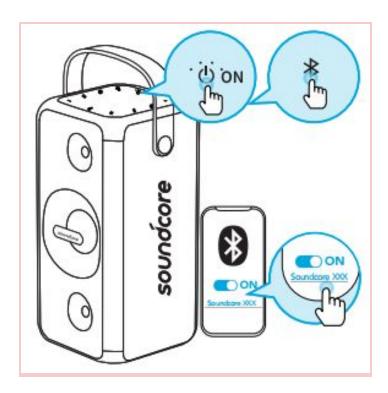

# LED behaviour (\*\*)

Flashing blue	Bluetooth pairing
Steady blue	Bluetooth connected




• **Dual Bluetooth Connection:** This speaker can pair up to two mobile devices via Bluetooth. This speaker can only play music on one mobile device at the same time.

- To pair with another Bluetooth device, press to re-enter Bluetooth pairing mode.
- To play from another connected device, pause the currently active device first.
- Each time you power on your Soundcore speaker, it will automatically connect to your last connected device if available within the Bluetooth range. If not, press
  - to enter Bluetooth pairing mode.
- You may also control music in the Soundcore App.

## 6.2 True Wireless Stereo (TWS) Mode

With True Wireless Stereo technology, you can pair your **Soundcore Trance / Mega** with another **Soundcore Trance / Mega** to explore the best sound effects with left and right sound channels separated on both speakers.

Press and hold on both **Soundcore Trance / Mega** speakers simultaneously to enter TWS mode.

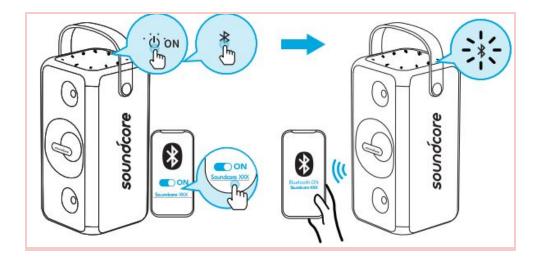

LED behaviour ( \*)


-  - Flashing white twice	TWS connecting
Steady white for 5 seconds then fade out	TWS connected



- With TWS connected, volume can be controlled at the same time for the two speakers.
- With TWS connected, both speakers can be paired with different smartphones.

## 6.3 USB / Aux Playback

Plug in a 3.5mm audio cable or insert a USB drive, then press to switch between AUX in mode and USB mode.

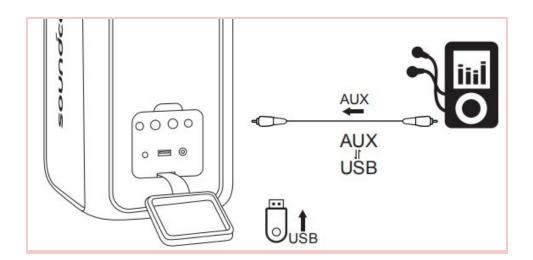

# LED behaviour ( )

Steady green	AUX in mode
Steady white	USB mode




- SoundLine AUX cable sold separately.
- When using AUX mode, control audio playback via the connected device.

### **6.4 Button controls**

<b>đ</b> Press	Play / Pause
<b>▶▶I</b> Press	Next track
III Press	Previous track
<b>-/+</b>	Volume down / up
BASS Press	Turn BassUp on / off
BASS Press and hold for 2 seconds	Switch between Indoor / Outdoor sound modes

## 6.5 Microphone / Guitar Connection (Only available for A3392)

- 1. Connect your microphone / guitar (not provided) to the **MIC / GUITAR** port on the rear of this product.
- 2. Rotate the microphone / guitar volume knob to adjust the microphone / guitar volume.

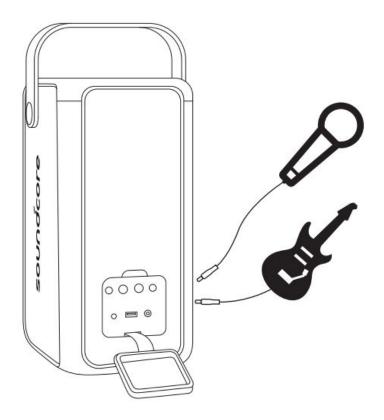

# 6.6 Beat-Driven Light Show

Press to turn on / off or adjust the light show effects.




• Check all available light modes in the Soundcore App.

# 7 Soundcore App

Download the Soundcore app for an enhanced product experience.

- Set up Bluetooth connection
- Update firmware
- Indicate battery status
- Switch among multiple light modes ( Default light scenario is "Party")
- Switch between indoor and outdoor sound modes
- Light DJ mode to support light and sound variation
- Enjoy party games
- Switch BassUP mode
- Remotely control the volume and play / pause



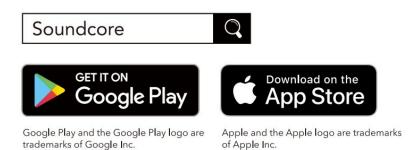

# 8 Specifications

Specifications are subject to change without notice.

AC power input	100 ~ 240 V, 50~60Hz
DC power input	15 V = 3 A
Battery capacity	10,000 mAh
USB output	5 V = 2.4 A (Max)
Output power	80 W
Charging time	4.5 hours
Waterproof level	IPX7
Playtime (varies by volume level and music content)	18 hours
Bluetooth version	V5.0
Bluetooth frequency	2402 - 2480 MHz
Bluetooth maximum transmitter power	8 dBm
Bluetooth profile	A2DP 1.2, AVRCP 1.5, HFP 1.7
Bluetooth range	20 m / 66 ft

## **Notice**



This product complies with the radio interference requirements of the European Community.



This symbol means the product must not be discarded as household waste, and should be delivered to an appropriate collection facility for recycling. Follow local rules and never dispose of the product and rechargeable batteries with normal household waste. Correct disposal of old products and

rechargeable batteries helps prevent negative consequences for the environment and human health.

CAUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.

#### FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -Reorient or relocate the receiving antenna.
- -Increase the separation between the equipment and receiver.
- -Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -Consult the dealer or an experienced radio/TV technician for help.

#### **Radiation Exposure Statement**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator & your body.

Company Name: Fantasia Trading LLC

Address: 9155 Archibald Avenue, Suite 202, Rancho Cucamonga, CA, 91730, US

Telephone: +1 (909) 484 1530

#### IC NOTICE TO CANADIAN USERS

#### IC NOTICE TO CANADIAN USERS

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L' appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CAN ICES-3 (B) / NMB-3 (B)

This equipment complies with IC RF radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

ce matériel est conforme aux limites d'exposition aux rayonnements rf de ic énoncés dans un autre environnement. ce matériel doit être installé et exploité à une distance minimale de 20 cm entre le radiateur et votre corps.

## **Declaration of Conformity**

Hereby, Anker Innovations Limited declares that the radio equipment type A3392 / A3393 is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: https://www.anker.com/products

Maximum output power: 2.0 dBm

Frequency band: 2.4G band (2.4000GHz-2.4835GHz)

### **Trademark**



Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Anker Innovations Limited. is under license. Other trademarks and trade names are those of their respective owners.

## **Customer Service**

## \* Additional Legal Rights for Consumers

For consumers, who are covered by consumer protection laws or regulations in their country of purchase or, if different, their country of residence, the benefits conferred by Soundcore's Limited Warranty are in addition to all rights and remedies conveyed by such consumer protection laws and regulations, including but not limited to these additional rights.

For FAQs and more information, please visit <a href="https://www.soundcore.com/">https://www.soundcore.com/</a> .		

Model: A3392 / A3393