
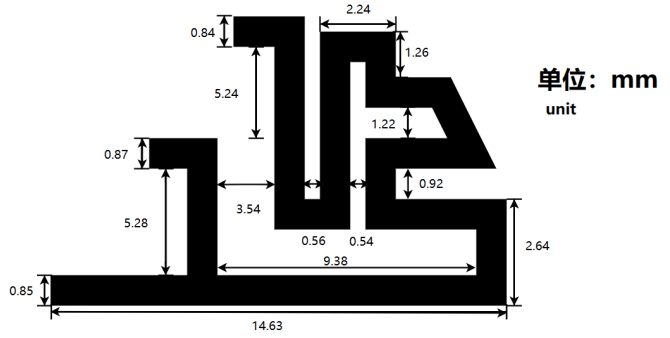


BT Audio Antenna Report

Manufacturer: Tianchang Alpha Electronic Co., LTD
M/N: AF01ANT

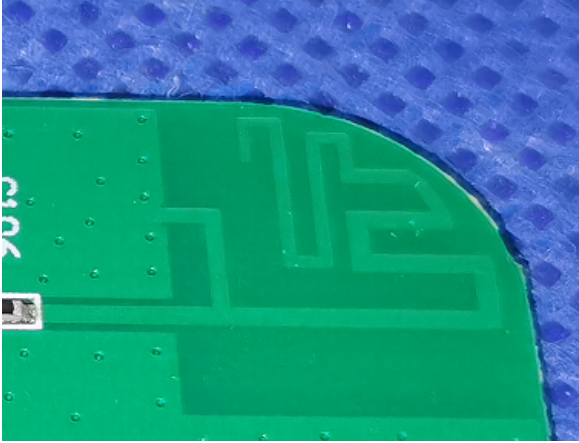

1. Gain and Efficiency

| Frequency (MHz) | Gain (dBi) | Efficiency (dB) | Efficiency (%) |
|-----------------|------------|-----------------|----------------|
| 2400 | -0.63 | -6.63 | 21.24 |
| 2410 | -0.28 | -6.25 | 22.7 |
| 2420 | -0.09 | -6.63 | 22.86 |
| 2430 | 0.0 | -5.68 | 27.24 |
| 2440 | -0.38 | -6.25 | 24.3 |
| 2450 | -1.08 | -5.74 | 26.25 |
| 2460 | -1.07 | -6.06 | 25.27 |
| 2470 | -0.97 | -5.7 | 26.19 |
| 2480 | -1.24 | -6.25 | 23.25 |
| 2490 | -1.25 | -6.35 | 22.84 |