

# ENTRY DOORS

Dimensions & Specifications Guide





With Andersen, create an entry door with character and handcrafted origins, built in solid fine-grain wood. Styled to suit you perfectly. One of a kind. Like your home. And like you.



# EXTERIOR & INTERIOR OPTIONS

Make a bold first impression with color – choose from 50 commercial-grade, aluminum exterior color options or a selection of anodized finishes for a rich, lustrous metallic appearance. On the interior of the door, choose from our painted options or enjoy the look of unfinished wood. For a unique look, custom colors are available on the interior or exterior of the door.

## ALUMINUM-CLAD EXTERIOR COLORS



## INTERIOR & EXTERIOR WOOD SPECIES



## INTERIOR PAINTED COLORS



Available on pine. Black and dark bronze also available on maple. Anodized silver available only on maple.

\*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies.

Naturally occurring variations in grain, color and texture of wood makes each window or door one of a kind.

Printing limitations prevent exact duplication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.

# OPTIONS & ACCESSORIES

## HARDWARE\*

Choose from Andersen® hardware or have your door prepped for hardware manufactured by others.



**YUMA®**

Distressed Bronze  
**Distressed Nickel**



**ENCINO®**

**Distressed Bronze**  
Distressed Nickel



**NEWBURY®**

Antique Brass  
Bright Brass  
**Oil Rubbed Bronze**  
Satin Nickel



**ALBANY**

**Black**  
Stone  
White



**ANVERS®**

Bright Brass  
Oil Rubbed Bronze  
**Satin Nickel**



**TRIBECA®**

Black  
Stone  
**White**

## FSB® HARDWARE†

Durable FSB hinged door hardware features clean lines and a sleek finish for a thoroughly modern look.



1035



1075



1076



1102\*\*

**Black Anodized Aluminum**  
Satin Stainless Steel

**Satin Stainless Steel**

## YALE® ASSURE LOCK®\*

The Yale Assure Lock† allows you to monitor, lock and unlock your door from anywhere.



**Black**



**Satin Nickel**



**White**

Bold name denotes finish shown.

## GRILLE OPTIONS

Grilles patterns and types are shown below and are available in four standard widths: ¾", ⅞", 1 ⅛" and 1 ½".



Colonial



Prairie




Specified  
Equal Light




### Full Divided Light

Permanent exterior  
Permanent interior with spacer



### Removable Interior

Removable interior



### Simulated Divided Light

Permanent exterior  
Permanent interior



### Simulated Divided Light with Removable Interior Grilles

Permanent exterior  
Removable interior

\*Hardware sold separately.

\*\*FSB style 1102 is not available in black anodized aluminum.

†Available on select hinged doors, see your Andersen supplier for details.

Tribeca and Albany hardware are zinc die cast with powder-coated durable finish. Yuma, Encino, Newbury and Anvers are solid forged brass. FSB is stainless steel or aluminum.

Distressed bronze and oil rubbed bronze are "living" finishes that will change with time and use.

Bright brass and satin nickel finishes on patio door hardware feature a 10-year limited warranty.

Printing limitations prevent exact finish replication. See your Andersen supplier for actual finish samples.

"FSB" is a registered trademark of Franz Schneider Brakel GmbH & Co.


Yale manufactures and supports the limited warranty for Yale Assure Lock for Andersen doors.




# DOOR STYLES

Enhance your curb appeal by choosing from a variety of door styles to fit your taste. All styles are offered as single or double doors. Please visit [andersenwindows.com/entry doors](http://andersenwindows.com/entry doors) to see all styles.


## STRAIGHTLINE – GLASS PANEL

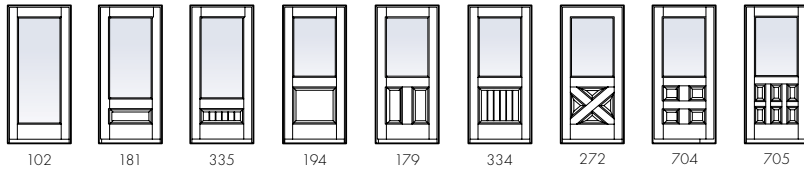


## ARTS & CRAFTS

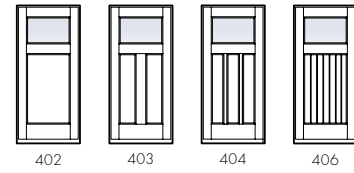


## STRAIGHTLINE – FULL PANEL

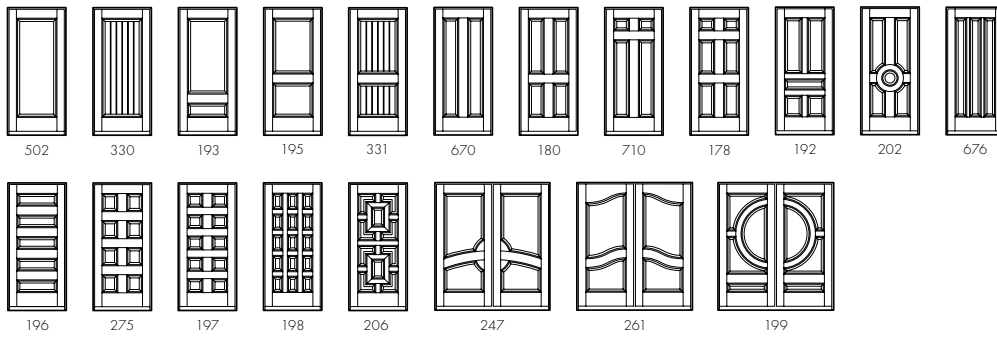


## ARCH – GLASS PANEL

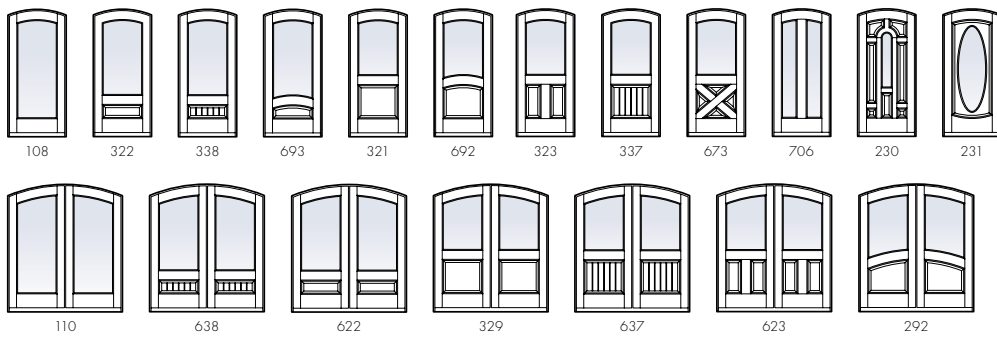


## ARCH – FULL PANEL

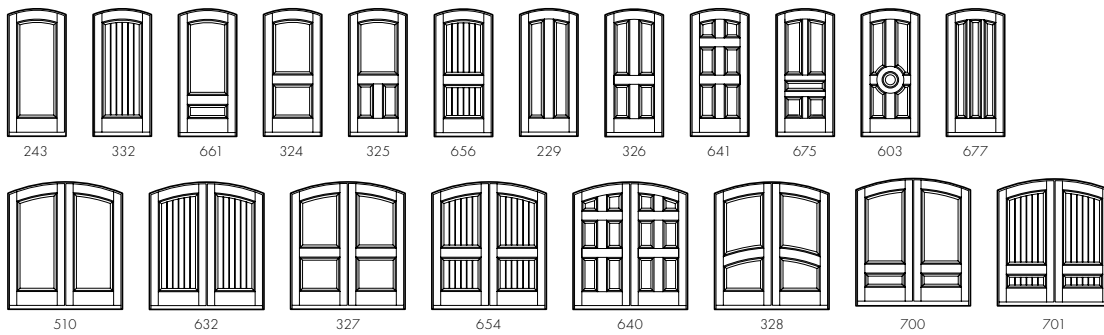

## SIDELIGHTS

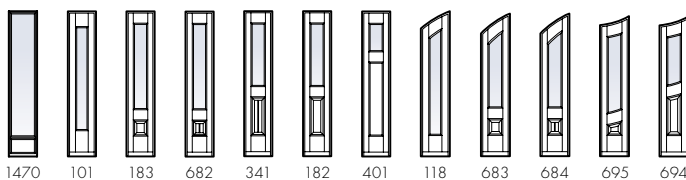


## TRANSOMS




# RESIDENTIAL ENTRY DOORS

## Rectangular Entry Door Order Designation Description

Viewed from the exterior.

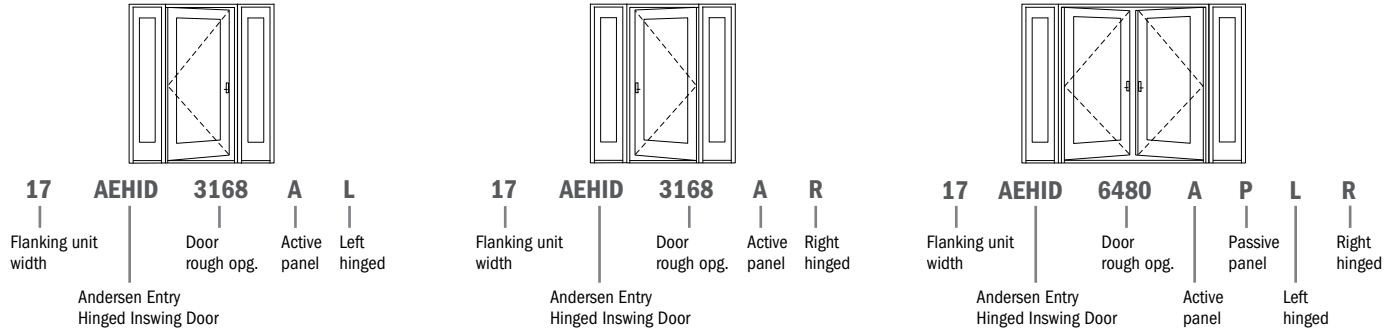

Inswing entry doors (AEHID) shown above, for outswing entry doors use AEOD. Outswing entry doors open outward to the exterior.

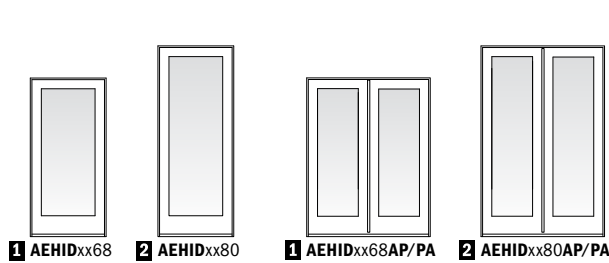


Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEHID2068S or AEHID4068SS).

## Rectangular Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEHID2068	1	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.56 (1.17)	20 13/16" (529)	22 7/8" (581)	79 1/16" (2008)	12.56 (1.17)	14.63 (1.36)
AEHID2668	1	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.85 (1.47)	26 13/16" (681)	28 7/8" (733)	79 1/16" (2008)	15.85 (1.47)	18.04 (1.68)
AEHID2868	1	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.95 (1.57)	28 13/16" (732)	30 7/8" (784)	79 1/16" (2008)	16.95 (1.57)	19.18 (1.78)
AEHID3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.15 (1.78)	32 13/16" (833)	34 7/8" (886)	79 1/16" (2008)	19.15 (1.78)	21.46 (1.99)
AEHID3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.44 (2.08)	38 13/16" (986)	40 7/8" (1038)	79 1/16" (2008)	22.44 (2.08)	24.88 (2.31)
AEHID2080	1	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.62 (1.36)	20 13/16" (529)	22 7/8" (581)	92 1/16" (2338)	14.62 (1.36)	16.95 (1.57)
AEHID2680	1	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.46 (1.71)	26 13/16" (681)	28 7/8" (733)	92 1/16" (2338)	18.46 (1.71)	20.90 (1.94)
AEHID2880	1	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.74 (1.83)	28 13/16" (732)	30 7/8" (784)	92 1/16" (2338)	19.74 (1.83)	22.22 (2.06)
AEHID3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.30 (2.07)	32 13/16" (833)	34 7/8" (886)	92 1/16" (2338)	22.30 (2.07)	24.86 (2.31)
AEHID3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.13 (2.43)	38 13/16" (986)	40 7/8" (1038)	92 1/16" (2338)	26.13 (2.43)	28.82 (2.68)
AEHID4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.32 (2.45)	43 13/16" (1113)	47 15/16" (1218)	79 1/16" (2008)	26.32 (2.45)	28.90 (2.68)
AEHID4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.59 (1.17)	20 7/8" (530)	22 15/16" (583)	79 1/16" (2008)	12.59 (1.17)	28.90 (2.68)
AEHID5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	32.91 (3.06)	55 13/16" (1418)	59 15/16" (1522)	79 1/16" (2008)	32.91 (3.06)	35.73 (3.32)
AEHID5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	15.89 (1.48)	26 7/8" (683)	28 15/16" (735)	79 1/16" (2008)	15.89 (1.48)	35.73 (3.32)
AEHID5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.10 (3.26)	59 13/16" (1519)	63 15/16" (1624)	79 1/16" (2008)	35.10 (3.26)	38.01 (3.53)
AEHID5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	16.99 (1.58)	28 13/16" (733)	30 15/16" (786)	79 1/16" (2008)	16.99 (1.58)	38.01 (3.53)
AEHID6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	39.50 (3.67)	67 13/16" (1722)	71 15/16" (1827)	79 1/16" (2008)	39.50 (3.67)	42.57 (3.95)
AEHID6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	19.18 (1.78)	32 7/8" (835)	34 15/16" (887)	79 1/16" (2008)	19.18 (1.78)	42.57 (3.95)
AEHID7068	2	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	46.09 (4.28)	79 13/16" (2027)	83 15/16" (2132)	79 1/16" (2008)	46.09 (4.28)	49.40 (4.59)
AEHID7068	1	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	22.48 (2.09)	38 7/8" (987)	40 15/16" (1040)	79 1/16" (2008)	22.48 (2.09)	49.40 (4.59)
AEHID4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	30.65 (2.85)	43 13/16" (1113)	47 15/16" (1218)	92 1/16" (2338)	30.65 (2.85)	33.48 (3.11)
AEHID4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.66 (1.36)	20 7/8" (530)	22 15/16" (583)	92 1/16" (2338)	14.66 (1.36)	33.48 (3.11)
AEHID5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.32 (3.56)	55 13/16" (1418)	59 15/16" (1522)	92 1/16" (2338)	38.32 (3.56)	41.40 (3.85)
AEHID5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.50 (1.72)	26 7/8" (683)	28 15/16" (735)	92 1/16" (2338)	18.50 (1.72)	41.40 (3.85)
AEHID5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	40.88 (3.80)	59 13/16" (1519)	63 15/16" (1624)	92 1/16" (2338)	40.88 (3.80)	44.04 (4.09)
AEHID5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.78 (1.84)	28 7/8" (733)	30 15/16" (786)	92 1/16" (2338)	19.78 (1.84)	44.04 (4.09)
AEHID6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	45.99 (4.27)	67 13/16" (1722)	71 15/16" (1827)	92 1/16" (2338)	45.99 (4.27)	49.31 (4.58)
AEHID6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.34 (2.08)	32 7/8" (835)	34 15/16" (887)	92 1/16" (2338)	22.34 (2.08)	49.31 (4.58)
AEHID7080	2	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	53.66 (4.99)	79 13/16" (2027)	83 15/16" (2132)	92 1/16" (2338)	53.66 (4.99)	57.23 (5.32)
AEHID7080	1	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	26.17 (2.43)	38 7/8" (987)	40 15/16" (1040)	92 1/16" (2338)	26.17 (2.43)	57.23 (5.32)

• "Door Dimension" always refers to outside frame to frame dimension.  
 • "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.  
 • Dimensions in parentheses are in millimeters or square meters.  
 \*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

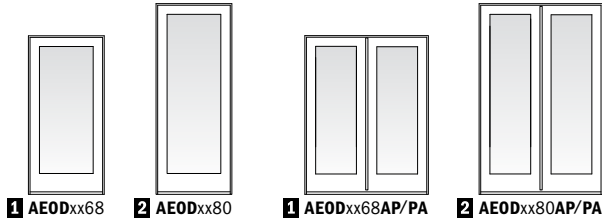

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. AEOD2068S or AEOD4068SS).

### Rectangular Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEOD2068	1	25 1/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.68 (1.18)	21 1/8" (537)	23 1/16" (586)	79 3/16" (2011)	12.58 (1.17)	14.63 (1.36)
AEOD2668	1	31 1/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.98 (1.48)	27 1/8" (689)	29 1/16" (738)	79 3/16" (2011)	15.82 (1.47)	18.04 (1.68)
AEOD2868	1	33 1/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	17.08 (1.59)	29 1/8" (740)	31 1/16" (789)	79 3/16" (2011)	16.89 (1.57)	19.18 (1.78)
AEOD3068	1	37 1/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.28 (1.79)	33 1/8" (841)	35 1/16" (891)	79 3/16" (2011)	19.00 (1.77)	21.46 (1.99)
AEOD3668	1	43 1/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.58 (2.10)	39 1/8" (994)	41 1/16" (1043)	79 3/16" (2011)	22.13 (2.06)	24.88 (2.31)
AEOD2080	1	25 1/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.76 (1.37)	21 1/8" (537)	23 1/16" (586)	92 3/16" (2342)	14.66 (1.36)	16.95 (1.57)
AEOD2680	1	31 1/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.61 (1.73)	27 1/8" (689)	29 1/16" (738)	92 3/16" (2342)	18.45 (1.71)	20.90 (1.94)
AEOD2880	1	33 1/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.89 (1.85)	29 1/8" (740)	31 1/16" (789)	92 3/16" (2342)	19.69 (1.83)	22.22 (2.06)
AEOD3080	1	37 1/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.45 (2.09)	33 1/8" (841)	35 1/16" (891)	92 3/16" (2342)	22.17 (2.06)	24.86 (2.31)
AEOD3680	1	43 1/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.29 (2.44)	39 1/8" (994)	41 1/16" (1043)	92 3/16" (2342)	25.84 (2.40)	28.82 (2.68)
AEOD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.46 (2.46)	44 3/16" (1122)	48 1/8" (1222)	79 3/16" (2011)	25.73 (2.39)	28.90 (2.68)
AEOD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.65 (1.18)	21" (533)	23" (584)	79 3/16" (2011)	12.28 (1.14)	28.90 (2.68)
AEOD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.06 (3.07)	56 3/16" (1427)	60 1/8" (1527)	79 3/16" (2011)	32.38 (3.01)	35.73 (3.32)
AEOD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	15.95 (1.48)	27" (686)	29" (737)	79 3/16" (2011)	15.60 (1.45)	35.73 (3.32)
AEOD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.26 (3.28)	60 3/16" (1529)	64 1/8" (1629)	79 3/16" (2011)	34.43 (3.20)	38.01 (3.53)
AEOD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.05 (1.58)	29" (737)	31" (787)	79 3/16" (2011)	16.63 (1.54)	38.01 (3.53)
AEOD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	39.66 (3.68)	68 3/16" (1732)	72 1/8" (1832)	79 3/16" (2011)	38.48 (3.57)	42.57 (3.95)
AEOD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	19.25 (1.79)	33" (838)	35" (889)	79 3/16" (2011)	18.65 (1.73)	42.57 (3.95)
AEOD7068	2	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	46.26 (4.30)	80 3/16" (2037)	84 1/8" (2137)	79 3/16" (2011)	44.37 (4.12)	49.40 (4.59)
AEOD7068	1	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	22.55 (2.09)	39" (991)	41" (1041)	79 3/16" (2011)	21.60 (2.01)	49.40 (4.59)
AEOD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	30.81 (2.86)	44 3/16" (1122)	48 1/8" (1222)	92 3/16" (2342)	30.08 (2.79)	33.48 (3.11)
AEOD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.72 (1.37)	21" (533)	23" (584)	92 3/16" (2342)	14.36 (1.33)	33.48 (3.11)
AEOD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.49 (3.58)	56 3/16" (1427)	60 1/8" (1527)	92 3/16" (2342)	37.80 (3.51)	41.40 (3.85)
AEOD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.57 (1.73)	27" (686)	29" (737)	92 3/16" (2342)	18.22 (1.69)	41.40 (3.85)
AEOD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.05 (3.81)	60 3/16" (1529)	64 1/8" (1629)	92 3/16" (2342)	40.22 (3.74)	44.04 (4.09)
AEOD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.85 (1.84)	29" (737)	31" (787)	92 3/16" (2342)	19.43 (1.81)	44.04 (4.09)
AEOD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.17 (4.29)	68 3/16" (1732)	72 1/8" (1832)	92 3/16" (2342)	44.99 (4.18)	49.31 (4.58)
AEOD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.41 (2.08)	33" (838)	35" (889)	92 3/16" (2342)	21.81 (2.03)	49.31 (4.58)
AEOD7080	2	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	53.86 (5.00)	80 3/16" (2037)	84 1/8" (2137)	92 3/16" (2342)	51.96 (4.83)	57.23 (5.32)
AEOD7080	1	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	26.25 (2.44)	39" (991)	41" (1041)	92 3/16" (2342)	25.30 (2.35)	57.23 (5.32)


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

### Direct-Set Rectangular Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m <sup>2</sup> )	Overall Sidelight Area Sq. Ft./ (m <sup>2</sup> )
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AESLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
AESLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
AESLD2068	25 15/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
AESLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
AESLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
AESLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
AESLD2080	25 15/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
AESLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- Sidelight Dimension always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

### Direct-Set & Sash-Set Rectangular Entry Door Sidelights

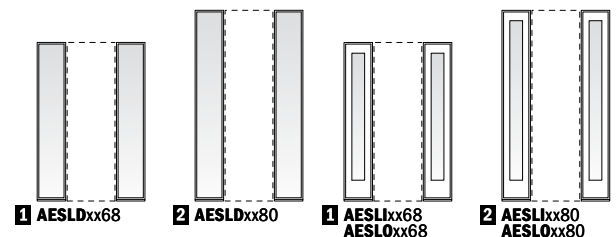


Direct-set (AESLD), sash-set inswing (AESLI) and sash-set outswing (AESLO) entry door sidelights shown. Dimensions and specifications shown for direct-set sidelights, contact your Andersen supplier for sash-set sidelight dimensions and specifications.


# RESIDENTIAL ENTRY DOORS

## Arch Entry Door Order Designation Description

Viewed from the exterior.

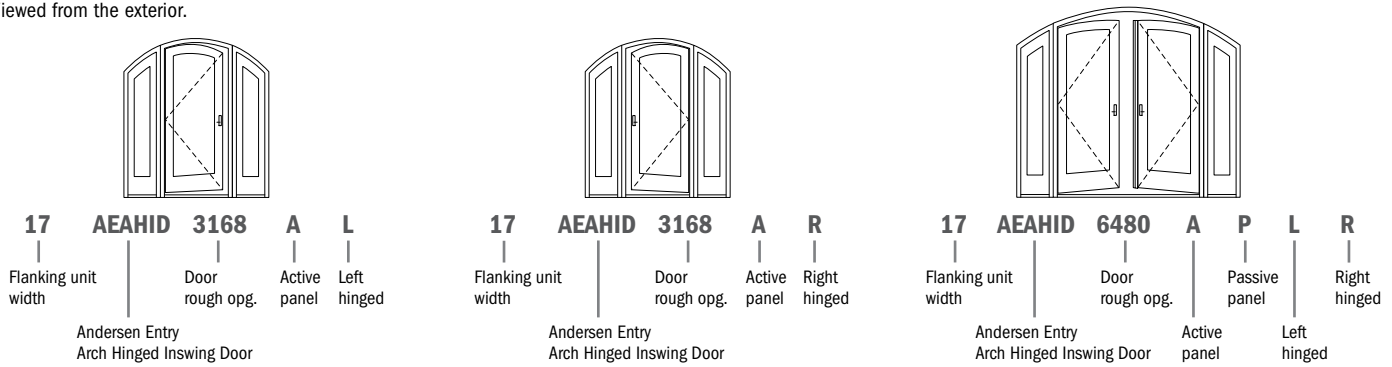

Arch inswing entry doors (AEAHD) shown above, for outswing arch entry doors use AEAOD. Outswing entry doors open outward to the exterior.

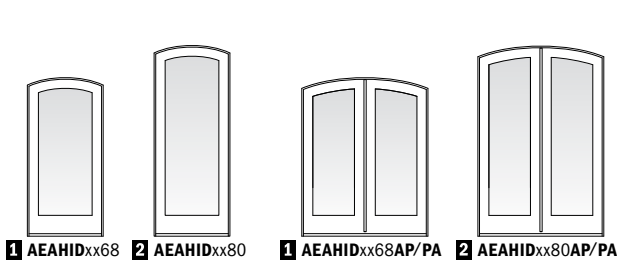

Custom-size doors are available in 1/8" (3) increments.


Available in custom designed panels. Stationary doors are also available (i.e. AEAHD2068S or AEAHD4068SS).

## Arch Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Area Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width (mm)	Height (mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEAHD2068	1	37 1/16" (941)	79 11/16" (2024)	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.26 (1.14)	20 13/16" (529)	22 7/8" (581)	77 3/16" (1961)	12.46 (1.16)	14.49 (1.35)
AEAHD2668	1	48" (1219)	79 5/16" (2015)	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.39 (1.43)	26 13/16" (681)	28 7/8" (733)	76 3/4" (1949)	15.70 (1.46)	17.85 (1.66)
AEAHD2868	1	48" (1219)	78 15/16" (2005)	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.39 (1.52)	28 13/16" (732)	30 7/8" (784)	76 7/16" (1942)	16.77 (1.56)	18.95 (1.76)
AEAHD3068	1	48" (1219)	78 1/8" (1984)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.33 (1.70)	32 13/16" (833)	34 7/8" (886)	75 11/16" (1922)	18.88 (1.75)	21.13 (1.96)
AEAHD3668	1	48" (1219)	76 3/4" (1949)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	21.11 (1.96)	38 13/16" (986)	40 7/8" (1038)	74 3/8" (1889)	22.01 (2.04)	24.36 (2.26)
AEAHD2080	1	37 1/16" (941)	92 11/16" (2354)	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.33 (1.33)	20 13/16" (529)	22 7/8" (581)	90 3/16" (2291)	14.53 (1.35)	16.81 (1.56)
AEAHD2680	1	48" (1219)	92 5/16" (2345)	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	18.00 (1.67)	26 13/16" (681)	28 7/8" (733)	89 3/4" (2280)	18.31 (1.70)	20.71 (1.92)
AEAHD2880	1	48" (1219)	91 15/16" (2335)	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	19.18 (1.78)	28 13/16" (732)	30 7/8" (784)	89 7/16" (2272)	19.55 (1.82)	21.99 (2.04)
AEAHD3080	1	48" (1219)	91 1/8" (2315)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.48 (2.00)	32 13/16" (833)	34 7/8" (886)	88 11/16" (2253)	22.03 (2.05)	24.53 (2.28)
AEAHD3680	1	48" (1219)	89 3/4" (2280)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	24.80 (2.30)	38 13/16" (986)	40 7/8" (1038)	87 3/8" (2219)	25.70 (2.39)	28.30 (2.63)
AEAHD4068	2	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	24.11 (2.24)	43 13/16" (1113)	47 15/16" (1218)	72 7/16" (1840)	25.61 (2.38)	28.07 (2.61)
AEAHD4068	1	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	11.54 (1.07)	20 7/8" (530)	22 15/16" (583)	72 7/16" (1840)	12.22 (1.14)	28.07 (2.61)
AEAHD5068	2	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	30.88 (2.87)	55 13/16" (1418)	59 15/16" (1522)	74 3/16" (1884)	32.24 (3.00)	34.97 (3.25)
AEAHD5068	1	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	14.91 (1.39)	26 7/8" (683)	28 15/16" (735)	74 3/16" (1884)	15.54 (1.44)	34.97 (3.25)
AEAHD5468	2	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	32.63 (3.03)	59 13/16" (1519)	63 15/16" (1624)	73 1/2" (1867)	34.29 (3.19)	37.09 (3.45)
AEAHD5468	1	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	15.79 (1.47)	28 7/8" (733)	30 15/16" (786)	73 1/2" (1867)	16.56 (1.54)	37.09 (3.45)
AEAHD6068	2	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	35.94 (3.34)	67 13/16" (1722)	71 15/16" (1827)	71 15/16" (1827)	38.33 (3.56)	41.27 (3.83)
AEAHD6068	1	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	17.45 (1.62)	32 7/8" (835)	34 15/16" (887)	71 15/16" (1827)	18.58 (1.73)	41.27 (3.83)
AEAHD7068	2	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	40.37 (3.75)	79 13/16" (2027)	83 15/16" (2132)	69 1/4" (1759)	44.22 (4.11)	47.36 (4.40)
AEAHD7068	1	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	19.69 (1.83)	38 7/8" (987)	40 15/16" (1040)	69 1/4" (1759)	21.53 (2.00)	47.36 (4.40)
AEAHD4080	2	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	28.44 (2.64)	43 13/16" (1113)	47 15/16" (1218)	85 7/16" (2170)	29.94 (2.78)	32.65 (3.03)
AEAHD4080	1	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	13.61 (1.26)	20 7/8" (530)	22 15/16" (583)	85 7/16" (2170)	14.29 (1.33)	32.65 (3.03)
AEAHD5080	2	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	36.29 (3.37)	55 13/16" (1418)	59 15/16" (1522)	87 3/16" (2215)	37.65 (3.50)	40.64 (3.78)
AEAHD5080	1	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	17.52 (1.63)	26 7/8" (683)	28 15/16" (735)	87 3/16" (2215)	18.15 (1.69)	40.64 (3.78)
AEAHD5480	2	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	38.41 (3.57)	59 13/16" (1519)	63 15/16" (1624)	86 1/2" (2197)	40.07 (3.72)	43.12 (4.01)
AEAHD5480	1	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	18.58 (1.73)	28 7/8" (733)	30 15/16" (786)	86 1/2" (2197)	19.35 (1.80)	43.12 (4.01)
AEAHD6080	2	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	42.43 (3.94)	67 13/16" (1722)	71 15/16" (1827)	84 15/16" (2157)	44.83 (4.16)	48.02 (4.46)
AEAHD6080	1	96" (2438)	87 7/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	20.61 (1.91)	32 7/8" (835)	34 15/16" (887)	84 15/16" (2157)	21.74 (2.02)	48.02 (4.46)
AEAHD7080	2	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	47.94 (4.45)	79 13/16" (2027)	83 15/16" (2132)	82 1/4" (2089)	51.80 (4.81)	55.20 (5.13)
AEAHD7080	1	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	23.38 (2.17)	38 7/8" (987)	40 15/16" (1040)	82 1/4" (2089)	25.22 (2.34)	55.20 (5.13)

\* "Door Dimension" always refers to outside frame to frame dimension.  
 \* "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.  
 • Dimensions in parentheses are in millimeters or square meters.  
 \*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.



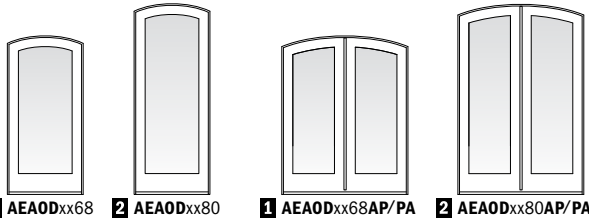

Custom-size doors are available in 1/8" (3) increments.


Available in custom designed panels. Stationary doors are also available (i.e. AEAOD2068S or AEAOD4068SS).

### Arch Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Area Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AEAOD2068	1	37 1/16" (941)	79 1/16" (2024)	25 1/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	12.58 (1.17)	14.49 (1.35)
AEAOD2668	1	48" (1219)	79 1/16" (2015)	31 1/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	15.82 (1.47)	17.85 (1.66)
AEAOD2868	1	48" (1219)	78 15/16" (2005)	33 1/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	16.50 (1.53)	29 1/8" (740)	31 1/16" (789)	76 1/2" (1943)	16.89 (1.57)	18.95 (1.76)
AEAOD3068	1	48" (1219)	78 1/8" (1984)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	19.00 (1.77)	21.13 (1.96)
AEAOD3668	1	48" (1219)	76 3/4" (1949)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	22.13 (2.06)	24.36 (2.26)
AEAOD2080	1	37 1/16" (941)	92 11/16" (2354)	25 1/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	12.37 (1.15)	21 1/8" (537)	23 1/16" (586)	77 1/4" (1962)	14.66 (1.36)	16.81 (1.56)
AEAOD2680	1	48" (1219)	92 5/16" (2345)	31 1/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	15.50 (1.44)	27 1/8" (689)	29 1/16" (738)	76 13/16" (1951)	18.45 (1.71)	20.71 (1.92)
AEAOD2880	1	48" (1219)	91 15/16" (2335)	33 1/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	16.50 (1.53)	29 1/8" (740)	31 1/16" (789)	76 1/2" (1943)	19.69 (1.83)	21.99 (2.04)
AEAOD3080	1	48" (1219)	91 1/4" (2315)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.44 (1.71)	33 1/8" (841)	35 1/16" (891)	75 3/4" (1924)	22.17 (2.06)	24.53 (2.28)
AEAOD3680	1	48" (1219)	89 3/4" (2280)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	21.21 (1.97)	39 1/8" (994)	41 1/16" (1043)	74 3/8" (1889)	25.84 (2.40)	28.30 (2.63)
AEAOD4068	2	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	24.23 (2.25)	44 3/16" (1122)	48 1/8" (1222)	72 1/2" (1842)	25.73 (2.39)	28.07 (2.61)
AEAOD4068	1	48" (1219)	74 3/4" (1899)	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	11.58 (1.08)	21" (533)	23" (584)	72 1/2" (1842)	12.28 (1.14)	28.07 (2.61)
AEAOD5068	2	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	31.00 (2.88)	56 3/16" (1427)	60 1/8" (1527)	74 1/4" (1886)	32.38 (3.01)	34.97 (3.25)
AEAOD5068	1	96" (2438)	76 3/4" (1949)	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	14.95 (1.39)	27" (686)	29" (737)	74 1/4" (1886)	15.60 (1.45)	34.97 (3.25)
AEAOD5468	2	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	32.76 (3.04)	60 3/16" (1529)	64 1/8" (1629)	73 9/16" (1868)	34.43 (3.20)	37.09 (3.45)
AEAOD5468	1	96" (2438)	76" (1930)	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	15.84 (1.47)	29" (737)	31" (787)	73 9/16" (1868)	16.63 (1.54)	37.09 (3.45)
AEAOD6068	2	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	36.06 (3.35)	68 3/16" (1732)	72 1/8" (1832)	72" (1829)	38.48 (3.57)	41.27 (3.83)
AEAOD6068	1	96" (2438)	74 7/16" (1891)	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	17.50 (1.63)	33" (838)	35" (889)	72" (1829)	18.65 (1.73)	41.27 (3.83)
AEAOD7068	2	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	40.49 (3.76)	80 3/16" (2037)	84 1/8" (2137)	69 5/16" (1761)	44.37 (4.12)	47.36 (4.40)
AEAOD7068	1	96" (2438)	71 5/8" (1819)	86 3/4" (2203)	82" (2083)	87 1/4" (2216)	82 1/2" (2096)	19.73 (1.83)	39" (991)	41" (1041)	69 5/16" (1761)	21.60 (2.01)	47.36 (4.40)
AEAOD4080	2	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	28.57 (2.65)	44 3/16" (1122)	48 1/8" (1222)	85 1/2" (2172)	30.08 (2.79)	32.65 (3.03)
AEAOD4080	1	48" (1219)	87 3/4" (2229)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	13.66 (1.27)	21" (533)	23" (584)	85 1/2" (2172)	14.36 (1.33)	32.65 (3.03)
AEAOD5080	2	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	36.43 (3.38)	56 3/16" (1427)	60 1/8" (1527)	87 1/4" (2216)	37.80 (3.51)	40.64 (3.78)
AEAOD5080	1	96" (2438)	89 3/4" (2280)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	17.57 (1.63)	27" (686)	29" (737)	87 1/4" (2216)	18.22 (1.69)	40.64 (3.78)
AEAOD5480	2	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	38.55 (3.58)	60 3/16" (1529)	64 1/8" (1629)	86 9/16" (2199)	40.22 (3.74)	43.12 (4.01)
AEAOD5480	1	96" (2438)	89" (2261)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	18.63 (1.73)	29" (737)	31" (787)	86 9/16" (2199)	19.43 (1.81)	43.12 (4.01)
AEAOD6080	2	96" (2438)	87 1/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	42.57 (3.95)	68 3/16" (1732)	72 1/8" (1832)	85" (2159)	44.99 (4.18)	48.02 (4.46)
AEAOD6080	1	96" (2438)	87 1/16" (2221)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	20.66 (1.92)	33" (838)	35" (889)	85" (2159)	21.81 (2.03)	48.02 (4.46)
AEAOD7080	2	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	48.09 (4.47)	80 3/16" (2037)	84 1/8" (2137)	82 5/16" (2091)	51.96 (4.83)	55.20 (5.13)
AEAOD7080	1	96" (2438)	84 5/8" (2149)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	23.44 (2.18)	39" (991)	41" (1041)	82 5/16" (2091)	25.30 (2.35)	55.20 (5.13)


- "Door Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.
- For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

### Direct-Set and Sash-Set Arch Entry Door Sidelights

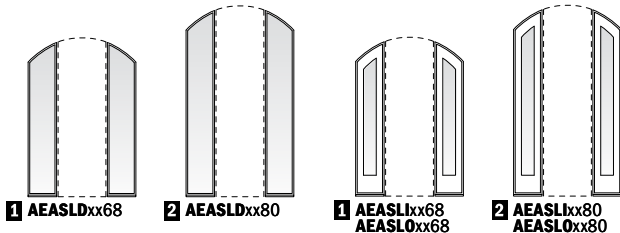

Direct-set (AEASLD), sash-set inswing (AEASLI) and sash-set outswing (AEASLO) entry door sidelights shown. Contact your Andersen supplier for dimensions and specifications.

# RESIDENTIAL ENTRY DOORS

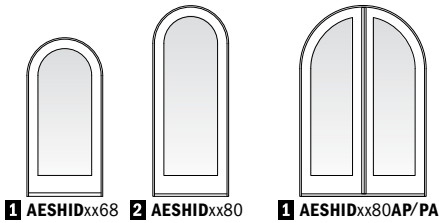


Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels.. Stationary doors are also available (i.e. **AESHID3080S** or **AESHID4080SS**).

## Springline™ Inswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Area Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESHID3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	14.92 (1.39)	32 13/16" (833)	34 1/8" (886)	61 5/8" (1565)	18.25 (1.70)	20.41 (1.90)
AESHID3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.64 (1.55)	38 13/16" (986)	40 7/8" (1038)	58 5/8" (1489)	21.21 (1.97)	23.46 (2.18)
AESHID3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.07 (1.68)	32 13/16" (833)	34 1/8" (886)	74 5/8" (1895)	21.40 (1.99)	23.81 (2.21)
AESHID3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.33 (1.89)	38 13/16" (986)	40 7/8" (1038)	71 5/8" (1819)	24.90 (2.31)	27.40 (2.55)
AESHID4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.68 (2.11)	43 13/16" (1113)	47 15/16" (1218)	68 1/8" (1730)	28.95 (2.69)	31.56 (2.93)
AESHID4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.85 (1.01)	20 7/8" (530)	22 15/16" (583)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESHID5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.86 (2.40)	55 13/16" (1418)	59 15/16" (1522)	62 1/8" (1578)	35.66 (3.31)	38.46 (3.57)
AESHID5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.48 (1.16)	26 7/8" (683)	28 15/16" (735)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESHID5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.70 (2.48)	59 13/16" (1519)	63 15/16" (1624)	60 1/8" (1527)	37.85 (3.52)	40.72 (3.78)
AESHID5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.92 (1.20)	28 7/8" (733)	30 15/16" (786)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESHID6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.04 (2.60)	67 13/16" (1722)	71 15/16" (1827)	56 1/8" (1426)	42.15 (3.92)	45.15 (4.19)
AESHID6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.62 (1.27)	32 7/8" (835)	34 15/16" (887)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESHID7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.22 (2.71)	79 13/16" (2027)	83 15/16" (2132)	50 1/8" (1273)	48.43 (4.50)	51.62 (4.80)
AESHID7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.25 (1.32)	38 7/8" (987)	40 15/16" (1040)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.
- \*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

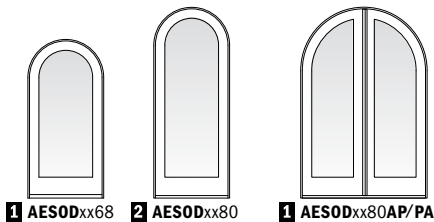

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels.. Stationary doors are also available (i.e. **AESOD3080S** or **AESOD4080SS**).

## Springline™ Outswing Entry Door Dimensions and Specifications

Door Number	Number of Panels Open*	Door Dimensions				Min. Rough Opening		Clear Opening Area Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Vent Area Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Radius Inches/(mm)	Shoulder Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)		
AESOD3068	1	18 7/8" (479)	63 1/8" (1603)	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	15.01 (1.39)	33 1/8" (841)	35 1/16" (891)	61 5/8" (1565)	18.34 (1.70)	20.41 (1.90)
AESOD3668	1	21 7/8" (556)	60 1/8" (1527)	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	16.72 (1.55)	39 1/8" (994)	41 1/16" (1043)	58 5/8" (1489)	21.29 (1.98)	23.46 (2.18)
AESOD3080	1	18 7/8" (479)	76 1/8" (1934)	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	18.17 (1.69)	33 1/8" (841)	35 1/16" (891)	74 5/8" (1895)	21.50 (2.00)	23.81 (2.21)
AESOD3680	1	21 7/8" (556)	73 1/8" (1857)	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	20.42 (1.90)	39 1/8" (994)	41 1/16" (1043)	71 5/8" (1819)	25.00 (2.32)	27.40 (2.55)
AESOD4080	2	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	22.77 (2.12)	44 3/16" (1122)	48 1/8" (1222)	68 1/8" (1730)	29.04 (2.70)	31.56 (2.93)
AESOD4080	1	25 3/8" (645)	69 5/8" (1768)	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	10.88 (1.01)	21" (533)	23" (584)	68 1/8" (1730)	13.79 (1.28)	31.56 (2.93)
AESOD5080	2	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	25.94 (2.41)	56 3/16" (1427)	60 1/8" (1527)	62 1/8" (1578)	35.74 (3.32)	38.46 (3.57)
AESOD5080	1	31 3/8" (797)	63 5/8" (1616)	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	12.51 (1.16)	27" (686)	29" (737)	62 1/8" (1578)	17.14 (1.59)	38.46 (3.57)
AESOD5480	2	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	26.77 (2.49)	60 3/16" (1529)	64 1/8" (1629)	60 1/8" (1527)	37.92 (3.52)	40.72 (3.78)
AESOD5480	1	33 3/8" (848)	61 5/8" (1565)	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	12.94 (1.20)	29" (737)	31" (787)	60 1/8" (1527)	18.24 (1.69)	40.72 (3.78)
AESOD6080	2	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	28.11 (2.61)	68 3/16" (1732)	72 1/8" (1832)	56 1/8" (1426)	42.23 (3.92)	45.15 (4.19)
AESOD6080	1	37 3/8" (949)	57 5/8" (1464)	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	13.64 (1.27)	33" (838)	35" (889)	56 1/8" (1426)	20.39 (1.89)	45.15 (4.19)
AESOD7080	2	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	29.28 (2.72)	80 3/16" (2037)	84 1/8" (2137)	50 1/8" (1273)	48.50 (4.51)	51.62 (4.80)
AESOD7080	1	43 3/8" (1102)	51 5/8" (1311)	86 3/4" (2203)	95" (2413)	87 1/4" (2216)	95 1/2" (2426)	14.27 (1.33)	39" (991)	41" (1041)	50 1/8" (1273)	23.53 (2.19)	51.62 (4.80)

- "Door Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.
- \*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

### Table of Commercial Outswing Entry Door and Sidelight Sizes

Scale 1/8" = 1'-0" (1:96)

Door Dimension	1'-3 7/8" (403)	2'-1 5/8" (651)	2'-7 5/8" (803)	2'-9 5/8" (854)	3'-1 5/8" (956)	3'-9 7/8" (1165)	6'-2 3/4" (1899)
6'-10" (2083)							
7'-1 5/16" (2167)							
7'-11" (2413)							



Custom-size doors are available in 1/8" (3) increments.

Standard sizes shown. See page 8 for minimum rough opening dimensions, glass area dimensions and opening specifications.


Available in both 10" (254) and 12" (305) bottom rail heights. For additional stile widths and additional options contact your Andersen supplier. This door has a limited water rating (LW) due to the low-threshold sill. Handle and lock are located between 34" (864) and 48" (1219).

For entry door transoms see pages 10-11.

Check local building codes, including the Americans with Disabilities Act (ADA) accessibility.

• Dimensions in parentheses are in millimeters.

# COMMERCIAL ENTRY DOORS

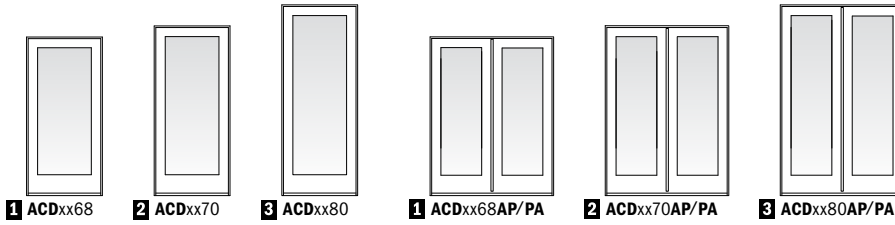

Custom-size doors are available in 1/8" (3) increments.

Available in custom designed panels. Stationary doors are also available (i.e. 3068S or 4068SS).

## Commercial Outswing Entry Door Dimensions and Specifications


Door Number	Number of Panels Open*	Door Dimensions		Min. Rough Opening		Clear Opening Area Sq. Ft./ (m <sup>2</sup> )	Clear Opening Maximums			Glass Area Sq. Ft./ (m <sup>2</sup> )	Vent Area Sq. Ft./ (m <sup>2</sup> )	Overall Door Area Sq. Ft./ (m <sup>2</sup> )
		Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		90° Width Inches/(mm)	Full Width Inches/(mm)	Height Inches/(mm)			
ACD3068	1	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	19.45 (1.81)	33 1/8" (841)	35 1/16" (891)	79 7/8" (2029)	10.60 (0.98)	19.45 (1.81)	21.46 (1.99)
ACD3668	1	43 11/16" (1110)	82" (2083)	44 3/16" (1122)	82 1/2" (2096)	22.78 (2.12)	39 1/8" (994)	41 1/16" (1043)	79 7/8" (2029)	13.15 (1.22)	22.78 (2.12)	24.88 (2.31)
ACD3868	1	45 15/16" (1167)	82" (2083)	46 7/16" (1180)	82 1/2" (2180)	24.02 (2.23)	41 3/8" (1051)	43 5/16" (1100)	79 7/8" (2029)	14.11 (1.31)	24.02 (2.23)	26.16 (2.43)
ACD3070	1	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	20.26 (1.88)	33 1/8" (841)	35 1/16" (891)	83 3/16" (2113)	11.17 (1.04)	20.26 (1.88)	22.33 (2.07)
ACD3670	1	43 11/16" (1110)	85 5/16" (2167)	44 3/16" (1122)	85 13/16" (2180)	23.72 (2.20)	39 1/8" (994)	41 1/16" (1043)	83 3/16" (2113)	13.86 (1.29)	23.72 (2.20)	25.88 (2.40)
ACD3870	1	45 15/16" (1167)	85 5/16" (2167)	46 7/16" (1180)	85 13/16" (2426)	25.02 (2.32)	41 3/8" (1051)	43 5/16" (1100)	83 3/16" (2113)	14.87 (1.38)	25.02 (2.32)	27.22 (2.53)
ACD3080	1	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	22.61 (2.10)	33 1/8" (841)	35 1/16" (891)	92 7/8" (2359)	12.84 (1.19)	22.61 (2.10)	24.86 (2.31)
ACD3680	1	43 11/16" (1110)	95" (2413)	44 3/16" (1122)	95 1/2" (2426)	26.48 (2.46)	39 1/8" (994)	41 1/16" (1043)	92 7/8" (2359)	15.94 (1.48)	26.48 (2.46)	28.82 (2.68)
ACD3880	1	45 15/16" (1167)	95" (2413)	46 7/16" (1180)	95 1/2" (2096)	27.94 (2.60)	41 3/8" (1051)	43 5/16" (1100)	92 7/8" (2359)	17.10 (1.59)	27.94 (2.60)	30.31 (2.82)
ACD4068	2	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	26.69 (2.48)	44 3/16" (1122)	48 1/8" (1222)	79 7/8" (2029)	12.46 (1.16)	26.69 (2.48)	28.90 (2.68)
ACD4068	1	50 3/4" (1289)	82" (2083)	51 1/4" (1302)	82 1/2" (2096)	12.76 (1.19)	21" (533)	23" (584)	79 7/8" (2029)	12.46 (1.16)	12.76 (1.19)	28.90 (2.68)
ACD5068	2	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	33.35 (3.10)	56 3/16" (1427)	60 1/8" (1527)	79 7/8" (2029)	16.08 (1.49)	33.35 (3.10)	35.73 (3.32)
ACD5068	1	62 3/4" (1594)	82" (2083)	63 1/4" (1607)	82 1/2" (2096)	16.09 (1.49)	27" (686)	29" (737)	79 7/8" (2029)	16.08 (1.49)	16.09 (1.49)	35.73 (3.32)
ACD5468	2	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	35.57 (3.30)	60 3/16" (1529)	64 1/8" (1629)	79 7/8" (2029)	17.79 (1.65)	35.57 (3.30)	38.01 (3.53)
ACD5468	1	66 3/4" (1695)	82" (2083)	67 1/4" (1708)	82 1/2" (2096)	17.20 (1.60)	29" (737)	31" (787)	79 7/8" (2029)	17.79 (1.65)	17.20 (1.60)	38.01 (3.53)
ACD6068	2	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2096)	40.01 (3.72)	68 3/16" (1732)	72 1/8" (1832)	79 7/8" (2029)	21.20 (1.97)	40.01 (3.72)	42.57 (3.95)
ACD6068	1	74 3/4" (1899)	82" (2083)	75 1/4" (1911)	82 1/2" (2180)	19.41 (1.80)	33" (838)	35" (889)	79 7/8" (2029)	21.20 (1.97)	19.41 (1.80)	42.57 (3.95)
ACD4070	2	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	27.80 (2.58)	44 3/16" (1122)	48 1/8" (1222)	83 3/16" (2113)	13.13 (1.22)	27.80 (2.58)	30.07 (2.79)
ACD4070	1	50 3/4" (1289)	85 5/16" (2167)	51 1/4" (1302)	85 13/16" (2180)	13.29 (1.23)	21" (533)	23" (584)	83 3/16" (2113)	13.13 (1.22)	13.29 (1.23)	30.07 (2.79)
ACD5070	2	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	34.73 (3.23)	56 3/16" (1427)	60 1/8" (1527)	83 3/16" (2113)	16.95 (1.57)	34.73 (3.23)	37.18 (3.45)
ACD5070	1	62 3/4" (1594)	85 5/16" (2167)	63 1/4" (1607)	85 13/16" (2180)	16.75 (1.56)	27" (686)	29" (737)	83 3/16" (2113)	16.95 (1.57)	16.75 (1.56)	37.18 (3.45)
ACD5470	2	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	37.04 (3.44)	60 3/16" (1529)	64 1/8" (1629)	83 3/16" (2113)	18.75 (1.74)	37.04 (3.44)	39.55 (3.67)
ACD5470	1	66 3/4" (1695)	85 5/16" (2167)	67 1/4" (1708)	85 13/16" (2180)	17.91 (1.66)	29" (737)	31" (787)	83 3/16" (2113)	18.75 (1.74)	17.91 (1.66)	39.55 (3.67)
ACD6070	2	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2180)	41.67 (3.87)	68 3/16" (1732)	72 1/8" (1832)	83 3/16" (2113)	22.34 (2.08)	41.67 (3.87)	44.29 (4.11)
ACD6070	1	74 3/4" (1899)	85 5/16" (2167)	75 1/4" (1911)	85 13/16" (2426)	20.22 (1.88)	33" (838)	35" (889)	83 3/16" (2113)	22.34 (2.08)	20.22 (1.88)	44.29 (4.11)
ACD4080	2	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	31.04 (2.88)	44 3/16" (1122)	48 1/8" (1222)	92 7/8" (2359)	15.10 (1.40)	31.04 (2.88)	33.48 (3.11)
ACD4080	1	50 3/4" (1289)	95" (2413)	51 1/4" (1302)	95 1/2" (2426)	14.83 (1.38)	21" (533)	23" (584)	92 7/8" (2359)	15.10 (1.40)	14.83 (1.38)	33.48 (3.11)
ACD5080	2	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	38.78 (3.60)	56 3/16" (1427)	60 1/8" (1527)	92 7/8" (2359)	19.49 (1.81)	38.78 (3.60)	41.40 (3.85)
ACD5080	1	62 3/4" (1594)	95" (2413)	63 1/4" (1607)	95 1/2" (2426)	18.70 (1.74)	27" (686)	29" (737)	92 7/8" (2359)	19.49 (1.81)	18.70 (1.74)	41.40 (3.85)
ACD5480	2	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	41.36 (3.84)	60 3/16" (1529)	64 1/8" (1629)	92 7/8" (2359)	21.56 (2.00)	41.36 (3.84)	44.04 (4.09)
ACD5480	1	66 3/4" (1695)	95" (2413)	67 1/4" (1708)	95 1/2" (2426)	19.99 (1.86)	29" (737)	31" (787)	92 7/8" (2359)	21.56 (2.00)	19.99 (1.86)	44.04 (4.09)
ACD6080	2	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	46.52 (4.32)	68 3/16" (1732)	72 1/8" (1832)	92 7/8" (2359)	25.69 (2.39)	46.52 (4.32)	49.31 (4.58)
ACD6080	1	74 3/4" (1899)	95" (2413)	75 1/4" (1911)	95 1/2" (2426)	22.57 (2.10)	33" (838)	35" (889)	92 7/8" (2359)	25.69 (2.39)	22.57 (2.10)	49.31 (4.58)

\* "Door Dimension" always refers to outside frame to frame dimension.  
 \* "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.  
 • Dimensions in parentheses are in millimeters or square meters.  
 \*For two-panel patio doors with one panel open, clear opening is based on active panel being open and passive panel being closed.

## Direct-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m <sup>2</sup> )	Overall Sidelight Area Sq. Ft./ (m <sup>2</sup> )
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLD0868	9 15/16" (252)	82" (2083)	10 7/16" (265)	82 1/2" (2096)	3.77 (0.35)	5.66 (0.53)
ACSLD1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	7.03 (0.65)	9.08 (0.84)
ACSLD2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	12.32 (1.14)	14.63 (1.36)
ACSLD3068	37 11/16" (957)	82" (2083)	38 3/16" (970)	82 1/2" (2096)	18.84 (1.75)	21.46 (1.99)
ACSLD0870	9 15/16" (252)	85 5/16" (2167)	10 7/16" (265)	85 13/16" (2180)	3.93 (0.37)	5.89 (0.55)
ACSLD1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	7.32 (0.68)	9.44 (0.88)
ACSLD2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	12.84 (1.19)	15.22 (1.41)
ACSLD3070	37 11/16" (957)	85 5/16" (2167)	38 3/16" (970)	85 13/16" (2180)	19.63 (1.82)	22.33 (2.07)
ACSLD0880	9 15/16" (252)	95" (2413)	10 7/16" (265)	95 1/2" (2426)	4.40 (0.41)	6.56 (0.61)
ACSLD1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	8.19 (0.76)	10.51 (0.98)
ACSLD2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	14.37 (1.33)	16.95 (1.57)
ACSLD3080	37 11/16" (957)	95" (2413)	38 3/16" (970)	95 1/2" (2426)	21.97 (2.04)	24.86 (2.31)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

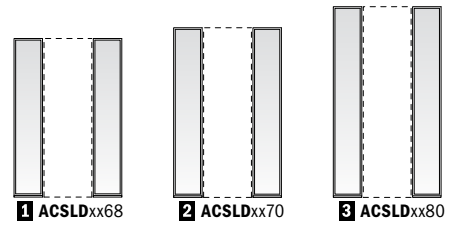


Direct-set (ACSLD) commercial outswing entry door sidelights.

## Sash-Set Commercial Outswing Entry Door Sidelight Dimensions and Specifications

Sidelight Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m <sup>2</sup> )	Overall Sidelight Area Sq. Ft./ (m <sup>2</sup> )
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
ACSLO1068	15 15/16" (405)	82" (2083)	16 7/16" (418)	82 1/2" (2096)	3.41 (0.32)	9.08 (0.84)
ACSLO2068	25 11/16" (652)	82" (2083)	26 3/16" (665)	82 1/2" (2096)	7.56 (0.70)	14.63 (1.36)
ACSLO2668	31 11/16" (805)	82" (2083)	32 3/16" (818)	82 1/2" (2096)	8.79 (0.82)	18.04 (1.68)
ACSLO2868	33 11/16" (856)	82" (2083)	34 3/16" (868)	82 1/2" (2096)	9.21 (0.86)	19.18 (1.78)
ACSLO1070	15 15/16" (405)	85 5/16" (2167)	16 7/16" (418)	85 13/16" (2180)	3.59 (0.33)	9.44 (0.88)
ACSLO2070	25 11/16" (652)	85 5/16" (2167)	26 3/16" (665)	85 13/16" (2180)	7.97 (0.74)	15.22 (1.41)
ACSLO2670	31 11/16" (805)	85 5/16" (2167)	32 3/16" (818)	85 13/16" (2180)	9.26 (0.86)	18.77 (1.74)
ACSLO2870	33 11/16" (856)	85 5/16" (2167)	34 3/16" (868)	85 13/16" (2180)	9.71 (0.90)	19.96 (1.85)
ACSLO1080	15 15/16" (405)	95" (2413)	16 7/16" (418)	95 1/2" (2426)	4.13 (0.38)	10.51 (0.98)
ACSLO2080	25 11/16" (652)	95" (2413)	26 3/16" (665)	95 1/2" (2426)	9.16 (0.85)	16.95 (1.57)
ACSLO2680	31 11/16" (805)	95" (2413)	32 3/16" (818)	95 1/2" (2426)	10.65 (0.99)	20.9 (1.94)
ACSLO2880	33 11/16" (856)	95" (2413)	34 3/16" (868)	95 1/2" (2426)	11.17 (1.04)	22.22 (2.06)

- "Sidelight Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

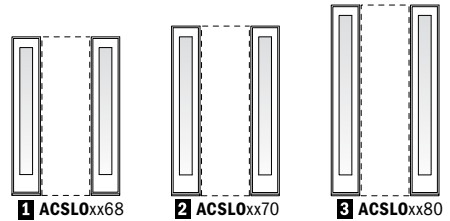

Sash-set (ACSLO) commercial outswing entry door sidelights.



# RESIDENTIAL & COMMERCIAL ENTRY DOOR TRANSOMS

## Direct-Set Rectangular Entry Door Transom Dimensions and Specifications

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m <sup>2</sup> )	Overall Sidelight Area Sq. Ft./ (m <sup>2</sup> )
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD0812	9 15/16" (252)	12 13/16" (325)	10 7/16" (265)	13 5/16" (338)	0.47 (0.04)	0.88 (0.08)
AETD1012	15 15/16" (405)	12 13/16" (325)	16 7/16" (418)	13 5/16" (338)	0.88 (0.08)	1.42 (0.13)
AETD2012	25 11/16" (652)	12 13/16" (325)	26 3/16" (665)	13 5/16" (338)	1.55 (0.14)	2.29 (0.21)
AETD2612	31 11/16" (805)	12 13/16" (325)	32 3/16" (818)	13 5/16" (338)	1.95 (0.18)	2.82 (0.26)
AETD2812	33 11/16" (856)	12 13/16" (325)	34 3/16" (868)	13 5/16" (338)	2.09 (0.19)	3.00 (0.28)
AETD3012	37 11/16" (957)	12 13/16" (325)	38 3/16" (970)	13 5/16" (338)	2.36 (0.22)	3.35 (0.31)
AETD3612	43 11/16" (1110)	12 13/16" (325)	44 3/16" (1122)	13 5/16" (338)	2.77 (0.26)	3.89 (0.36)
AETD4012	50 3/4" (1289)	12 13/16" (325)	51 1/4" (1302)	13 5/16" (338)	3.25 (0.30)	4.52 (0.42)
AETD5012	62 3/4" (1594)	12 13/16" (325)	63 1/4" (1607)	13 5/16" (338)	4.07 (0.38)	5.58 (0.52)
AETD5412	66 3/4" (1695)	12 13/16" (325)	67 1/4" (1708)	13 5/16" (338)	4.34 (0.40)	5.94 (0.55)
AETD6012	74 3/4" (1899)	12 13/16" (325)	75 1/4" (1911)	13 5/16" (338)	4.89 (0.45)	6.65 (0.62)
AETD7012	86 3/4" (2203)	12 13/16" (325)	87 1/4" (2216)	13 5/16" (338)	5.71 (0.53)	7.72 (0.72)
AETD0817	9 15/16" (252)	17 13/16" (452)	10 7/16" (265)	18 5/16" (465)	0.71 (0.07)	1.23 (0.11)
AETD1017	15 15/16" (405)	17 13/16" (452)	16 7/16" (418)	18 5/16" (465)	1.33 (0.12)	1.97 (0.18)
AETD2017	25 11/16" (652)	17 13/16" (452)	26 3/16" (665)	18 5/16" (465)	2.33 (0.22)	3.18 (0.30)
AETD2617	31 11/16" (805)	17 13/16" (452)	32 3/16" (818)	18 5/16" (465)	2.95 (0.27)	3.92 (0.36)
AETD2817	33 11/16" (856)	17 13/16" (452)	34 3/16" (868)	18 5/16" (465)	3.16 (0.29)	4.17 (0.39)
AETD3017	37 11/16" (957)	17 13/16" (452)	38 3/16" (970)	18 5/16" (465)	3.57 (0.33)	4.66 (0.43)
AETD3617	43 11/16" (1110)	17 13/16" (452)	44 3/16" (1122)	18 5/16" (465)	4.19 (0.39)	5.40 (0.50)
AETD4017	50 3/4" (1289)	17 13/16" (452)	51 1/4" (1302)	18 5/16" (465)	4.91 (0.46)	6.28 (0.58)
AETD5017	62 3/4" (1594)	17 13/16" (452)	63 1/4" (1607)	18 5/16" (465)	6.15 (0.57)	7.76 (0.72)
AETD5417	66 3/4" (1695)	17 13/16" (452)	67 1/4" (1708)	18 5/16" (465)	6.56 (0.61)	8.26 (0.77)
AETD6017	74 3/4" (1899)	17 13/16" (452)	75 1/4" (1911)	18 5/16" (465)	7.38 (0.69)	9.25 (0.86)
AETD7017	86 3/4" (2203)	17 13/16" (452)	87 1/4" (2216)	18 5/16" (465)	8.61 (0.80)	10.73 (1.00)
AETD08111	9 15/16" (252)	21 13/16" (554)	10 7/16" (265)	22 5/16" (567)	0.91 (0.08)	1.51 (0.14)
AETD10111	15 15/16" (405)	21 13/16" (554)	16 7/16" (418)	22 5/16" (567)	1.69 (0.16)	2.41 (0.22)
AETD20111	25 11/16" (652)	21 13/16" (554)	26 3/16" (665)	22 5/16" (567)	2.96 (0.27)	3.89 (0.36)
AETD26111	31 11/16" (805)	21 13/16" (554)	32 3/16" (818)	22 5/16" (567)	3.75 (0.35)	4.80 (0.45)
AETD28111	33 11/16" (856)	21 13/16" (554)	34 3/16" (868)	22 5/16" (567)	4.01 (0.37)	5.10 (0.47)
AETD30111	37 11/16" (957)	21 13/16" (554)	38 3/16" (970)	22 5/16" (567)	4.53 (0.42)	5.71 (0.53)
AETD36111	43 11/16" (1110)	21 13/16" (554)	44 3/16" (1122)	22 5/16" (567)	5.32 (0.49)	6.62 (0.61)
AETD40111	50 3/4" (1289)	21 13/16" (554)	51 1/4" (1302)	22 5/16" (567)	6.24 (0.58)	7.69 (0.71)

- "Transom Dimension" always refers to outside frame to frame dimension.
- "Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.
- Dimensions in parentheses are in millimeters or square meters.

continued on next page




Custom-size windows are available in 1/8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.

## Direct-Set Rectangular Entry Door Transom Dimensions and Specifications (continued)

Transom Number	Sidelight Dimensions		Min. Rough Opening		Glass Area Sq. Ft./ (m <sup>2</sup> )	Overall Sidelight Area Sq. Ft./ (m <sup>2</sup> )
	Width Inches/(mm)	Height Inches/(mm)	Width Inches/(mm)	Height Inches/(mm)		
AETD50111	62 3/4" (1594)	21 13/16" (554)	63 1/4" (1607)	22 5/16" (567)	7.81 (0.73)	9.51 (0.88)
AETD54111	66 3/4" (1695)	21 13/16" (554)	67 1/4" (1708)	22 5/16" (567)	8.33 (0.77)	10.11 (0.94)
AETD60111	74 3/4" (1899)	21 13/16" (554)	75 1/4" (1911)	22 5/16" (567)	9.37 (0.87)	11.32 (1.05)
AETD70111	86 3/4" (2203)	21 13/16" (554)	87 1/4" (2216)	22 5/16" (567)	10.94 (1.02)	13.14 (1.22)
AETD0827	9 15/16" (252)	30" (762)	10 7/16" (265)	30 1/2" (775)	1.30 (0.12)	2.07 (0.19)
AETD1027	15 15/16" (405)	30" (762)	16 7/16" (418)	30 1/2" (775)	2.43 (0.23)	3.32 (0.31)
AETD2027	25 11/16" (652)	30" (762)	26 3/16" (665)	30 1/2" (775)	4.25 (0.39)	5.35 (0.50)
AETD2627	31 11/16" (805)	30" (762)	32 3/16" (818)	30 1/2" (775)	5.38 (0.50)	6.60 (0.61)
AETD2827	33 11/16" (856)	30" (762)	34 3/16" (868)	30 1/2" (775)	5.75 (0.53)	7.02 (0.65)
AETD3027	37 11/16" (957)	30" (762)	38 3/16" (970)	30 1/2" (775)	6.50 (0.60)	7.85 (0.73)
AETD3627	43 11/16" (1110)	30" (762)	44 3/16" (1122)	30 1/2" (775)	7.63 (0.71)	9.10 (0.85)
AETD4027	50 3/4" (1289)	30" (762)	51 1/4" (1302)	30 1/2" (775)	8.95 (0.83)	10.57 (0.98)
AETD5027	62 3/4" (1594)	30" (762)	63 1/4" (1607)	30 1/2" (775)	11.20 (1.04)	13.07 (1.21)
AETD5427	66 3/4" (1695)	30" (762)	67 1/4" (1708)	30 1/2" (775)	11.95 (1.11)	13.91 (1.29)
AETD6027	74 3/4" (1899)	30" (762)	75 1/4" (1911)	30 1/2" (775)	13.45 (1.25)	15.57 (1.45)
AETD7027	86 3/4" (2203)	30" (762)	87 1/4" (2216)	30 1/2" (775)	15.70 (1.46)	18.07 (1.68)
AETD4029	50 3/4" (1289)	32" (813)	51 1/4" (1302)	32 1/2" (826)	9.62 (0.89)	11.28 (1.05)
AETD5029	62 3/4" (1594)	32" (813)	63 1/4" (1607)	32 1/2" (826)	12.03 (1.12)	13.94 (1.30)
AETD5429	66 3/4" (1695)	32" (813)	67 1/4" (1708)	32 1/2" (826)	12.84 (1.19)	14.83 (1.38)
AETD6029	74 3/4" (1899)	32" (813)	75 1/4" (1911)	32 1/2" (826)	14.45 (1.34)	16.61 (1.54)
AETD7029	86 3/4" (2203)	32" (813)	87 1/4" (2216)	32 1/2" (826)	16.87 (1.57)	19.28 (1.79)
AETD4041	50 3/4" (1289)	48" (1219)	51 1/4" (1302)	48 1/2" (1232)	14.92 (1.39)	16.92 (1.57)
AETD5041	62 3/4" (1594)	48" (1219)	63 1/4" (1607)	48 1/2" (1232)	18.67 (1.73)	20.92 (1.94)
AETD5441	66 3/4" (1695)	48" (1219)	67 1/4" (1708)	48 1/2" (1232)	19.92 (1.85)	22.25 (2.07)
AETD6041	74 3/4" (1899)	48" (1219)	75 1/4" (1911)	48 1/2" (1232)	22.42 (2.08)	24.92 (2.32)
AETD7041	86 3/4" (2203)	48" (1219)	87 1/4" (2216)	48 1/2" (1232)	26.17 (2.43)	28.92 (2.69)
AETD4051	50 3/4" (1289)	60" (1524)	51 1/4" (1302)	60 1/2" (1537)	18.90 (1.76)	21.15 (1.96)
AETD5051	62 3/4" (1594)	60" (1524)	63 1/4" (1607)	60 1/2" (1537)	23.65 (2.20)	26.15 (2.43)
AETD5451	66 3/4" (1695)	60" (1524)	67 1/4" (1708)	60 1/2" (1537)	25.23 (2.34)	27.81 (2.58)
AETD6051	74 3/4" (1899)	60" (1524)	75 1/4" (1911)	60 1/2" (1537)	28.40 (2.64)	31.15 (2.89)
AETD7051	86 3/4" (2203)	60" (1524)	87 1/4" (2216)	60 1/2" (1537)	33.15 (3.08)	36.15 (3.36)

- "Transom Dimension" always refers to outside frame to frame dimension.
- **"Minimum Rough Opening" dimensions may need to be increased to allow for use of building wraps, flashing, sill panning, brackets, fasteners or other items.**
- Dimensions in parentheses are in millimeters or square meters.



Custom-size windows are available in 1/8" (3) increments.



Direct-Set Rectangular Entry Door Transom

Direct-set transoms (**AETD**) provide maximum unobstructed glass. Direct-set dimensions and specifications shown.



Sash-Set Rectangular Entry Door Transoms

Sash-set single (**AETXXX-1**) and twin (**AETXXX-2**) transoms are also available. Contact your Andersen supplier for dimensions and specifications.



All trademarks where denoted are marks of their respective owners.  
©2022 Andersen Corporation. All rights reserved. 04/22 Part #110017