

# Latitude 5320/Latitude 5320 2in1

## Setup and specifications guide

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

<b>Chapter 1: Set up your Latitude 5320</b> .....	<b>4</b>
<b>Chapter 2: Chassis overview</b> .....	<b>6</b>
Right .....	6
Left .....	7
Top.....	8
Front .....	9
Bottom .....	10
Modes.....	10
Battery Charge and Status LED .....	13
<b>Chapter 3: Specifications of Latitude 5320</b> .....	<b>14</b>
Dimensions and weight.....	14
Processor.....	15
Chipset.....	15
Operating system.....	15
Memory.....	16
Intel Optane memory.....	16
External ports.....	17
Internal slots.....	17
Wireless module.....	17
WWAN module.....	18
Audio.....	18
Storage.....	19
Intel Optane Memory H20 with Solid State Storage (optional).....	19
Media-card reader.....	20
Keyboard.....	20
Camera.....	21
Clickpad.....	21
Power adapter.....	22
Battery.....	22
Display.....	24
Sensor and control.....	26
Fingerprint reader (optional).....	26
GPU—Integrated.....	26
Security.....	27
Operating and storage environment.....	27
<b>Chapter 4: Dell low blue light display</b> .....	<b>28</b>
<b>Chapter 5: Keyboard shortcuts</b> .....	<b>29</b>
<b>Chapter 6: Getting help and contacting Dell</b> .....	<b>30</b>

# Set up your Latitude 5320

1. Connect the power adapter, and press the power button.



**NOTE:** The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.



2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell Technologies recommends that you:






- Connect to a network for Windows updates.
  - NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

**Table 1. Locate Dell apps**

Dell apps	Details
	<p><b>My Dell</b></p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>
	<p><b>Dell Product Registration</b></p> <p>Register your computer with Dell.</p>

**Table 1. Locate Dell apps (continued)**


Dell apps	Details
	<p><b>Dell Help &amp; Support</b></p> <p>Access help and support for your computer.</p>
	<p><b>SupportAssist</b></p> <p>Proactively checks the health of your computer's hardware and software.</p> <p> <b>NOTE:</b> Renew or upgrade your warranty by clicking the warranty expiry date in SupportAssist.</p>
	<p><b>Dell Update</b></p> <p>Updates your computer with critical fixes and important device drivers as they become available.</p>
	<p><b>Dell Digital Delivery</b></p> <p>Download software applications including software that is purchased but not pre-installed on your computer.</p>

## Chassis overview

### Topics:

- [Right](#)
- [Left](#)
- [Top](#)
- [Front](#)
- [Bottom](#)
- [Modes](#)
- [Battery Charge and Status LED](#)

## Right

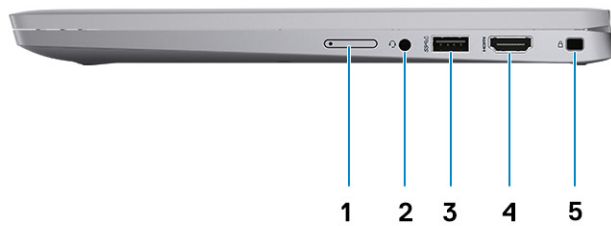


1. microSIM-card tray (optional)
2. Universal audio port
3. USB 3.2 Gen1 port with PowerShare
4. HDMI 2.0 port
5. Wedge-shaped lock slot

# Left



1. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
2. Thunderbolt 4 port with DisplayPort Alt Mode/USB4/Power Delivery
3. USB 3.2 Gen 1 port
4. microSD-card slot
5. Smart card reader slot (optional)

# Top

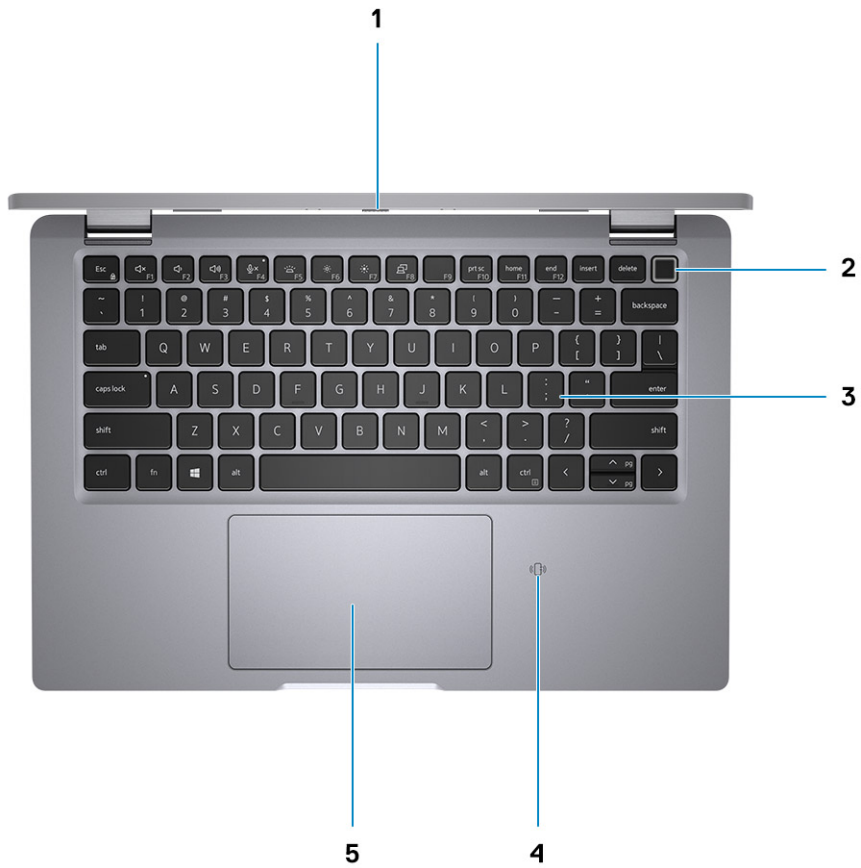

1. Privacy shutter
2. Power button (with optional fingerprint reader)
3. Keyboard
4. NFC/contactless card (optional)
5. Clickpad




# Front



1. Proximity sensor (optional)
2. IR LED (optional)
3. RGB IR Camera (optional)
4. RGB LED (optional)
5. Microphone
6. Ambient Light Sensor (ALS) (optional)
7. LCD panel
8. Battery indicator LED/diagnostic LED

## Bottom

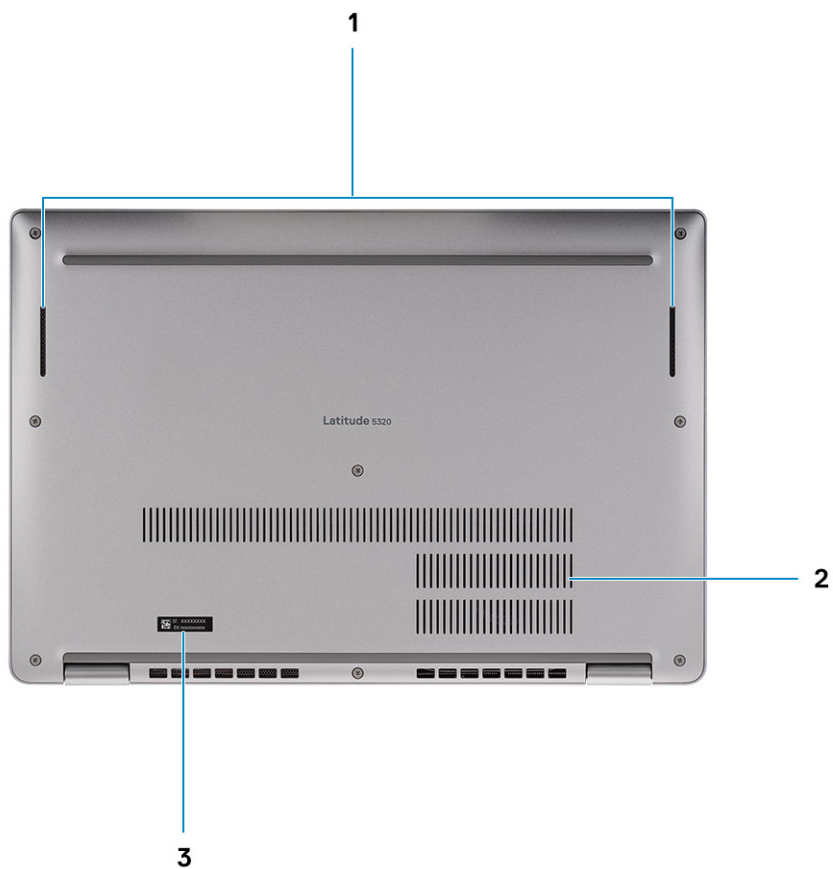

1. Speakers
2. Thermal vent
3. Service Tag label

## Modes

**NOTE:** The modes are applicable only to Latitude 5320 2-in-1 (an upsell option).

## Laptop



## Tablet



Stand



Tent



# Battery Charge and Status LED

Table 2. Battery Charge and Status LED Indicator

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%

- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

# Specifications of Latitude 5320

**NOTE:** Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to **Help and Support** in your Windows operating system and select the option to view information about your computer.

## Topics:

- Dimensions and weight
- Processor
- Chipset
- Operating system
- Memory
- Intel Optane memory
- External ports
- Internal slots
- Wireless module
- WWAN module
- Audio
- Storage
- Intel Optane Memory H20 with Solid State Storage (optional)
- Media-card reader
- Keyboard
- Camera
- Clickpad
- Power adapter
- Battery
- Display
- Sensor and control
- Fingerprint reader (optional)
- GPU—Integrated
- Security
- Operating and storage environment

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Latitude 5320.

**Table 3. Dimensions and weight**

Description	Values
Height:	16.96 mm (0.67 in.)
Width	305.70 mm (12.04 in.)
Depth	207.50 mm (8.17 in.)
Weight (minimum)	Laptop - 1.18 kg (2.61 lb) 2-in-1 - 1.32 kg (2.90 lb) <b>NOTE:</b> The weight of your system depends on the configuration ordered and the manufacturing variability.

# Processor

The following table lists the details of the processors supported by your Latitude 5320.

**Table 4. Processor**

Description	Option one	Option two	Option three	Option four
Processor type	11th Generation Intel Core i3-1125G4	11th Generation Intel Core i5-1135G7	11th Generation Intel Core i5-1145G7	11th Generation Intel Core i7-1185G7
Processor wattage	17.50 W	17.50 W	17.50 W	17.50 W
Processor core count	4	4	4	4
Processor thread count	8	8	8	8
Processor speed	2.00 GHz to 3.70 GHz	2.40 GHz to 4.20 GHz	2.60 GHz to 4.40 GHz	3.00 GHz to 4.80 GHz
Processor cache	8 MB	8 MB	8 MB	12 MB
Integrated graphics	Intel UHD Graphics	Intel Iris X <sup>e</sup> Graphics	Intel Iris X <sup>e</sup> Graphics	Intel Iris X <sup>e</sup> Graphics
<p><b>NOTE:</b> i5 and i7 will have Intel UHD graphics if the system is configured with a single-channel memory configuration.</p> <p><b>NOTE:</b> Intel UHD Graphics with single-channel memory configuration</p> <p><b>NOTE:</b> Intel Iris X<sup>e</sup> graphics with dual-channel memory configuration</p>				

# Chipset

The following table lists the details of the chipset supported by your Latitude 5320.

**Table 5. Chipset**

Description	Values
Chipset	Intel PCH-LP
Processor	11th Generation Intel Core i3/i5/i7
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen3

# Operating system

Your Latitude 5320 supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Home National Academic, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Pro National Academic, 64-bit
- Windows 10 Home, 64-bit
- Windows 10 Pro, 64-bit
- Windows 10 Pro Education, 64-bit

- Windows 10 Enterprise, 64-bit
- Ubuntu 20.04 LTS, 64-bit

## Memory

The following table lists the memory specifications of your Latitude 5320.

**Table 6. Memory specifications**

Description	Values
Memory slots	Onboard memory
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB, 32 GB
Memory configurations supported	<ul style="list-style-type: none"> <li>• 4 GB, DDR4, 3200 MHz, single-channel, integrated</li> <li>• 8 GB, DDR4, 3200 MHz, dual-channel, integrated</li> <li>• 16 GB, DDR4, 3200 MHz, dual-channel, integrated</li> <li>• 32 GB, DDR4, 3200 MHz, dual-channel, integrated</li> </ul>

## Intel Optane memory

Intel Optane memory functions only as a storage accelerator. It neither replaces nor adds to the memory (RAM) installed on your computer.

**NOTE:** Intel Optane memory is supported on computers that meet the following requirements:

- 11<sup>th</sup> Generation or higher Intel Core i3/i5/i7 processor
- Windows 10 64-bit version or higher (Anniversary Update)
- Latest version of Intel Rapid Storage Technology driver

**Table 7. Intel Optane memory**

Description	Values
Type	M.2 2280, PCIe NVMe, Intel Optane memory H20
Interface	Gen 3 PCIe x4 NVMe
Connector	M.2 2280
Configurations supported	32 GB + 512 GB
Capacity	32 GB + 512 GB



## External ports

The following table lists the external ports on your Latitude 5320.

**Table 8. External ports**

Description	Values
USB ports	<ul style="list-style-type: none"> <li>One USB 3.2 Gen 1 port</li> <li>One USB 3.2 Gen 1 port with PowerShare</li> <li>Two Thunderbolt 4 ports with DisplayPort Alt Mode/USB4/Power Delivery</li> </ul>
Audio port	One Universal Audio Jack
Video port/ports	<ul style="list-style-type: none"> <li>One HDMI 2.0 port</li> <li>Two DisplayPorts over Type-C</li> </ul>
Media-card reader	One microSD-card slot
Docking port	Supported through Type-C
Power-adapter port	USB-C power-adapter port
Security-cable slot	One wedge-shaped lock slot

## Internal slots

The following table lists the internal slots of your Latitude 5320.

**Table 9. Internal slots**

Description	Values
M.2	<ul style="list-style-type: none"> <li>M.2 2230 slot for Wi-Fi and Bluetooth combo card</li> <li>One M.2 2230 slot for solid-state drive</li> <li>One M.2 2280 slot for solid-state drive/Intel Optane</li> <li>One M.2 3042 slot for WWAN card</li> </ul> <p><b>NOTE:</b> To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at <a href="http://www.dell.com/support">www.dell.com/support</a>.</p>

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your Latitude 5320.

**Table 10. Wireless module specifications**

Description	Option one	Option two	Option three
Model number	Intel Wi-Fi 6 AX201	Intel AX210	Qualcomm QCA61x4A
Transfer rate	Up to 2.40 Gbps	Up to 2.40 Gbps	Up to 867 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz/6 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> <li>Wi-Fi 802.11a/b/g</li> </ul>	<ul style="list-style-type: none"> <li>Wi-Fi 802.11a/b/g</li> </ul>	<ul style="list-style-type: none"> <li>Wi-Fi 802.11a/b/g</li> </ul>


**Table 10. Wireless module specifications (continued)**

Description	Option one	Option two	Option three
	<ul style="list-style-type: none"> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> <li>• Wi-Fi 6 (Wi-Fi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> <li>• Wi-Fi 6 (Wi-Fi 802.11ax)</li> </ul>	<ul style="list-style-type: none"> <li>• Wi-Fi 4 (Wi-Fi 802.11n)</li> <li>• Wi-Fi 5 (Wi-Fi 802.11ac)</li> </ul>
Encryption	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>	<ul style="list-style-type: none"> <li>• 64-bit/128-bit WEP</li> <li>• AES-CCMP</li> <li>• TKIP</li> </ul>
Bluetooth	Bluetooth 5.1	Bluetooth 5.2	Bluetooth 5.0

## WWAN module

The following table lists the Wireless Wide Area Network (WWAN) module supported on your Latitude 5320.

**Table 11. WWAN module specifications**

Description	Values
Model number	Intel XMM 7360 Global LTE-Advanced (DW5820e) CAT9
Form factor	M.2 3042 form factor
Transfer rate	Up to 450 Mbps DL/50 Mbps UL (Cat 9)
Frequency bands supported	(1, 2, 3, 4, 5, 7, 8, 11, 12, 13, 17, 18, 19, 20, 21, 26, 28, 29, 30, 38, 39, 40, 41, 66), HSPA+ (1, 2, 4, 5, 8)
Power supply	DC 3.135 V to 4.4 V, typical 3.3 V
Temperature	<ul style="list-style-type: none"> <li>• Normal operating temperature: -10°C to + 55°C</li> <li>• Extended operating temperature: -20°C to +65°C</li> </ul>
Antenna connector	<ul style="list-style-type: none"> <li>• WWAN Main Antenna x 1</li> <li>• WWAN Diversity Antenna x 1</li> </ul>
Wake on Wireless	Supported
Network standards	LTE FDD/TDD, WCDMA/HSPA+, GNSS/ Beidou
 <b>NOTE:</b> For instructions on how to find your computer's IMEI (International Mobile Station Equipment Identity) number, see the knowledge base article <a href="https://www.dell.com/support">000143678</a> at <a href="https://www.dell.com/support">www.dell.com/support</a> .	

## Audio

The following table lists the audio specifications of your Latitude 5320.

**Table 12. Audio specifications**

Description	Values
Audio controller	Realtek ALC3254
Stereo conversion	Supported
Internal audio interface	High-definition audio

**Table 12. Audio specifications (continued)**

Description		Values
External audio interface		Universal Audio Jack
Number of speakers		Two
Internal-speaker amplifier		Supported (audio codec integrated)
External volume controls		Keyboard shortcut controls
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	2.5 W
Subwoofer output		Not supported
Microphone		Digital-array microphones

## Storage

This section lists the storage options on your Latitude 5320.

Your computer supports one of the following configurations:

- M.2 2230, PCIe x4 NVMe, Class 35 SSD
- M.2 2280, PCIe x4 NVMe, Class 40 SSD
- M.2 2230, PCIe x4 NVMe, Class 35 SED
- M.2 2280, PCIe x4 NVMe, Class 40 SED

The primary drive of your computer varies with the storage configuration. For systems with a M.2 drive, the M.2 drive is the primary drive.

**Table 13. Storage specifications**

Storage type	Interface type	Capacity
M.2 2230, PCIe x4 NVMe, Class 35 SSD	Gen 3 PCIe x4 NVMe	128 GB, 256 GB, 512 GB
M.2 2280, PCIe x4 NVMe, Class 40 SSD	Gen 3 PCIe x4 NVMe	256 GB, 512 GB, 1 TB
M.2 2280, PCIe x4 NVMe, Class 40 SSD	Gen 4 PCIe x4 NVMe	2 TB
M.2 2230, PCIe x4 NVMe, Class 35 SED	Gen 3 PCIe x4 NVMe	256 GB

## Intel Optane Memory H20 with Solid State Storage (optional)

Intel Optane Memory technology utilizes 3D XPoint memory technology and functions as a non-volatile storage cache/accelerator and/or storage device depending on the Intel Optane Memory installed in your computer.

Intel Optane Memory H20 with Solid State Storage functions as both a non-volatile storage cache/accelerator (enabling enhanced read/write speeds for hard-drive storage) and a solid-state storage solution. It neither replaces nor adds to the memory (RAM) installed on your computer.

**Table 14. Intel Optane Memory H20 with Solid State Storage specifications**

Description	Values
Interface	PCIe 3 x4 NVMe <ul style="list-style-type: none"> <li>One PCIe 3 x2 for Optane memory</li> <li>One PCIe 3 x2 for solid-state storage</li> </ul>
Connector	M.2
Form factor	2280
Capacity (Intel Optane memory)	Up to 32 GB
Capacity (solid-state storage)	Up to 512 GB

**NOTE:** Intel Optane Memory H20 with Solid State Storage is supported on computers that meet the following requirements:

- 11<sup>th</sup> Generation or higher Intel Core i3/i5/i7 processors
- Windows 10 64-bit version or higher (Anniversary Update)
- Intel Rapid Storage Technology driver version 18.1.0.1027 or higher

## Media-card reader

The following table lists the media cards supported by your Latitude 5320.

**Table 15. Media-card reader specifications**

Description	Values
Media-card type	One microSD-card slot
Media-cards supported	<ul style="list-style-type: none"> <li>micro-Secure Digital (mSD)</li> <li>micro-Secure Digital High Capacity (mSDHC)</li> <li>micro-Secure Digital Extended Capacity (mSDXC)</li> </ul>

**NOTE:** The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.

## Keyboard

The following table lists the keyboard specifications of your Latitude 5320.

**Table 16. Keyboard specifications**

Description	Values
Keyboard type	<ul style="list-style-type: none"> <li>Standard non-backlit keyboard</li> <li>Standard backlit keyboard</li> </ul>
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> <li>United States and Canada: 79 keys</li> <li>United Kingdom: 80 keys</li> <li>Japan: 83 keys</li> </ul>
Keyboard size	X=18.05 mm key pitch Y=18.05 mm key pitch

**Table 16. Keyboard specifications (continued)**

Description	Values
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p>

## Camera

The following table lists the camera specifications of your Latitude 5320.

**Table 17. Camera specifications**

Description	Values		
Number of cameras	One	One	One
Type	HD RGB camera	HD RGB + Ir camera	FHD RGB + Ir camera
Location	Front camera	Front camera	Front camera
Sensor type	CMOS sensor technology	CMOS sensor technology	CMOS sensor technology
Resolution			
Camera			
Still image	0.92 megapixel	0.92 megapixels	2.07 megapixels
Video	1280 x 720 (HD) at 30 fps	1280 x 720 (HD) at 30 fps	1920 x 1080 (FHD) at 30 fps
Infrared camera			
Still image	NA	0.23	0.23
Video	NA	640 x 360	640 x 360
Diagonal viewing angle			
Camera	78.6 degrees	87 degrees	87.6 degrees
Infrared camera	NA	87 degrees	87.6 degrees

## Clickpad

The following table lists the clickpad specifications of your Latitude 5320.

**Table 18. Clickpad specifications**

Description	Values
Resolution:	>=300 dpi
Dimensions:	
Horizontal	115 mm (4.53 in.)


**Table 18. Clickpad specifications (continued)**

Description	Values
Vertical	67 mm (2.64 in.)

## Power adapter

The following table lists the power adapter specifications of your Latitude 5320.

**Table 19. Power adapter specifications**

Description	Option 1	Option 2	Option 3	Option 4
Type	45 W AC adapter, USB-C	65 W AC adapter, USB-C	90 W AC adapter, USB-C	60 W AC adapter USB-C
Input voltage	100 VAC-240 VAC	100 VAC-240 VAC	100 VAC-240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz-60 Hz	50 Hz-60 Hz	50 Hz-60 Hz	50 Hz x 60 Hz
Input current (maximum)	1.3 A	1.7 A	1.5 A	1.7 A
Output current (continuous)	<ul style="list-style-type: none"> <li>• 20 V/2.25 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9 V/3 A (Continuous)</li> <li>• 5 V/3 A (Continuous)</li> </ul>	<ul style="list-style-type: none"> <li>• 20 V/3.25 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9 V/3 A (Continuous)</li> <li>• 5 V/3 A (Continuous)</li> </ul>	<ul style="list-style-type: none"> <li>• 20 V/4.50 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9 V/3 A (Continuous)</li> <li>• 5 V/3 A (Continuous)</li> </ul>	<ul style="list-style-type: none"> <li>• 20 V/3 A (Continuous)</li> <li>• 15 V/3 A (Continuous)</li> <li>• 9 V/3 A (Continuous)</li> <li>• 5 V/3 A (Continuous)</li> </ul>
Rated output voltage	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC	20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:				
Operating	0 °C (32 °F) to 40 °C (104 °F)	0 °C (32 °F) to 40 °C (104 °F)	0 °C (32 °F) to 40 °C (104 °F)	0°C (32°F) to 40 °C (104°F)
Storage	-40 °C (-40 °F) to 70 °C ( 158 °F)	-40 °C (-40 °F) to 70 °C ( 158 °F)	-40 °C (-40 °F) to 70 °C ( 158 °F)	- 40° C to 70°C (158°F)
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>				




## Battery

The following table lists the battery specifications of your Latitude 5320.

**Table 20. Battery specifications**

Description	Option 1	Option 2
Type	3-cell 42 WHr Polymer	4-cell 63 WHr Polymer
Voltage	11.40 VDC	15.20 VDC
Weight (maximum)	0.21 kg ( 0.46 lb)	0.26 kg ( 0.58 lb)

**Table 20. Battery specifications (continued)**

Description		Option 1	Option 2
Dimensions:			
	Height	92.80 mm (3.65 in.)	92.80 mm (3.65 in.)
	Width	238 mm (9.37 in.)	238 mm (9.37 in.)
	Depth	5.70 mm (0.22 in.)	5.70 mm (0.22 in.)
Temperature range:			
	Operating	Minimum operating temperature: Charge/Discharge : 0°C (32°F)  Maximum operating temperature: <ul style="list-style-type: none"> <li>● Charge: 45°C/ 113°F</li> <li>● Discharge: 70°C/ 158°F</li> </ul>	Minimum operating temperature: Charge/Discharge : 0°C (32°F)  Maximum operating temperature: <ul style="list-style-type: none"> <li>● Charge: 45°C/ 113°F</li> <li>● Discharge: 70°C/ 158°F</li> </ul>
	Storage	Minimum storage temperature: -20°C (-4°F)  Maximum storage temperature: 65°C (149°F)	Minimum storage temperature: -20°C (-4°F)  Maximum storage temperature: 65°C (149°F)
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Charging time (approximate)		<ul style="list-style-type: none"> <li>● ExpressCharge Boost (0% up to 35%) : 20 minutes</li> <li>● Express charge : 2 hours</li> <li>● Standard charge : 3 hours</li> </ul> <p> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com/">www.dell.com/</a></p>	<ul style="list-style-type: none"> <li>● ExpressCharge Boost (0% up to 35%) : 20 minutes</li> <li>● Express charge : 2 hours</li> <li>● Standard charge : 3 hours</li> </ul> <p> <b>NOTE:</b> Control the charging time, duration, start and end time, and so on, using the Dell Power Manager application. For more information about the Dell Power Manager see, <i>Me and My Dell</i> on <a href="http://www.dell.com/">www.dell.com/</a></p>
Life span (approximate)		<ul style="list-style-type: none"> <li>● 1 year for Standard battery</li> <li>● 3 years for LcL battery</li> </ul>	<ul style="list-style-type: none"> <li>● 1 year for Standard battery</li> <li>● 3 years for LcL battery</li> </ul>
Coin-cell battery		No	No
ExpressCharge		Supported	Supported
User replaceable		No	No
Operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
		<p> <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</p>	

# Display

The following table lists the display specifications of your Latitude 5320 and Latitude 5320 2-in-1.

## Latitude 5320

**Table 21. Display specifications**

Description		Option 1	Option 2	Option 3	Option 4
Type		13.3-inch Full High Definition (FHD)	13.3-inch Full High Definition (FHD)	13.3-inch Full High Definition (FHD) (Privacy/Touch)	13.3-inch Full High Definition (FHD) (Touch)
Panel technology		Wide Viewing Angle (WVA), Super Low Power (SLP)	Wide Viewing Angle (WVA), Super Low Power (SLP), Low Blue Light (LBL)	Wide Viewing Angle (WVA), Super Low Power (SLP)	Wide Viewing Angle (WVA), Super Low Power (SLP)
Luminance (typical)		250 nits	400 nits	300 nits	300 nits
Dimensions (Active Area):					
	Height	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)	165.24 mm (6.51 in.)
	Width	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)	293.76 mm (11.57 in.)
	Diagonal	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)	337.08 mm (13.27 in.)
Native Resolution		1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Megapixels		2.07	2.07	2.07	2.07
Color gamut		45% NTSC	100% sRGB typical	100% sRGB typical	72% NTSC
Pixels per Inch (PPI)		166	166	166	166
Contrast Ratio (min)		600:1	1000:1	600:1	600:1
Response Time (max)		35 ms	35 ms	35 ms	35 ms
Refresh Rate		60 Hz	60 Hz	60 Hz	60 Hz
Horizontal viewing angle (Measurement represents typical viewing angle)		85 +/- degrees	85 +/- degrees	<ul style="list-style-type: none"> <li>Sharing Mode: 85 +/- degrees</li> <li>Privacy Mode (brightness &lt; 40%) : 30/30 (max) degrees</li> </ul>	85 +/- degrees
Vertical viewing angle (Measurement represents typical viewing angle)		85 +/- degrees	85 +/- degrees	<ul style="list-style-type: none"> <li>Sharing Mode: 85 +/- degrees</li> <li>Privacy Mode (brightness &lt; 40%) : 30/30 (max) degrees</li> </ul>	85 +/- degrees
Pixel Pitch		0.153 x 0.153 mm	0.153 x 0.153 mm	0.153 x 0.153 mm	0.153 x 0.153 mm



**Table 21. Display specifications (continued)**

Description				
Power Consumption (maximum)	3.50 W @ Mosaic	2.52 W @ Mosaic	<ul style="list-style-type: none"> <li>• Sharing mode : 3.35 W</li> <li>• Privacy mode : 3.45 W</li> </ul>	4.8 W
Anti-glare vs glossy finish	Anti-glare	Anti-glare	Anti-glare	Anti-glare
Touch options	No	No	Yes	Yes
Adaptive sync	No	No	No	No
Stylus support	Not supported	Not supported	Not supported	Not supported

## Latitude 5320 2-in-1

**Table 22. Display specifications**

Description		
Type	Full High Definition (FHD)	
Panel technology	Wide Viewing Angle (WVA), Super Low Power (SLP)	
Luminance (typical)	300 nits	
Dimensions (Active Area):		
	Height	165.24 mm (6.51 in.)
	Width	293.76 mm (11.57 in.)
	Diagonal	337.08 mm (13.27 in.)
Native Resolution	1920 x 1080	
Megapixels	2.07	
Color gamut	72% NTSC	
Pixels per Inch (PPI)	166	
Contrast Ratio (min)	800:1 typ, 600:1 min	
Response Time (max)	35 ms	
Refresh Rate	60 Hz	
Horizontal View Angle	80 min degrees	
Vertical View Angle	80 min degrees	
Pixel Pitch	0.153 x 0.153	
Power Consumption (maximum)	4.2 W	
Anti-glare vs glossy finish	Anti-glare	
Touch options	Yes	
Adaptive sync	No	
Stylus support	Supported	

# Sensor and control

The following table lists the sensor and control list for your Latitude 5320.

**Table 23. Sensor and control**

Sensor support	
Sensor	Ambient Light Sensor
	Windows Adaptive Color
	Accelerometer (G sensor): Laptop: <ul style="list-style-type: none"> <li>One on the system board.</li> <li>One on the system board and another on the hinge-up (for configuration that supports Express Sign-in feature with proximity sensor).</li> </ul> 2-in-1: <ul style="list-style-type: none"> <li>One on the system board and another on the hinge-up.</li> </ul>

# Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader.

**Table 24. Fingerprint reader specifications**

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi
Sensor area	
Sensor pixel size	108 x 88

# GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Latitude 5320.

**Table 25. GPU—Integrated**

Controller	External display support	Memory size	Processor
Intel UHD 630 Graphics	HDMI 2.0, DP over USB Type-C	Shared system memory	11th Generation Intel Core i3
<p><b>NOTE:</b> Intel UHD Graphics with Intel Core i3 processors.</p> <p><b>NOTE:</b> Intel UHD Graphics with Intel Core i5/i7 processors and single-channel memory configuration.</p> <p><b>NOTE:</b> Intel Iris Xe Graphics with Intel Core i5/i7 processors and dual-channel memory configuration.</p>			

# Security

**Table 26. Hardware Security**


Hardware security options
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
Trusted Computing Group (TCG) Certification for TPM
Fingerprint reader in power button tied to ControlVault 3
ControlVault 3 Advanced Authentication with FIPS 140-2 Level 3 Certification
Contacted Smart Card and ControlVault 3
Contactless Smart Card, NFC, and ControlVault 3
SED SSD NVMe, SSD, and hard drive (Opal and non-Opal) per SDL
FIPS 201 Full Scan FPR and ControlVault 3

# Operating and storage environment

This table lists the operating and storage specifications of your Latitude 5320.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985


**Table 27. Computer environment**

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (noncondensing)	5% to 95% (noncondensing)
Vibration (maximum)*	0.66	NA
Shock (maximum)	140	NA
Altitude (maximum)	3048	10668
 <b>CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.</b>		

\* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse when the hard drive is in use.

# Dell low blue light display

 **WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.**

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

## Keyboard shortcuts

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

**Table 28. List of keyboard shortcuts**



Keys	Primary Behavior	Secondary Behavior (Fn + Key)
Fn + Esc	Escape	Toggle Fn-key lock
Fn + F1	Mute audio	F1 behavior
Fn + F2	Decrease volume	F2 behavior
Fn + F3	Increase volume	F3 behavior
Fn + F4	Mic Mute	F4 behavior
Fn + F5	Keyboard backlight <b>NOTE:</b> Not applicable for non-backlight keyboard.	F5 behavior
Fn + F6	Decrease screen brightness	F6 behavior
Fn + F7	Increase screen brightness	F7 behavior
Fn + F8	Switch to external display	F8 behavior
Fn + F9	Disable camera	F9 behavior
Fn + F10	Print Screen	F10 behavior
Fn + F11	Home	F11 behavior
Fn + F12	End	F12 behavior
Fn + Left Arrow	Left Arrow	Home
Fn + Right Arrow	Right Arrow	End
Fn + Right Ctrl	Emulates right click	--
Fn + P	SafeScreen (e-Privacy)	--

# Getting help and contacting Dell

## Self-help resources


You can get information and help on Dell products and services using these self-help resources:


**Table 29. Self-help resources**

Self-help resources	Resource location
Information about Dell products and services	<a href="http://www.dell.com">www.dell.com</a>
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	<a href="http://www.dell.com/support/windows">www.dell.com/support/windows</a>
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at <a href="http://www.dell.com/support">www.dell.com/support</a> .  For more information on how to find the Service Tag for your computer, see <a href="#">Locate the Service Tag on your computer</a> .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> <li>1. Go to <a href="http://www.dell.com/support">www.dell.com/support</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Knowledge Base</b>.</li> <li>3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>

## Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see [www.dell.com/contactdell](http://www.dell.com/contactdell).

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.