
	BEVERAGE-AIR.
--	---------------

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

SIDE MOUNT UNDERCOUNTER REFRIGERATOR

UCR67AHC Solid Door Refrigerator Hydrocarbon Series

MODEL: **UCR67AHC**





CABINET CONSTRUCTION

- Stainless steel front, sides, top, door and grille (galvanized steel back &
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- Interior thermometer is standard
- Self-closing doors with 120° stay-open feature
- · Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two epoxy-coated steel wire shelves per door section
- Field-reversible door

OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- · Right or left hinged door
- Door locks
- Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F


















MODEL	UCR67AHC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	67"	
Depth Overall with Handle & Bumper	34 ¾"	
Height Overall with 6" Casters	34 ½"	
Number of Doors	2	
Depth with Door Open 90°	57 ½"	
Door Openings	21 %" x 23 %"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.2	
Internal Width Overall (in)	63"	
Internal Depth Overall (in)	26"	
Internal Height Overall (in)	25"	
Number of Shelves	4	
ELECTRICAL DATA		
Full Load Amperes	2.0	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1350	
Heat Rejection (BTU/Hr)	2025	
Charge (lbs/grams)	0.243/110	
SHIPPING DATA		
Gross Weight - Crated	358 lbs	
Height - Crated	39"	
Width - Crated	70"	
Depth - Crated	35"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Undercounter Refrigerator-Side Mount Model: UCR67AHC

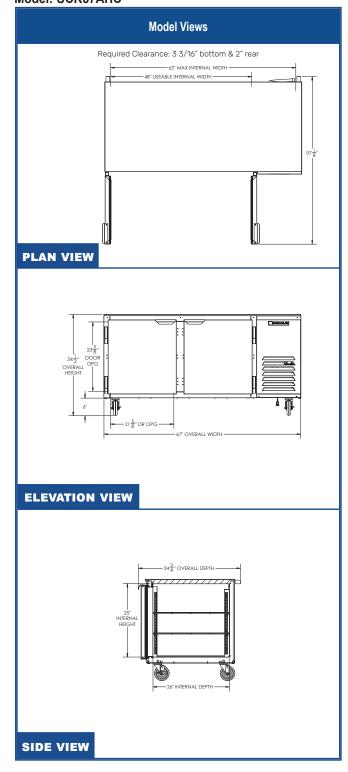

ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

