



# TEST REPORT

**No. I14Z47644-EMC03**

**for**

**TCL Communication Ltd.**

**CDMA 1X/EVDO tri-band mobile phone**

**FCC ID: 2ACCJB001**

**with**

**Hardware Version: VC**

**Software Version: V5HT3-5**

**Issued Date: Oct. 10<sup>th</sup>, 2014**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAkks accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0) 10-62304633-2678, Fax:+86(0)10-62304633-2504 Email:welcme@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>3</b>
1.1. TESTING LOCATION .....	3
1.2. TESTING ENVIRONMENT .....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE .....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>5</b>
3.1. ABOUT EUT .....	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION .....	6
3.5. EUT SET-UPS .....	6
<b>4. REFERENCE DOCUMENTS .....</b>	<b>7</b>
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>8</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
6.1. SUMMARY OF TEST RESULTS .....	9
6.2. STATEMENTS .....	10
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
A.1 OUTPUT POWER.....	12
A.2 EMISSION LIMIT .....	14
<b>ANNEX B: TEST LAYOUT .....</b>	<b>17</b>

## **1. Test Laboratory**

### **1.1. Testing Location**

#### **Location B**

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: Building Shouxiang, No.51, Xueyuan Road, Haidian District, Beijing,  
China  
Postal Code: 100191

### **1.2. Testing Environment**

Normal Temperature: 15-35℃  
Relative Humidity: 20-75%  
Air pressure 980 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### **1.3. Project data**

Testing Start Date: Sep. 23<sup>rd</sup>, 2014  
Testing End Date: Oct. 16<sup>th</sup>, 2014

### **1.4. Signature**



---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Song Chongwen**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: TCL Communication Ltd.  
Address /Post: 12F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District, Shenzhen, Guangdong, P.R. China  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Contact Person: Lv Meixian  
Contact Email: meixian.lv@tcl.com  
Telephone: 0086 755 33956929  
Fax: 0086 755 36645072

### **2.2. Manufacturer Information**

Company Name: TCL Communication Ltd.  
Address /Post: 12F/B, TCL Tower, Gaoxin Nanyi Road, Nanshan District, Shenzhen, Guangdong, P.R. China  
City: Shenzhen  
Postal Code: 518057  
Country: China  
Telephone: 0086 755 33956929  
Fax: 0086 755 36645072

### 3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

#### 3.1. About EUT

Description	Band class 0/Band class 1/ Band class 10(subclass 2 and 3) 1X RTT、EV-DO、rev0、rev.A WLAN ( 802.11 b/g/n), Bluetooth(EDR and BLE) MP3,camera, USB, FM, GPS mobile phone
FCC ID	2ACCJB001
Antenna	Internal
Power supply	Battery ( charged by travel adapter or vehicle charger )
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

#### 3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
EUT1	A100003BCFECE6	VC	V5HT3-5

\*EUT ID: is used to identify the test sample in the lab internally.

#### 3.3. Internal Identification of AE used during the test

AE ID*	Description	SN	Revision
AE1	Battery	/	1447644BA013
AE2	Battery	/	1447644BA007
AE3	Battery	/	1447644BA005
AE4	Battery	/	1447644BA002

AE1, AE2, AE3, AE4

Model	TLi014A1
Manufacturer	BYD
Capacitance	1400 mAh
Nominal voltage	3.7V

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment Under Test (EUT) is a model of CDMA 1X/EVDO tri-band mobile phone with integrated antenna and embedded battery.

The EUT supports Band class 0/Band class 1/ Band class 10(subclass 2 and 3) and 1X RTT、EV-DO、 rev0、 rev.A. It has MP3, camera, USB memory, FM radio, GPS receiver, Bluetooth (EDR, BLE), and WLAN (802.11 b/g/n) functions.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### **3.5. EUT set-ups**

<b>EUT Set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT1 +AE1	ERP/EIRP/RSE tests

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 90	PRIVATE LAND MOBILE RADIO SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB 971168 D01	Measurement Guidance for Certification of Licensed Digital Transmitters	v02r01

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber FAC-3** (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



## 6. SUMMARY OF TEST RESULTS

### 6.1. Summary of test results

Abbreviations used in this clause:		
Verdict Column	P	Pass
	F	Fail
	NA	Not applicable
	NM	Not measured
Location Column	A/B/C/D	The test is performed in test location A, B, C or D which are described in section 1.1 of this report

#### CDMA800 BC10

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Output Power	90.635(b)	5.4	A.1	B
2	Emission Limit	90.691, 2.1051	5.5	A.2	B

## **6.2. Statements**

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by TMC according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.

This report only deals with the CDMA functions among the features described in section 3.

## 7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL. DUE DATE	CAL. INTERVAL
1.	EMI Antenna	VULB 9163	9163-234	Schwarzbeck	2016-09-15	3 Years
2.	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3 Years
3.	EMI Antenna	9117	167	Schwarzbeck	2015-07-06	3 Years
4.	EMI Antenna	3117	00058889	ETS-Lindgren	2014-12-20	3 Years
5.	Signal Generator	N5183A	MY49060052	Agilent	2015-03-02	1 Year
6.	Power Amplifier	5S1G4	0341863	AR	/	1 Year
7.	Universal Radio Communication Tester	E5515C	MY48363198	Agilent	2015-07-06	1 Year
8.	Spectrum Analyzer	E4440A	MY48250642	Agilent	2015-02-27	1 Year

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 OUTPUT POWER**

#### **Reference**

FCC: CFR Part 90.635, and 2.1053

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via Agilent Universal Radio Communication Tester (E5515C) to ensure max power transmission and proper modulation.

This result contains peak output power and ERP/EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

#### **A.1.2 Radiated**

##### **A.1.2.1 Description**


This is the test for the maximum radiated power from the EUT.

Rule Part 90.635(b) specifies "The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw)."


##### **A.1.2.2 Method of Measurement**

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

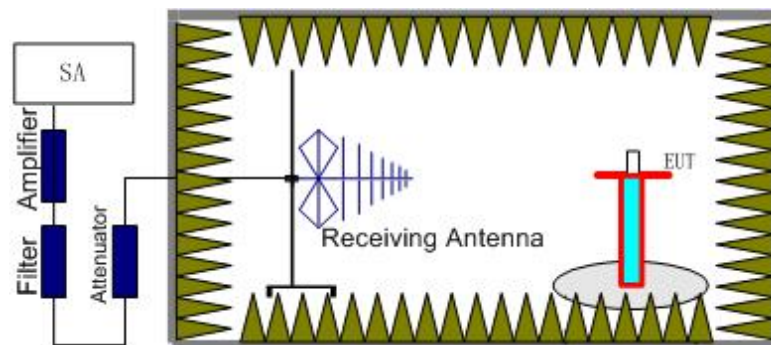

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

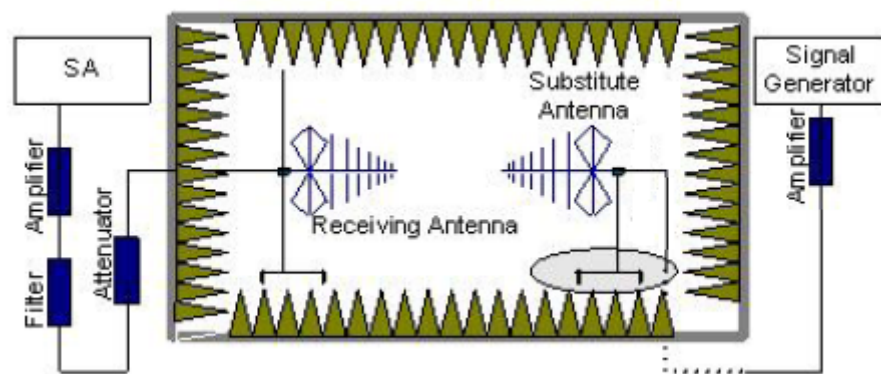

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.  
The cable loss ( $P_{cl}$ ), the substitution antenna Gain ( $G_a$ ) and the amplifier Gain ( $P_{Ag}$ ) should be recorded after test.  
The measurement results are obtained as described below:  
Power (EIRP) =  $P_{Mea} - P_{Ag} - P_{cl} - G_a$
5. This value is EIRP since the measurement is calibrated using an antenna of known gain (Unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15$ .

For test layout photo, please refer to Pic.1 in Annex B.

### CDMA800(BC10)- ERP

#### Limits

Band	Peak ERP (dBm)
CDMA800(BC10)	$\leq 50\text{dBm}$ (100W)

#### Measurement result

Frequency (MHz)	$P_{Mea}$ (dBm)	$P_{cl}$ (dB)	$P_{Ag}$ (dB)	$G_a$ (dBi)	Correction (dB)	Peak ERP(dBm)	Polarization
817.90	-17.79	2.18	-45.87	0.44	2.15	23.31	Horizontal
823.10	-17.91	2.24	-45.80	0.76	2.15	22.74	Horizontal

Sample calculation: 846.6MHz

$$\begin{aligned} \text{Peak ERP (dBm)} &= P_{Mea}(-17.79\text{dBm}) - G_a(0.44\text{dBi}) - P_{Ag}(-45.87\text{dB}) - P_{cl}(2.18\text{dB}) - 2.15 \\ &= 23.31 \text{ dBm} \end{aligned}$$

#### ANALYZER SETTINGS: RBW = VBW = 5MHz

Note: Expanded measurement uncertainty for CDMA800 (BC10) is  $U = 0.96 \text{ dB}$ ,  $k=2$ .

## **A.2 EMISSION LIMIT**

### **Reference**

FCC: CFR Part 90.691 and 2.1053


### **A.2.1 Measurement Method**

The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in fully-anechoic chamber 3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in CFR Part 90.691. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of CDMA800 BC10.

### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

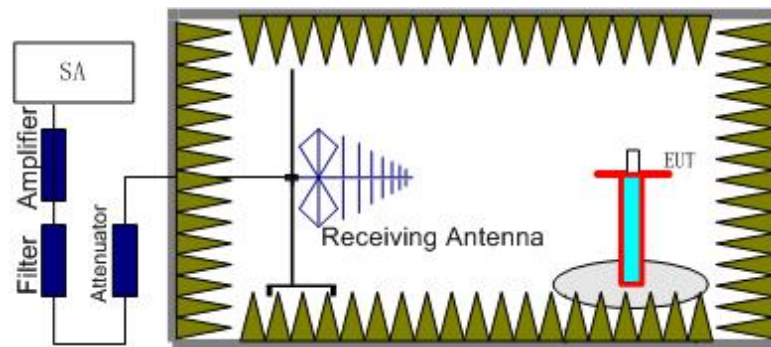

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

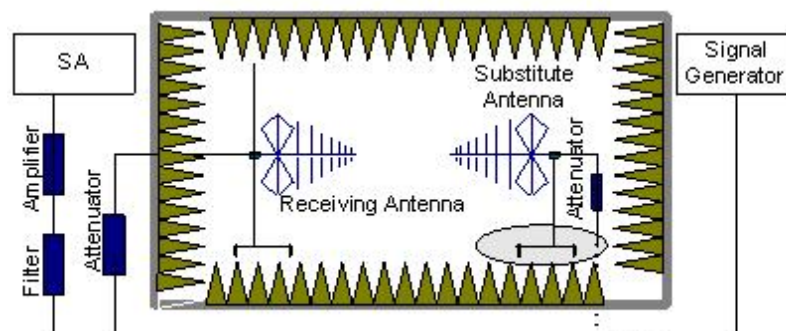

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dB}$ .

### A.2.2 Measurement Limit

CFR Part 90.691 all specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper and lower carrier frequencies of the CDMA BC10 (817.9MHz and 823.1MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the CDMA BC0, CDMA BC1 or CDMA BC10 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**CDMA BC10, Channel 475/817.9MHz**


Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1635.92	-51.30	2.90	-5.50	2.15	-50.85	-13.00	Horizontal
2439.51	-52.98	3.54	-5.22	2.15	-53.45	-13.00	Vertical
4281.34	-57.99	4.79	-8.67	2.15	-56.26	-13.00	Horizontal
5658.15	-59.58	5.45	-10.06	2.15	-57.12	-13.00	Vertical
6987.58	-58.92	6.22	-11.09	2.15	-56.20	-13.00	Horizontal
8760.81	-56.27	7.31	-12.41	2.15	-53.32	-13.00	Vertical

**CDMA BC10, Channel 684/823.1MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
1646.95	-55.50	2.91	-5.45	2.15	-55.11	-13.00	Vertical
2460.77	-52.61	3.55	-5.28	2.15	-53.03	-13.00	Vertical
3551.44	-60.04	4.31	-7.96	2.15	-58.54	-13.00	Vertical
4343.04	-58.04	4.84	-8.71	2.15	-56.32	-13.00	Horizontal
5640.53	-61.05	5.45	-10.06	2.15	-58.59	-13.00	Vertical
7325.64	-57.55	6.45	-11.30	2.15	-54.85	-13.00	Vertical

Note: Expanded measurement uncertainty for this test item is  $U = 4.2$  dB,  $k = 2$ .

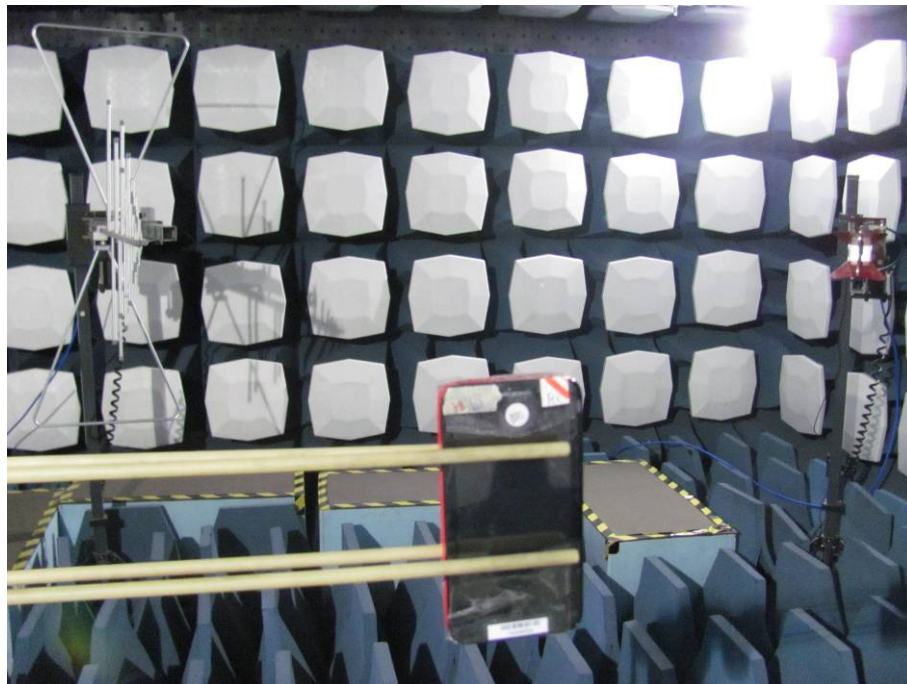

**ANNEX B: TEST LAYOUT**

**Pic.1 Radiated spurious emission**

**\*\*\*END OF REPORT\*\*\***