

EVOLVE EC/DC 52" CEILING FAN



White

Installation Locations:

Coastal, indoor and outdoor locations. The fan is also suitable for installation in a pergola or outside in a sheltered area, protected from wind.

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Motor:

156mm x 12mm DC motor
Made with high grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Top Canopy & Downrod:

Materials: ABS Polymer & Aluminium

Product Range:

- E363 - White with White Blades
- E364 - Matt Black with Matt Black Blades
- E365- Matt Black with Koa Blades

Accessory Light Kit (Supplied separately):

- EL095 - 18w CCT dimmable Light Kit White
- EL095 - 18w CCT dimmable Light Kit Matt Black

Blades:

Sizes: 1320mm (52")
Materials: Polymer Blades
Blade Pitch: 19.2°

Extra Information:

Introduced into the HPI range in 2023
9 speed remote controller
Light Adaptable
Reversible

Standard Canopy Cover:

Suitable for flat ceilings

Weight Including Packaging:

Complete fan: 7.3kg (not including light kit)

Packaging Dimensions (CM):

Complete Fan: 66L x 37.5W x 23H

Accessories (Supplied separately):

Down Rod 26mm diameter (includes wire harness)

- DC2480 - 91cm White Downrod
- DC2481 - 91cm Black Downrod
- DC2490 - 180cm White Downrod
- DC2491 - 180cm Black Downrod

009 - T-Hook for ceiling roses

- DCWC240 - 240V DC Wall Controller (6 speed)
- DCWC2409 - 240V DC Wall Controller (9 speed)

38° Ceiling Kit* (for pitched ceilings)

- 080 - Ceiling Kit White 38°
- 083 - Ceiling Kit Black 38°

WiFi / Bluetooth Adaptable (Supplied separately):

- WIFIM099 Smart WiFi Module Only
- PIXIEM098 HPI Pixie Ceiling Fan Module Only


Warranty*:

- 2 years in-home warranty on all electric components (control modules, remote control system, lighting and accessory wall control)
- 3 years standard "in home" warranty
- 4 years extended warranty on motor only (excluding labour)

*For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

	Speed 1	Speed 2	Speed 3	Speed 4	Speed 5	Speed 6	Speed 7	Speed 8	Speed 9
RPMS	82	102	119	134	150	163	173	183	196
WATTS	3.6	4.8	10.1	12.9	15.9	18.6	21.6	23.8	26.2
M3/HR	4175	4683	8973	10000	10853	11675	12084	13151	14798

Dimensions

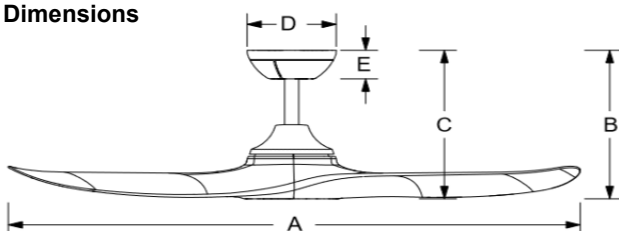

A	B	C	D	E
1320mm	295mm	295mm	170mm	60mm