


## OVERVIEW

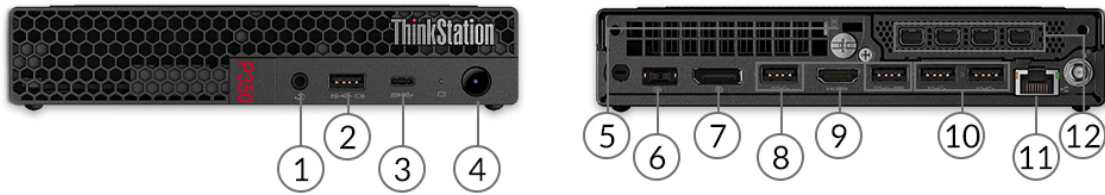

1. Headphone / microphone combo jack (3.5mm)	7. DisplayPort
2. USB 3.2 Gen 2 (Always On and fast charge)	8. 2x USB 3.2 Gen 1
3. USB-C 3.2 Gen 2 (data transfer only)	9. HDMI
4. Power button	10. 2x USB 3.2 Gen 2
5. Kensington Security Slot	11. Ethernet (RJ-45)
6. Power connector	12. 4x MiniDP *

Notes:

- Ports with \* are only available on selected models

## PERFORMANCE

### Processor

#### Processor Family

10th Generation Intel® Core™ i3 or 11th Generation Intel Core i5 / i7 / i9 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-10105	4	8	3.7GHz	4.4GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10105T	4	8	3.0GHz	3.9GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10305	4	8	3.8GHz	4.5GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10305T	4	8	3.0GHz	4.0GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10325	4	8	3.9GHz	4.7GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-11400	6	12	2.6GHz	4.4GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11400T	6	12	1.3GHz	3.7GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11500	6	12	2.7GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11500T	6	12	1.5GHz	3.9GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600	6	12	2.8GHz	4.8GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600T	6	12	1.7GHz	4.1GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i7-11700	8	16	2.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i7-11700T	8	16	1.4GHz	4.6GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-11900	8	16	2.5GHz	5.2GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-11900T	8	16	1.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750

#### Processor Sockets

1x FCLGA1200

### Operating System

#### Operating System\*\*

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.5 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No operating system

### Graphics

#### Integrated Graphics\*\*

- Intel UHD Graphics 630
- Intel UHD Graphics 730
- Intel UHD Graphics 750

#### Discrete Graphics Support

Supports up to one NVIDIA® T1000 on models with 35W processor

#### Discrete Graphics Offering\*\*

Graphics	Memory	Power	Connector	SLI / NVlink
Quadro® P1000	4GB GDDR5	50W	4x miniDP 1.4	None
NVIDIA T600	4GB GDDR6	40W	4x miniDP 1.4	None

NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	None

## Monitor Support

### Monitor Support

Supports multiple displays via onboard video ports and discrete graphics, the number of maximum monitors supported depends on the graphic card in use

## Chipset

### Chipset

Intel Q570 chipset

## Memory

### Max Memory<sup>[1]</sup>

Up to 64GB DDR4-3200

### Memory Type

DDR4-3200 non-ECC

### Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support<sup>[1]</sup>

Up to two drives, 2x M.2 SSD

- M.2 SSD up to 2TB each

### Storage Type

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe® NVMe®, PCIe 4.0	-	256GB / 512GB / 1TB / 2TB	Opal

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

## Removable Storage

### Optical Support

Optional one 9.0mm optical drive via optical drive kit, DVD-ROM or DVD±RW

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB codec

### Speakers

Single speaker, 2W x1

## Power Supply

### Power Supply<sup>\*\*[1]</sup>

Power	Type	Efficiency	Key Features
170W	Adapter	89%	100V - 240V
230W	Adapter	89%	100V - 240V

Notes:

1. When work with TIO monitor, an appropriate power adapter is needed. Customer may need to:

- Order a Tiny for TIO MT (30EH or 30EJ) models
- Or order an additional 230W power adapter if original power adapter is less than 230W

## DESIGN

### Mechanical

#### Form Factor

Tiny (1L)

#### Dimensions (WxDxH)

37 x 182.9 x 179 mm (1.5 x 7.2 x 7.0 inches)

#### Weight

Models	Weight
Tiny only	1.4 kg (3 lbs, maximum configuration)

#### Bays

No bays

#### M.2 Slots<sup>[1]</sup>

- Up to 2x M.2 SSD on models with 10th Core processor:
  - 1x M.2 2280 onboard slot, M.2 PCIe Gen 3
  - 1x M.2 2280 /2242 onboard slot, M.2 PCIe Gen 3
- Up to 2x M.2 SSD on models with 11th Core processor:
  - 1x M.2 2280 onboard slot, M.2 PCIe Gen 4
  - 1x M.2 2280 /2242 onboard slot, M.2 PCIe Gen 4

#### Expansion Slots

One PCIe slot via specific riser card:

PCIe 3.0 x16 (negotiable link width x8) and low profile for discrete graphics card, PCIe 3.0 x4 and low profile for ethernet adapter and Thunderbolt™ adapter

#### Notes:

1. M.2 Gen 4 SSD works at Gen 3 speed on Gen 3 slot

## CONNECTIVITY

### Network

#### Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

#### Optional Ethernet

One additional Ethernet adapter support, up to four additional GbE ports

- Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4
- Gigabit Ethernet, Intel I350-T4, 4x RJ-45, PCIe x4

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, Intel vPro® technology support, M.2 Card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- No WLAN and Bluetooth

#### Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

### Ports<sup>[1]</sup>

#### Front Ports

- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 1x USB-C® 3.2 Gen 2
- 1x headphone / microphone combo jack (3.5mm)

#### Rear Ports<sup>[2]</sup>

# ThinkStation P350 Tiny

- 2x USB 3.2 Gen 1 (one supports Smart Power On)
- 2x USB 3.2 Gen 2
- 1x HDMI®
- 1x DisplayPort™
- 1x Ethernet (RJ-45)

## Optional Rear Ports\*\*\*

- Optional port 1 (one of VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 3.2 Gen 1 with DisplayPort function)
- 1x Thunderbolt 4
- Optional port 2 (serial)

## Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3/4: 40 Gbit/s;
2. For video ports on discrete graphics, please see graphics section

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

Kensington® Security Slot™, 3 x 7 mm

#### Chassis Intrusion Switch

Chassis intrusion switch

#### BIOS Security

- Administrator password
- Power-on password

## MANAGEABILITY

### System Management

#### System Management<sup>[1][2]</sup>

- Intel vPro with Intel AMT 14 on wired LAN
- Non-vPro

## Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.
2. Intel vPro offers a superset of DASH's defined capabilities.

### Diagnostic

#### Diagnostic

Lenovo UEFI Bootable Diagnostics

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year limited onsite service
- 2-year limited onsite service
- 3-year limited onsite service
- No base warranty

**Notes:**

1. The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## ENVIRONMENTAL

### Operating Environment

**Temperature**

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

**Altitude**

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

**Humidity**

- Operating: 20% to 80%
- Storage: 10% to 90%

## CERTIFICATIONS

### Green Certifications

**Green Certifications**

- EPEAT™ Gold
- ENERGY STAR® 8.0
- RoHS compliant

### Other Certifications

**Mil-Spec Test**

MIL-STD-810G military test passed

### ISV Certifications

**ISV Certifications**

Please visit [www.thinkworkstations.com/isv-certifications/](http://www.thinkworkstations.com/isv-certifications/)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. **LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

