

TP-LINK TL-WR940N/ TL-WR941ND 450Mbps Wireless N **Router User Guide**

Home » tp-link » TP-LINK TL-WR940N/ TL-WR941ND 450Mbps Wireless N Router User Guide 🖺



TP-LINK TL-WR940N/ TL-WR941ND 450Mbps Wireless N Router User Guide



COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice. **TP-LINK**° is a registered trademark of TP-LINK TECHNOLOGIES CO., LTD. Other brands and product names are trademarks or registered trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK TECHNOLOGIES CO., LTD. Copyright © 2014 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved. http://www.tp-link.com

FCC STATEMENT



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference.
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement:

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

CE Mark Warning

C€1588

This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

Canadian Compliance Statement

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference, and
- 2. This device must accept any interference, including interference that may cause undesired operation of the device.

This device has been designed to operate with the antennas listed below, and having a maximum gain of 3 dBi. Antennas not included in this list or having a gain greater than 3 dBi are strictly prohibited for use with this device. The required antenna impedance is 50 ohms.

To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that permitted for successful communication.

Industry Canada Statement

Complies with the Canadian ICES-003 Class B specifications

Safety Information

- When product has power button, the power button is one of the way to shut off the product; when there is no power button, the only way to completely shut off power is to disconnect the product or the power adapter from the power source.
- Don't disassemble the product, or make repairs yourself. You run the risk of electric shock and voiding the limited warranty. If you need service, please contact us.
- Avoid water and wet locations.

This product can be used in the following countries:

AT	BG	BY	CA	CZ	DE	DK	EE
ES	FI	FR	GB	GR	HU	ΙE	IR
LT	LV	MT	NL	NO	PL	PT	RI
RU	SE	SK	TR	UA	US		

DECLARATION OF CONFORMITY

For the following equipment:

Product Description: 450Mbps Wireless N Router

Model No.: TL-WR940N/TL-WR941ND

Trademark: TP-LINK

We declare under our own responsibility that the above products satisfy all the technical regulations applicable to the product within the scope of Council Directives:

Directives 1999/5/EC, Directives 2004/108/EC, Directives 2006/95/EC, Directives 1999/519/EC, Directives 2011/65/EU

The above product is in conformity with the following standards or other normative documents

EN 300 328 V1.8.1

EN 301 489-1 V1.9.2 & EN 301 489-17 V2.2.1

EN 55022: 2010 + AC: 2011

EN 55024: 2010

EN 61000-3-2: 2006 + A1: 2009 + A2: 2009

EN 61000-3-3: 2013

EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011

EN 50385: 2002

The product carries the CE Mark:

CE1588

Person responsible for making this declaration:

Yang Hongliang

Product Manager of International Business

Contents [hide

1 Package Contents

2 Introduction 2.1 Overview of the Router 2.2 Simple Installation 2.3 Conventions 2.4 Main Features 2.5 Panel Layout 3 Connecting the Router 3.1 System Requirements 3.2 Installation Environment Requirements 3.3 Connecting the Router 4 Quick Installation Guide 4.1 TCP/IP Configuration 4.2 Quick Installation Guide **5 Configuring the Router** 5.1 Login 5.2 Status 5.3 Quick Setup **5.4 WPS** 5.5 Network **5.6 WAN** 5.7 MAC Clone **5.8 LAN** 5.9 Wireless 5.9.1 Wireless Settings 5.9.2 Wireless Security 5.9.3 Wireless MAC Filtering 5.9.4 Wireless Advanced 5.9.5 Wireless Statistics 5.10 DHCP 5.10.1 DHCP Settings 5.10.2 DHCP Client List 5.10.3 Address Reservation 5.11 Forwarding 5.11.1 Virtual Servers 5.11.2 Port Triggering 5.11.3 DMZ 5.11.4 UPnP 5.12 Security 5.12.1 Basic Security 5.12.2 Advanced Security 5.12.3 Local Management 5.12.4 Remote Management 5.13 Parental Control **5.14 Access Control** 5.14.1 Rule 5.14.2 Host **5.14.3 Target** 5.14.4 Schedule 5.15 Advanced Routing 5.15.1 Static Routing List 5.15.2 System Routing Table **5.16 Bandwidth Control** 5.16.1 Control Settings 5.16.2 Rules List 5.17 IP & MAC Binding Setting 5.17.1 Binding Settings 5.17.2 ARP List 5.18 Dynamic DNS 5.18.1 Comexe DDNS

```
5.18.2 Dyndns DDNS
   5.18.3 No-IP DDNS
 5.19 System Tools
   5.19.1 Time Settings
   5.19.2 Diagnostic
   5.19.3 Firmware Upgrade
   5.19.4 Factory Defaults
   5.19.5 Backup & Restore
   5.19.6 Reboot
   5.19.7 Password
   5.19.8 System Log
   5.19.9 Statistics
 5.20 Logout
6 Appendix A: FAQ
7 Appendix B: Configuring the PCs
8 Appendix C: Specifications
9 Appendix D: Glossary
10 References
11 Related Manuals
```

Package Contents

The following items should be found in your package:

- TL-WR940N/TL-WR941ND 450Mbps Wireless N Router
- DC Power Adapter for TL-WR940N/TL-WR941ND 450Mbps Wireless N Router
- · Ethernet Cable
- Quick Installation Guide
- Resource CD for TL-WR940N/TL-WR941ND 450Mbps Wireless N Router, including:
 - This Guide
 - Other Helpful Information

Note: Make sure that the package contains the above items. If any of the listed items is damaged or missing, please contact your distributor.

Introduction

Overview of the Router

The **TL-WR940N/TL-WR941ND 450Mbps** Wireless N Router integrates 4-port Switch, Firewall, NAT-Router and Wireless AP. The **450Mbps** Wireless N Router delivers exceptional range and speed, which can fully meet the need of Small Office/Home Office (SOHO) networks and the users demanding higher networking performance.

Incredible Spreed

The TL-WR940N/TL-WR941ND 450Mbps Wireless N Router provides up to 450Mbps wireless connection with other 802.11n wireless clients. The incredible speed makes it ideal for handling multiple data streams at the same time, which ensures your network stable and smooth. The performance of this 802.11n wireless Router will give you the unexpected networking experience at speed 650% faster than 802.11g. It is also compatible with all IEEE 802.11g and IEEE 802.11b products.

Multiple Security Protections

With multiple protection measures, including **SSID** broadcast control and wireless **LAN 64/128/152-bit** WEP encryption, Wi-Fi protected Access (**WPA2-PSK**, **WPA-PSK**), as well as advanced Firewall protections, the **TL-WR941ND 450Mbps** Wireless N Router provides complete data privacy.

Flexible Access Control

The **TL-WR940N/TL-WR941ND 450Mbps** Wireless N Router provides flexible access control, so that parents or network administrators can establish restricted access policies for children or staff. It also supports Virtual Server and DMZ host for Port Triggering, and then the network administrators can manage and monitor the network in real time with the remote management function.

Simple Installation

Since the Router is compatible with virtually all the major operating systems, it is very easy to manage. Quick Setup Wizard is supported and detailed instructions are provided step by step in this user guide. Before installing the Router, please look through this guide to know all the Router's functions.

Conventions

The Router or **TL-WR940N/TL-WR941ND** mentioned in this guide stands for **TL-WR940N/TL-WR941ND 450Mbps** Wireless N Router without any explanation.

Note: The two devices of **TL-WR940N** and **TL-WR941ND** share this User Guide. For simplicity, we will take **TL-WR940ND** for example throughout this Guide.

The difference between them is:

- TL-WR940N has one fixed antenna.
- TL-WR941ND has one detachable antenna.

Main Features

- Make use of IEEE 802.11n wireless technology to provide a wireless data rate of up to 450Mbps.
- One 10/100M Auto-Negotiation RJ45 WAN port, four 10/100M Auto-Negotiation RJ45 LAN ports, supporting Auto MDI/MDIX.
- Provides WPA/WPA2, WPA-PSK/WPA2-PSK authentication, TKIP/AES encryption security.
- Shares data and Internet access for users, supporting Dynamic IP/Static IP/PPPoE Internet access.
- Supports Virtual Server, Special Application and DMZ host.
- Supports UPnP, Dynamic DNS, Static Routing.
- Provides Automatic-connection and Scheduled Connection on certain time to the Internet.
- Connects Internet on demand and disconnects from the Internet when idle for PPPoE.
- Built-in NAT and DHCP server supporting static IP address distributing.
- · Supports Stateful Packet Inspection.
- · Supports VPN Passthrough.
- Supports Parental Control and Access Control.
- Provides 64/128/152-bit WEP encryption security and wireless LAN ACL (Access Control List).
- Supports Flow Statistics.
- Supports firmware upgrade and Web management.

• Provide a switch for the power.

Panel Layout

The Front Panel



Figure 1.1 Front Panel sketch

The Router's LEDs and the WPS button are located on the front panel (View from left to right).

Name	Status	Indication
()	Off	Power is off.
(Power)	On	Power is on.
	Off	The Wireless function is disabled.
(Wireless)	On	The Wireless function is working properly.
[]	On	There is device(s) connected to the Ethernet (1/2/3/4) port(s).
(Ethernet)	Off	No device is connected to the Ethernet (1/2/3/4) port.
	Blue	The Internet port is connected, and the Internet is accessible.
(Internet)	Orange	The Internet port is connected, but the Internet is inaccessible.
	Off	The Internet port isn't connected, and the Internet is inaccessible.
	Flashing	WPS button on the router is pressed, and the router is trying to conn ect a wireless device to its network via WPS.
A (WPS)	On	The connection via WPS is successful.
	Off	The connection via WPS fails.

Table 1.1 The LEDs description

Solution Note: After a device is successfully added to the network by WPS function, the WPS LED will keep on for about 5 minutes and then turn off.

The Rear Panel




Figure 1.2 Rear Panel sketch

The following parts are located on the rear panel (View from left to right).

Power: The Power socket is where you will connect the power adapter. Please use the power adapter provided with this TL-WR940N/TL-WR941ND 450Mbps Wireless N Router.

WPS/Reset:

Pressing this button for less than 5 seconds enables the WPS function. If your client devices, such as wireless adapters, that support Wi-Fi Protected Setup, then you can press this button to quickly establish a connection between the router and client devices and automatically configure wireless security for your wireless network.

Pressing this button for more than 5 seconds enables the Reset function. With the router powered on, press and hold the WPS/Reset button (approximately 8 seconds) until the system LED becomes quick-flash from slow-flash. And then release the button and wait the router to reboot to its factory default settings.

There are two ways to reset to the Router's factory defaults:

- 1. Use the Factory Defaults function on System Tools -> Factory Defaults page in the Router's Web-based Utility.
- 2. Use the Factory Default Reset button: Press the WPS/Reset button for more than 5 seconds and then wait for the Router to reboot.

Wireless On/Off: This button is to control the wireless function of the router, either to enable or disable.

WAN: This WAN port is where you will connect the DSL/cable Modem, or Ethernet.

4/3/2/1 (LAN): These ports connect the Router to the local PC(s).

Wireless antenna: To receive and transmit the wireless data.

Connecting the Router

System Requirements

- Broadband Internet Access Service (DSL/Cable/Ethernet)
- One DSL/Cable Modem that has an RJ45 connector (which is not necessary if the Router is connected directly

to the Ethernet.)

- PCs with a working Ethernet Adapter and an Ethernet cable with RJ45 connectors
- TCP/IP protocol on each PC
- Web browser, such as Microsoft Internet Explorer 5.0, Netscape Navigator 6.0 or above


Installation Environment Requirements

- Place the Router in a well ventilated place far from any heater or heating vent
- · Avoid direct irradiation of any strong light (such as sunlight)
- Keep at least 2 inches (5 cm) of clear space around the Router
- Operating Temperature: 0°C~40°C (32°F~104°F)
- Operating Humidity: 10%~90%RH, Non-condensing

Connecting the Router

Before installing the Router, make sure your PC is connected to the Internet through the broadband service successfully. If there is any problem, please contact your ISP. After that, please install the router according to the following steps. Don't forget to pull out the power plug and keep your hands dry.

- 1. Power off your Cable/DSL Modem.
- 2. Locate an optimum location for the router. The best place is usually at the center of your wireless network. The place must accord with the **Installation Environment Requirements**.
- 3. Adjust the direction of the antenna. Normally, upright is a good direction.
- 4. Connect the **DSL/Cable** modem to the Internet port on the router.
- 5. Connect the PC to the Ethernet port on the router. (If you have the wireless **NIC** and want to use the wireless function, you can skip this step.)
- 6. Connect the power adapter to the Power socket on the router, and the other end into an electrical outlet. Then press the Power On/Off button to turn on the router.
- 7. Power on your Cable/DSL Modem.

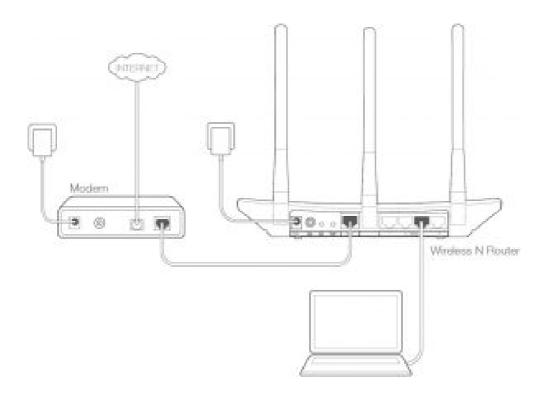

Quick Installation Guide

This chapter will show you how to configure the basic functions of your **TL-WR941ND 450Mbps** Wireless N Router using Quick Setup Wizard within minutes.

TCP/IP Configuration

The default domain name of the **TL-WR941ND 450Mbps** Wireless N Router is http://tplinkwifi.net, the default IP address is 192.168.0.1, and the default Subnet **Mask** is **255.255.255.0**. These values can be changed as you desire. In this guide, we all use the default values for description.

Connect the local PC to the LAN ports of the Router, and then you can configure the IP address for your PC by following the steps below:

- 1. Set up the TCP/IP Protocol in "Obtain an IP address automatically" mode on your PC. If you need instructions as to how to do this, please refer to **Appendix B: Configuring the PC.**
- 2. Then the built-in DHCP server will assign IP address for the PC.

Now, you can run the Ping command in the command prompt to verify the network connection between your PC and the Router. The following example is in Windows 7 operation system.

Open a command prompt, and type ping 192.168.0.1, and then press Enter.

• If the result displayed is similar to the **Figure 3.1**, it means the connection between your PC and the Router has been established well.

```
Ricronoft Mindown Receion 6.1.76811
(C) Copyright 2887 Hicrosoft Corporation.

C: Decements and Settings anglish ping 192.168.8.1

Pinging 192.168.8.1 with 32 bytes of data:

Reply from 192.168.8.1: bytes 32 time(ins ITL-64

Ping statistics for 192.168.8.1:

Packets: Sent = 4. Received = 4. Lest = 8 (8x less).

Ripperximate round trip times in milli-seconds:

Minimum = Ness, Maximum = Ness, Average = Ness

C: Decements and Settings anglish).
```

Figure 3.1 Success result of Ping command

• If the result displayed is similar to the Figure 3-2, it means the connection between your PC and the Router failed.

```
Microsoft Windows (Mersion 6.1.7681)

(C) Cappright 2009 Microsoft Corporation.

C: Vocuments and Settings english/ping 192.168.0.1

Pinging 192.168.8.1 with 32 bytes of data:

Destination host unreachable.

Destination host unreachable.

Destination host unreachable.

Pentination host unreachable.

Ping statistics for 192.168.0.1:

Packets: Sent - 4. Received - 0. Lest - 4 (100x less).

C: Vocuments and Settings english)
```

Figure 3.2 Failure result of Ping command

Please check the connection following these steps:

- 1. Is the connection between your PC and the Router correct?
 - Note: The 1/2/3/4 LEDs of LAN ports which you link to on the Router and LEDs on your PC's adapter should be lit.
- 2. Is the TCP/IP configuration for your PC correct?
 - Note: If the Router's IP address is 192.168.0.1, your PC's IP address must be within the range of 192.168.0.2 ~ 192.168.0.254.
- 3. Try the IP address 192.168.1.1.
 - Note: If the LAN IP of the modem connected with your router is 192.168.0.x, the default LAN IP of the Router will automatically switch from 192.168.0.1 to 192.168.1.1 to avoid IP conflict. Therefore, in order to verify the network connection between your PC and the Router, you can open a command prompt, and type ping 192.168.1.1, and then press Enter.

Quick Installation Guide

With a Web-based (Internet Explorer or Netscape® Navigator) utility, it is easy to configure and manage the **TL-WR941ND 450Mbps** Wireless N Router. The Web-based utility can be used on any Windows, Macintosh or **UNIX OS** with a Web browser.

To access the configuration utility, open a web-browser and type the default address http://tplinkwifi.net in the address field of the browser.



Figure 3.3 Login the Router

After a moment, a login window will appear, similar to Figure 3.4. Enter admin for the User Name and Password, both in lower case letters. Then click the Login button or press the Enter key.



Figure 3.4 Login Windows

Solution Note: If the above screen does not pop-up, it means that your Web-browser has been set to a proxy. Go to Tools **menu>Internet Options>Connections>LAN** Settings, in the screen that appears, cancel the Using Proxy checkbox, and click OK to finish it.

After successful login, click Next on the Quick Setup page and then you can go to quickly configure your router.



Figure 3.5 Quick Setup

WAN Connection Type page will appear as shown in Figure 3.6, select a proper type and then click Next.



Figure 3.6 Choose WAN Connection Type

The router provides **Auto-Detect** function and supports five popular ways **PPPoE**, **Dynamic IP**, **Static IP**, **L2TP** and **PPTP** to connect to the Internet. It's recommended that you make use of the **Auto-Detect** function. If you are sure of what kind of connection type your ISP provides, you can select the very type and click **Next** to go on

configuring.

If you select **Auto-Detect**, the router will automatically detect the connection type your ISP provides. Make sure the cable is securely plugged into the Internet port before detection. The appropriate configuration page will be displayed when an active Internet service is successfully detected by the router.

• a) If the connection type detected is **Dynamic IP**, the next screen will appear as shown in Figure 3.7. Please select to clone the MAC address or not, according to your situation.



Figure 37 Quick Setup - MAC Clone

• b) If the connection type detected is **Static IP**, the next screen will appear as shown in Figure 3.8. Configure the following parameters and then click **Next** to continue.

IP Address:	0.0.0.0	
Subnet Mask:	0.0.0.0	
Default Gateway:	0.0.0.0	
Primary DHS:	0.0.0.0	
Secondary DHS:	0.0.0.0	(Optional)

Figure 3.8 Quick Setup - Static IP

IP Address: This is the WAN IP address as seen by external users on the Internet (including your ISP). Your ISP will provide you with the IP address you need to enter here. Enter the IP address into the field.

Subnet Mask: The Subnet Mask is used for the WAN IP address. Your IPS will provide you with the subnet mask which is usually 255.255.255.0.

Default Gateway: Your ISP will provide you with the Gateway address which is the ISP server's address. Enter the gateway IP address into the box if required.

Primary DNS: Enter the DNS Server IP address into the box if required.

Secondary DNS: Optional If your ISP provides another DNS server, enter it into this field.

• c) If the connection type detected is **PPPoE/Russian PPPoE**, the next screen will appear as shown in Figure 3.9. Configure the following parameters and then click **Next** to continue.



Figure 3.9 Quick Setup - PPPoE/Russia PPPoE

User Name/Password: Enter the **User Name** and **Password** provided by your **ISP.** These fields are case-sensitive. If you have difficulty with this process, please contact your ISP.

Confirm Password: Enter the password again to make sure that the password is correct. Check the radio button of **Dynamic/Static IP** to activate the secondary connection if your ISP provides an extra Connection type such as Dynamic/Static IP to connect to a local area network.

User Name:			
Password:			
Confirm Password:			
Secondary Connection:	Disabled	Dynamic IP	(For Dual Access/Russia PPPol
IP Address:	0.000		
Subnet Mask:	0000		

• d) If the connection type detected is L2TP/ Russian L2TP, the next screen will appear as shown in Figure 3.10. Configure the following parameters and then click Next to continue.

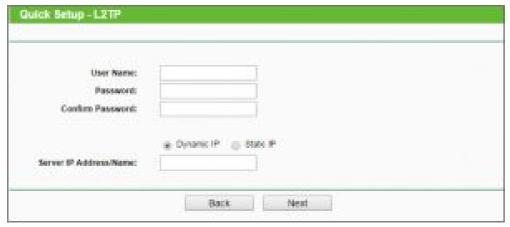


Figure 3-10 Quick Setup – L2TP/Russia L2TP

User Name/Password: Enter the User Name and Password provided by your ISP. These fields are case-sensitive. If you have difficulty with this process, please contact your ISP.

Select **Static IP** if IP Address/ Subnet Mask/ Gateway and DNS server address have been provided by your ISP. Then please enter server IP address or domain name provided by your ISP, and also enter the corresponding

parameters.

	Dynamic IP	
Server IP Address/Name:		
IP Address:	0.0.0.0	
Subnet Mask:	0.0.0.0	
Gateway:	0.000	
DNS:	0.0.0.0	

Select **Dynamic IP** if none of the above parameters are provided. Then you just need to enter server IP address or domain name provided by your ISP.



• e) If the connection type detected is **PPTP/Russian PPTP**, the next screen will appear as shown in Figure 3.11. Configure the following parameters and then click Next to continue.

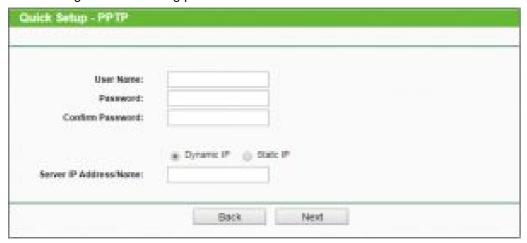


Figure 3.11 Quick Setup – PPTP/Russia PPTP

User Name/Password: Enter the User Name and Password provided by your ISP. These fields are case-sensitive. If you have difficulty with this process, please contact your ISP.

Select **Static IP** if IP Address/ Subnet Mask/ Gateway and DNS server address have been provided by your ISP. Then please enter server IP address or domain name provided by your ISP, and also enter the corresponding parameters.

	○ Dynamic IP ⊕ Static IP
ierver IP Address/Name:	
IP Address:	0.0.0.0
Subnet Mask:	0.0.0.0
Gateway:	0.000
DNS:	0.0.00

Select **Dynamic IP** if none of the above parameters are provided. Then you just need to enter server IP address or domain name provided by your ISP.

*	Oynamic IP	
Server IP Address/Name:		

Wireless settings page will appear as shown in Figure 3.12. Please configure the parameters and then click Next.

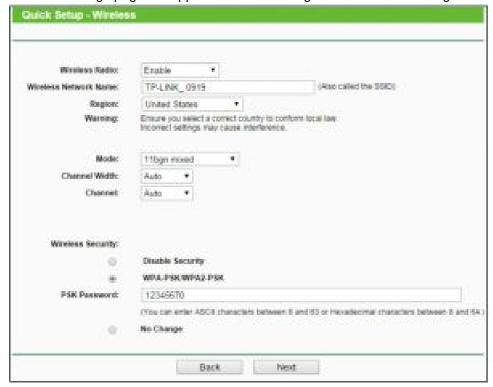


Figure 3.12 Quick Setup - Wireless

- Wireless Radio Enable or disable the wireless radio by choosing from the drop-down list.
- Wireless Network Name (also called SSID) Enter a value of up to 32 characters. The same name of SSID
 (Service Set Identification) must be assigned to all wireless devices in your network. Considering your wireless
 network security, the default SSID is set to be TP-LINK_XXXX (XXXX indicates the last unique four numbers of
 each Router's MAC address). This value is case-sensitive. For example, TEST is NOT the same as test.
- Region Select your region from the drop-down list. This field specifies the region where the wireless function
 of the Router can be used. It may be illegal to use the wireless function of the Router in a region other than one
 of those specified in this field. If your country or region is not listed, please contact your local government
 agency for assistance.
- Mode This field determines the wireless mode which the Router works on.
- Channel Width The bandwidth of the wireless channel.
- Channel This field determines which operating frequency will be used. It is not necessary to change the wireless channel unless you notice interference problems with another nearby access point. If you select auto, then the AP will select the best channel automatically.
- **Disable Security** The wireless security function can be enabled or disabled. If disabled, the wireless stations will be able to connect the Router without encryption. It is strongly recommended that you choose one of following options to enable security.
- WPA-PSK/WPA2-PSK Select WPA based on pre-shared passphrase.
- Wireless Password You can enter ASCII or Hexadecimal characters.

For ASCII, the key can be made up of any numbers from 0 to 9 and any letters from A to Z, and the length should be between 8 and 63 characters.

For **Hexadecimal**, the key can be made up of any numbers from 0 to 9 and letters from A to F, and the length should be between 8 and 64 characters.

Please also note the key is case sensitive, which means that upper and lower case keys will affect the outcome. It would also be a good idea to write down the key and all related wireless security settings.

No Change – If you choose this option, wireless security configuration will not change!
 These settings are only for basic wireless parameters. For advanced settings, please refer to Wireless".

Click the Finish button to complete the Quick Setup.



Figure 3.13 Quick Setup - Finish

Configuring the Router

This chapter will show each Web page's key functions and the configuration way.

Login

After your successful login, you will see the main menus on the left of the Web-based utility. On the right, there are the corresponding explanations and instructions.



The detailed explanations for each Web page's key function are listed below.

Status

The Status page provides the current status information about the Router. All information is read-only.

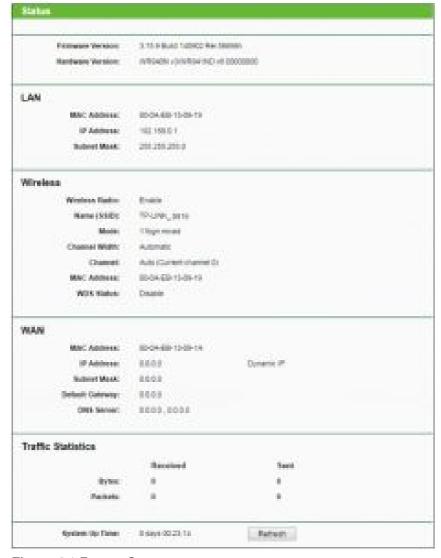


Figure 4.1 Router Status

Quick Setup

Please refer to Quick Installation Guide.

WPS

This section will guide you to add a new wireless device to an existing network quickly by WPS (Wi-Fi Protected Setup) function. Choose menu "WPS", and you will see the next screen (shown in Figure 4.2).



Figure 4.2 WPS

- WPS Status Enable or disable the WPS function here.
- Current PIN The current value of the Router's PIN displayed here. The default PIN of the Router can be

found in the label or User Guide.

Restore PIN - Restore the PIN of the Router to its default.

- Gen New PIN Click this button, and then you can get a new random value for the Router's PIN. You can
 ensure the network security by generating a new PIN.
- **Disable PIN of this device** WPS external registrar of entering this device's PIN can be disabled or enabled manually. If this device receives multiple failed attempts to authenticate an external registrar, this function will be disabled automatically.
- Add Device You can add the new device to the existing network manually by clicking this button.

If the wireless adapter supports Wi-Fi Protected Setup (WPS), you can establish a wireless connection between wireless adapter and router using either Push Button Configuration (PBC) method or PIN method.

Note: To build a successful connection by WPS, you should also do the corresponding configuration of the new device for WPS function meanwhile.

I. Use the Wi-Fi Protected Setup Button

Use this method if your client device has a WPS button.

Step 1: Press the **WPS/Reset button** on the back panel of the router, as shown in Figure 4.3. You can also keep the default WPS status as Enabled and click the Add device button in Figure 4.2. Then choose "**Press the button of the new device in two minutes**" and click **Connect**, shown in Figure 4.4.

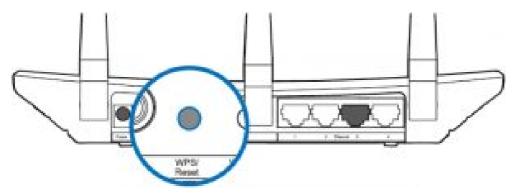


Figure 4.3



Figure 4.4 Add A New Device

- **Step 2:** Press and hold the **WPS** button of the client device.
- Step 3: The Wi-Fi Protected Setup LED flashes for two minutes during the Wi-Fi Protected Setup process.
- **Step 4:** When the WPS LED is on, the client device has successfully connected to the router.

II. Enter the client device's PIN on the router

Use this method if your client device does not have the WPS button, but has a Wi-Fi Protected Setup PIN number.

Step 1: Keep the default WPS status as **Enabled** and click the **Add device** button in Figure 4.2, then Figure 4.5 will appear.

@ Enter the r		N.		
PINI				
O Press the I	outton of the ne	ew device in by	o minutes.	

Figure 4.5 Add A New Device

Step 2: Enter the PIN number from the client device in the field on the WPS screen above. Then click **Connect** button.

Step 3: "Connect successfully" will appear on the screen of Figure 4.5, which means the client device has successfully connected to the router.

III. Enter the router's PIN on your client device

Use this method if your client device asks for the router's PIN number.

Step 1: On the client device, enter the PIN number listed on the router's Wi-Fi Protected Setup screen, shown in Figure 4.2 (It is also labeled on the bottom of the router).

Step 2: The Wi-Fi Protected Setup LED flashes for two minutes during the Wi-Fi Protected Setup process.

Step 3: When the WPS LED is on, the client device has successfully connected to the router.

S Note:

- 1. The WPS LED on the router will light green for five minutes if the device has been successfully added to the network.
- 2. The WPS function cannot be configured if the Wireless Function of the router is disabled. Please make sure the Wireless Function is enabled before configuring the WPS.

Network

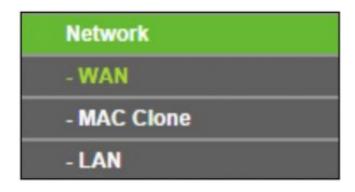


Figure 4.6 the Network menu

There are three submenus under the Network menu (shown in Figure 4.6): **WAN, MAC Clone** and **LAN.** Click any of them, and you will be able to configure the corresponding function.

WAN

Choose menu "Network→WAN", and then you can configure the IP parameters of the WAN on the screen below.

1. If your ISP provides the DHCP service, please choose **Dynamic** IP type, and the Router will automatically get IP parameters from your ISP. You can see the page as follows (Figure 4.7).

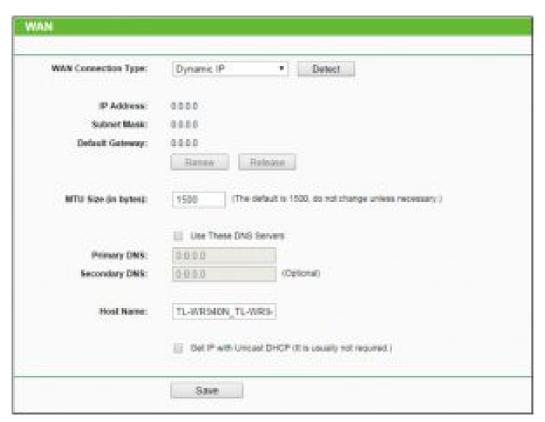


Figure 4.7 WAN - Dynamic IP

This page displays the WAN IP parameters assigned dynamically by your ISP, including IP address, Subnet Mask, Default Gateway, etc. Click the **Renew** button to renew the IP parameters from your ISP. Click the **Release** button to release the IP parameters.

- MTU Size The normal MTU (Maximum Transmission Unit) value for most Ethernet networks is 1500 Bytes. It is not recommended that you change the default MTU Size unless required by your ISP.
- Use These DNS Servers If your ISP gives you one or two DNS addresses, select Use These DNS Servers and enter the primary and secondary addresses into the correct fields. Otherwise, the DNS servers will be assigned dynamically from your ISP.

Note: If you find error when you go to a Web site after entering the DNS addresses, it is likely that your DNS servers are set up improperly. You should contact your ISP to get DNS server addresses.

• Get IP with Unicast DHCP - A few ISPs' DHCP servers do not support the broadcast applications. If you

2. If your ISP provides a static or fixed IP Address, Subnet Mask, Gateway and DNS setting, select Static IP. The **Static IP** settings page will appear as shown in Figure 4.8.



Figure 4.8 WAN - Static IP

- IP Address Enter the IP address in dotted-decimal notation provided by your ISP.
- Subnet Mask Enter the subnet Mask provided by your ISP in dotted-decimal notation. Usually, the Sub Mask is 255.255.255.0.
- **Default Gateway** Enter the gateway IP address provided by your ISP in dotted-decimal notation.
- MTU Size The normal MTU (Maximum Transmission Unit) value for most Ethernet networks is 1500 Bytes. It is not recommended that you change the default MTU Size unless required by your ISP.
- Primary/Secondary DNS Enter one or two DNS addresses in dotted-decimal notation provided by your ISP.
- 3. If your ISP provides a PPPoE connection, select PPPoE/Russia PPPoE option. And you should enter the following parameters (Figure 4.9):

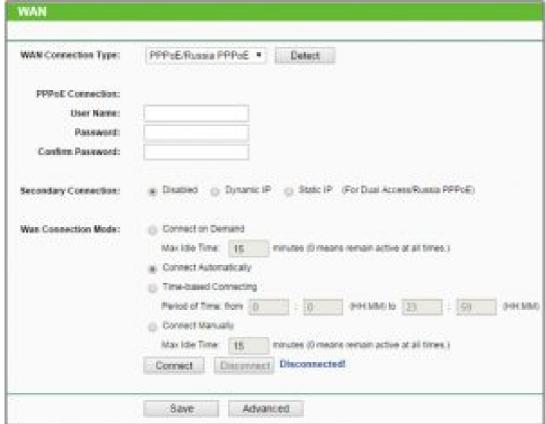


Figure 4.9 WAN -

PPPoE

User Name/Password – Enter the User Name and Password provided by your ISP. These fields are case-sensitive.

Confirm Password – Re-enter the Password provided by your ISP to ensure the Password you entered is correct.

Secondary Connection – It's available only for PPPoE Connection. If your ISP provides an extra Connection type such as Dynamic/Static IP to connect to a local area network, then you can check the radio button of Dynamic/Static IP to activate this secondary connection.

- **Disabled** The Secondary Connection is disabled by default, so there is PPPoE connection only. This is recommended.
- Dynamic IP You can check this radio button to use Dynamic IP as the secondary connection to connect to the local area network provided by ISP.
- Static IP You can check this radio button to use Static IP as the secondary connection to connect to the local area network provided by ISP.

Connect on Demand: In this mode, the Internet connection can be terminated automatically after a specified inactivity period **(Max Idle Time)** and **be** re established when you attempt to access the Internet again. If you want your Internet connection keeps active all the time, please enter "0" in the **Max Idle Time** field. Otherwise, enter the number of minutes you want to have elapsed before your Internet access disconnects.

Connect Automatically: The connection can be re established automatically when it was down.

Time-based Connecting: The connection will only be established in the period from the start time to the end time (both are in HH:MM format).

Solution System Tools -> Time page, will the Time-based Connecting function can take effect.

Connect Manually – You can click the Connect/ Disconnect button to connect/disconnect immediately. This mode also supports the Max Idle Time function as Connect on Demand mode. The Internet connection can be disconnected automatically after a specified inactivity period and re-established when you attempt to access the Internet again.

Caution: Sometimes the connection cannot be terminated although you specify a time to Max Idle Time, since some applications are visiting the Internet continually in the background.

If you want to do some advanced configurations, please click the Advanced button, and the page shown in Figure 4.10 will then appear:

MTU Size (in byles):	1480	(The default is 1480, do not change unless necessary.)
Service Name:	A	
AC Nome:		
	□ Use P	Address Specified by ISP
IP Specified IP Address:	00.00	
Defect Online Interval:	0	Seconds (0 $-$ 120 seconds, the default is 0; 0 means not detecting.)
	Use Th	ne Following DNG Servers
Primary DMS:	0.0.0.0	
Secondary DMS:	0.000	(Optional)

Figure 4.10 PPPoE Advanced Settings

MTU Size: The default MTU size is "1480" bytes, which is usually fine. It is not recommended that you change the default **MTU Size** unless required by your ISP.

Service Name: The service name and AC (Access Concentrator) name, which should not be configured unless you are sure it is necessary for your ISP. In most cases, leaving these fields blank will work.

ISP Specified IP Address: If your ISP does not automatically assign IP addresses to the Router during login, please click "**Use IP address specified by ISP**" check box and enter the IP address provided by your ISP in dotted-decimal notation.

Detect Online Interval: The Router will detect Access Concentrator online at every interval. The default value is "0". You can input the value between "0" and "120". The value "0" means no detect.

DNS IP address: If your ISP does not automatically assign DNS addresses to the Router during login, please click "**Use the following DNS servers**" check box and enter the IP address in dotted-decimal notation of your ISP's primary DNS server. If a secondary DNS server address is available, enter it as well.

Click the **Save** button to save your settings

4. If your ISP provides **BigPond Cable** (or Heart Beat Signal) connection, please select **BigPond Cable**. And you should enter the following parameters (Figure 4-11):

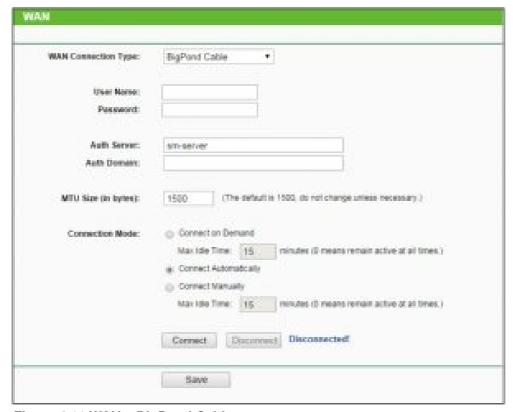


Figure 4.11 WAN – BigPond Cable

User Name/Password: Enter the User Name and Password provided by your ISP. These fields are case-sensitive.

Auth Server: Enter the authenticating server IP address or host name.

Auth Domain: Type in the domain suffix server name based on your location e.g.

NSW / ACT – <u>nsw.bigpond.net.au</u>

VIC / TAS / WA / SA / NT - vic.bigpond.net.au

QLD - qld.bigpond.net.au

MTU Size – The normal **MTU** (Maximum Transmission Unit) value for most Ethernet networks is 1500 Bytes. It is not recommended that you change the default **MTU Size** unless required by your ISP.

Connect on Demand – In this mode, the Internet connection can be terminated automatically after a specified inactivity period (**Max Idle Time**) and be re established when you attempt to access the Internet again. If you want your Internet connection keeps active all the time, please enter "0" in the **Max Idle Time** field. Otherwise, enter the number of minutes you want to have elapsed before your Internet access disconnects.

Connect Automatically – The connection can be re established automatically when it was down.

Connect Manually – You can click the **Connect/Disconnect** button to connect/disconnect immediately. This mode also supports the **Max Idle Time** function as **Connect on Demand** mode. The Internet connection can be disconnected automatically after a specified inactivity period and re-established when you attempt to access the Internet again. Click the **Connect** button to connect immediately. Click the **Disconnect** button to disconnect immediately.

Caution: Sometimes the connection cannot be terminated although you specify a time to **Max Idle Time** because some applications are visiting the Internet continually in the background.

Click the **Save** button to save your settings.

5. If your ISP provides **L2TP** connection, please select **L2TP/Russia L2TP** option. And you should enter the following parameters (Figure 4.12):



Figure 4.12 WAN -L2TP

User Name/Password – Enter the User Name and Password provided by your ISP. These fields are case-sensitive.

Dynamic IP/ **Static IP** – Choose either as you are given by your ISP. Click the Connect button to connect immediately. Click the Disconnect button to disconnect immediately.

Connect on Demand – You can configure the Router to disconnect from your Internet connection after a specified period of inactivity (Max Idle Time). If your Internet connection has been terminated due to inactivity, Connect on Demand enables the Router to automatically re-establish your connection as soon as you attempt to access the Internet again. If you wish to activate Connect on Demand, click the radio button. If you want your Internet connection to remain active at all times, enter 0 in the Max Idle Time field. Otherwise, enter the number of minutes you want to have elapsed before your Internet connection terminates.

Connect Automatically – Connect automatically after the Router is disconnected. To use this option, click the radio button.

Connect Manually – You can configure the Router to make it connect or disconnect manually. After a specified period of inactivity (Max Idle Time), the Router will disconnect from your Internet connection, and you will not be able to re-establish your connection automatically as soon as you attempt to access the Internet again. To use this option, click the radio button. If you want your Internet connection to remain active at all times, enter "0" in the **Max Idle Time** field. Otherwise, enter the number in minutes that you wish to have the Internet connecting last unless a new link is requested.

Caution: Sometimes the connection cannot be disconnected although you specify a time to **Max Idle Time**, since some applications is visiting the Internet continually in the background.

6. If your ISP provides PPTP connection, please select PPTP/Russia PPTP option. And you should enter the following parameters (Figure 4.13):



Figure 4.13 WAN -PPTP

User Name/Password – Enter the User Name and Password provided by your ISP. These fields are case-sensitive.

Dynamic IP/ **Static IP** – Choose either as you are given by your ISP and enter the ISP's IP address or the domain name.

If you choose static IP and enter the domain name, you should also enter the DNS assigned by your ISP. And click the Save button.

Click the Connect button to connect immediately. Click the Disconnect button to disconnect immediately

Connect on Demand – You can configure the Router to disconnect from your Internet connection after a specified period of inactivity (Max Idle Time). If your Internet connection has been terminated due to inactivity, Connect on Demand enables the Router to automatically re-establish your connection as soon as you attempt to access the Internet again. If you wish to activate Connect on Demand, click the radio button. If you want your Internet connection to remain active at all times, enter 0 in the Max Idle Time field. Otherwise, enter the number of minutes you want to have elapsed before your Internet connection terminates.

Connect Automatically – Connect automatically after the Router is disconnected. To use this option, click the radio button.

Connect Manually – You can configure the Router to make it connect or disconnect manually. After a specified period of inactivity (Max Idle Time), the Router will disconnect from your Internet connection, and you will not be able to re-establish your connection automatically as soon as you attempt to access the Internet again. To use this option, click the radio button. If you want your Internet connection to remain active at all times, enter "0" in the **Max Idle Time** field. Otherwise, enter the number in minutes that you wish to have the Internet connecting last unless a new link is requested.

Caution: Sometimes the connection cannot be disconnected although you specify a time to **Max Idle Time**, since some applications are visiting the Internet continually in the background.

SNote:

If you don't know how to choose the appropriate connection type, click the Detect button to allow the Router to automatically search your Internet connection for servers and protocols. The connection type will be reported when an active Internet service is successfully detected by the Router. This report is for your reference only. To make sure the connection type your ISP provides, please refer to the ISP. The various types of Internet connections that the Router can detect are as follows:

- **PPPoE** Connections which use PPPoE that requires a user name and password.
- Dynamic IP Connections which use dynamic IP address assignment.
- Static IP Connections which use static IP address assignment.

The Router can not detect PPTP/L2TP/BigPond connections with your ISP. If your ISP uses one of these protocols, then you must configure your connection manually

MAC Clone

Choose menu "**Network**→**MAC Clone**", and then you can configure the MAC address of the WAN on the screen below,



Figure 4-14: MAC Address Clone

Some ISPs require that you register the MAC Address of your adapter. Changes are rarely needed here.

- WAN MAC Address This field displays the current MAC address of the WAN port. If your ISP requires you to register the MAC address, please enter the correct MAC address into this field in XX-XX-XX-XX-XX format(X is any hexadecimal digit).
- Your PC's MAC Address This field displays the MAC address of the PC that is managing the Router. If the
 MAC address is required, you can click the Clone MAC Address button and this MAC address will fill in the
 WAN MAC Address

Click Restore Factory MAC to restore the MAC address of WAN port to the factory default value.

Click the **Save** button to save your settings.



Only the PC on your LAN can use the MAC Address Clone function.

LAN

Choose menu "**Network**→**LAN**", and then you can configure the IP parameters of the LAN on the screen as below.

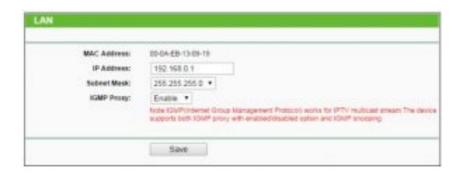


Figure 4-15 LAN

- MAC Address The physical address of the Router, as seen from the LAN. The value can't be changed.
- **IP Address** Enter the IP address of your Router or reset it in dotted-decimal notation (factory default: 192.168.0.1).
- Subnet Mask An address code that determines the size of the network. Normally use 255.255.255.0 as the subnet mask.
- IGMP Proxy If you want to watch TV through IGMP, please Enable it.

S Note:

- 1. If you change the IP Address of LAN, you must use the new IP Address to login the Router.
- 2. If the new LAN IP Address you set is not in the same subnet, the IP Address pool of the DHCP server will change accordingly at the same time while the Virtual Server and DMZ Host will not take effect until they are re-configured.

Wireless



Figure 4-16 Wireless menu

There are five submenus under the Wireless menu (shown in Figure 4-16): **Wireless Settings**, **Wireless Security**, **Wireless MAC Filtering**, **Wireless Advanced** and **Wireless Statistics**. Click any of them, and you will be able to configure the corresponding function.

Wireless Settings

Choose menu "Wireless→Wireless Setting", and then you can configure the basic settings for the wireless network on this page.

Windess Network Name:	TP-LINK_0919		(Also called the SSID)
Region	United States	- 2	
Warning	Ensure jou select a c Incorrect settings may	y cause interference	oform local law.
Mode:	11bgn mixed		
Channel Width:	Auto +		
Channel	Auto •		
	Ø Erutre fireless Ø Erutre 100 Br	sadcaet dging	

Figure 4-17 Wireless Settings

Wireless Network Name (also called SSID) – Enter a value of up to 32 characters. The same name of SSID (Service Set Identification) must be assigned to all wireless devices in your network. Considering your wireless network security, the default SSID is set to be TP-LINK_XXXX (XXXX indicates the last unique four numbers of each Router's MAC address). This value is case-sensitive. For example, *TEST* is NOT the same as *test*.

• Region – Select your region from the drop-down list. This field specifies the region where the wireless function of the Router can be used. It may be illegal to use the wireless function of the Router in a region other than one of those specified in this field. If your country or region is not listed, please contact your local government agency for assistance.

When you select your local region from the drop-down list, click the **Save** button, and then the Note Dialog will appear. Click **OK**.



Note:

Limited by local law regulations, version for North America does not have region selection option.

- Mode Select the desired mode. The default setting is 11bgn mixed.
- 11bg mixed Select if you are using both 802.11b and 802.11g wireless clients.
- 11bgn mixed Select if you are using a mix of 802.11b, 11g, and 11n wireless clients.
- Select the desired wireless mode. When 802.11g mode is selected, only 802.11g wireless stations can connect to the Router. When 802.11n mode is selected, only 802.11n wireless stations can connect to the AP. It is strongly recommended that you set the Mode to 11b&g&n, and all of 802.11b, 802.11g, and 802.11n wireless stations can connect to the Router.
- Channel Width Select any channel width from the drop-down list. The default setting is automatic, which can automatically adjust the channel width for your clients.
- White:
 - If 11bg mixed is selected in the Mode field, the Channel Width selecting field will turn grey and the value will become 20M, which is unable to be changed.
- **Channel** This field determines which operating frequency will be used. The default channel is set to **Auto**, so the AP will choose the best channel automatically. It is not necessary to change the wireless channel unless you notice interference problems with another nearby access point.
- Enable Wireless Router Radio The wireless radio of this Router can be enabled or disabled to allow wireless stations access.
- Enable SSID Broadcast When wireless clients survey the local area for wireless networks to associate with, they will detect the SSID broadcast by the Router. If you select the Enable SSID Broadcast checkbox, the Wireless Router will broadcast its name (SSID) on the air.
- Enable WDS Bridging Check this box to enable WDS. With this function, the Router can bridge two or more
 WLANs. If this checkbox is selected, you will have to set the following parameters as shown below. Make sure
 the following settings are correct.



- SSID (to be bridged) The SSID of the AP your Router is going to connect to as a client. You can also use the search function to select the SSID to join.
- **BSSID** (to be bridged) The BSSID of the AP your Router is going to connect to as a client. You can also use the search function to select the BSSID to join.
- Survey Click this button, you can search the AP which runs in the current channel.
- WDS Mode This field determines which WDS Mode will be used. It is not necessary to change the WDS
 Mode unless you notice network communication problems with root AP If you select Auto, then Router will
 choose the appropriate WDS Mode automatically.
- **Key type** This option should be chosen according to the AP's security configuration. It is recommended that the security type is the same as your AP's security type
- WEP Index This option should be chosen if the key type is WEP (ASCII) or WEP (HEX).It indicates the index of the WEP key.
- Auth Type This option should be chosen if the key type is WEP (ASCII) or WEP (HEX). It indicates the

authorization type of the Root AP.

 Password – If the AP your Router is going to connect needs password, you need to fill the password in this blank.

Wireless Security

Choose menu "Wireless → Wireless Security", and then you can configure the security settings of your wireless network.

There are five wireless security modes supported by the Router: WPA/WPA2-Personal, WPA/WPA2-Enterprise and WEP.

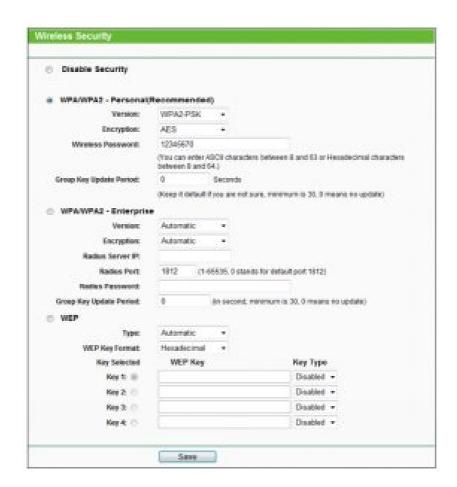


Figure 4-18

- **Disable Security** If you do not want to use wireless security, select this check box, but it's strongly recommended to choose one of the following modes to enable security.
- WPA/WPA2-Personal(Recommended) It's the WPA/WPA2 authentication type based on pre-shared passphrase.
- Version you can choose the version of the WPA-PSK security on the drop-down list. The default setting is
- Automatic, which can select WPA-PSK (Pre-shared key of WPA) or WPA2-PSK (Pre-shared key of WPA)
 automatically based on the wireless station's capability and request.
- Encryption When WPA-PSK or WPA is set as the Authentication Type, you can select either Automatic, or TKIP or AES as Encryption.



If you check the **WPA/WPA2-Personal(Recommended)** radio button and choose TKIP encryption, you will find a notice in red as shown in Figure 4-19.

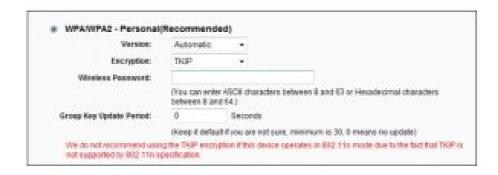


Figure 4-19

- Password You can enter ASCII characters between 8 and 63 characters or 8 to 64 Hexadecimal characters.
- Group Key Update Period Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.
- WPA/WPA2-Enterprise It's based on Radius Server.
- Version you can choose the version of the WPA security on the drop-down list. The default setting is
 Automatic, which can select WPA (Wi-Fi Protected Access) or WPA2 (WPA version 2) automatically based on
 the wireless station's capability and request.
- Encryption You can select either Automatic, or TKIP or

S Note:

If you check the **WPA/WPA2-Enterprise** radio button and choose TKIP encryption, you will find a notice in red as shown in Figure 4-20



Figure 4-20

- Radius Server IP Enter the IP address of the Radius Server.
- Radius Port Enter the port that radius service used.
- Radius Password Enter the password for the Radius Server.
- Group Key Update Period Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.
- WEP It is based on the IEEE 802.11 standard. If you select this check box, you will find a notice in red as show in Figure 4-21.



Figure 4-21

- Type you can choose the type for the WEP security on the drop-down list. The default setting is Automatic,
 which can select Open System or Shared Key authentication type automatically based on the wireless
 station's capability and request.
- WEP Key Format Hexadecimal and ASCII formats are provided. Hexadecimal format stands for any combination of hexadecimal digits (0-9, a-f, A-F) in the specified length. ASCII format stands for any combination of keyboard characters in the specified length.
- **WEP Key-** Select which of the four keys will be used and enter the matching WEP key that you create. Make sure these values are identical on all wireless stations in your network.
- **Key Type** You can select the WEP key length (64-bit, or 128-bit, or 152-bit.) for encryption. "Disabled" means this WEP key entry is invalid.

64-bit – You can enter 10 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 5 ASCII characters.

128-bit – You can enter 26 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 13 ASCII characters.

152-bit – You can enter 32 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 16 ASCII characters.

Note:

If you do not set the key, the wireless security function is still disabled even if you have selected Shared Key as Authentication Type.

Be sure to click the **Save** button to save your settings on this page.

Wireless MAC Filtering

Choose menu "Wireless — Wireless MAC Filtering", and then you can control the wireless access by configuring the Wireless MAC Address Filtering function, shown in Figure 4-22.



Figure 4-22 Wireless MAC address Filtering

To filter wireless users by MAC Address, click **Enable**. The default setting is **Disable**.

- MAC Address The wireless station's MAC address that you want to filter.
- Status The status of this entry either Enabled or Disabled.
- **Description** A simple description of the wireless station.



Figure 4-23 Add or Modify Wireless MAC Address Filtering entry

To Add a Wireless MAC Address filtering entry, click the **Add New...** button. The "**Add or Modify Wireless MAC Address Filtering entry**" page will appear as shown in Figure 4-23:

Figure 4-23 Add or Modify Wireless MAC Address Filtering entry

To add or modify a MAC Address Filtering entry, follow these instructions:

- 2. 00-0A-EB-00-07-8A.
- 3. Enter a simple description of the wireless station in the **Description** For example:
- 4. Wireless station A.
- 5. **Status** Select **Enabled** or **Disabled** for this entry on the **Status** drop-down list.

6. Click the Save button to save this entry.

To modify or delete an existing entry:

- 1. Click the **Modify** in the entry you want to modify. If you want to delete the entry, click the **Delete**.
- 2. Modify the information.
- 3. Click the Save

Click the **Enable All** button to make all entries enabled.

Click the **Disable All** button to make all entries disabled.

Click the **Delete All** button to delete all entries.


Click the **Next** button to go to the next page.

Click the **Previous** button to return to the previous page.

For example: If you desire that the wireless station A with MAC address 00-0A-EB-00-07-8A and the wireless station B with MAC address 00-0A-EB-00-23-11 are able to access the Router, but all the other wireless stations cannot access the Router, you can configure the **Wireless MAC Address Filtering** list by following these steps:

- 1. Click the **Enable** button to enable this function.
- Select the radio button: Deny the stations specified by any enabled entries in the list to access for Filtering Rules.
- 3. Delete all or disable all entries if there are any entries already.
- 4. Click the Add New... button and enter the MAC address 00-0A-EB-00-07-8A /00-0A-EB-00-23-11 in the MAC Address field, then enter wireless station A/B in the Description field, while select Enabled in the Status drop-down list. Finally, click the Save and the Back

The filtering rules that configured should be similar to the following list:

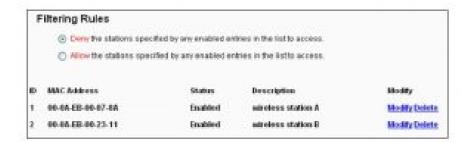

Wireless Advanced

Choose menu "Wireless→Wireless Advanced", and then you can configure the advanced settings of your wireless network.



Figure 4-24 Wireless Advanced

- Beacon Interval Enter a value between 20-1000 milliseconds for Beacon Interval here.
 - The beacons are the packets sent by the router to synchronize a wireless network. Beacon Interval value determines the time interval of the beacons. The default value is 100.
- RTS Threshold Here you can specify the RTS (Request to Send) Threshold. If the packet is larger than the specified RTS Threshold size, the router will send RTS frames to a particular receiving station and negotiate the sending of a data frame. The default value is 2346.
- Fragmentation Threshold This value is the maximum size determining whether packets will be fragmented. Setting the Fragmentation Threshold too low may result in poor network performance since excessive packets. 2346 is the default setting and is recommended.
- **DTIM Interval** This value determines the interval of the Delivery Traffic Indication Message (DTIM). A DTIM field is a countdown field informing clients of the next window for listening to broadcast and multicast messages. When the Router has buffered broadcast or multicast messages for associated clients, it sends the next DTIM with a DTIM Interval value. You can specify the value between 1-255 Beacon Intervals. The default value is 1, which indicates the DTIM Interval is the same as Beacon Interval.
- **Enable WMM WMM** function can guarantee the packets with high- priority messages being transmitted preferentially. It is strongly recommended enabled.
- Enable Short GI This function is recommended for it will increase the data capacity by reducing the guard interval time.
- Enabled AP Isolation This function can isolate wireless stations on your network from each other. Wireless devices will be able to communicate with the Router but not with each other. To use this function, check this box. AP Isolation is disabled by default.

SNote:

If you are not familiar with the setting items in this page, it's strongly recommended to keep the provided default values; otherwise it may result in lower wireless network performance.

Wireless Statistics

Choose menu "Wireless→Wireless Statistics", and then you can see the MAC Address, Current Status, Received Packets and Sent Packets for each connected wireless station.



Figure 4-25 The Router attached wireless stations

- MAC Address The connected wireless station's MAC address
- Current Status The connected wireless station's running status, one of STA-AUTH /
- STA-ASSOC / STA-JOINED / WPA / WPA-PSK / WPA2 / WPA2-PSK / AP-UP / AP-DOWN /
 - Disconnected
- Received Packets Packets received by the station
- Sent Packets Packets sent by the station

You cannot change any of the values on this page. To update this page and to show the current connected wireless stations, click on the **Refresh** button.

If the numbers of connected wireless stations go beyond one page, click the **Next** button to go to the next page and click the **Previous** button to return to the previous page.

SNote:

This page will be refreshed automatically every 5 seconds.

DHCP



Figure 4-26 The DHCP menu

There are three submenus under the DHCP menu (shown in Figure 4-26): **DHCP Settings**, **DHCP Client List** and **Address Reservation**. Click any of them, and you will be able to configure the corresponding function.

DHCP Settings

Choose menu "**DHCP DHCP Settings**", and then you can configure the DHCP Server on the page (shown in Figure 4-27). The Router is set up by default as a DHCP (Dynamic Host Configuration Protocol) server, which provides the TCP/IP configuration for all the PC(s) that are connected to the Router on the LAN.

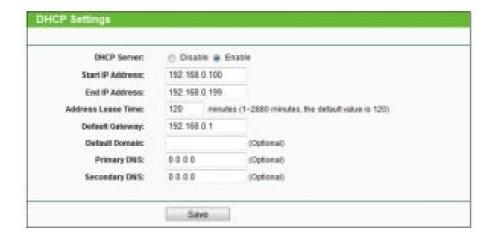


Figure 4-27 DHCP Settings

- **DHCP Server Enable** or **Disable** the DHCP server. If you disable the Server, you must have another DHCP server within your network or else you must configure the computer manually.
- Start IP Address Specify an IP address for the DHCP Server to start with when assigning IP addresses. 192.168.0.100 is the default start address.
- End IP Address Specify an IP address for the DHCP Server to end with when assigning IP addresses. 192.168.0.199 is the default end address.
- Address Lease Time The Address Lease Time is the amount of time a network user will be allowed
 connection to the Router with their current dynamic IP Address. Enter the amount of time in minutes and the
 user will be "leased" this dynamic IP Address. After the
- time is up, the user will be automatically assigned a new dynamic IP address. The range of the time is 1 ~ 2880 minutes. The default value is 120 minutes.
- Default Gateway Suggest to input the IP address of the LAN port of the Router, default value is 192.168.0.1
- **Default Domain** (Optional.) Input the domain name of your network.
- Primary DNS (Optional.) Input the DNS IP address provided by your ISP. Or consult your ISP.
- Secondary DNS (Optional.) Input the IP address of another DNS server if your ISP provides two DNS servers.

Note:

To use the DHCP server function of the Router, you must configure all computers on the LAN as "Obtain an IP Address automatically".

DHCP Client List

Choose menu "**DHCP**→**DHCP Client List**", and then you can view the information about the clients attached to the Router in the next screen (shown in Figure 4-28).



- ID The index of the DHCP Client.
- Client Name The name of the DHCP client.
- MAC Address The MAC address of the DHCP client.
- Assigned IP The IP address that the Router has allocated to the DHCP client.
- Lease Time The time of the DHCP client leased. After the dynamic IP address has expired, a new dynamic IP address will be automatically assigned to the user.

You cannot change any of the values on this page. To update this page and to show the current attached devices, click the **Refresh** button.

Address Reservation

Choose menu "**DHCP**→**Address Reservation**", and then you can view and add a reserved address for clients via the next screen (shown in Figure 4-29). When you specify a reserved IP address for a PC on the LAN, that PC will always receive the same IP address each time when it accesses the DHCP server. Reserved IP addresses should be assigned to the servers that require permanent IP settings.



Figure 4-29 Address Reservation

- MAC Address The MAC address of the PC for which you want to reserve IP address.
- Reserved IP Address The IP address of the Router reserved.
- Status The status of this entry, either Enabled or Disabled.

To Reserve IP addresses:

- 1. Click the Add New ... (Pop-up Figure 4-30)
- 2. Enter the MAC address (in XX-XX-XX-XX-XX format) and IP address of the computer you wish to add in dotted-decimal notation.



Figure 4-30 Add or Modify an Address Reservation Entry

To modify or delete an existing entry:

- 1. Click the **Modify** in the entry you want to modify. If you want to delete the entry, click the **Delete**.
- 2. Modify the information.
- 3. Click the Save

Click the **Enable/ Disable All** button to make all entries enabled/disabled.

Click the **Delete All** button to delete all entries.

Click the **Next** button to go to the next page and Click the **Previous** button to return to the previous page.

Forwarding




Figure 4-31 The Forwarding menu

There are four submenus under the Forwarding menu (shown in Figure 4-31): **Virtual Servers**, **Port Triggering**, **DMZ** and **UPnP**. Click any of them, and you will be able to configure the corresponding function.

Virtual Servers

Choose menu "Forwarding Virtual Servers", and then you can view and add virtual servers in the next screen (shown in Figure 4-32). Virtual servers can be used for setting up public services on your LAN. A virtual server is defined as a service port, and all requests from Internet to this service port will be redirected to the computer specified by the server IP. Any PC that was used for a virtual server must have a static or reserved IP address because its IP address may change when using the DHCP function.



Figure 4-32 Virtual Servers

• Service Port - The numbers of External Service Ports. You can enter a service port or a range of service ports

(the format is XXX – YYY; XXX is the Start port and YYY is the End port).

- Internal Port The Internal Service Port number of the PC running the service application. You can leave it blank if the Internal Port is the same as the Service Port, or enter a specific port number when Service Port is a single one.
- IP Address The IP address of the PC running the service application.
- Protocol The protocol used for this application, either TCP, UDP, or All (all protocols supported by the Router).
- Status The status of this entry, "Enabled" means the virtual server entry is enabled.
- Modify To modify or delete an existing entry.

To setup a virtual server entry:

- 1. Click the **Add New...** (pop-up Figure 4-33)
- Select the service you want to use from the Common Service Port If the Common Service Port menu does
 not list the service that you want to use, enter the number of the service port or service port range in the
 Service Port field.
- 3. Enter the IP address of the computer running the service application in the IP Address
- 4. Select the protocol used for this application in the Protocol drop-down list, either TCP, UDP, or All.
- 5. Select the **Enabled** option in the **Status** drop-down list.
- 6. Click the Save

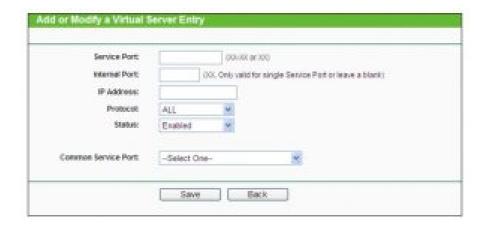


Figure 4-29 Address Reservation

S Note:

It is possible that you have a computer or server that has more than one type of available service.

If so, select another service, and type the same IP address for that computer or server.

To modify or delete an existing entry:

- 1. Find the desired entry in the table.
- 2. Click Modify or Delete as desired on the Modify

Click the **Enable/ Disable All** button to make all entries enabled/ disabled.

Click the **Delete All** button to delete all entries.

Click the **Next** button to go to the next page and click the **Previous** button to return to the previous page.



If you set the service port of the virtual server as 80, you must set the Web management port on **Security -> Remote Management** page to be any other value except 80 such as 8080.

Otherwise there will be a conflict to disable the virtual server.

Port Triggering

Choose menu "Forwarding → Port Triggering", you can view and add port triggering in the next screen (shown in Figure 4-34). Some applications require multiple connections, like Internet games, video conferencing, Internet telephoning and so on. Port Triggering is used for some of these applications that cannot work with a pure NAT Router.



Figure 4-34 Port Triggering

To add a new rule, follow the steps below.

- 1. Click the **Add New...** button, the next screen will pop-up as shown in Figure 4-35.
- 2. Select a common application from the **Common Applications** drop-down list, then the **Trigger Port** field and the **Incoming Ports** field will be automatically filled. If the **Common Applications** do not have the application you need, enter the **Trigger Port** and the **Incoming Ports**
- 3. Select the protocol used for Trigger Port from the **Trigger Protocol** drop-down list, either **TCP**, **UDP**, or **All**.
- 4. Select the protocol used for Incoming Ports from the Incoming Protocol drop-down list, either TCP or UDP, or
- 5. Select **Enable** in **Status**
- 6. Click the Save button to save the new rule.



Figure 4-35 Add or Modify a Triggering Entry

- Trigger Port The port for outgoing traffic. An outgoing connection using this port will trigger this rule.
- Trigger Protocol The protocol used for Trigger Ports, either TCP, UDP, or All (all protocols supported by the Router).
- Incoming Port The port or port range used by the remote system when it responds to the outgoing request.
 A response using one of these ports will be forwarded to the PC which triggered this rule. You can input at most 5 groups of ports (or port sections). Every group of ports must be separated with ",", for example, 2000-2038, 2046, 2050-2051, 2085, 3010-3030.
- Incoming Protocol The protocol used for Incoming Port, either TCP, UDP, or ALL (all protocols supported by the Router).
- Status The status of this entry, Enabled means the Port Triggering entry is enabled.
- Common Applications Some popular applications already listed in the drop-down list of Incoming Protocol.

To modify or delete an existing entry:

- 1. Find the desired entry in the table.
- 2. Click Modify or Delete as desired on the Modify

Click the **Enable All** button to make all entries enabled.

Click the **Disable All** button to make all entries disabled.

Click the **Delete All** button to delete all entries.

Once the Router is configured, the operation is as follows:

- A local host makes an outgoing connection to an external host using a destination port number defined in the Trigger Port
- The Router records this connection, opens the incoming port or ports associated with this entry in the Port
 Triggering table, and associates them with the local host.
- When necessary, the external host will be able to connect to the local host using one of the ports defined in the Incoming Ports



- 1. When the trigger connection is released, the corresponding opened ports will be closed.
- 2. Each rule can only be used by one host on the LAN at a time. The trigger connection of other hosts on the LAN will be refused.
- 3. Incoming Ports ranges cannot overlap each other.

DMZ

Choose menu "Forwarding→DMZ", and then you can view and configure DMZ host in the screen (shown in Figure 4-36). The DMZ host feature allows one local host to be exposed to the Internet for a special-purpose service such as Internet gaming or videoconferencing. The Router forwards packets of all services to the DMZ host. Any PC whose port is being forwarded must have its DHCP client function disabled and should have a new static IP Address assigned to it because its IP Address may be changed when using the DHCP function.




Figure 4-36 DMZ

To assign a computer or server to be a DMZ server:

- 1. Click the Enable
- 2. Enter the IP address of a local PC that is set to be DMZ host in the DMZ Host IP Address
- 3. Click the Save

UPnP

Choose menu "Forwarding UPnP", and then you can view the information about UPnP in the screen (shown in Figure 4-37). The Universal Plug and Play (UPnP) feature allows the devices, such as Internet computers, to access the local host resources or devices as needed. UPnP devices can be automatically discovered by the UPnP service application on the LAN.

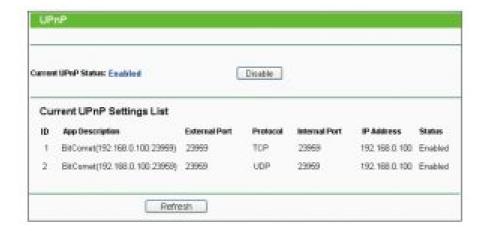

- Current UPnP Status UPnP can be enabled or disabled by clicking the Enable or Disable This feature is
 enabled by default.
- Current UPnP Settings List This table displays the current UPnP information.
 - App Description The description about the application which initiates the UPnP request.
 - External Port The port which the Router opened for the application.
 - **Protocol** The type of protocol which is opened.
 - Internal Port The port which the Router opened for local host.
 - IP Address The IP address of the local host which initiates the UPnP request.
 - Status Either Enabled or Disabled. "Enabled" means that the port is still active; otherwise, the port is inactive.

Click the **Enable** button to enable UPnP.

Click the **Disable** button to disable UPnP.

Click the **Refresh** button to update the Current UPnP Settings List.

Security



Figure 4-38 The Security menu

There are four submenus under the Security menu as shown in Figure 4-38: **Basic Security**, **Advanced Security**, **Local Management** and **Remote Management**. Click any of them, and you will be able to configure the corresponding function.

Basic Security

Choose menu "Security → Basic Security", and then you can configure the basic security in the screen as shown in Figure 4-39.

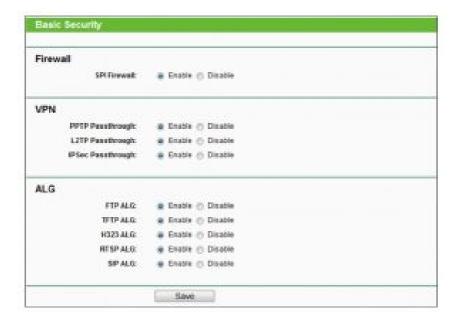


Figure 4-39 Basic Security

- **Firewall** A firewall protects your network from the outside world. Here you can enable or disable the Router's firewall.
- SPI Firewall SPI (Stateful Packet Inspection, also known as dynamic packet filtering) helps to prevent cyber
 attacks by tracking more state per session. It validates that the traffic passing through the session conforms to
 the protocol. SPI Firewall is enabled by factory default. If you want all the computers on the LAN exposed to the
 outside world, you can disable it.
- VPN VPN Passthrough must be enabled if you want to allow VPN tunnels using VPN protocols to pass through the Router.
- PPTP Passthrough Point-to-Point Tunneling Protocol (PPTP) allows the Point-to-Point Protocol (PPP) to be tunneled through an IP network. To allow PPTP tunnels to pass through the Router, click Enable.
- L2TP Passthrough Layer Two Tunneling Protocol (L2TP) is the method used to enable Point-to-Point sessions via the Internet on the Layer Two level. To allow L2TP tunnels to pass through the Router, click Enable.
- **IPSec Passthrough** Internet Protocol security (IPSec) is a suite of protocols for ensuring private, secure communications over Internet Protocol (IP) networks, through the use of cryptographic security services. To allow IPSec tunnels to pass through the Router, click **Enable**.
- ALG It is recommended to enable Application Layer Gateway (ALG) because ALG allows customized
 Network Address Translation (NAT) traversal filters to be plugged into the gateway to support address and port
 translation for certain application layer "control/data" protocols such as FTP, TFTP, H323 etc.
- FTP ALG To allow FTP clients and servers to transfer data across NAT, click Enable.
- TFTP ALG To allow TFTP clients and servers to transfer data across NAT, click Enable.
- H323 ALG To allow Microsoft NetMeeting clients to communicate across NAT, click Enable.
- RTSP ALG To allow some media player clients to communicate with some streaming media servers across NAT, click Enable.
- SIP ALG To allow some multimedia clients to communicate across NAT, click Enable.

Click the **Save** button to save your settings.

Choose menu "Security → Advanced Security", and then you can protect the Router from being attacked by TCP-SYN Flood, UDP Flood and ICMP-Flood in the screen as shown in Figure 4-40.

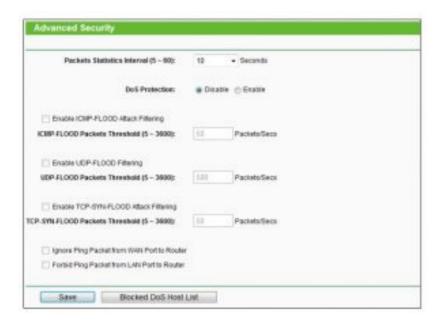


Figure 4-40 Advanced Security

- Packets Statistics Interval (5~60) The default value is 10. Select a value between 5 and 60 seconds from
 the drop-down list. The Packets Statistics Interval value indicates the time section of the packets statistics. The
 result of the statistics is used for analysis by SYN Flood, UDP Flood and ICMP-Flood.
- DoS Protection Denial of Service protection. Check the Enable or Disable button to enable or disable the
 DoS protection function. Only when it is enabled, will the flood filters be enabled.

SNote:

Dos Protection will take effect only when the **Traffic Statistics** in "System Tool → Statistics" is enabled.

- Enable ICMP-FLOOD Attack Filtering Enable or Disable the ICMP-FLOOD Attack
- ICMP-FLOOD Packets Threshold (5~3600) The default value is 50. Enter a value between 5 ~ When the
 current ICMP-FLOOD Packets number is beyond the set value, the Router will startup the blocking function
 immediately.
- Enable UDP-FLOOD Filtering Enable or Disable the UDP-FLOOD Filtering.
- UDP-FLOOD Packets Threshold (5~3600) The default value is 500. Enter a value between 5 ~ When the
 current UPD-FLOOD Packets number is beyond the set value, the Router will startup the blocking function
 immediately.
- Enable TCP-SYN-FLOOD Attack Filtering Enable or Disable the TCP-SYN-FLOOD
- Attack Filtering.
- TCP-SYN-FLOOD Packets Threshold (5~3600) The default value is 50. Enter a value between 5 ~ When the current TCP-SYN-FLOOD Packets numbers is beyond the set value, the Router will startup the blocking function immediately.

- Ignore Ping Packet from WAN Port to Router Enable or Disable Ignore Ping Packet from WAN Port to Router. The default setting is disabled. If enabled, the ping packet from Internet cannot access the Router.
- Forbid Ping Packet from LAN Port to Router Enable or Disable Forbid Ping Packet from LAN Port to Router. The default setting is disabled. If enabled, the ping packet from LAN cannot access the Router. (Defends against some viruses).

Click the **Save** button to save the settings.

Click the **Blocked DoS Host List** button to display the DoS host table by blocking.

Local Management

Choose menu "Security → Local Management", and then you can configure the management rule in the screen as shown in Figure 4-41. The management feature allows you to deny computers in LAN from accessing the Router.



Figure 4-41 Local Management

By default, the radio button "All the PCs on the LAN are allowed to access the Router's Web-Based Utility" is checked. If you want to allow PCs with specific MAC Addresses to access the Setup page of the Router's Web-Based Utility locally from inside the network, check the radio button "Only the PCs listed can browse the built-in web pages to perform Administrator tasks", and then enter each MAC Address in a separate field. The format for the MAC Address is XX-XX-XX-XX-XX-XX (X is any hexadecimal digit). Only the PCs with MAC address listed can use the password to browse the built-in web pages to perform Administrator tasks while all the others will be blocked.

After click the **Add** button, your PC's MAC Address will be placed in the list above.

Click the **Save** button to save your settings.

Note:

If your PC is blocked but you want to access the Router again, use a pin to press and hold the **WPS/RESET** button on the back panel for about 5 seconds to reset the Router's factory defaults on the Router's Web-Based Utility.

Choose menu "Security → Remote Management", and then you can configure the Remote Management function in the screen as shown in Figure 4-42. This feature allows you to manage your Router from a remote location via the Internet.



Figure 4-42 Remote Management

- Web Management Port Web browser access normally uses the standard HTTP service port 80. This
 Router's default remote management web port number is 80. For greater security, you can change the remote
 management web port to a custom port by entering that number in the box provided. Choose a number
 between 1 and 65534 but do not use the number of any common service port.
- Remote Management IP Address This is the current address you will use when accessing your Router from the Internet. This function is disabled when the IP address is set to the default value of 0.0.0.0. To enable this function change 0.0.0.0 to a valid IP address. If set to 255.255.255, then all the hosts can access the Router from internet.

Mote:

- 1. To access the Router, you should type your Router's WAN IP address into your browser's address (in IE) or Location (in Navigator) box, followed by a colon and the custom port number. For example, if your Router's WAN address is 202.96.12.8, and the port number used is 8080, please enter http://202.96.12.8:8080 in your browser. Later, you may be asked for the Router's password. After successfully entering the username and password, you will be able to access the Router's web-based utility.
- 2. Be sure to change the Router's default password to a very secure password .

Parental Control

Choose menu "**Parental Control**", and then you can configure the parental control in the screen as shown in Figure 4-43. The Parental Control function can be used to control the internet activities of the child, limit the child to access certain websites and restrict the time of surfing.



Figure 4-43 Parental Control Settings

- Parental Control Check Enable if you want this function to take effect; otherwise, check Disable.
- MAC Address of Parental PC In this field, enter the MAC address of the controlling PC, or you can make
 use of the Copy To Above button below.
- MAC Address of Your PC This field displays the MAC address of the PC that is managing this Router. If the
 MAC Address of your adapter is registered, you can click the Copy To Above button to fill this address to the
 MAC Address of Parental PC field above.

To add a new entry, please follow the steps below.

1. Click the Add New... button and the next screen will pop-up as shown in Figure 4-44.



Figure 4-44 Add or Modify Parental Control Entry

- 2. Enter the MAC address of the PC (e.g. 00-11-22-33-44-AA) you'd like to control in the MAC Address of Child PC field, or you can choose the MAC address from the All MAC Address in Current LAN drop-down list.
- 3. Give a description (e.g. Allow Google) for the website allowed to be accessed in the Website Description
- 4. Enter the allowed domain name of the website, either the full name or the keywords (e.g. google) in the **Allowed Website Name**
- 5. Select from the Effective Time drop-down list the schedule (e.g. Schedule_1) you want. If there are not suitable

schedules for you, click the **Schedule** in red below to go to the Advance Schedule Settings page and create the schedule you need.

- 6. In the Status field, you can select "Enabled" or "Disabled" to enable or disable your entry.
- 7. Click the Save

Click the **Enable All** button to enable all the rules in the list.

Click the **Disable All** button to disable all the rules in the list.

Click the **Delete All** button to delete all the entries in the table.

Click the **Next** button to go to the next page, or click the **Previous** button to return to the previous page.

For example: If you desire that the child PC with MAC address 00-11-22-33-44-AA can access www.google.com on Saturday only while the parent PC with MAC address 00-11-22-33-44-BB is without any restriction, you should follow the settings below.

- 1. Click "Parental Control" menu on the left to enter the Parental Control Settings page. Check Enable and enter the MAC address 00-11-22-33-44-BB in the MAC Address of Parental PC field.
- 2. Click "Access Control → Schedule" on the left to enter the Schedule Settings page. Click Add New... button to create a new schedule with Schedule Description is Schedule 1, Day is Sat and Time is all day-24 hours.
- 3. Click "Parental Control" menu on the left to go back to the Add or Modify Parental Control Entry page:
 - Click Add New...
 - Enter 00-11-22-33-44-AA in the MAC Address of Child PC
 - Enter "Allow Google" in the Website Description
 - Enter "www.google.com" in the Allowed Website Name
 - Select "Schedule_1" you create just now from the Effective Time drop-down list.
 - In Status field, select Enable.
- 4. Click **Save** to complete the settings.
- 5. Then you will go back to the **Parental Control Settings** page and see the following list, as shown in Figure 4-45.



Figure 4-45 Parental Control Settings

Access Control



Figure 4-46 Access Control

There are four submenus under the Access Control menu as shown in Figure 4-46: **Rule**, **Host**, **Target** and **Schedule**. Click any of them, and you will be able to configure the corresponding function.

Rule

Choose menu "Access Control → Rule", and then you can view and set Access Control rules in the screen as shown in Figure 4-47.

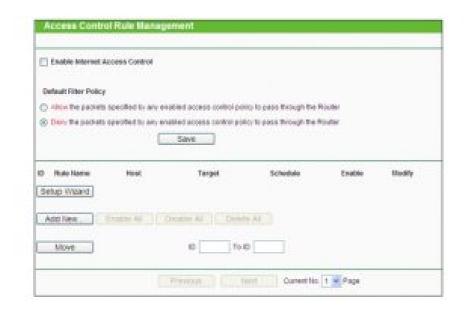


Figure 4-47 Access Control Rule Management

- Enable Internet Access Control Select the check box to enable the Internet Access Control function, so the Default Filter Policy can take effect.
- Rule Name Here displays the name of the rule and this name is unique.
- **Host** Here displays the host selected in the corresponding rule.
- Target Here displays the target selected in the corresponding rule.
- Schedule Here displays the schedule selected in the corresponding rule.
- Enable Here displays the status of the rule, enabled or not. Check this option to enable a specific entry.
- Modify Here you can edit or delete an existing rule.
- **Setup Wizard** Click the **Setup Wizard** button to create a new rule entry.
- Add New... Click the Add New... button to add a new rule entry.
- Enable All Click the Enable All button to enable all the rules in the list.
- Disable All Click the Disable All button to disable all the rules in the list.

- **Delete All** Click the **Delete All** button to delete all the entries in the table.
- Move You can change the entry's order as desired. Enter in the first box the ID number of the entry you want
 to move and in the second box another ID number, and then click the Move button to change the entries' order.
- **Next** Click the **Next** button to go to the next page.
- **Previous** Click the **Previous** button to return to the previous page.

There are two methods to add a new rule.

Method One:

1. Click Setup Wizard button and the next screen will appear as shown in Figure 4-48.



Figure 4-48 Quick Setup – Create a Host Entry

- Host Description In this field, create a unique description for the host (e.g. Host_1).
- Mode Here are two options, IP Address and MAC Address. You can select either of them from the drop-down list.
- If the **IP Address** is selected, you can see the following item:
 - LAN IP Address Enter the IP address or address range of the host in dotted-decimal format (e.g. 192.168.0.23).
- If the MAC Address is selected, you can see the following item:
 - MAC Address Enter the MAC address of the host in XX-XX-XX-XX-XX format (e.g. 00-11-22-33-44-AA).
- 2. Click **Next** when finishing creating the host entry, and the next screen will appear as shown in Figure 4-49.



- Mode Here are two options, IP Address and Domain Name. You can choose either of them from the dropdown list
- Target Description In this field, create a description for the target. Note that this description should be unique (e.g. Target_1).

If the **IP Address** is selected, you will see the following items:

- **IP Address** Enter the IP address (or address range) of the target (targets) in dotted-decimal format (e.g. 192.168.0.23).
- Target Port Specify the port or port range for the target. For some common service ports, you can make use of the Common Service Port item below.
- **Protocol** Here are four options, All, TCP, UDP, and ICMP. Select one of them from the drop-down list for the target.
- Common Service Port Here lists some common service ports. Select one from the drop-down list and the corresponding port number will be filled in the Target Port field automatically. For example, if you select "FTP", "21" will be filled in the Target Port automatically.

If the **Domain Name** is selected, you will see the following item:

- **Domain Name** Here you can enter 4 domain names, either the full name or the keywords (for example, google). Any domain name with keywords in it (www.google.com, www.google.cn) will be blocked or allowed.
- Click Next when finishing creating the access target entry, and the next screen will appear as shown in Figure 4-50.



Figure 4-50 Quick Setup – Create an Advanced Schedule Entry

- Schedule Description In this field, create a description for the schedule. Note that this description should be unique (e.g. Schedule_1).
- Day Choose Select Days and select the certain day (days), or choose Everyday.

- Time Select "24 hours", or specify the Start Time and Stop Time yourself.
- Start Time Enter the start time in HHMM format (HHMM are 4 numbers). For example 0800 is 8:00.
- Stop Time Enter the stop time in HHMM format (HHMM are 4 numbers). For example 2000 is 20:00.
- 4. Click **Next** when finishing creating the advanced schedule entry, and the next screen will appear as shown in Figure 4-51.



Figure 4-51 Quick Setup - Create an Internet Access Control Entry

- Rule Name In this field, create a name for the rule. Note that this name should be unique (e.g. Rule_1).
 - Host In this field, select a host from the drop-down list for the rule. The default value is the Host
 Description you set just now.
 - Target In this filed, select a target from the drop-down list for the rule. The default value is the Target
 Description you set just now.
 - Schedule In this field, select a schedule from the drop-down list for the rule. The default value is the Schedule Description you set just now.
 - Status In this field, there are two options, Enable or Disable. Select Enable so that the rule will take
 effect. Select Disable so that the rule won't take effect.
- 5. Click **Finish** to complete adding a new rule.

Method Two:

- 1. Click the Add New... button and the next screen will pop up as shown in Figure 4-52.
- 2. Give a name (e.g. Rule 1) for the rule in the Rule Name
- 3. Select a host from the Host drop-down list or choose "Click Here To Add New Host List".
- 4. Select a target from the Target drop-sown list or choose "Click Here To Add New Target
- 5. List".
- 6. Select a schedule from the Schedule drop-down list or choose "Click Here To Add New Schedule".
- 7. In the **Status** field, select **Enabled** or **Disabled** to enable or disable your entry.
- 8. Click the Save

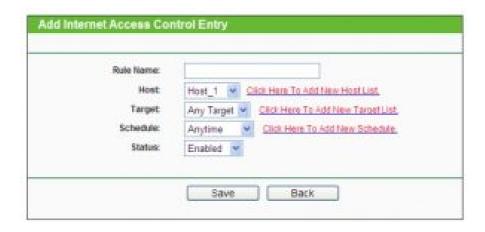


Figure 4-52 Add Internet Access Control Entry

For example: If you desire to allow the host with MAC address 00-11-22-33-44-AA to access www.google.com only from 18:00 to 20:00 on Saturday and Sunday, and forbid other hosts in the LAN to access the Internet, you should follow the settings below:

- 1. Click the submenu **Rule of Access Control** in the left to return to the Rule List page. Select Enable Internet Access Control and choose "Allow the packets specified by any enabled access control policy to pass through the Router".
- 2. We recommend that you click **Setup Wizard** button to finish all the following settings.
- 3. Click the submenu **Host of Access Control** in the left to enter the Host List page. Add a new entry with the Host Description is Host_1 and MAC Address is 00-11-22-33-44-AA.
- 4. Click the submenu **Target of Access Control** in the left to enter the Target List page. Add a new entry with the Target Description is Target_1 and Domain Name is www.google.com.
- 5. Click the submenu **Schedule of Access Control** in the left to enter the Schedule List page. Add a new entry with the Schedule Description is Schedule 1, Day is Sat and Sun, Start Time is 1800 and Stop Time is 2000.
- 6. Click the submenu Rule of Access Control in the left, Click Add New... button to add a new rule as follows:
- In Rule Name field, create a name for the rule. Note that this name should be unique, for example Rule 1.
- In Host field, select Host 1.
- In Target field, select Target 1.
- In Schedule field, select Schedule 1.
- In Status field, select Enable.
- Click Save to complete the settings.

Then you will go back to the Access Control Rule Management page and see the following list.



Host

Choose menu "**Access Control** → **Host**", and then you can view and set a Host list in the screen as shown in Figure 4-53. The host list is necessary for the Access Control Rule.



Figure 4-53 Host Settings

- Host Description Here displays the description of the host and this description is unique.
- Information Here displays the information about the host. It can be IP or MAC.
- Modify To modify or delete an existing entry.

To add a new entry, please follow the steps below.

- 1. Click the Add New...
- 2. In the Mode field, select IP Address or MAC Address.
 - If you select IP Address, the screen shown is Figure 4-54.
 - In **Host Description** field, create a unique description for the host (e.g. Host_1).
 - In LAN IP Address field, enter the IP address.
 - If you select MAC Address, the screen shown is Figure 4-55.
 - In **Host Description** field, create a unique description for the host (e.g. Host_1).
 - In MAC Address field, enter the MAC address.
- 3. Click the Save button to complete the settings.

Click the **Delete All** button to delete all the entries in the table.

Click the **Next** button to go to the next page, or click the **Previous** button to return to the previous page.



Figure 4-54 Add or Modify a Host Entry



Figure 4-55 Add or Modify a Host Entry

For example: If you desire to restrict the internet activities of host with MAC address 00-11-22-33-44-AA, you should first follow the settings below:

- 4. Click Add New... button in Figure 4-53 to enter the Add or Modify a Host Entry page.
- 5. In Mode field, select MAC Address from the drop-down list.
- 6. In **Host Description** field, create a **unique** description for the host (e.g. Host_1).
- 7. In MAC Address field, enter 00-11-22-33-44-AA.
- 8. Click **Save** to complete the settings.

Then you will go back to the Host Settings page and see the following list.



Target

Choose menu "Access Control → Target", and then you can view and set a Target list in the screen as shown in Figure 4-56. The target list is necessary for the Access Control Rule.



Figure 4-56 Target Settings

- Target Description Here displays the description about the target and this description is unique.
- Information The target can be IP address, port, or domain name.
- Modify To modify or delete an existing entry.

To add a new entry, please follow the steps below.

1. Click the Add New...

- 2. In Mode field, select IP Address or Domain Name.
- 3. If you select **IP Address**, the screen shown is Figure 4-57.

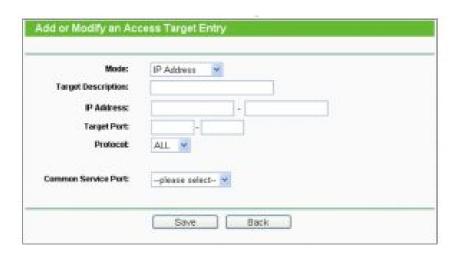


Figure 4-57 Add or Modify an Access Target Entry

• In **Target Description** field, create a unique description for the target (e.g.

Target_1).

- In IP Address field, enter the IP address of the target.
- Select a common service from Common Service Port drop-down list, so that the Target Port will be automatically filled. If the Common Service Port drop-down list doesn't have the service you want, specify the Target Port
- In **Protocol** field, select TCP, UDP, ICMP or ALL from the drop-down list.
- 1. If you select **Domain Name**, the screen shown is Figure 4-58.



Figure 4-58 Add or Modify an Access Target Entry

- In **Target Description** field, create a unique description for the target (e.g. Target_1).
- In **Domain Name** field, enter the domain name, either the full name or the keywords (for example, google) in the blank. Any domain name with keywords in it (www.google.com, google.cn) will be blocked or allowed. You can enter 4 domain names.

2. Click the Save

Click the **Delete All** button to delete all the entries in the table.

Click the **Next** button to go to the next page, or click the **Previous** button to return to the previous page.

For example: If you desire to restrict the internet activities of host with MAC address

00-11-22-33-44-AA in the LAN to access www.google.com only, you should first follow the settings below:

- 1. Click Add New... button in Figure 4-56 to enter the Add or Modify an Access Target Entry page.
- 2. In **Mode** field, select Domain Name from the drop-down list.
- 3. In **Target Description** field, create a unique description for the target (e.g. Target_1).
- 4. In **Domain Name** field, enter www.google.com.
- 5. Click Save to complete the settings.

Then you will go back to the Target Settings page and see the following list.



Schedule

Choose menu "Access Control → Schedule", and then you can view and set a Schedule list in the next screen as shown in Figure 4-59. The Schedule list is necessary for the Access Control Rule.



Figure 4-59 Schedule Settings

- Schedule Description Here displays the description of the schedule and this description is unique.
- Day Here displays the day(s) in a week.
- **Time** Here displays the time period in a day.
- Modify Here you can edit or delete an existing schedule.

To add a new schedule, follow the steps below:

- 1. Click **Add New...** button shown in Figure 4-59 and the next screen will pop-up as shown in Figure 4-60.
- 2. In **Schedule Description** field, create a unique description for the schedule (e.g. Schedule_1).

- 3. In Day field, select the day or days you need.
- 4. In **Time** field, you can select all day-24 hours or you may enter the Start Time and Stop Time in the corresponding field.
- 5. Click **Save** to complete the settings.

Click the **Delete All** button to delete all the entries in the table.

Click the **Next** button to go to the next page, or click the **Previous** button to return to the previous page.

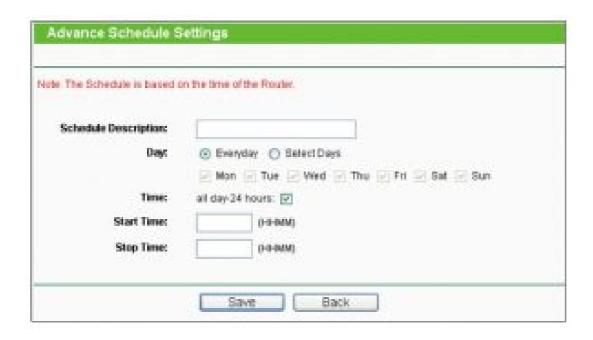


Figure 4-60 Advanced Schedule Settings

For example: If you desire to restrict the internet activities of host with MAC address 00-11-22-33-44-AA to access www.google.com only from 18:00 to 20:00 on Saturday and Sunday, you should first follow the settings below:

- Click Add New... button shown in Figure 4-59 to enter the Advanced Schedule Settings page.
- In **Schedule Description** field, create a unique description for the schedule (e.g. Schedule_1).
- In **Day** field, check the Select Days radio button and then select Sat and Sun.
- In **Time** field, enter 1800 in Start Time field and 2000 in Stop Time field.
- · Click Save to complete the settings.

Then you will go back to the Schedule Settings page and see the following list.



Advanced Routing



Figure 4-61 Advanced Routing

There are two submenus under the Advanced Routing menu as shown in Figure 4-61: **Static Routing List** and **System Routing Table**. Click either of them, and you will be able to configure the corresponding function.

Static Routing List

Choose menu "Advanced Routing → Static Routing List", and then you can configure the static route in the next screen (shown in Figure 4-62). A static route is a pre-determined path that network information must travel to reach a specific host or network.



Figure 4-62 Static Routing

To add static routing entries:

1. Click Add New... shown in Figure 4-62, you will see the following screen.

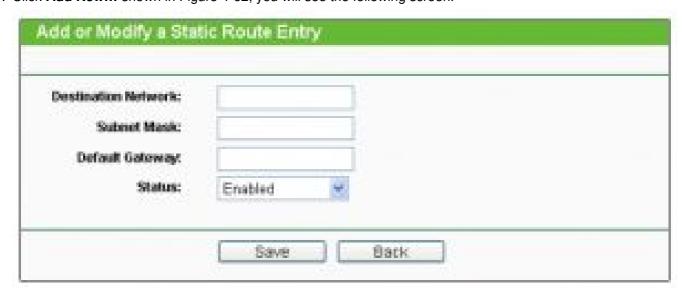


Figure 4-63 Add or Modify a Static Route Entry

- 2. Enter the following data:
- Destination Network The Destination Network is the address of the network or host that you want to assign

to a static route.

- Subnet Mask The Subnet Mask determines which portion of an IP Address is the network portion, and which portion is the host portion.
- **Default Gateway** This is the IP Address of the gateway device that allows for contact between the Router and the network or host.
- 3. Select **Enabled** or **Disabled** for this entry on the **Status** drop-down list.
- 4. Click the **Save** button to make the entry take effect.

Other configurations for the entries:

Click the **Delete** button to delete the entry.

Click the **Enable All** button to enable all the entries.

Click the **Disable All** button to disable all the entries.

Click the **Delete All** button to delete all the entries.

Click the **Previous** button to view the information in the previous screen, click the **Next** button to view the information in the next screen.

System Routing Table

Choose menu "Advanced Routing → System Routing Table", and then you can view the System Routing Table in the next screen (shown in Figure 4-64). System routing table views all of the valid route entries in use. The Destination IP address, Subnet Mask, Gateway, and Interface will be displayed for each entry.



Figure 4-64 System Routing Table

- Destination Network The Destination Network is the address of the network or host to which the static route
 is assigned.
- Subnet Mask The Subnet Mask determines which portion of an IP address is the network portion, and which portion is the host portion.
- Gateway This is the IP address of the gateway device that allows for contact between the Router and the network or host.
- Interface This interface tells you either the Destination IP Address is on the LAN & WLAN (internal wired and wireless networks), or on the WAN (Internet).

Bandwidth Control



Figure 4-65 Bandwidth Control

There are two submenus under the Bandwidth Control menu as shown in Figure 4-65: **Control Settings** and **Rule List**. Click any of them, and you will be able to configure the corresponding function. The detailed explanations for each submenu are provided below.

Control Settings

Choose menu "Bandwidth Control → Control Settings", and then you can configure the Egress Bandwidth and Ingress Bandwidth in the next screen. Their values you configure should be less than 100000Kbps. For optimal control of the bandwidth, please select the right Line Type and ask your ISP for the total bandwidth of the egress and ingress.



Figure 4-66 Bandwidth Control Settings

- Enable Bandwidth Control Check this box so that the Bandwidth Control settings can take effect.
- Line Type Select the right type for you network connection. If you don't know how to choose, please ask your ISP for the information.
- Egress Bandwidth The upload speed through the WAN port.
- Ingress Bandwidth The download speed through the WAN port.

Rules List

Choose menu "Bandwidth Control → Rules List", and then you can view and configure the Bandwidth Control rules in the screen below.



Figure 4-67 Bandwidth Control Rules List

- Description This is the information about the rules such as address range.
- Egress bandwidth This field displays the max and mix upload bandwidth through the WAN port, the default is 0.
- Ingress bandwidth This field displays the max and mix download bandwidth through the WAN port, the default is 0.
- Enable This displays the status of the rule.
- Modify Click Modify to edit the rule. Click Delete to delete the rule.

To add/modify a Bandwidth Control rule, follow the steps below.

1. Click Add New... shown in Figure 4-67, you will see a new screen shown in Figure 4-68.



Figure 4-68 Bandwidth Control Rule Settings

- 2. Enter the information like the screen shown below.
- 3. Click the Save

IP & MAC Binding Setting



Figure 4-69 the IP & MAC Binding menu

There are two submenus under the IP &MAC Binding menu (shown in Figure 4-69): **Binding Settings** and **ARP List**. Click any of them, and you will be able to scan or configure the corresponding function. The detailed explanations for each submenu are provided below.

Binding Settings

This page displays the **IP & MAC Binding Setting** table; you can operate it in accord with your desire (shown in Figure 4-70).



Figure 4-70 Binding Setting

- MAC Address The MAC address of the controlled computer in the LAN.
- IP Address The assigned IP address of the controlled computer in the LAN.
- Bind Check this option to enable ARP binding for a specific device.
- Modify To modify or delete an existing entry.

When you want to add or modify an IP & MAC Binding entry, you can click the **Add New...** button or **Modify** button, and then you will go to the next page. This page is used for adding or modifying an IP & MAC Binding entry (shown in Figure 4-71).



Figure 4-71 IP & MAC Binding Setting (Add & Modify) To add IP & MAC Binding entries, follow the steps below.

- 1. Click the **Add New...** button as shown in Figure 4-70.
- 2. Enter the MAC Address and IP Address.
- 3. Select the Bind checkbox.
- 4. Click the Save button to save it.

To modify or delete an existing entry, follow the steps below.

- 1. Find the desired entry in the table.
- 2. Click Modify or Delete as desired on the Modify

To find an existing entry, follow the steps below.

- 1. Click the **Find** button as shown in Figure 4-70.
- 2. Enter the MAC Address or IP Address.
- 3. Click the **Find** button in the page as shown in Figure 4-72.

MAC Address:	00-14-5E-91-19-E3
IP Address:	
D	MAC Address IP Address Bind Link
2	00-14-SE-91-19-E3 192 168 056 FT To page

Figure 4-72 Find IP & MAC Binding Entry

Click the **Enable All** button to make all entries enabled.

Click the **Delete All** button to delete all entries.

ARP List

To manage the computer, you could observe the computers in the LAN by checking the relationship of MAC address and IP address on the ARP list, and you could also configure the items on the ARP list. This page displays the ARP List; it shows all the existing IP & MAC Binding entries (shown in Figure 4-73).



Figure 4-73 ARP List

- 1. MAC Address The MAC address of the controlled computer in the LAN.
- 2. **IP Address** The assigned IP address of the controlled computer in the LAN.
- 3. Status Indicates whether or not the MAC and IP addresses are bound.
- 4. Configure Load or delete an item.
- Load Load the item to the IP & MAC Binding list.

• **Delete** – Delete the item.

Click the **Bind All** button to bind all the current items, available after enable.

Click the Load All button to load all items to the IP & MAC Binding list.

Click the **Refresh** button to refresh all items.



An item could not be loaded to the IP & MAC Binding list if the IP address of the item has been loaded before. Error warning will prompt as well. Likewise, "Load All" only loads the items without interference to the IP & MAC Binding list.

Dynamic DNS

Choose menu "Dynamic DNS", and you can configure the Dynamic DNS function.

The Router offers the **DDNS** (Dynamic Domain Name System) feature, which allows the hosting of a website, FTP server, or e-mail server with a fixed domain name (named by yourself) and a dynamic IP address, and then your friends can connect to your server by entering your domain name no matter what your IP address is. Before using this feature, you need to sign up for DDNS service providers such as www.comexe.cn, <a href="dynamic-number-d

Comexe DDNS

If the dynamic DNS **Service Provider** you select is www.comexe.cn, the page will appear as shown in Figure 4-74.

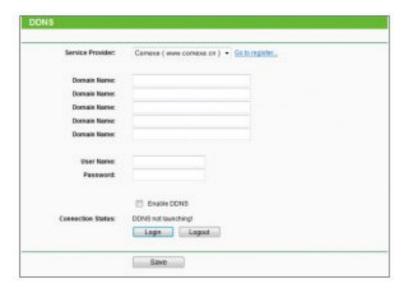


Figure 4-74 Comexe.cn DDNS Settings

To set up for DDNS, follow these instructions:

- 1. Enter the **Domain Name** your dynamic DNS service provider gave.
- 2. Enter the **User Name** for your DDNS account.

- 3. Enter the Password for your DDNS account.
- 4. Click the **Login** button to login the DDNS service.

Connection Status - The status of the DDNS service connection is displayed here.

Click **Logout** to log out of the DDNS service.

SNote:

If you want to login again with another account after a successful login, please click the **Logout** button, then input your new username and password and click the **Login** button.

Dyndns DDNS

If the dynamic DNS **Service Provider** you select is <u>dyn.com/dns</u>, the page will appear as shown in Figure 4-75.

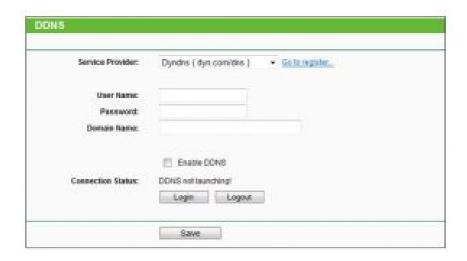


Figure 4-75 Dyndns.org DDNS Settings

To set up for DDNS, follow these instructions:

- 1. Enter the User Name for your DDNS account.
- 2. Enter the Password for your DDNS account.
- 3. Enter the **Domain Name** you received from dynamic DNS service provider.
- 4. Click the **Login** button to login to the DDNS service.

Connection Status –The status of the DDNS service connection is displayed here.

Click **Logout** to logout of the DDNS service.



If you want to login again with another account after a successful login, please click the **Logout** button, then input your new username and password and click the **Login** button.

If the dynamic DNS **Service Provider** you select is <u>www.noip.com</u>, the page will appear as shown in Figure 4-76.

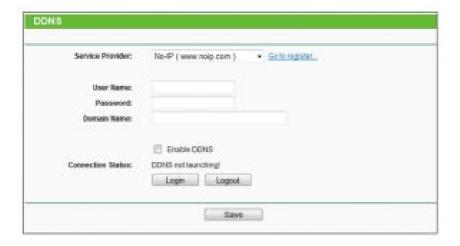


Figure 4-76 No-ip.com DDNS Settings

To set up for DDNS, follow these instructions:

- 1. Enter the User Name for your DDNS account.
- 2. Enter the Password for your DDNS account.
- 3. Enter the **Domain Name** you received from dynamic DNS service provider.
- 4. Click the **Login** button to login to the DDNS service.

Connection Status – The status of the DDNS service connection is displayed here.

Click Logout to log out the DDNS service.

SNote:

If you want to login again with another account after a successful login, please click the **Logout** button, then input your new username and password and click the **Login** button.

System Tools



Figure 4-77 The System Tools menu

Choose menu "System Tools", and you can see the submenus under the main menu: Time Settings, Diagnostic, Firmware Upgrade, Factory Defaults, Backup & Restore, Reboot, Password, System Log and Statistics. Click any of them, and you will be able to configure the corresponding function. The detailed explanations for each submenu are provided below.

Time Settings

Choose menu "System Tools→Time Settings", and then you can configure the time on the following screen.



Figure 4-78 Time settings

- Time Zone Select your local time zone from this pull down list.
- Date Enter your local date in MM/DD/YY into the right blanks.
- **Time** Enter your local time in HH/MM/SS into the right blanks.
- NTP Server 1 / NTP Server 2 Enter the address or domain of the NTP Server 1 or NTP Server 2, and then the Router will get the time from the NTP Server preferentially. In addition, the Router built-in some common NTP Servers, so it can get time automatically once it connects the Internet.
- **Enable Daylight Saving** Check the box to enable the Daylight Saving function.
- Start The time to start the Daylight Saving. Select the month in the first field, the week in the second field, the day in the third field and the time in the last field.
- **End** The time to end the Daylight Saving. Select the month in the first field, the week in the second field, the day in the third field and the time in the last field.
- Daylight Saving Status Displays the status whether the Daylight Saving is in use.

To set time manually:

- 1. Select your local time zone.
- 2. Enter the **Date** in Month/Day/Year format.
- 3. Enter the **Time** in Hour/Minute/Second format.
- 4. Click Save.

To set time automatically:

- 1. Select your local time zone.
- 2. Enter the address or domain of the NTP Server I or NTP Server II.
- 3. Click the **Get GMT** button to get system time from Internet if you have connected to the Internet.

To set Daylight Saving:

- 1. Check the box to enable Daylight Saving.
- 2. Select the start time from the drop-down lists in the Start
- 3. Select the end time from the drop-down lists in the End
- 4. Click the Save button to save the settings.




Figure 4-79 Time settings

Note:

- 1. This setting will be used for some time-based functions such as firewall. You must specify your time zone once you login to the router successfully, otherwise, these functions will not take effect.
- 2. The time will be lost if the router is turned off.
- 3. The Router will automatically obtain GMT from the Internet if it is configured accordingly.
- 4. The Daylight Saving will take effect one minute after the configurations are completed.

Diagnostic

Choose menu "System Tools → Diagnostic", and then you can transact Ping or Traceroute function to check connectivity of your network in the following screen.

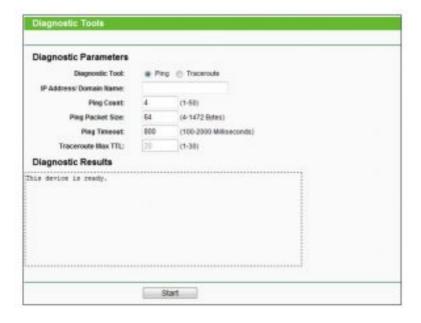

- Diagnostic Tool Check the radio button to select one diagnostic too.
- Ping This diagnostic tool troubleshoots connectivity, reachability, and name resolution to a given host or gateway.
- Traceroute This diagnostic tool tests the performance of a connection.

S Note:

You can use ping/traceroute to test both numeric IP address or domain name. If pinging/tracerouting the IP address is successful, but pinging/tracerouting the domain name is not, you might have a name resolution problem. In this case, ensure that the domain name you are specifying can be resolved by using Domain Name System (DNS) queries.

- IP Address/Domain Name Enter the IP Address or Domain Name of the PC whose connection you wish to diagnose.
- Ping Count Specifies the number of Echo Request messages sent. The default is 4.
- Ping Packet Size Specifies the number of data bytes to be sent. The default is 64.
- Ping Timeout Time to wait for a response, in milliseconds. The default is 800.
- Traceroute Max TTL Set the maximum number of hops (max TTL to be reached) in the path to search for the target (destination). The default is 20.

Click **Start** to check the connectivity of the Internet.

The **Diagnostic Results** page displays the result of diagnosis.

If the result is similar to the following screen, the connectivity of the Internet is fine.

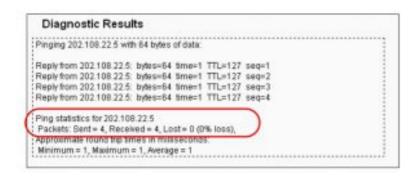


Figure 4-81 Diagnostic Results



- 1. Only one user can use the diagnostic tools at one time.
- 2. "Ping Count", "Ping Packet Size" and "Ping Timeout" are Ping Parameters, and "Traceroute Max TTL" is Traceroute Parameter.

Choose menu "**System Tools** → **Firmware Upgrade**", and then you can update the latest version of firmware for the Router on the following screen.

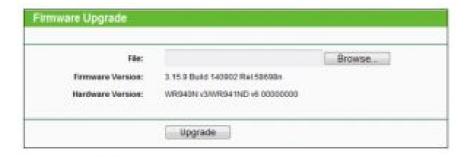


Figure 4-82 Firmware Upgrade

- Firmware Version Displays the current firmware version.
- **Hardware Version** Displays the current hardware version. The hardware version of the upgrade file must accord with the Router's current hardware version.

To upgrade the Router's firmware, follow these instructions below:

- 1. Download a most recent firmware upgrade file from our website (www.tp-link.com).
- 2. Enter or select the path name where you save the downloaded file on the computer into the File
- 3. Click the Upgrade
- 4. The Router will reboot while the upgrading has been finished.

Note:

- New firmware versions are posted at http://www.tp-link.com and can be downloaded for free. There is no need to upgrade the firmware unless the new firmware has a new feature you want to use. However, when experiencing problems caused by the Router rather than the configuration, you can try to upgrade the firmware.
- When you upgrade the Router's firmware, you may lose its current configurations, so before upgrading the firmware please write down some of your customized settings to avoid losing important settings.
- Do not turn off the Router or press the Reset button while the firmware is being upgraded.

Loss of power during the upgrade could damage the Router.

- The firmware version must correspond to the hardware.
- The upgrade process takes a few moments and the Router restarts automatically when the upgrade is complete.

Factory Defaults

Choose menu "System Tools → Factory Defaults", and then and you can restore the configurations of the Router to factory defaults on the following screen.



Figure 4-83 Restore Factory Default

Click the **Restore** button to reset all configuration settings to their default values.

• The default **User Name**: admin

• The default Password: admin

• The default IP Address: 192.168.0.1 The default Subnet Mask: 255.255.255.0

Note:

All changed settings will be lost when defaults are restored.

Backup & Restore

Choose menu "System Tools → Backup & Restore", and then you can save the current configuration of the Router as a backup file and restore the configuration via a backup file as shown in Figure 4-84.



Figure 4-84 Backup & Restore Configuration

- Click the Backup button to save all configuration settings as a backup file in your local computer.
- To upgrade the Router's configuration, follow these instructions.
 - $\circ\,$ Click the Browse... button to find the configuration file which you want to restore.
 - Click the **Restore** button to update the configuration with the file whose path is the one you have input or selected in the blank.

Mote:

The current configuration will be covered with the uploading configuration file. Wrong process will lead the device unmanaged. The restoring process lasts for 20 seconds and the Router will restart automatically then. Keep the power of the Router on during the process, in case of any damage.

Reboot

Choose menu "System Tools → Reboot", and then you can click the Reboot button to reboot the Router via the next screen.



Figure 4-85 Reboot the Router

Some settings of the Router will take effect only after rebooting, which include

- Change the LAN IP Address (system will reboot automatically).
- · Change the DHCP Settings.
- Change the Wireless configurations.
- · Change the Web Management Port.
- Upgrade the firmware of the Router (system will reboot automatically).
- Restore the Router's settings to factory defaults (system will reboot automatically).
- Update the configuration with the file (system will reboot automatically.

Password

Choose menu "**System Tools** → **Password**", and then you can change the factory default user name and password of the Router in the next screen as shown in Figure 4-86.

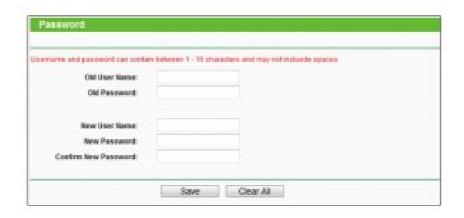


Figure 4-86 Password

It is strongly recommended that you should change the factory default user name and password of the Router, because all users who try to access the Router's Web-based utility or Quick Setup will be prompted for the Router's default user name and password.

Note:

The new user name and password must not exceed 15 characters in length and must not include any spaces. Enter the new Password twice to confirm it.

Click the **Save** button when finished.

Click the Clear All button to clear all.

Choose menu "System Tools → System Log", and then you can view the logs of the Router.

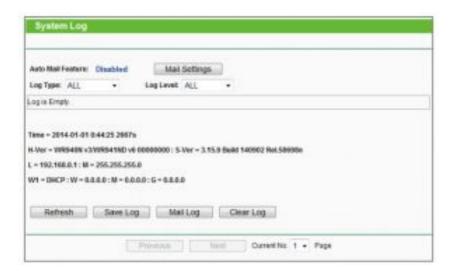


Figure 4-87 System Log

- Auto Mail Feature Indicates whether auto mail feature is enabled or not.
- Mail Settings Set the receiving and sending mailbox address, server address, validation information as well as the timetable for Auto Mail Feature, as shown in Figure 4-88.



Figure 4-88 Mail Account Settings

- From Your mail box address. The Router would connect it to send logs.
- To Recipient's address. The destination mailbox where the logs would be received.
- **SMTP Server** Your smtp server. It corresponds with the mailbox filled in the **From** You can log on the relevant website for help if you are not clear with the address.
- Authentication Most SMTP Server requires Authentication. It is required by most mailboxes that need User

Name and Password to log in.

S Note:

Only when you select Authentication, do you have to enter the User Name and Password in the following fields.

- User Name Your mail account name filled in the From field. The part behind @ is excluded.
- Password Your mail account password.
- Confirm The Password Enter the password again to confirm.
- Enable Auto Mail Feature Select it to mail logs automatically. You could mail the current logs either at a specified time everyday or by intervals, but only one could be the current effective rule. Enter the desired time or intervals in the corresponding field as shown in Figure 4-88.

Click Save to keep your settings.

Click Back to return to the previous page.

- **Log Type** By selecting the log type, only logs of this type will be shown.
- Log Level By selecting the log level, only logs of this level will be shown.
- Refresh Refresh the page to show the latest log list.
- Save Log Click to save all the logs in a txt file.
- Mail Log Click to send an email of current logs manually according to the address and validation information set in Mail Settings.
- Clear Log All the logs will be deleted from the Router permanently, not just from the page.

Click the **Next** button to go to the next page, or click the **Previous** button to return to the previous page.

Statistics

Choose menu "System Tools → Statistics", and then you can view the statistics of the Router, including total traffic and current traffic of the last Packets Statistic Interval.

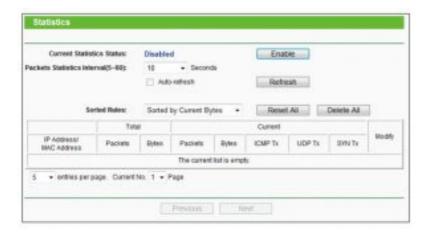


Figure 4-89 Statistics

• Current Statistics Status - Enable or Disable. The default value is disabled. To enable it, click the Enable If it

is disabled, the function of DoS protection in Security settings will be disabled.

- Packets Statistics Interval 5-60 The default value is 10. Select a value between 5 and 60 seconds in the drop-down list. The Packets Statistic interval indicates the time section of the packets statistic.
- Sorted Rules Choose how the displayed statistics are sorted.

Select the **Auto-refresh** checkbox to refresh automatically.

Click the **Refresh** button to refresh immediately.

Click Reset All to reset the values of all the entries to zero.

Click **Delete All** to delete all entries in the table.

Statistics Table:

IP/MAC Address		The IP and MAC address are displayed with related statistics.
Total	Packets	The total number of packets received and transmitted by the Router.
	Bytes	The total number of bytes received and transmitted by the Router.
Current	Packets	The total number of packets received and transmitted in the last Packets Statistic interval seconds.
	Bytes	The total number of bytes received and transmitted in the last Packets Statistic interval seconds.
	ICMP Tx	The number of the ICMP packets transmitted to WAN per second at the specified Packets Statistics interval. It is shown like "current transmitting rate".
	UDP Tx	The number of UDP packets transmitted to the WAN per second at the specified Packets Statistics interval. It is shown like "current transmitting rate".
	TCP SYN Tx	The number of TCP SYN packets transmitted to the WAN per second at the specified Packets Statistics interval. It is shown like "current transmitting rate".
Modify	Reset	Reset the value of he entry to zero.
	Delete	Delete the existing entry in the table.

There would be 5 entries on each page. Click **Previous** to return to the previous page and **Next** to the next page.

Logout



Click the **Logout** tab at the bottom of the main menu, and then the web-page will be logged out and return to the login window.

Appendix A: FAQ

- 1. How do I configure the Router to access Internet by ADSL users?
 - 1. First, configure the ADSL Modem configured in RFC1483 bridge model.
 - 2. Connect the Ethernet cable from your ADSL Modem to the WAN port on the Router. The telephone cord plugs into the Line port of the ADSL Modem.
 - 3. Login to the Router, click the "Network" menu on the left of your browser, and click "WAN" submenu. On the WAN page, select "PPPoE/Russia PPPoE" for WAN Connection Type. Type user name in the "User Name" field and password in the "Password" field, type password in the "Confirm Password" field again, finish by clicking "Connect".



Figure A-1 PPPoE Connection Type

4. If your ADSL lease is in "pay-according-time" mode, select "Connect on Demand" or "Connect Manually" for Internet connection mode. Type an appropriate number for "Max Idle Time" to avoid wasting paid time. Otherwise, you can select "Auto-connecting" for Internet connection mode.



Figure A-2 PPPoE Connection Mode

SNote:

- 1. Sometimes the connection cannot be disconnected although you specify a time to Max Idle Time, since some applications is visiting the Internet continually in the background.
- 2. If you are a Cable user, please configure the Router following the above steps.

2. How do I configure the Router to access Internet by Ethernet users?

- 1. Login to the Router, click the "Network" menu on the left of your browser, and click "WAN" submenu. On the WAN page, select "Dynamic IP" for "WAN Connection Type", finish by clicking "Save".
- 2. Some ISPs require that you register the MAC Address of your adapter, which is connected to your cable/DSL Modem during installation. If your ISP requires MAC register, login to the Router and click the "Network" menu link on the left of your browser, and then click "MAC Clone" submenu link. On the "MAC Clone" page, if your PC's MAC address is proper MAC address, click the "Clone MAC Address" button and your PC's MAC address will fill in the "WAN MAC Address" field. Or else, type the MAC Address into the "WAN MAC Address" field. The format for the MAC Address is XX-XX-XX-XX-XX. Then click the "Save" button. It will take effect after rebooting.



Figure A-3 MAC Clone

3. I want to use Netmeeting, what do I need to do?

- 1. If you start Netmeeting as a host, you don't need to do anything with the Router.
- 2. If you start as a response, you need to configure Virtual Server or DMZ Host and make sure the H323 ALG is enabled.
- 3. How to configure Virtual Server: Log in to the Router, click the "Forwarding" menu on the left of your browser, and click "Virtual Servers" submenu. On the "Virtual Servers" page, click Add New.... Then on the "Add or Modify a Virtual Server Entry" page, enter "1720" for the "Service Port" blank, and your IP address for the "IP Address" blank, taking 192.168.0.169 for an example, remember to Enable and Save.



Figure A-4 Virtual Servers

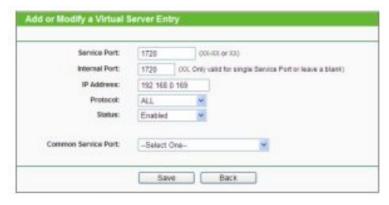


Figure A-5 Add or Modify a Virtual server Entry

Note:

Your opposite side should call your WAN IP, which is displayed on the "Status" page.

4. How to enable DMZ Host: Log in to the Router, click the "**Forwarding**" menu on the left of your browser, and click "**DMZ**" submenu. On the "DMZ" page, click **Enable** radio button and type your IP address into the "DMZ Host IP Address" field, using 192.168.0.169 as an example, remember to click the **Save**



Figure A-6 DMZ

5. How to enable H323 ALG: Log in to the Router, click the "Security" menu on the left of your browser, and click "Basic Security" submenu. On the "Basic Security" page, check the Enable radio button next to H323 ALG. Remember to click the Save

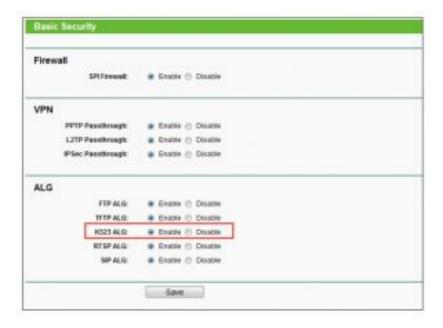


Figure A-7 Basic Security

4. I want to build a WEB Server on the LAN, what should I do?

- Because the WEB Server port 80 will interfere with the WEB management port 80 on the Router, you must change the WEB management port number to avoid interference.
- To change the WEB management port number: Log in to the Router, click the "Security" menu on the left of your browser, and click "Remote Management" submenu. On the "Remote Management" page, type a port number except 80, such as 88, into the "Web Management Port" field. Click Save and reboot the Router.



Figure A-8 Remote Management

Note:

If the above configuration takes effect, you can visit and configure the Router by typing http://192.168.0.1:88 (the Router's LAN IP address: Web Management Port) in the address field of the Web browser. If the LAN IP of the modem connected with your router is 192.168.1.x, the default LAN IP of the Router will automatically switch from 192.168.0.1 to 192.168.1.1 to avoid IP conflict; in this case, please try http://192.168.1.1:88.

• Log in to the Router, click the "Forwarding" menu on the left of your browser, and click the "Virtual Servers" submenu. On the "Virtual Servers" page, click Add New..., then on the "Add or Modify a Virtual Server" page, enter "80" into the blank next to the "Service Port", and your IP address next to the "IP Address", assuming 192.168.0.169 for an example, remember to Enable and Save.



Figure A-9 Virtual Servers

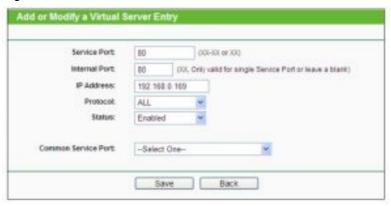


Figure A-10 Add or Modify a Virtual server Entry

5. The wireless stations cannot connect to the Router.

- 1. Make sure the "Wireless Router Radio" is enabled.
- 2. Make sure that the wireless stations' SSID accord with the Router's SSID.
- 3. Make sure the wireless stations have right KEY for encryption when the Router is encrypted.
- 4. If the wireless connection is ready, but you can't access the Router, check the IP Address of your wireless stations.

Appendix B: Configuring the PCs

In this section, we'll use Windows 7 as an example to introduce how to install and configure the TCP/IP correctly. First make sure your Ethernet adapter is working, refer to the adapter's manual if needed.

1. Install TCP/IP component

On the Windows taskbar, click the Windows icon, and then select Control Panel.



Figure B-1

2. Click on View network status and tasks under Network and Internet.



Figure B-2

3. Click on Change adapter settings.

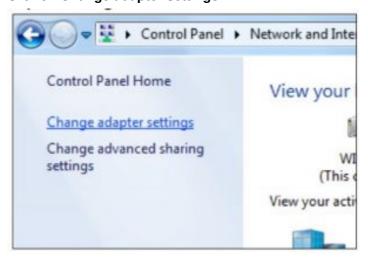


Figure B-3

4. Right-click Local Area Connection, and then select Properties.

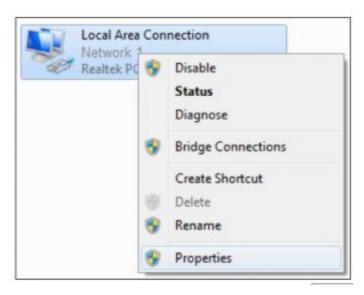


Figure B-4

5. In the Local Area Connection Properties window, click on Internet Protocol Version 4 (TCP/IPv4).



Figure B-5

6. Select Obtain an IP address automatically and Obtain DNS server address automatically.

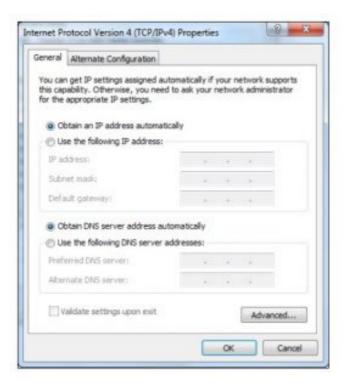


Figure B-6

Appendix C: Specifications

General				
Standards	IEEE 802.3, IEEE 802.3u, IEEE802.11n, IEEE802.11b, IEEE 802.11g			
Protocols	TCP/IP, PPPoE, DHCP, ICMP, NAT, SNTP			
Ports	One 10/100M Auto-Negotiation WAN RJ45 port, Four 10/100M Auto-Negotiation LAN RJ45 ports supporting Auto MDI/MDIX			
Cabling Type	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)			
Cabling Type	100BASE-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)			
LEDs	(Power), (WLAN), (LAN 1-4), (WAN),	A (WPS)		
Safety & Emissions	FCC, CE			

Wireless				
Frequency Band*	2.4~2.4835GHz			
	11n: up to 450Mbps Automatic			
Radio Data Rate	11g: 54/48/36/24/18/12/9/6M Automatic			
	11b: 11/5.5/2/1M Automatic			
Frequency Expansion	DSSS(Direct Sequence Spread Spectrum)			
Modulation	DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM			
Security	WEP/WPA/WPA2/WPA2-PSK/WPA-PSK			
	130M: -68dBm@10% PER			
	108M: -68dBm@10% PER;			
	54M: -68dBm@10% PER			
Sensitivity @PER	11M: -85dBm@8% PER;			
	6M: -88dBm@10% PER			
	1M: -90dBm@8% PER			
Antenna Gain	5dBi			
Environmental and Physical				
Temperature.	Operating: 0°C~40°C (32°F~104°F)			
Tomperature.	Storage: -40°C~70°C(-40°F~158°F)			
Humidity	Operating: 10% – 90% RH, Non-condensing			
	Storage: 5% – 95% RH, Non-condensing			

^{*} Only 2.412GHz~2.462GHz is allowed to be used in USA, which means only channel 1~11 is available for

American users to choose.

Appendix D: Glossary

• 11n – 802.11n builds upon previous 802.11 standards by adding MIMO (multiple-input multiple-output). MIMO uses multiple transmitter and receiver antennas to allow for increased data throughput via spatial multiplexing

and increased range by exploiting the spatial diversity, perhaps through coding schemes like Alamouti coding. The Enhanced Wireless Consortium (EWC) [3] was formed to help accelerate the IEEE 802.11n development process and promote a technology specification for interoperability of next-generation wireless local area networking (WLAN) products.

- 11b The 802.11b standard specifies a wireless networking at 11 Mbps using direct-sequence spreadspectrum (DSSS) technology and operating in the unlicensed radio spectrum at 2.4GHz, and WEP encryption for security. 802.11b networks are also referred to as Wi-Fi networks.
- 11g specification for wireless networking at 54 Mbps using direct-sequence spread-spectrum (DSSS) technology, using OFDM modulation and operating in the unlicensed radio spectrum at 2.4GHz, and backward compatibility with IEEE 802.11b devices, and WEP encryption for security.
- DDNS (Dynamic Domain Name System) The capability of assigning a fixed host and domain name to a
 dynamic Internet IP Address.
- **DHCP** (**D**ynamic **H**ost **C**onfiguration **P**rotocol) A protocol that automatically configure the TCP/IP parameters for the all the PC(s) that are connected to a DHCP server.
- DMZ (Demilitarized Zone) A Demilitarized Zone allows one local host to be exposed to the Internet for a special-purpose service such as Internet gaming or videoconferencing.
- DNS (Domain Name System) An Internet Service that translates the names of websites into IP addresses.
- **Domain Name** A descriptive name for an address or group of addresses on the Internet.
- **DSL** (**D**igital **S**ubscriber **L**ine) A technology that allows data to be sent or received over existing traditional phone lines.
- ISP (Internet Service Provider) A company that provides access to the Internet.
- MTU (Maximum Transmission Unit) The size in bytes of the largest packet that can be transmitted.
- NAT (Network Address Translation) NAT technology translates IP addresses of a local area network to a
 different IP address for the Internet.
- **PPPoE** (**P**oint to **P**oint **P**rotocol **o**ver **E**thernet) PPPoE is a protocol for connecting remote hosts to the Internet over an always-on connection by simulating a dial-up connection.
- SSID A Service Set Identification is a thirty-two character (maximum) alphanumeric key identifying a wireless local area network. For the wireless devices in a network to communicate with each other, all devices must be configured with the same SSID. This is typically the configuration parameter for a wireless PC card. It corresponds to the ESSID in the wireless Access Point and to the wireless network name.
- WEP (Wired Equivalent Privacy) A data privacy mechanism based on a 64-bit or 128-bit or 152-bit shared key algorithm, as described in the IEEE 802.11 standard.
- Wi-Fi A trade name for the 802.11b wireless networking standard, given by the Wireless Ethernet
 Compatibility Alliance (WECA, see http://www.wi-fi.net), an industry standards group promoting interoperability
 among 802.11b devices.
- WLAN (Wireless Local Area Network) A group of computers and associated devices communicate with each other wirelessly, which network serving users are limited in a local area.



TP-LINK TL-WR940N/ TL-WR941ND 450Mbps Wireless N Router User Guide – **Download [optimized]** TP-LINK TL-WR940N/ TL-WR941ND 450Mbps Wireless N Router User Guide – **Download**

References

Netscape® Trademark

Related Manuals

- tp-link TL-WR90N 450Mbps Wireless N Router User Manual 450Mbps Wireless N Router 450 Mbps, the Fastest 11N Router...
- tp-link Wireless Telephony Modem Router Installation Guide Quick Installation Guide AC2100 Wireless MU-MIMO VDSL/ADSL Telephony Modem Router...
- tp-link 300Mbps Wireless N USB Adapter TL-WN821N User Manual tp-link 300Mbps Wireless N USB Adapter TL-WN821N For Mac OS...
- 4. tp-link Range Extender Router Installation Guide tp-link Range Extender Router Power On Plug the extender into...
- tp-link Gaming Router User Manual AX11000 Next-Gen Tri-Band Gaming Router DOMINATE THE COMPETITION Archer AX11000...
- 6. tp-link Wireless USB Adapter Installation Guide tp-link Wireless USB Adapter Connect to a Computer Option 1:...