

# TEST REPORT

**Applicant:** Acer India Pvt Ltd.  
**Address of Applicant:** Embassy Heights 6th Floor, No.13, Magrath Road, (Next to Hosmat Hospital), Bangalore, India  
**Manufacturer:** Acer India Pvt Ltd.  
**Address of Manufacturer:** Embassy Heights 6th Floor, No.13, Magrath Road, (Next to Hosmat Hospital), Bangalore, India  
**Equipment Under Test (EUT)**  
**Product Name:** Tablet  
**Model No.:** Acer One 10 T9-1212L  
**Trade Mark:** ACER  
**FCC ID:** 2AMY3ONE10T9-1212L  
**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2013  
**Date of sample receipt:** November 8, 2022  
**Date of Test:** November 8, 2022~January 9, 2023  
**Date of report issued:** January 9, 2023  
**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




**Robinson Luo**  
**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

## 2 Version

Version No.	Date	Description
00	2023-1-9	Original

Prepared By:




Project Engineer

Date:

2023-1-9

Check By:

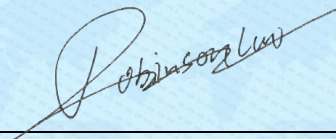

Reviewer

Date:

2023-1-9

## 3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION.....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION.....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 DESCRIPTION OF SUPPORT UNITS .....	7
5.3 DEVIATION FROM STANDARDS.....	7
5.4 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.5 TEST FACILITY.....	7
5.6 TEST LOCATION .....	7
5.7 ADDITIONAL INSTRUCTIONS.....	7
6 TEST INSTRUMENTS LIST .....	8
7 TEST RESULTS AND MEASUREMENT DATA.....	10
7.1 ANTENNA REQUIREMENT .....	10
7.2 CONDUCTED EMISSIONS .....	11
7.3 CONDUCTED PEAK OUTPUT POWER.....	14
7.4 CHANNEL BANDWIDTH & 99% OCCUPY BANDWIDTH.....	16
7.5 POWER SPECTRAL DENSITY .....	18
7.6 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS .....	20
7.6.1 Conducted Emission Method.....	20
7.6.2 Radiated Emission Method.....	23
8 TEST SETUP PHOTO .....	30
9 EUT CONSTRUCTIONAL DETAILS .....	30

## 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (b)(4)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

**Remarks:**

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10:2013.

**Measurement Uncertainty**

No.	Item	Measurement Uncertainty
1	Radio Frequency	$1 \times 10^{-7}$
2	Duty cycle	0.37%
3	Occupied Bandwidth	3%
4	RF conducted power	0.75dB
5	RF power density	3dB
6	Conducted Spurious emissions	2.58dB
7	AC Power Line Conducted Emission	3.44dB (0.15MHz ~ 30MHz)
8	Radiated Spurious emission test	3.1dB (9kHz-30MHz)
		3.8039dB (30MHz-200MHz)
		3.9679dB (200MHz-1GHz)
		4.29dB (1GHz-18GHz)
		3.30dB (18GHz-40GHz)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



## 5 General Information

### 5.1 General Description of EUT

Product Name:	Tablet
Model No.:	Acer One 10 T9-1212L
Test sample(s) ID:	GTS2023010007-1
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Hardware Version:	R200
Software Version:	M300Y.WH.211.S0..G.2022120521.C951232A9AD.USERDEBUG
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	FPC antenna
Antenna Gain:	3.96dBi
Power Supply:	DC 9V, 2A
Adapter Information	Model: BPS-PN18A Input: AC 100-240V~, 50/60Hz, 800mA (Max) Output: USB-A: 5V 3A, 9V 2A, 12V 1.5A

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402 MHz	11	2422 MHz	21	2442 MHz	31	2462 MHz
2	2404 MHz	12	2424 MHz	22	2444 MHz	32	2464 MHz
3	2406 MHz	13	2426 MHz	23	2446 MHz	33	2466 MHz
4	2408 MHz	14	2428 MHz	24	2448 MHz	34	2468 MHz
5	2410 MHz	15	2430 MHz	25	2450 MHz	35	2470 MHz
6	2412 MHz	16	2432 MHz	26	2452 MHz	36	2472 MHz
7	2414 MHz	17	2434 MHz	27	2454 MHz	37	2474 MHz
8	2416 MHz	18	2436 MHz	28	2456 MHz	38	2476 MHz
9	2418 MHz	19	2438 MHz	29	2458 MHz	39	2478 MHz
10	2420 MHz	20	2440 MHz	30	2460 MHz	40	2480 MHz

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz

**Output power setting table:**

Test Mode	Set Tx Output Power	Data Rate
BLE	7	1Mbps

## Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

## 5.2 Description of Support Units

None.
-------

## 5.3 Deviation from Standards

None.
-------

## 5.4 Abnormalities from Standard Conditions

None.
-------

## 5.5 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC—Registration No.: 381383</b> Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.</li> <li>● <b>IC —Registration No.: 9079A</b> CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing</li> <li>● <b>NVLAP (LAB CODE:600179-0)</b> Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).</li> </ul>
--

## 5.6 Test Location

All tests were performed at:
<p>Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p>

## 5.7 Additional Instructions

Test Software	Testing tools provided by the manufacturer
Power level setup	7



## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 02, 2020	July 01, 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 22, 2022	April 21, 2023
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 21, 2022	March 20, 2023
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June 12, 2022	June 11, 2023
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 23, 2022	June 22, 2023
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	April 22, 2022	April 21, 2023
9	Coaxial Cable	GTS	N/A	GTS211	April 22, 2022	April 21, 2023
10	Coaxial cable	GTS	N/A	GTS210	April 22, 2022	April 21, 2023
11	Coaxial Cable	GTS	N/A	GTS212	April 22, 2022	April 21, 2023
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April 22, 2022	April 21, 2023
13	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 23, 2022	June 22, 2023
14	Band filter	Amindeon	82346	GTS219	June 23, 2022	June 22, 2023
15	Power Meter	Anritsu	ML2495A	GTS540	June 23, 2022	June 22, 2023
16	Power Sensor	Anritsu	MA2411B	GTS541	June 23, 2022	June 22, 2023
17	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 22, 2022	April 21, 2023
18	Splitter	Agilent	11636B	GTS237	June 23, 2022	June 22, 2023
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 29, 2022	Nov. 28, 2023
20	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 22, 2022	April 21, 2023
21	Breitband hornantenna	SCHWARZBECK	BBHA 9170	GTS579	Oct. 16, 2022	Oct. 15, 2023
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 16, 2022	Oct. 15, 2023
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 16, 2022	Oct. 15, 2023
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June 23, 2022	June 22, 2023
25	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 22, 2022	April 21, 2023



Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 14, 2022	May 13, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 24, 2022	April 23, 2023
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 23, 2022	June 22, 2023
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	April 22, 2022	April 21, 2023
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	JINCHUANG	GSP-8A	GTS639	April 28, 2022	April 27, 2023
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 15, 2022	April 14, 2023
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 22, 2022	April 21, 2023
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 22, 2022	April 21, 2023

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 22, 2022	April 21, 2023
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 22, 2022	April 21, 2023
3	Spectrum Analyzer	Agilent	E4440A	GTS536	April 22, 2022	April 21, 2023
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 22, 2022	April 21, 2023
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 22, 2022	April 21, 2023
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 22, 2022	April 21, 2023
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 22, 2022	April 21, 2023
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 22, 2022	April 21, 2023

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 25, 2022	April 24, 2023
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023

## 7 Test results and Measurement Data

### 7.1 Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203 /247(b)(4)
<p><b>15.203 requirement:</b></p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247(b)(4) requirement:</b></p> <p>(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<p><b>E.U.T Antenna:</b></p> <p><i>The antenna is FPC antenna, the best case gain of the is 3.96dBi, reference to the appendix II for details</i></p>	

## 7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150kHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9kHz, VBW=30kHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	<p>Remark  E.U.T: Equipment Under Test  LISN: Line Impedance Stabilization Network  Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2009 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					


Remark: Both high and low voltages have been tested to show only the worst low voltage test data.



## Measurement data


Pre-scan all test modes, found worst case at 2402MHz, and so only show the test result of 2402MHz

Line:

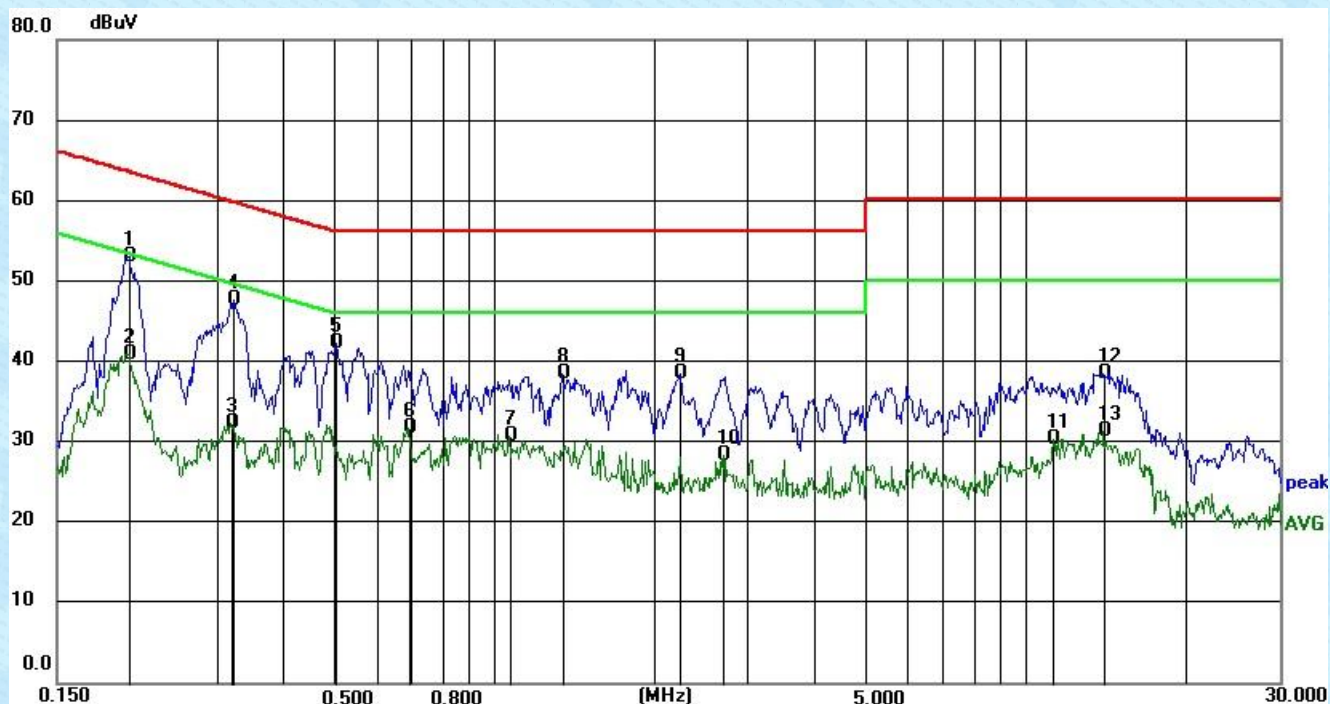

Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.2049	42.98	10.02	53	63.41	10.41	QP
0.2049	30.97	10.02	40.99	53.41	12.42	AVG
0.3186	22.24	10.03	32.27	49.74	17.47	AVG
0.3234	37.63	10.03	47.66	59.62	11.96	QP
0.5039	32.15	10.05	42.2	56	13.8	QP
0.6888	21.75	10.07	31.82	46	14.18	AVG
1.0666	20.57	10.11	30.68	46	15.32	AVG
1.3413	28.36	10.13	38.49	56	17.51	QP
2.2486	28.25	10.22	38.47	56	17.53	QP
2.7067	18.13	10.27	28.4	46	17.6	AVG
11.2721	19.35	11.01	30.36	50	19.64	AVG
14.0627	27.51	11.04	38.55	60	21.45	QP

Neutral:

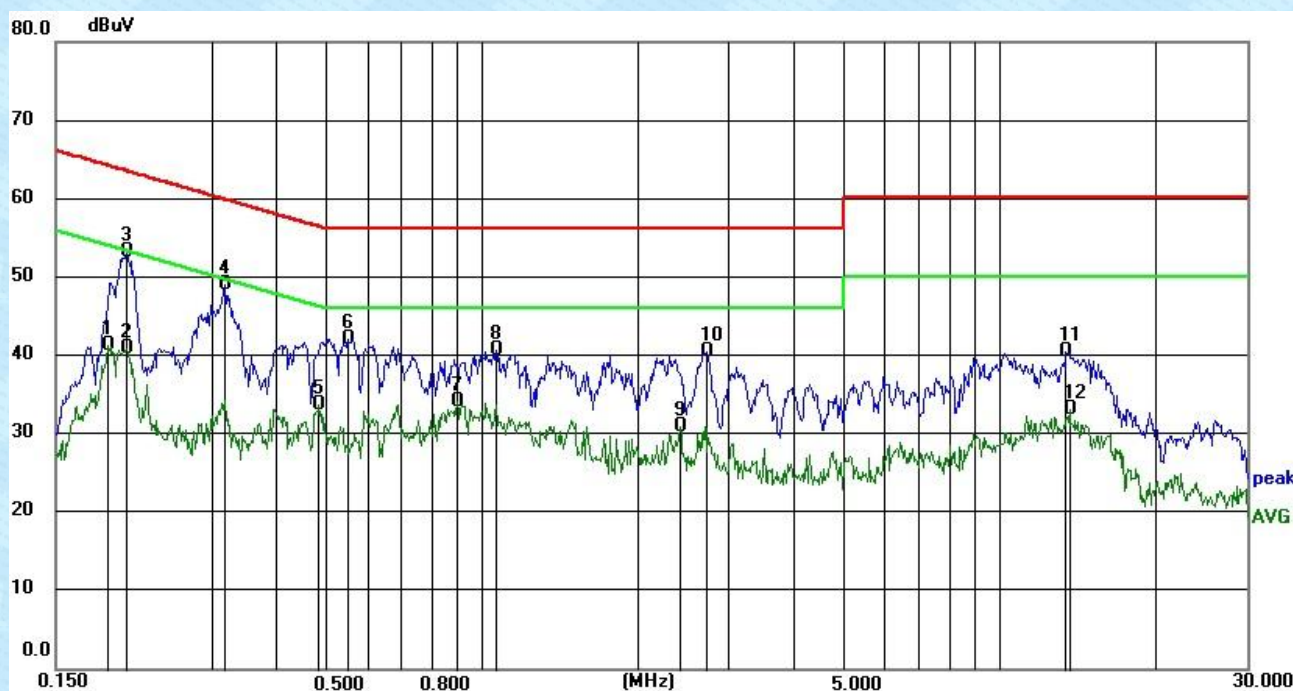


Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1901	31.22	10.02	41.24	54.03	12.79	AVG
0.2048	30.97	10.02	40.99	53.41	12.42	AVG
0.2066	43.25	10.02	53.27	63.34	10.07	QP
0.3185	39.04	10.03	49.07	59.75	10.68	QP
0.4868	23.64	10.05	33.69	46.22	12.53	AVG
0.5522	32.07	10.05	42.12	56	13.88	QP
0.9002	24.05	10.09	34.14	46	11.86	AVG
1.0665	30.65	10.11	40.76	56	15.24	QP
2.4184	20.76	10.24	31	46	15	AVG
2.7174	30.27	10.27	40.54	56	15.46	QP
13.4611	29.47	11.03	40.5	60	19.5	QP
13.7315	22.05	11.03	33.08	50	16.92	AVG

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

## 7.3 Conducted Peak Output Power

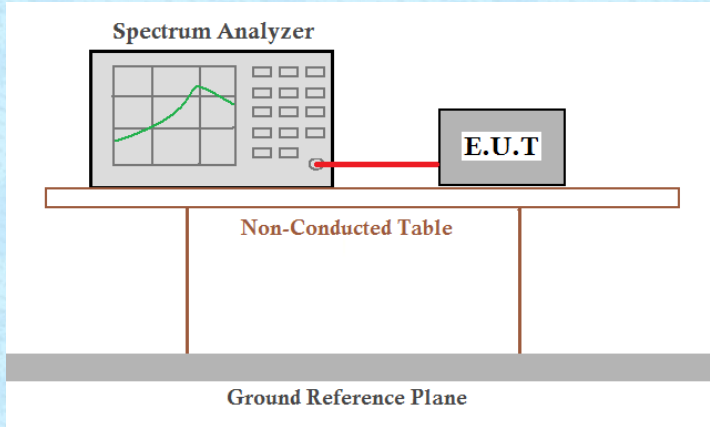Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

#### Duty Cycle:


Test channel	Frequency (MHz)	Duty cycle (%)	Duty Factor
Lowest	2402	100	0
Middle	2440	100	0
Highest	2480	100	0

Test channel	Peak Output Power (dBm)	Output Power Limit(dBm)	Result
Lowest	2.932	30.00	Pass
Middle	3.782	30.00	Pass
Highest	2.816	30.00	Pass




Test plot as follows:


Lowest channel

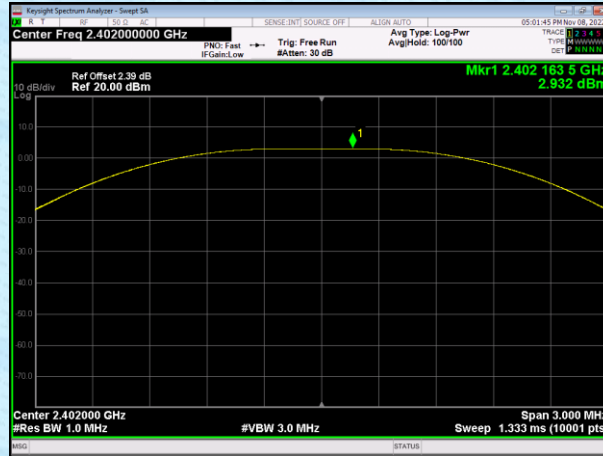


Middle channel

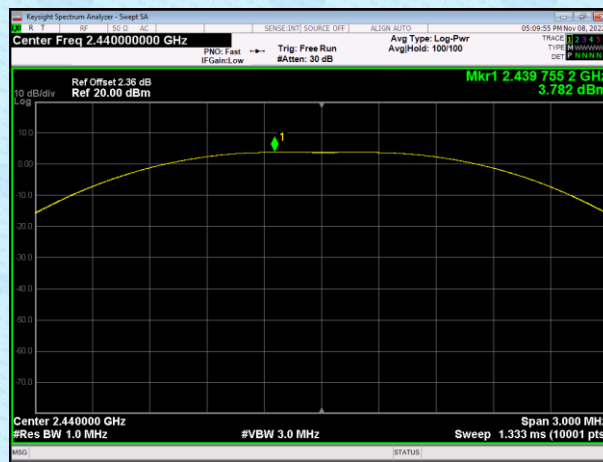

Highest channel

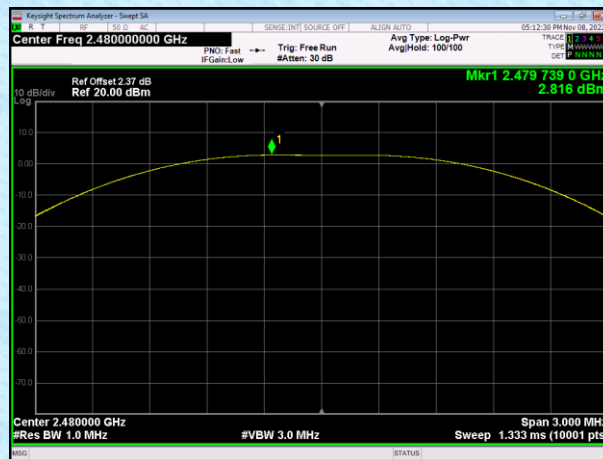

## 7.4 Channel Bandwidth & 99% Occupancy Bandwidth

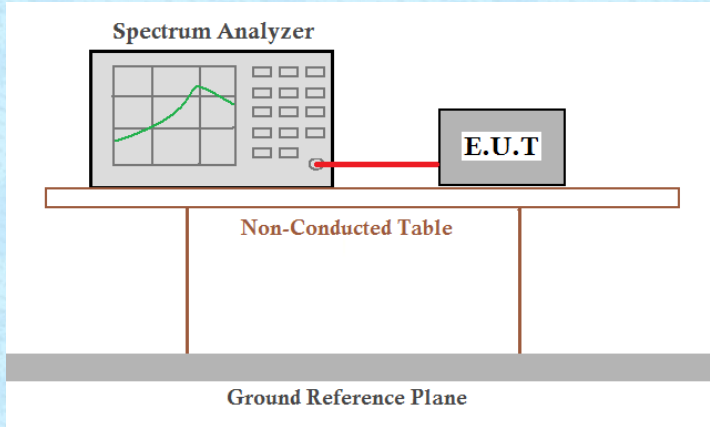
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	>500kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test channel	Channel Bandwidth (MHz)	Limit(kHz)	Result
Lowest	0.715	>500	Pass
Middle	0.678		
Highest	0.714		


Test channel	99% Bandwidth (MHz)	Result
Lowest	1.051	Pass
Middle	1.049	
Highest	1.050	

Test plot as follows:

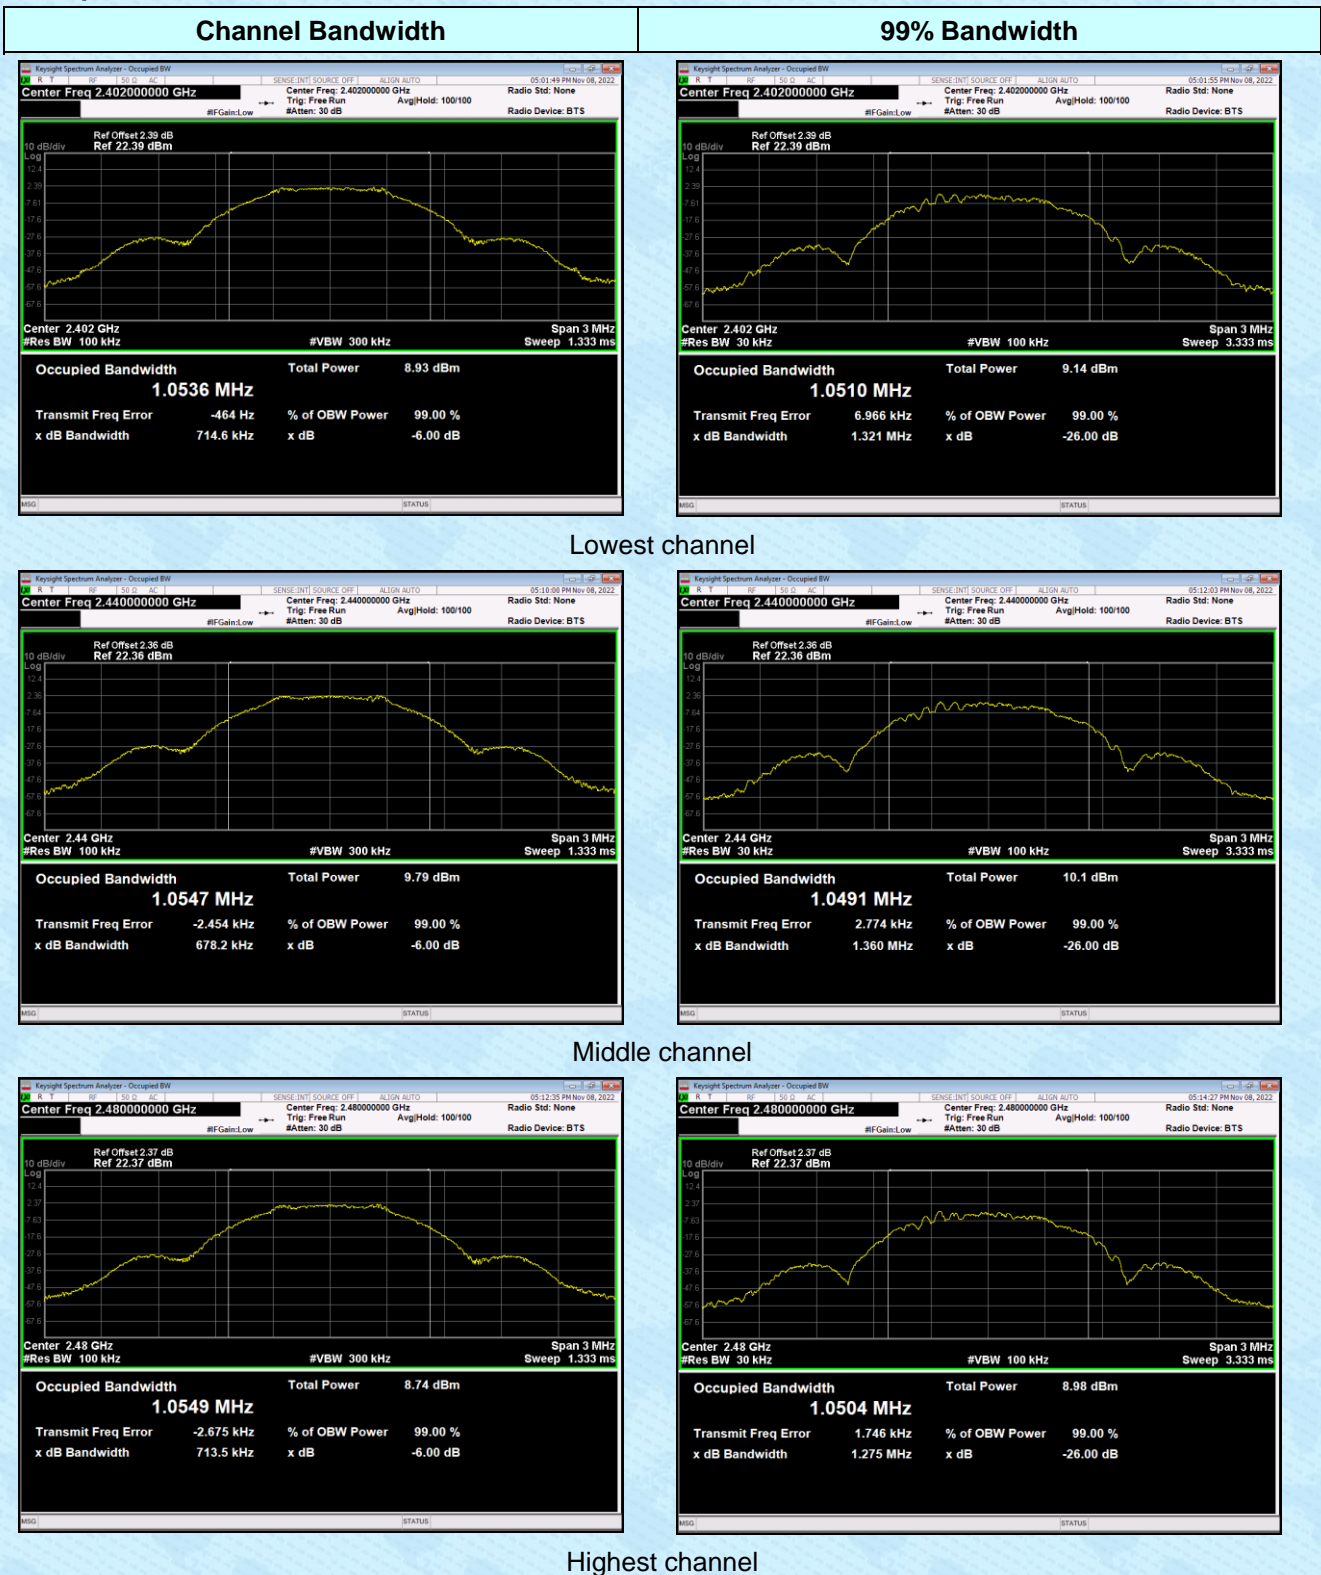




## 7.5 Power Spectral Density

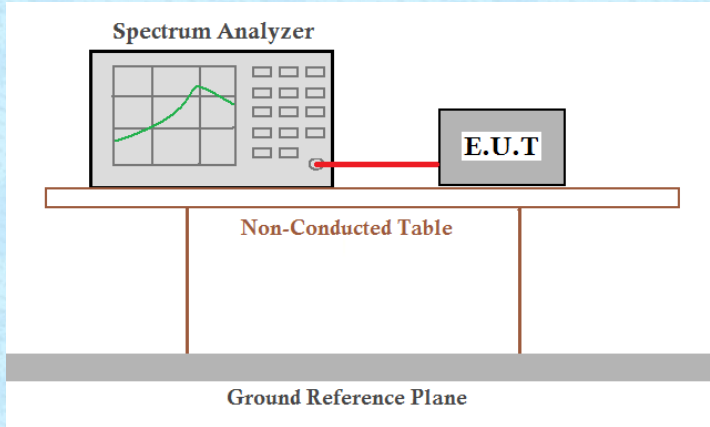Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


### Measurement Data

Test channel	Power Spectral Density (dBm/3kHz)	Limit(dBm/3kHz)	Result
Lowest	-13.39	8.00	Pass
Middle	-12.62		
Highest	-13.769		


Test plot as follows:

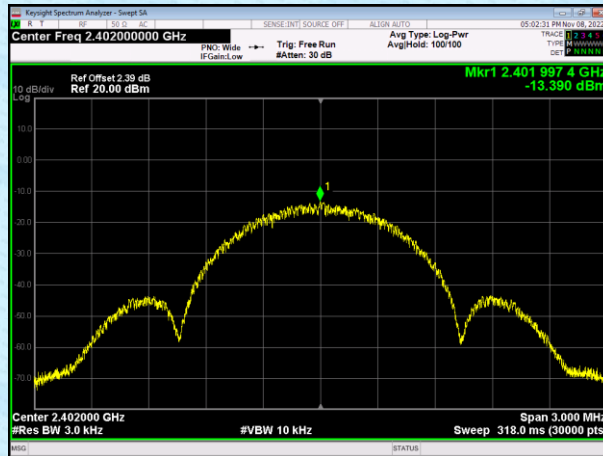

Lowest channel

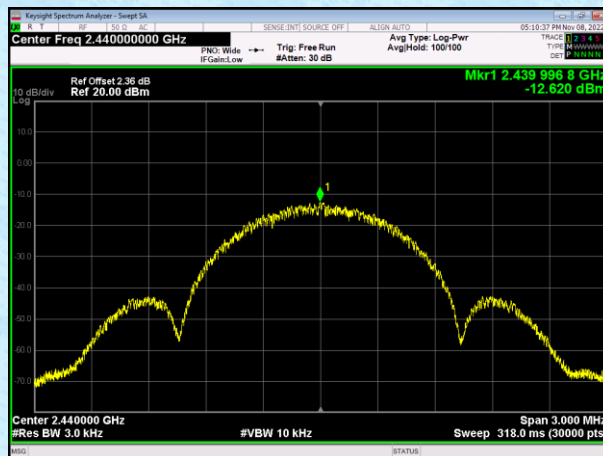


Middle channel

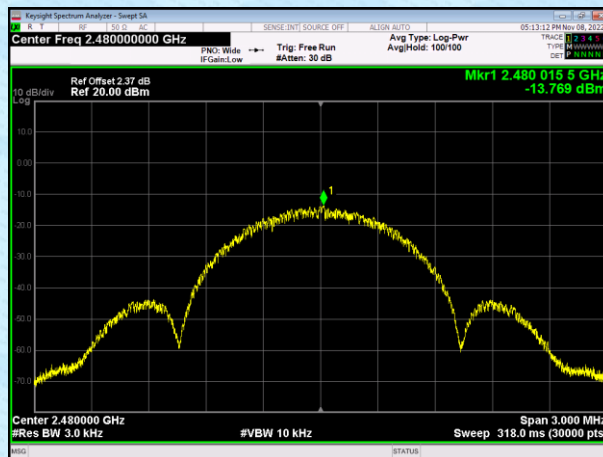

Highest channel


## 7.6 Spurious Emission in Non-restricted & restricted Bands

### 7.6.1 Conducted Emission Method

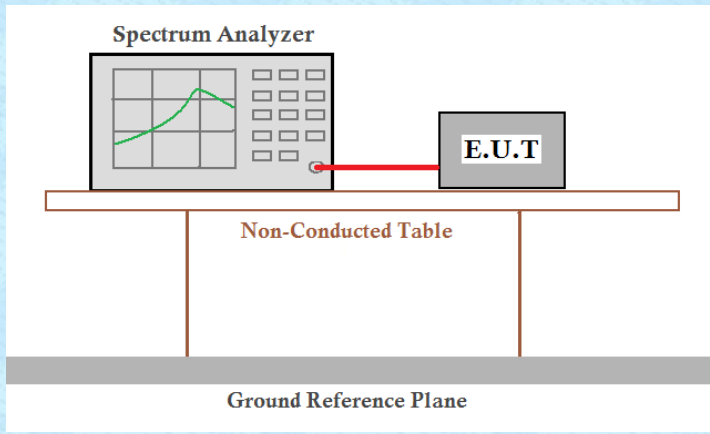Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 15.247 Meas Guidance v05r02
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass




Test plot as follows:  
Lowest channel

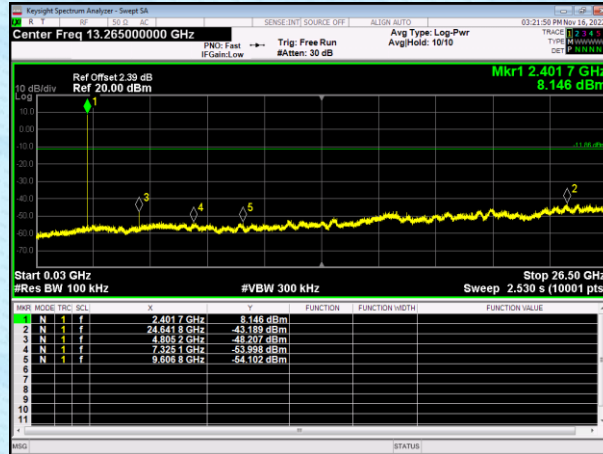


30MHz~26.5GHz

Middle channel

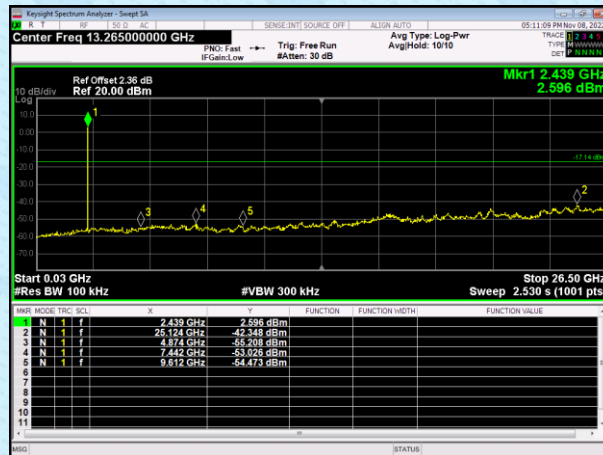

30MHz~26.5GHz


Highest channel

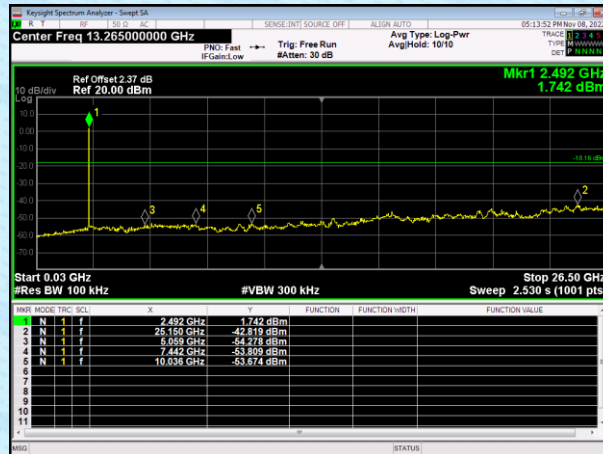

30MHz~26.5GHz

Test plot as follows:


Global United Technology Services Co., Ltd.  
No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone,  
Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102  
Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

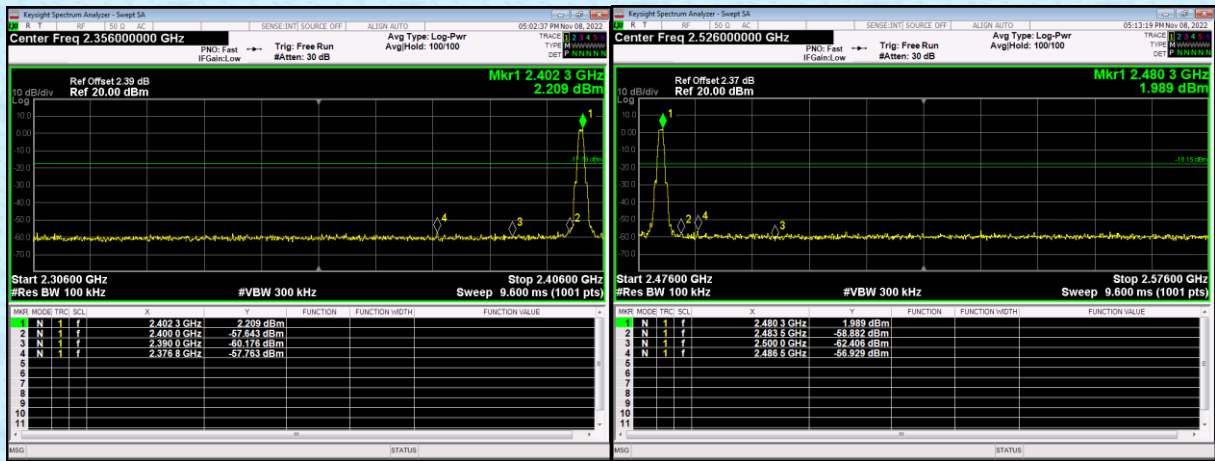



Lowest channel

Highest channel

## 7.6.2 Radiated Emission Method

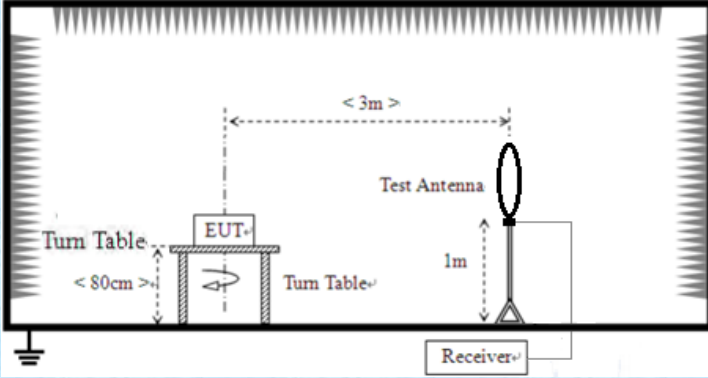Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 26.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(kHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(kHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
	 <p>The diagram illustrates the test setup for radiated emissions. An Equipment Under Test (EUT) is placed on a turn table, which is itself on another turn table. The EUT is positioned at a distance of less than 80 cm from the center of the turn table. A test antenna is positioned at a distance of 3 meters from the EUT. The antenna is mounted on a stand that is 1 meter high. The antenna is connected to a receiver. The ground plane is indicated by a ground symbol.</p>				

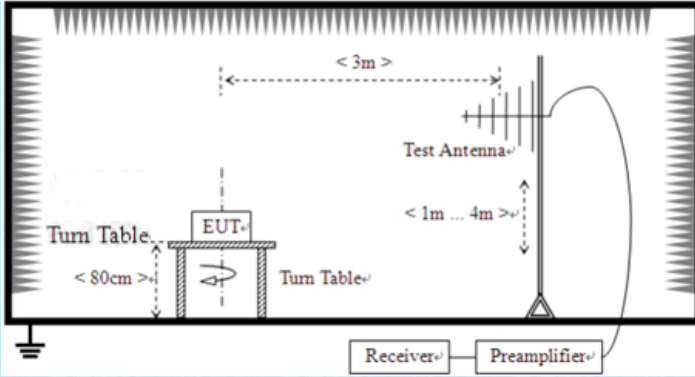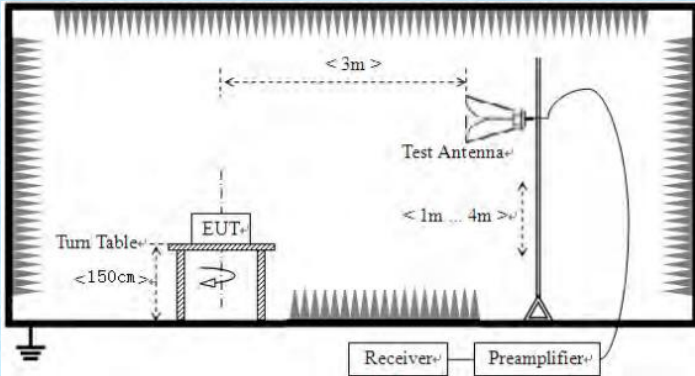

	<p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>

Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	26 °C	Humid.:	54%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

## Measurement data:

### Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. Both high and low voltages have been tested to show only the worst low voltage test data.


### ■ 9kHz~30MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

**Below 1GHz**

Pre-scan all test modes, found worst case at 2480MHz, and so only show the test result of 2480MHz


**Horizontal:**

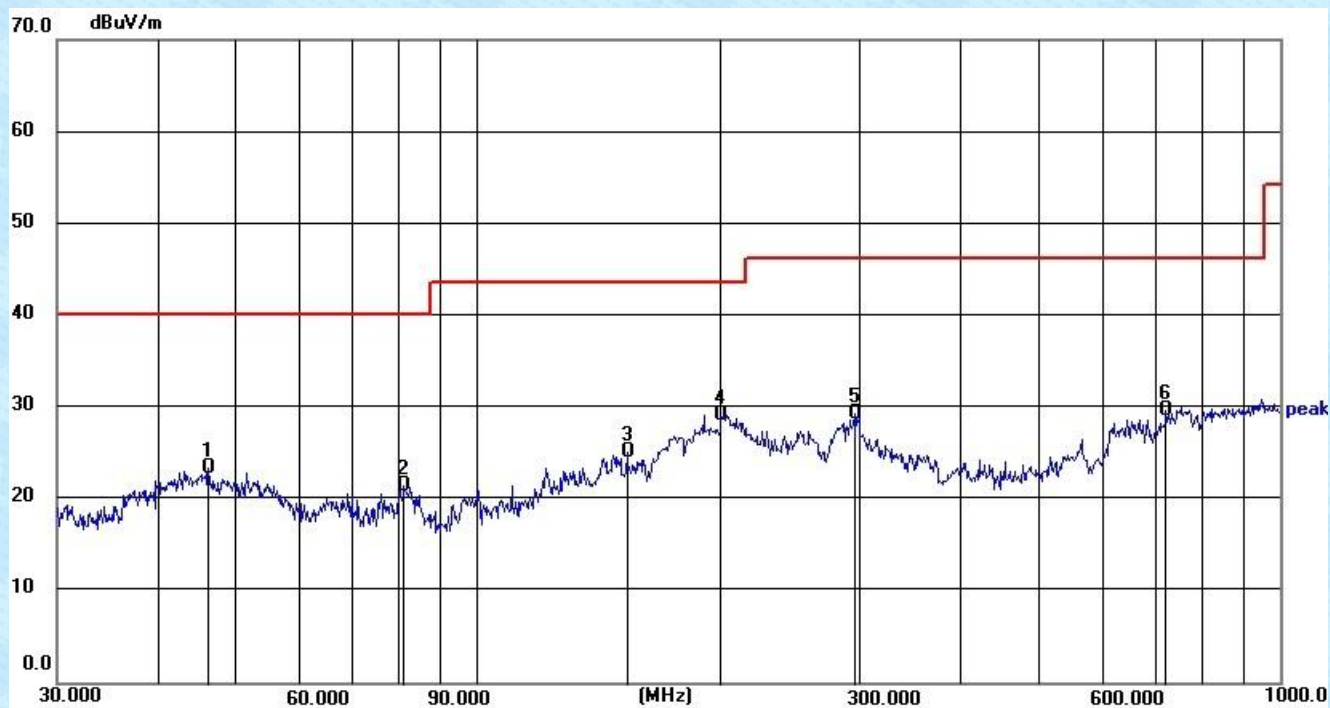

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	46.3402	8.78	14.56	23.34	40.00	16.66	QP
2	81.2116	10.70	10.81	21.51	40.00	18.49	QP
3	153.7384	9.22	15.99	25.21	43.50	18.29	QP
4	201.3930	17.40	11.83	29.23	43.50	14.27	QP
5	295.1467	14.64	14.65	29.29	46.00	16.71	QP
6	721.7258	7.42	22.19	29.61	46.00	16.39	QP



**Vertical:**

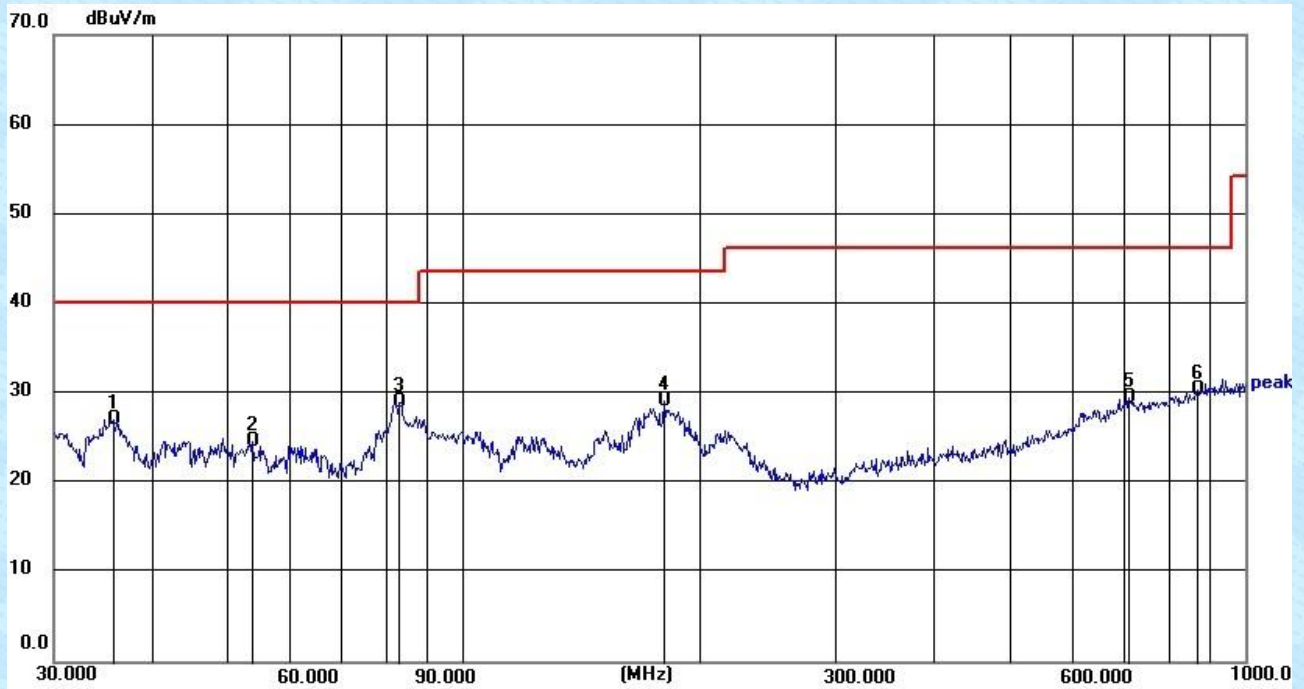

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.7490	13.88	13.24	27.12	40.00	12.88	QP
2	53.8817	10.28	14.29	24.57	40.00	15.43	QP
3	82.9384	18.21	10.86	29.07	40.00	10.93	QP
4	181.2834	15.70	13.38	29.08	43.50	14.42	QP
5	709.1820	7.41	22.03	29.44	46.00	16.56	QP
6	869.1300	6.71	23.67	30.38	46.00	15.62	QP

*Remark:*

1. An initial pre-scan was performed on the Horizontal and Vertical with peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Level = Reading + Factor
4. Factor = Antenna Gain + Cable Loss – Amplifier Gain



## Unwanted Emissions in non-restricted Frequency Bands

### Above 1GHz

Test mode:	BLE	Test channel:	Lowest
------------	-----	---------------	--------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804	34	31.62	8.58	32.11	42.09	74	-31.91	Vertical
4804	34.64	31.62	8.58	32.11	42.73	74	-31.27	Horizontal

Test mode:	BLE	Test channel:	Middle
------------	-----	---------------	--------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4880	34.36	31.92	8.71	32.11	42.88	74	-31.12	Vertical
4880	34.23	31.92	8.71	32.11	42.75	74	-31.25	Horizontal

Test mode:	BLE	Test channel:	Highest
------------	-----	---------------	---------

#### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960	34.88	31.96	8.75	32.3	43.29	74	-31.08	Vertical
4960	65.59	31.96	8.75	32.3	74	74	-30.71	Horizontal

Test mode:	BLE	Test channel:	Lowest
------------	-----	---------------	--------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2310	50.58	27.14	6.19	42.04	41.87	74	-32.13	Horizontal
2390	53.34	27.37	6.31	42.11	44.91	74	-29.09	Horizontal
2310	49.64	27.14	6.19	42.04	40.93	74	-33.07	Vertical
2390	62.37	27.37	6.31	42.11	53.94	74	-20.06	Vertical

Test mode:	BLE	Test channel:	Highest
------------	-----	---------------	---------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.5	51.2	27.66	6.45	42.01	43.3	74	-30.7	Horizontal
2500	46.85	27.7	6.47	42	39.02	74	-34.98	Horizontal
2483.5	48.04	27.66	6.45	42.01	40.14	74	-33.86	Vertical
2500	47.22	27.7	6.47	42	39.39	74	-34.61	Vertical

*Remark.*

1.  $Level = Reading\ Level + Antenna\ factor + Cable\ Loss - Amplifier\ factor$
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*



## 8 Test Setup Photo

Reference to the **appendix I** for details.

## 9 EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----