




PCTEST
18855 Adams Court, Morgan Hill, CA 95037 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctest.com>



MEASUREMENT REPORT

FCC PART 15.247 / ISSED RSS-247 WLAN 802.11b/g/n

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

12/10/2019 - 02/11/2020

Test Site/Location:

PCTEST. Morgan Hill, CA, USA

Test Report Serial No.:

1C1912170051-06.BCG

FCC ID:

BCGA2068

IC:

579C-A2068

APPLICANT:

Apple Inc.

Application Type:

Certification

Model/HVIN:

A2068

EUT Type:

Tablet Device

Frequency Range:

2412 – 2472MHz

FCC Classification:

Digital Transmission System (DTS)

FCC Rule Part(s):

Part 15 Subpart C (15.247)

ISED Specification:


RSS-247 Issue 2

Test Procedure(s):

ANSI C63.10-2013, KDB 558074 D01 v05r02,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 558074 D01 v05r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President



| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 1 of 98 |

© 2020 PCTEST


V 9.5 12/16/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.


TABLE OF CONTENTS

| | | |
|-------|--|----|
| 1.0 | INTRODUCTION | 4 |
| 1.1 | Scope | 4 |
| 1.2 | PCTEST Test Location | 4 |
| 1.3 | Test Facility / Accreditations | 4 |
| 2.0 | PRODUCT INFORMATION | 5 |
| 2.1 | Equipment Description..... | 5 |
| 2.2 | Device Capabilities | 5 |
| 2.3 | Antenna Description | 6 |
| 2.4 | Test Support Equipment | 7 |
| 2.5 | Test Configuration | 7 |
| 2.6 | Software and Firmware..... | 7 |
| 2.7 | EMI Suppression Device(s)/Modifications..... | 7 |
| 3.0 | DESCRIPTION OF TESTS..... | 8 |
| 3.1 | Evaluation Procedure | 8 |
| 3.2 | AC Line Conducted Emissions | 8 |
| 3.3 | Radiated Emissions..... | 9 |
| 3.4 | Environmental Conditions..... | 9 |
| 4.0 | ANTENNA REQUIREMENTS..... | 10 |
| 5.0 | MEASUREMENT UNCERTAINTY..... | 11 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA | 12 |
| 7.0 | TEST RESULTS..... | 13 |
| 7.1 | Summary | 13 |
| 7.2 | 6dB Bandwidth Measurement..... | 14 |
| 7.3 | Output Power Measurement..... | 25 |
| 7.3.1 | Average Output Power Measurement | 26 |
| 7.3.2 | Peak Output Power Measurement | 27 |
| 7.4 | Power Spectral Density | 29 |
| 7.5 | Conducted Emissions at the Band Edge..... | 48 |
| 7.6 | Conducted Spurious Emissions | 61 |
| 7.7 | Radiated Spurious Emission Measurements – Above 1 GHz..... | 69 |
| 7.7.1 | SISO Core 0 Radiated Spurious Emission Measurements | 72 |
| 7.7.2 | SISO Core 1 Radiated Spurious Emission Measurements | 75 |
| 7.7.3 | CDD Radiated Spurious Emission Measurements..... | 78 |
| 7.7.4 | SISO Core 0 Radiated Restricted Band Edge Measurements | 82 |
| 7.7.5 | SISO Core 1 Radiated Restricted Band Edge Measurements | 85 |
| 7.7.6 | CDD Radiated Restricted Band Edge Measurements | 88 |
| 7.8 | Radiated Spurious Emissions Measurements – Below 1GHz | 90 |
| 7.9 | AC Line-Conducted Test Data | 94 |
| 8.0 | CONCLUSION | 98 |

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 2 of 98 |



MEASUREMENT REPORT



| Mode | Tx Frequency (MHz) | Core 0 | | | | Core 1 | | | |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
| | | Avg Conducted | | Peak Conducted | | Avg Conducted | | Peak Conducted | |
| | | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11b | 2412 - 2472 | 19.953 | 13.00 | 79.616 | 19.01 | 19.953 | 13.00 | 32.211 | 15.08 |
| 802.11g | 2412 - 2472 | 19.953 | 13.00 | 76.913 | 18.86 | 19.861 | 12.98 | 76.736 | 18.85 |
| 802.11n | 2412 - 2472 | 19.953 | 13.00 | 77.446 | 18.89 | 19.770 | 12.96 | 83.753 | 19.23 |

EUT Overview SISO

| Mode | Tx Frequency (MHz) | Core 0 | | | | Core 1 | | | | CDD | | | |
|---------|--------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|-----------------|------------------|
| | | Avg Conducted | | Peak Conducted | | Avg Conducted | | Peak Conducted | | Avg Conducted | | Peak Conducted | |
| | | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) | Max. Power (mW) | Max. Power (dBm) |
| 802.11g | 2412 - 2472 | 19.953 | 13.00 | 76.913 | 18.86 | 19.861 | 12.98 | 76.736 | 18.85 | 39.719 | 15.99 | 152.757 | 21.84 |
| 802.11n | 2412 - 2472 | 19.953 | 13.00 | 34.594 | 15.39 | 19.953 | 13.00 | 35.075 | 15.45 | 39.811 | 16.00 | 69.663 | 18.43 |

EUT Overview CDD

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 3 of 98 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Morgan Hill, CA 95037, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISSED.

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 4 of 98 |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID: BCGA2068**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

Test Device Serial No.: DLXZN008P7GX, DLXZN005P7GX

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE, HDR4, HDR8)

This device supports BT Beamforming

| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
|-----|-----------------|-----|-----------------|
| 1 | 2412 | 8 | 2447 |
| 2 | 2417 | 9 | 2452 |
| 3 | 2422 | 10 | 2457 |
| 4 | 2427 | 11 | 2462 |
| 5 | 2432 | 12 | 2467 |
| 6 | 2437 | 13 | 2472 |
| 7 | 2442 | | |

Table 2-1. Frequency/ Channel Operations

Note:

- The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01 v05r02 and ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Measured Duty Cycles | | | | |
|----------------------|---|----------------|--------|------|
| 802.11 Mode/Band | | Duty Cycle [%] | | |
| | | CORE 0 | CORE 1 | CDD |
| 2.4GHz | b | 100 | 99.9 | N/A |
| | g | 98.6 | 98.4 | 98.4 |
| | n | 98.9 | 98.9 | 98.9 |

Table 2-2. Measured Duty Cycles

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 5 of 98 |

2. Ant 4a is correlating to Core 0 and Ant 2a is correlating to Core 1.
3. The device employs CDD technology. Below are the possible configurations.

| WiFi Configurations | | SISO | | SDM | | CDD | |
|---------------------|-----|--------|--------|--------|--------|--------|--------|
| | | CORE 0 | CORE 1 | CORE 0 | CORE 1 | CORE 0 | CORE 1 |
| 2.4GHz | 11b | ✓ | ✓ | ✗ | ✗ | ✗ | ✗ |
| | 11g | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 11n | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Table 2-3. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – 2Tx Function

CDD = Cyclic Delay Diversity – 2Tx Function

Data Rates Supported: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (g)
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n)
13/14.4Mbps, 26/28.9Mbps, 39/43.3Mbps, 52/57.8Mbps, 78/86.7Mbps,
104/115.6Mbps, 117/130Mbps, 130/144.4Mbps (CDD n)

4. This device supports simultaneous transmission operation, which allows for two transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

| Simultaneous Tx | Antenna | | | | | | | |
|-------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| | 4a | | | | 2a | | | |
| | Config 1 | Config 2 | Config 3 | Config 4 | Config 5 | Config 6 | Config 7 | Config 8 |
| WIFI 2.4GHz | ✓ | ✓ | ✗ | ✗ | ✓ | ✓ | ✗ | ✗ |
| Bluetooth (1x, EDR, LE, HDR4, HDR8) | ✗ | ✗ | ✓ | ✓ | ✗ | ✗ | ✓ | ✓ |
| LTE Mid Bands | ✓ | ✗ | ✓ | ✗ | ✓ | ✗ | ✓ | ✗ |
| LTE High Bands | ✗ | ✓ | ✗ | ✓ | ✗ | ✓ | ✗ | ✓ |

Table 2-4. Simultaneous Tx Configurations

✓ = Support ; ✗ = NOT Support

- a. The worst simultaneous Tx configuration was found to be Bluetooth BDR and LTE High Band transmitting on antenna 4a. These results can be found in the RF Bluetooth and RF LTE FCC reports.

2.3 Antenna Description

Following antennas were used for the testing.

| Frequency [GHz] | Antenna Gain (dBi) | |
|-----------------|--------------------|--------|
| | Ant 4a | Ant 2a |
| 2.4 | -2.2 | -0.9 |

Table 2-5. Highest Antenna Gain

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 6 of 98 |

2.4 Test Support Equipment

| | | | |
|---|-----------------------------------|------------------------------|---|
| 1 | Apple MacBook w/ AC/DC Adapter | Model: A1398 Model: A1435 | S/N: C2QKP008F6F3 S/N: C04325505K1F288BG |
| 2 | Apple USB-C Cable | Model: Chimp | S/N: 304523 |
| 3 | USB-C Cable w / AC/DC Adapter | Model: A1997 Model: A1720 | S/N: N/A S/N: C3D9274B06YLHDAE |
| 4 | Apple Pencil | Model: A2051 | S/N: GQXYGSXCJKM9 |
| 5 | DC Power Supply | Model: KPS3010D | S/N N/A |

Table 2-6. Test Support Equipment Used

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 558074 D01 v05r02. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and, 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

There are two vendors of the WiFi/Bluetooth radio modules, variant 1 and variant 2. Both radio modules have the same mechanical outline, same on-board antenna matching circuit, identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances. The worst case configuration was found between the two variants. The EUT was also investigated with and without charger.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted and radiated test below 1GHz, following configuration were investigated and worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with wire charger
- EUT powered by host PC via USB-C cable with wire charger

For 802.11ax test results, see separate WLAN 802.11ax (OFDMA) report, 1C1912170051-07.BCG.

2.6 Software and Firmware

The test was conducted with firmware version 17E228 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 7 of 98 |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v05r02 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-6. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz - 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.35.04.

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 8 of 98 |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | |
|--|---|-----------------------------------|--|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 9 of 98 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connections to an external antenna.

Conclusion:

The EUT unit complies with the requirement of §15.203.

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 10 of 98 |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.29 |
| Line Conducted Disturbance | 2.48 |
| Radiated Disturbance (<1GHz) | 4.15 |
| Radiated Disturbance (>1GHz) | 4.70 |
| Radiated Disturbance (>18GHz) | 5.01 |

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 11 of 98 |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|----------------------|-------------|--|------------|--------------|------------|---------------|
| Agilent Technologies | N9030A | 3Hz-44GHz PXA Signal Analyzer | 3/13/2019 | Annual | 3/13/2020 | MY49430244 |
| Anritsu | ML2496A | Power Meter | 10/29/2019 | Annual | 10/29/2020 | 184005 |
| Anritsu | MA2411B | Pulse Power Sensor | 10/29/2019 | Annual | 10/29/2020 | 1726261 |
| Anritsu | MA2411B | Pulse Power Sensor | 10/29/2019 | Annual | 10/29/2020 | 1726262 |
| ATM | 180-442A-KF | 20dB Nominal Gain Horn Antenna | 10/29/2019 | Annual | 10/29/2020 | T058701-02 |
| COM-POWER | LIN-120A | LISN | 3/13/2019 | Annual | 3/13/2020 | 241297 |
| ETS-Lindgren | 3142E-PA | Pre-Amplifier (30MHz - 6GHz) | 9/19/2019 | Annual | 9/19/2020 | 213236 |
| ETS-Lindgren | 3142E | BiConiLog Antenna (30MHz - 6GHz) | 8/14/2019 | Annual | 8/14/2020 | 224569 |
| ETS-Lindgren | 3117 | Double Ridged Guide Antenna (1-18 GHz) | 3/12/2019 | Annual | 3/12/2020 | 205956 |
| Rohde & Schwarz | ESW26 | EMI Test Receiver | 5/21/2019 | Annual | 5/21/2020 | 101299 |
| Rohde & Schwarz | ESW44 | EMI Test Receiver | 7/27/2019 | Annual | 7/27/2020 | 101668 |
| Rohde & Schwarz | TS-PR1840 | Pre-Amplifier (18GHz - 40GHz) | 9/19/2019 | Annual | 9/19/2020 | 100051 |
| Rohde & Schwarz | TC-TA18 | Cross Polarized Vivaldi Antenna (400MHz-18GHz) | 11/14/2019 | Annual | 11/14/2020 | 101057 |
| Rohde & Schwarz | HFH2-Z2 | Loop Antenna | 3/21/2019 | Annual | 3/21/2020 | 100519 |

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 12 of 98 |

7.0 TEST RESULTS

7.1 Summary

Company Name: Apple Inc.

FCC ID: BCGA2068

FCC Classification: Digital Transmission System (DTS)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|---------------------|----------------|---|--|----------------|-------------|-------------------|
| 15.247(a)(2) | RSS-247 [5.2] | 6dB Bandwidth | > 500kHz | CONDUCTED | PASS | Section 7.2 |
| 15.247(b)(3) | RSS-247 [5.4] | Transmitter Output Power | < 1 Watt | | PASS | Sections 7.3 |
| 15.247(e) | RSS-247 [5.2] | Transmitter Power Spectral Density | < 8dBm / 3kHz Band | | PASS | Section 7.4 |
| 15.247(d) | RSS-247 [5.5] | Band Edge / Out-of-Band Emissions | ≥ 20dBc | | PASS | Sections 7.5, 7.6 |
| 15.205 15.209 | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | RADIATED | PASS | Sections 7.7, 7.8 |
| 15.207 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 limits (RSS-Gen[8.8]) | LINE CONDUCTED | PASS | Section 7.9 |

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "WLAN Automation," Version 3.5.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 13 of 98 |

7.2 6dB Bandwidth Measurement

§15.247(a.2); RSS-247 [5.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The minimum permissible 6dB bandwidth is 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2
KDB 558074 D01 v05r02 – Section 8.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

All antenna configurations were investigated and only the worst case is reported.

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 14 of 98 |

© 2020 PCTEST


V 9.5 12/16/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

SISO Core 0 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|-------------|
| 2412 | 1 | b | 1 | 8.616 | 0.500 | Pass |
| 2437 | 6 | b | 1 | 8.577 | 0.500 | Pass |
| 2462 | 11 | b | 1 | 8.082 | 0.500 | Pass |
| 2412 | 1 | g | 6 | 15.740 | 0.500 | Pass |
| 2437 | 6 | g | 6 | 16.310 | 0.500 | Pass |
| 2462 | 11 | g | 6 | 15.200 | 0.500 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | 16.130 | 0.500 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | 17.210 | 0.500 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | 15.750 | 0.500 | Pass |

Table 7-2. Conducted Bandwidth Measurements SISO CORE0

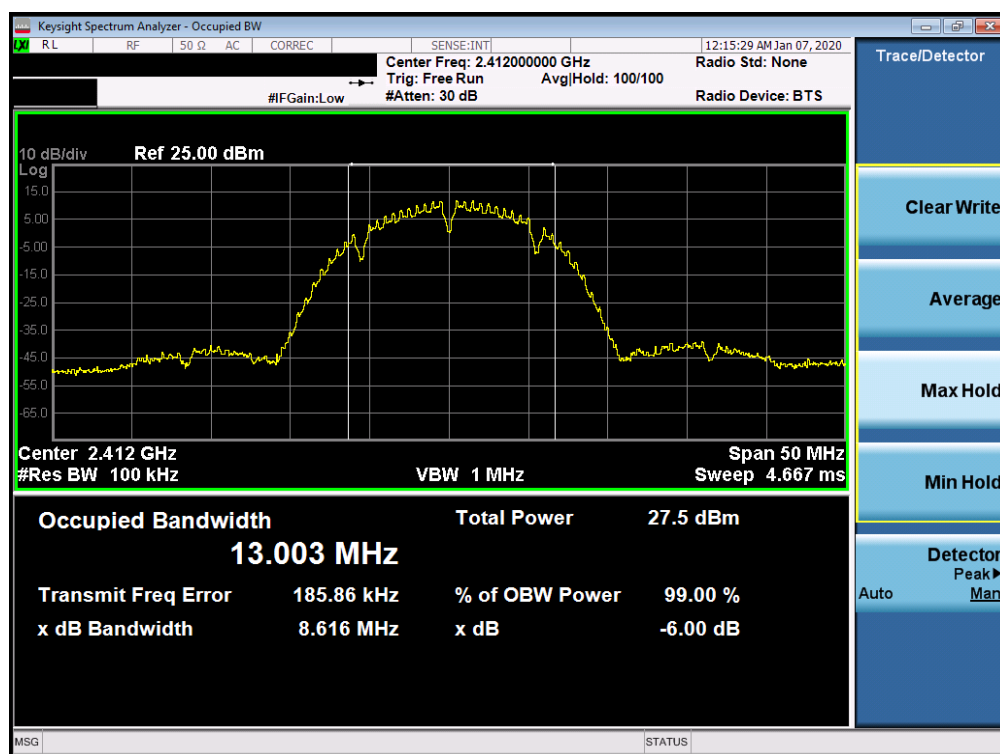


Plot 7-1. 6dB Bandwidth Plot SISO CORE0 (802.11b - Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 15 of 98 |

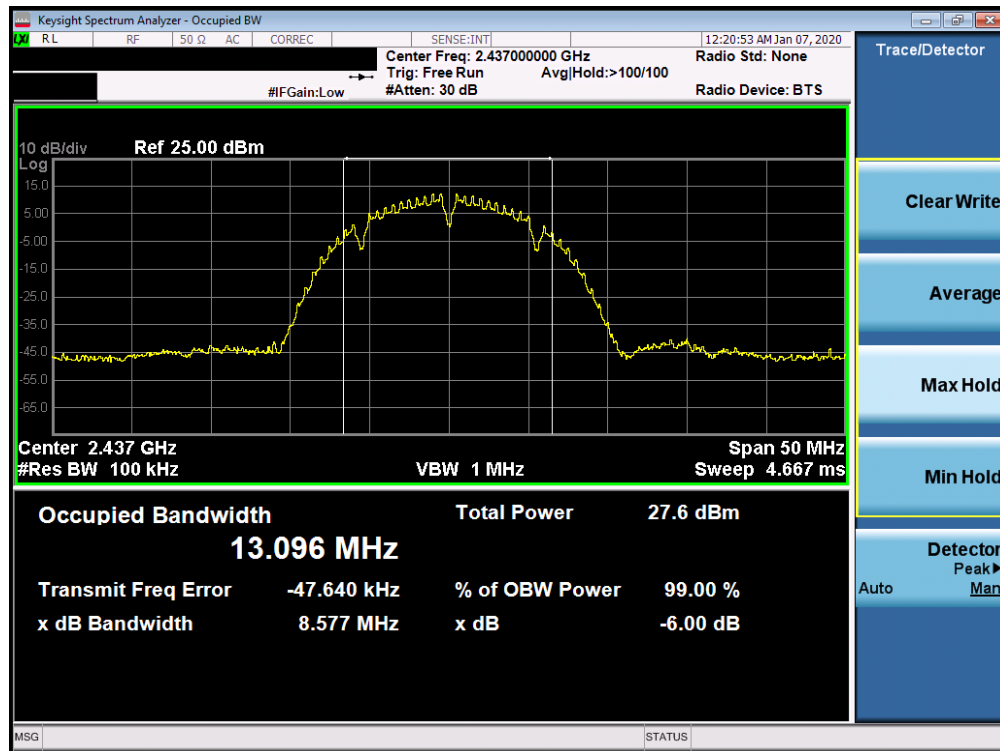


Plot 7-2. 6dB Bandwidth Plot SISO CORE0 (802.11b – Ch. 6)

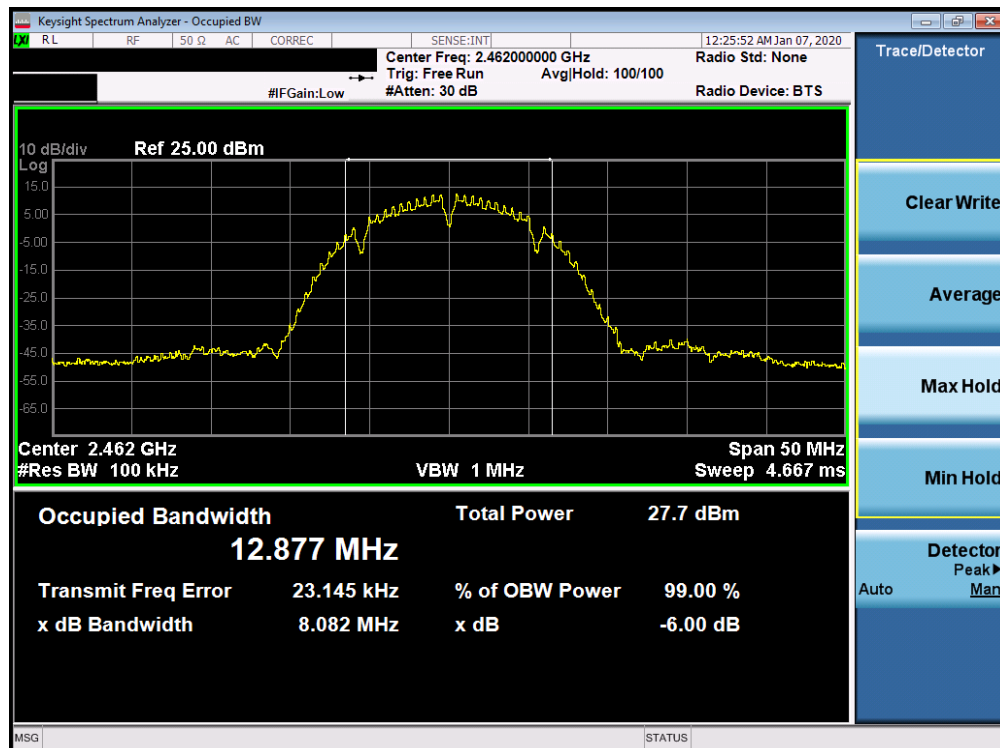


Plot 7-3. 6dB Bandwidth Plot SISO CORE0 (802.11b – Ch. 11)

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 16 of 98 |

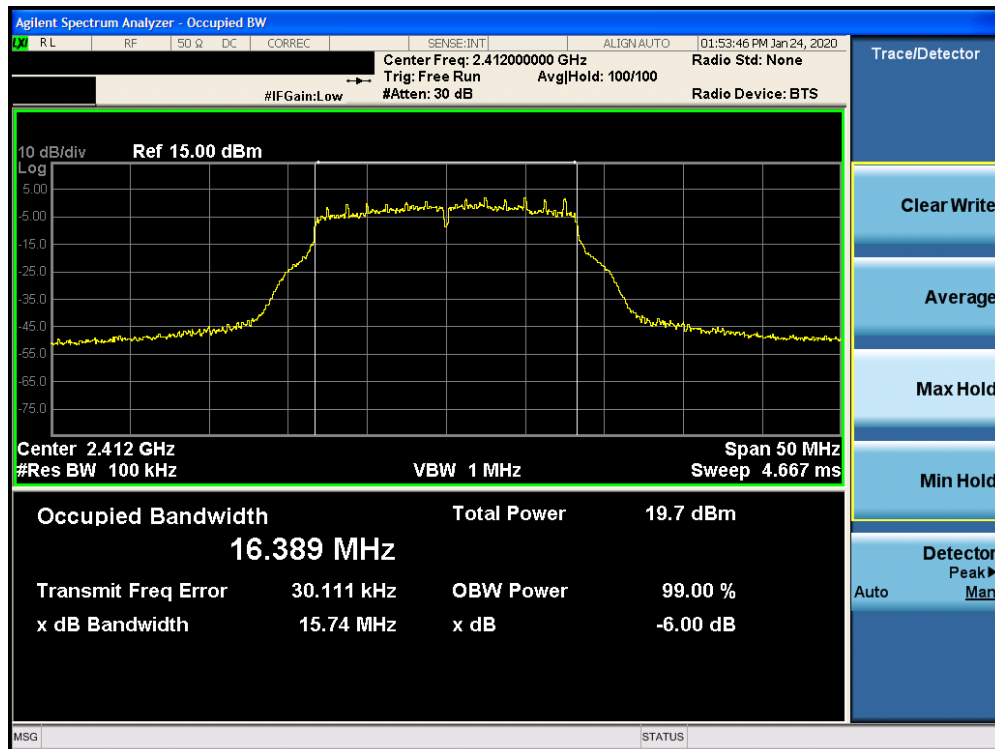


Plot 7-4. 6dB Bandwidth Plot SISO CORE0 (802.11g – Ch. 1)

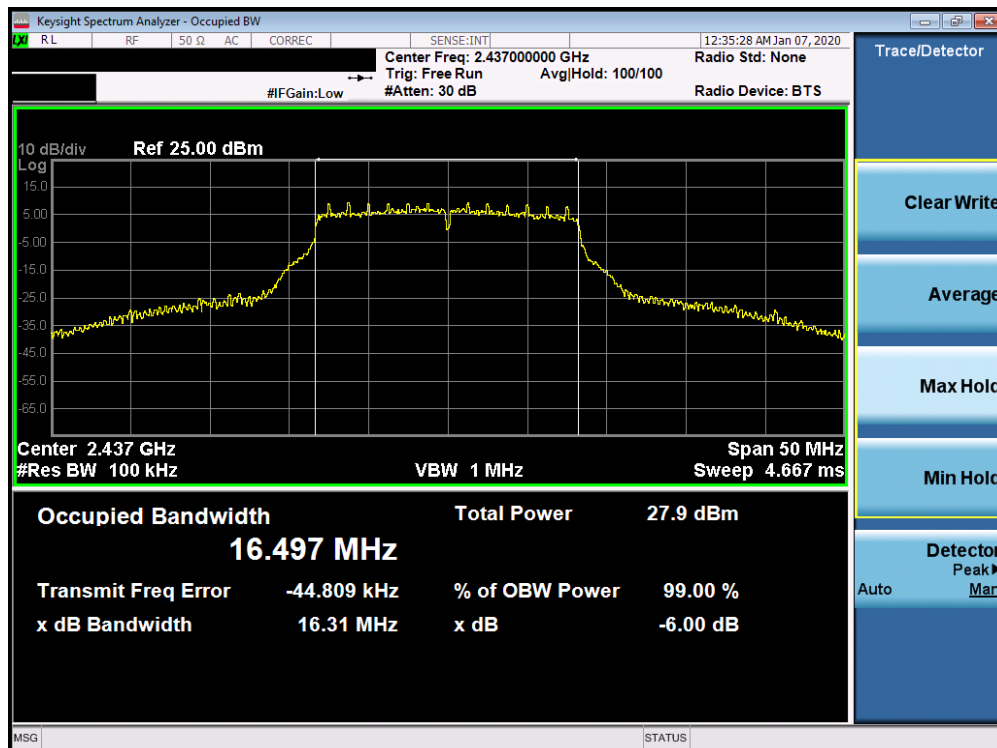


Plot 7-5. 6dB Bandwidth Plot SISO CORE0 (802.11g – Ch. 6)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 17 of 98 |

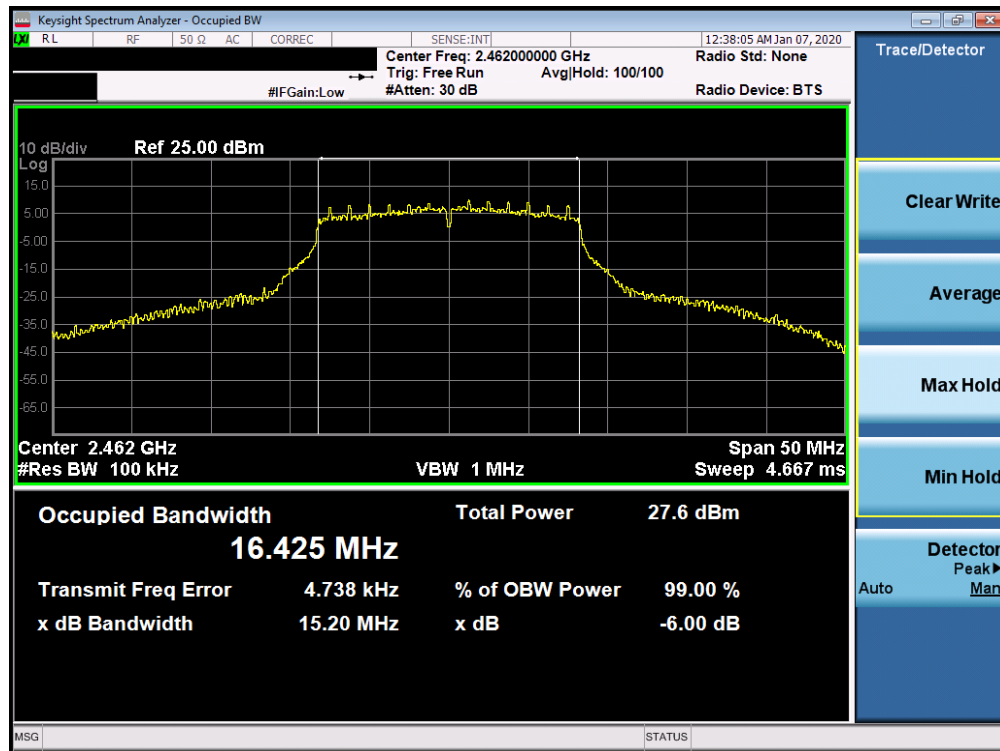


Plot 7-6. 6dB Bandwidth Plot SISO CORE0 (802.11g – Ch. 11)

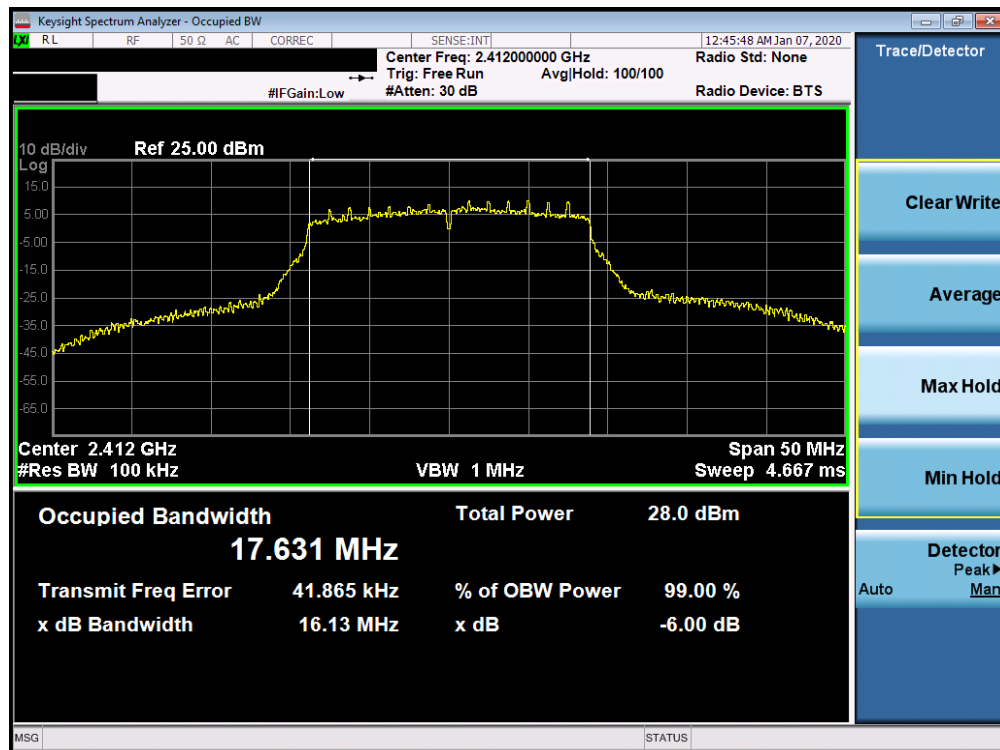


Plot 7-7. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 18 of 98 |

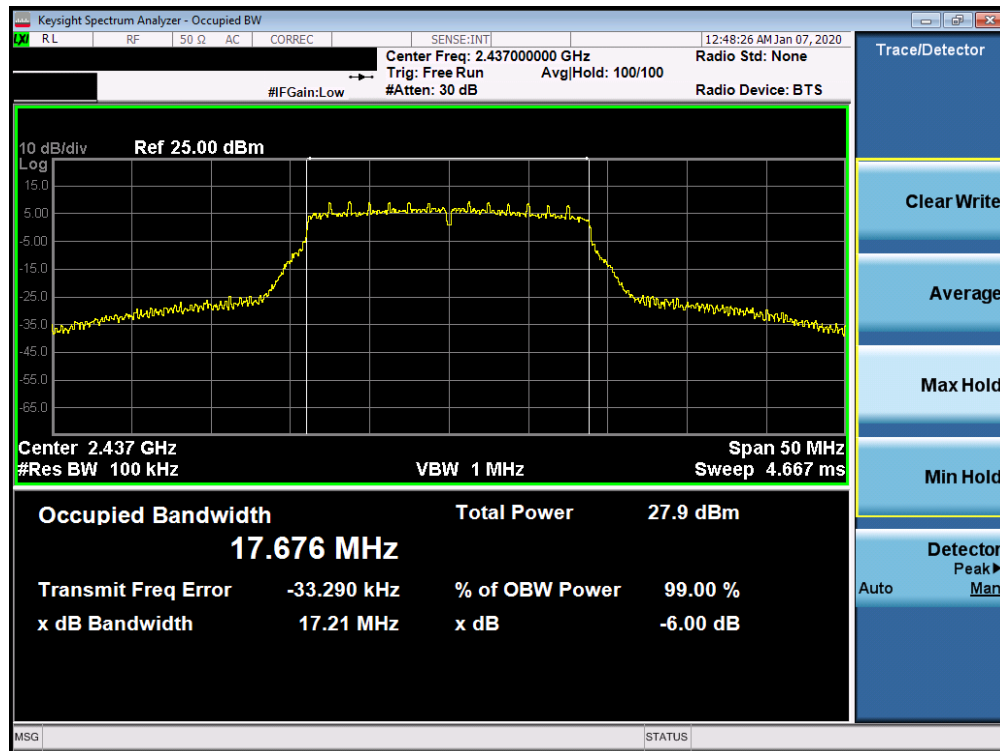

Plot 7-8. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 6)

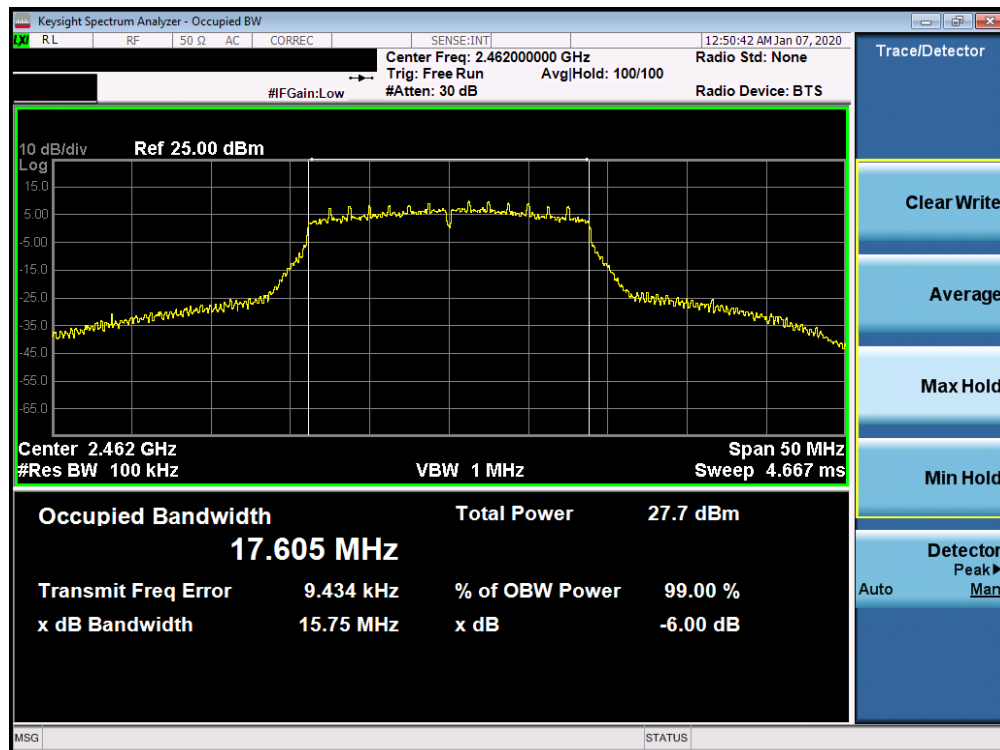


Plot 7-9. 6dB Bandwidth Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 19 of 98 |

SISO Core 1 6 dB Bandwidth Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Bandwidth [MHz] | Minimum Bandwidth [MHz] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--------------------------|-------------------------|-------------|
| 2412 | 1 | b | 1 | 8.579 | 0.500 | Pass |
| 2437 | 6 | b | 1 | 8.595 | 0.500 | Pass |
| 2462 | 11 | b | 1 | 8.088 | 0.500 | Pass |
| 2412 | 1 | g | 6 | 15.360 | 0.500 | Pass |
| 2437 | 6 | g | 6 | 15.980 | 0.500 | Pass |
| 2462 | 11 | g | 6 | 15.520 | 0.500 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | 15.990 | 0.500 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | 16.900 | 0.500 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | 15.450 | 0.500 | Pass |

Table 7-3. Conducted Bandwidth Measurements SISO CORE 1

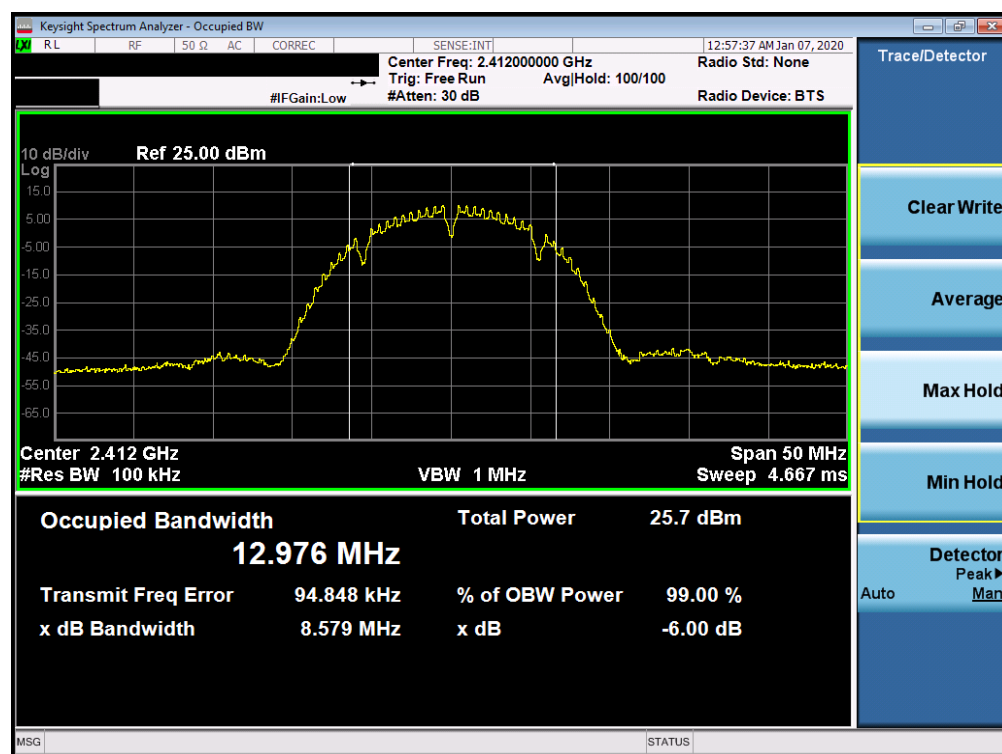


Plot 7-10. 6dB Bandwidth Plot SISO CORE1 (802.11b - Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 20 of 98 |

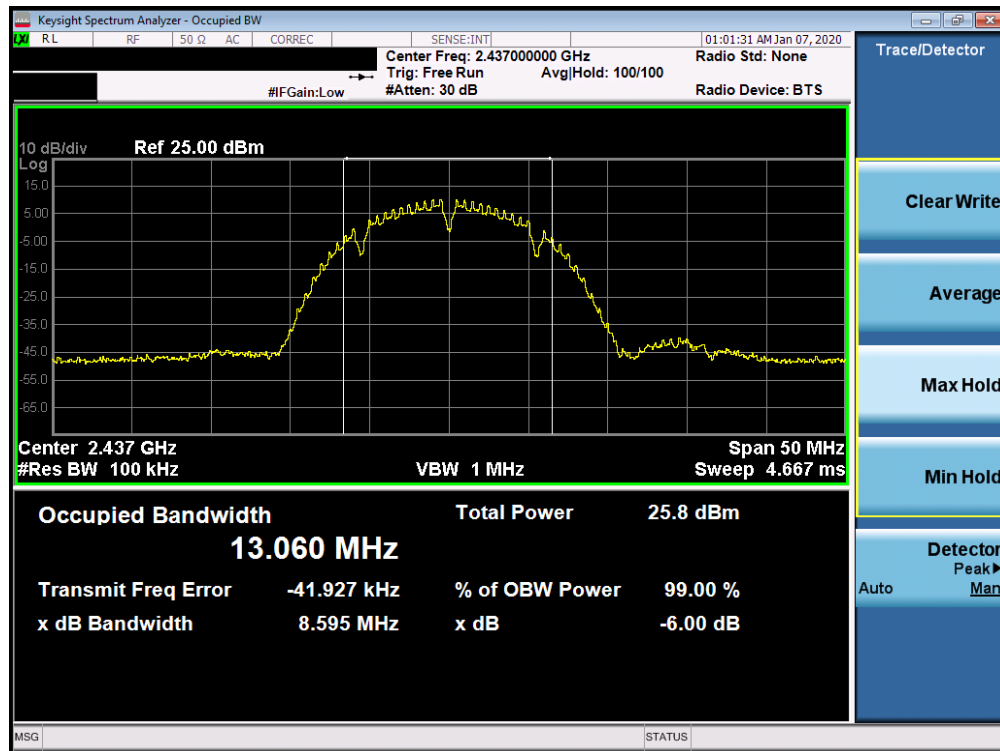


Plot 7-11. 6dB Bandwidth Plot SISO CORE1 (802.11b – Ch. 6)

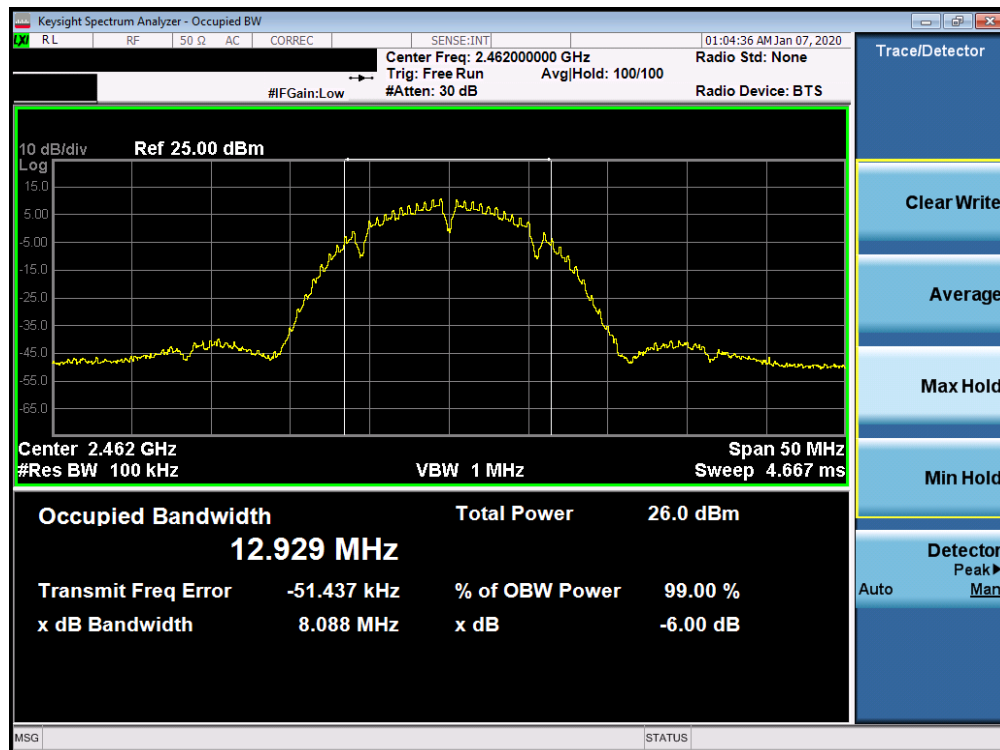


Plot 7-12. 6dB Bandwidth Plot SISO CORE1 (802.11b – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 21 of 98 |

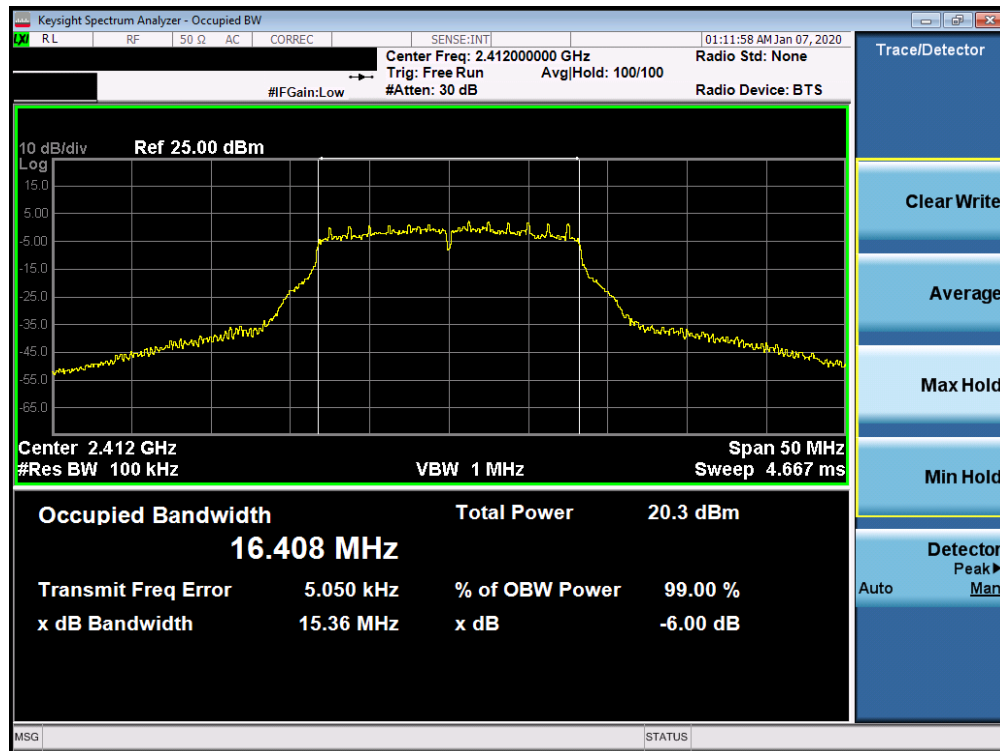


Plot 7-13. 6dB Bandwidth Plot SISO CORE1 (802.11g – Ch. 1)

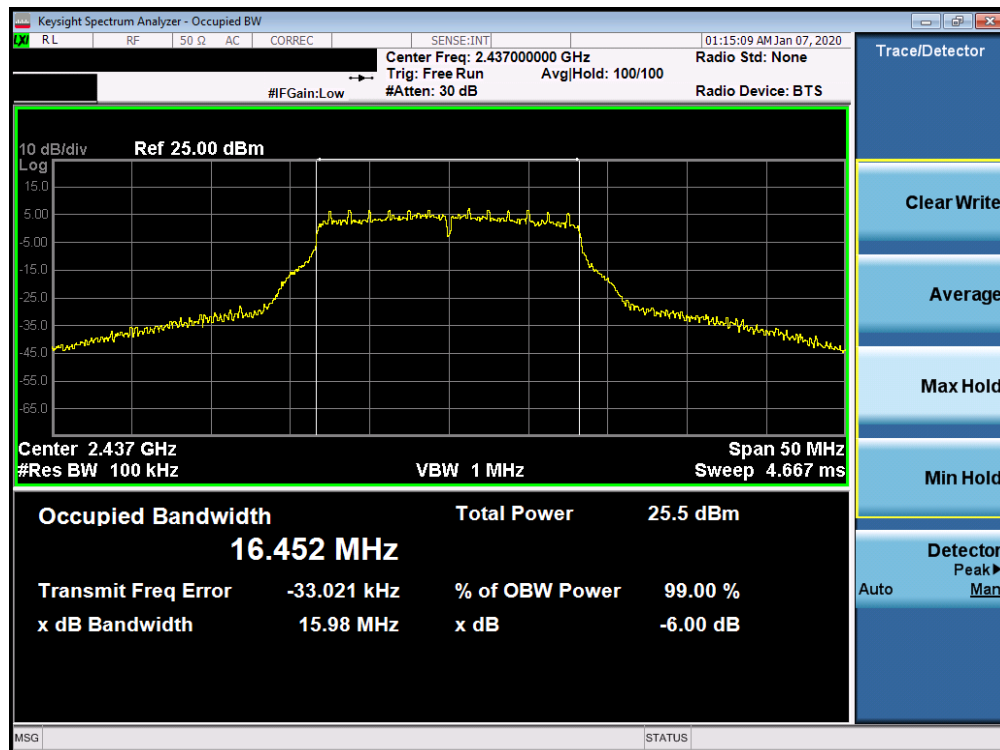


Plot 7-14. 6dB Bandwidth Plot SISO CORE1 (802.11g – Ch. 6)

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 22 of 98 |

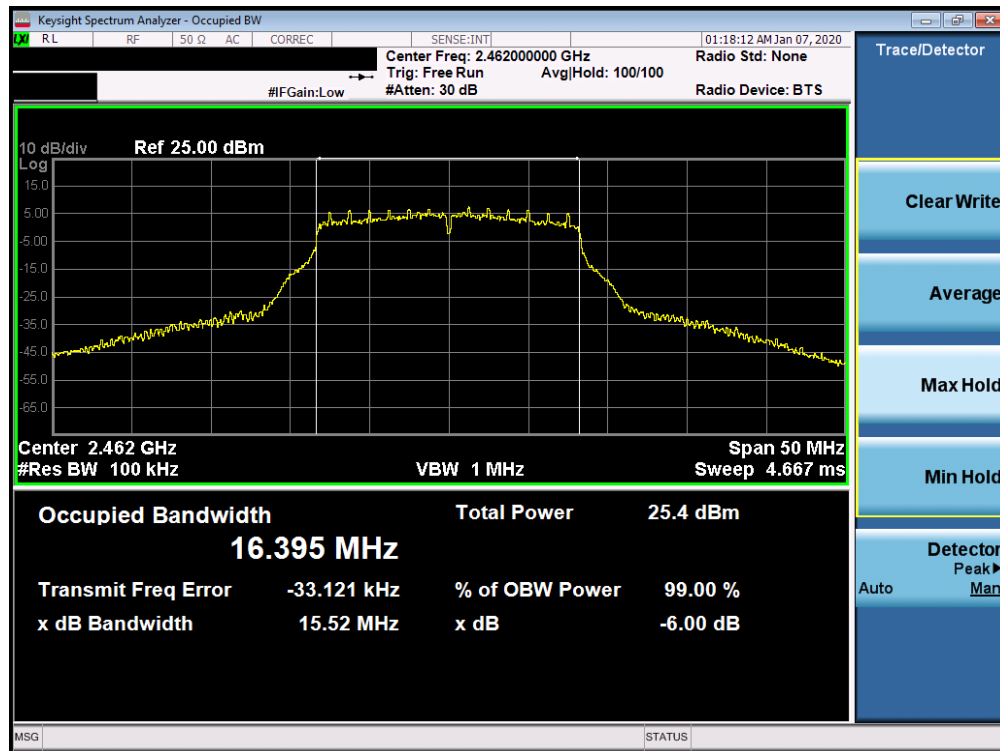


Plot 7-15. 6dB Bandwidth Plot SISO CORE1 (802.11g – Ch. 11)

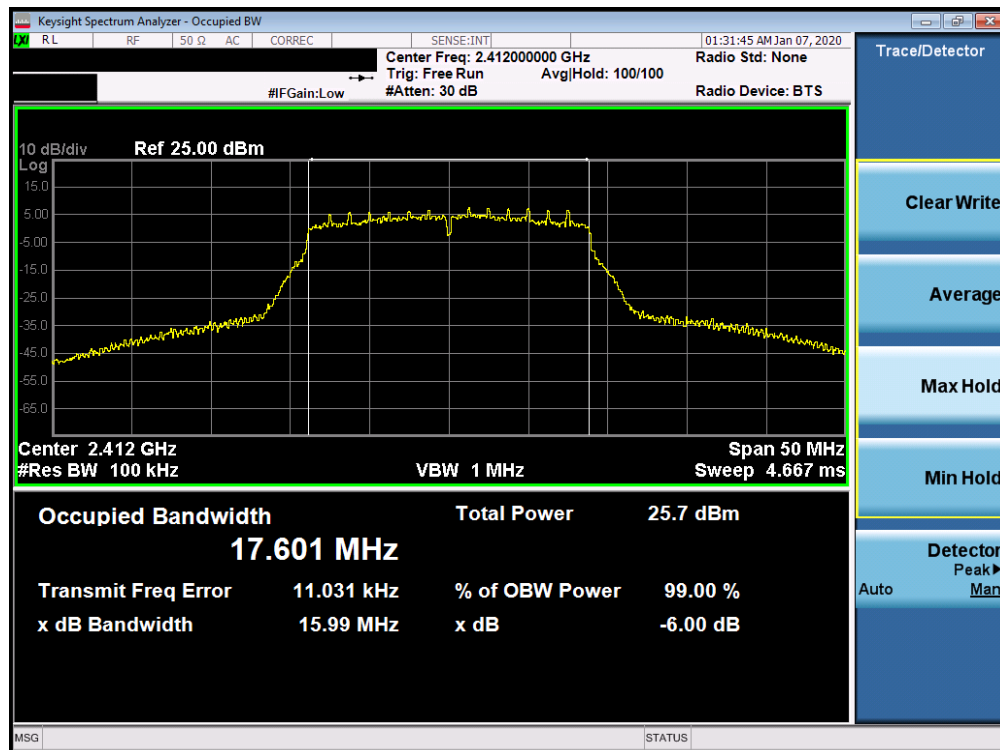


Plot 7-16. 6dB Bandwidth Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 23 of 98 |

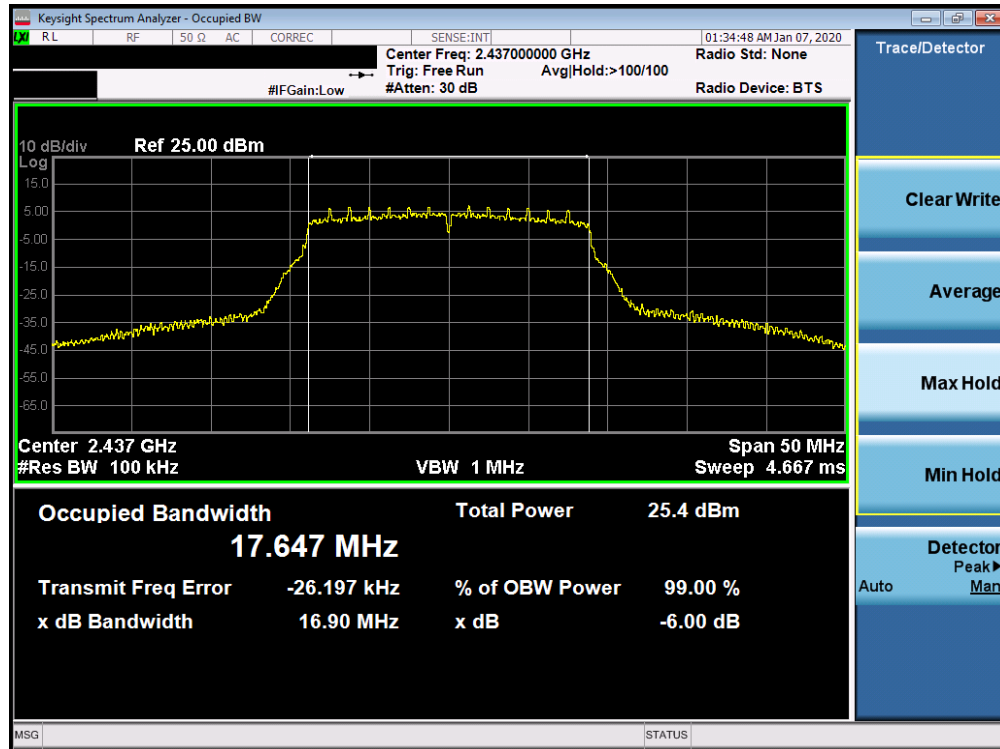

Plot 7-17. 6dB Bandwidth Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 6)

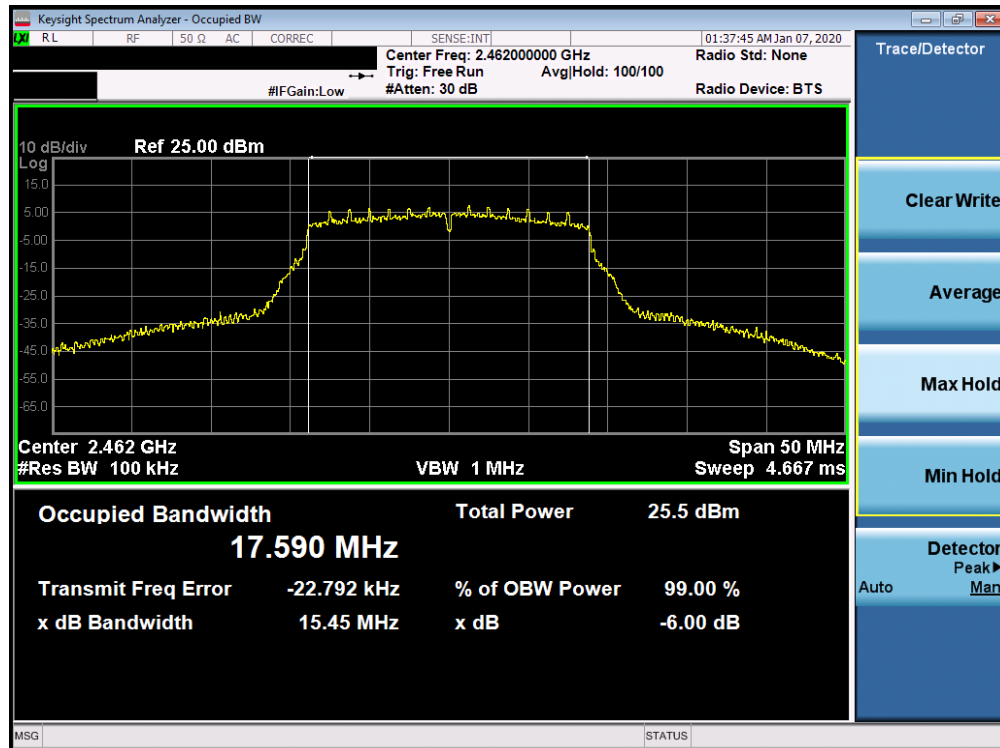

Plot 7-18. 6dB Bandwidth Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 24 of 98 |

7.3 Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3 PKPM1 Peak Power Method
 KDB 558074 D01 v05r02 – Section 8.3.1.3 PKPM1 Peak-reading Power Meter Method
 ANSI C63.10-2013 – Section 11.9.2.3.2 Method AVGPM-G
 KDB 558074 D01 v05r02 – Section 8.3.2.3 Measurement using a Power Meter (PM)
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique
 KDB 662911 D01 v02r01 – Section E)1) Measure-and-Sum Technique

Test Settings

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Average Power Measurement)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.



Figure 7-2. Test Instrument & Measurement Setup for Power Meter Measurements

Test Notes

None

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 25 of 98 |

© 2020 PCTEST

V 9.5 12/16/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.3.1 Average Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | 802.11b | 802.11g | 802.11n | | | | | | |
| 2412 | 1 | AVG | 13.00 | 12.96 | 12.93 | 30.00 | -17.00 | -2.20 | 10.80 | 36.02 | -25.22 |
| 2437 | 6 | AVG | 12.98 | 12.98 | 12.99 | 30.00 | -17.01 | -2.20 | 10.79 | 36.02 | -25.23 |
| 2462 | 11 | AVG | 13.00 | 13.00 | 13.00 | 30.00 | -17.00 | -2.20 | 10.80 | 36.02 | -25.22 |
| 2467 | 12 | AVG | 12.95 | 11.97 | 12.00 | 30.00 | -17.05 | -2.20 | 10.75 | 36.02 | -25.27 |
| 2472 | 13 | AVG | 12.95 | 0.96 | 1.00 | 30.00 | -17.05 | -2.20 | 10.75 | 36.02 | -25.27 |

Table 7-4. Average Conducted Output Power Measurements SISO CORE0

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | 802.11b | 802.11g | 802.11n | | | | | | |
| 2412 | 1 | AVG | 12.98 | 12.98 | 12.93 | 30.00 | -17.02 | -0.90 | 12.08 | 36.02 | -23.94 |
| 2437 | 6 | AVG | 12.94 | 12.92 | 12.89 | 30.00 | -17.06 | -0.90 | 12.04 | 36.02 | -23.98 |
| 2462 | 11 | AVG | 13.00 | 12.95 | 12.96 | 30.00 | -17.00 | -0.90 | 12.10 | 36.02 | -23.92 |
| 2467 | 12 | AVG | 12.97 | 11.93 | 11.99 | 30.00 | -17.03 | -0.90 | 12.07 | 36.02 | -23.95 |
| 2472 | 13 | AVG | 12.89 | 3.00 | 3.00 | 30.00 | -17.11 | -0.90 | 11.99 | 36.02 | -24.03 |

Table 7-5. Average Conducted Output Power Measurements SISO CORE1

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|--------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
| | | | Core 0 | Core 1 | Summed | | | | | | |
| 2412 | 1 | AVG | 12.96 | 12.98 | 15.98 | 30.00 | -14.02 | 1.48 | 17.46 | 36.02 | -18.56 |
| 2437 | 6 | AVG | 12.98 | 12.92 | 15.96 | 30.00 | -14.04 | 1.48 | 17.44 | 36.02 | -18.58 |
| 2462 | 11 | AVG | 13.00 | 12.95 | 15.99 | 30.00 | -14.01 | 1.48 | 17.47 | 36.02 | -18.55 |
| 2467 | 12 | AVG | 10.97 | 10.45 | 13.73 | 30.00 | -16.27 | 1.48 | 15.21 | 36.02 | -20.81 |
| 2472 | 13 | AVG | 1.47 | -0.50 | 3.61 | 30.00 | -26.39 | 1.48 | 5.09 | 36.02 | -30.93 |

Table 7-6. Average Conducted Output Power Measurements CDD (802.11g)

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|--------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
| | | | Core 0 | Core 1 | Summed | | | | | | |
| 2412 | 1 | AVG | 12.98 | 13.00 | 16.00 | 30.00 | -14.00 | 1.48 | 17.48 | 36.02 | -18.54 |
| 2437 | 6 | AVG | 12.93 | 12.97 | 15.96 | 30.00 | -14.04 | 1.48 | 17.44 | 36.02 | -18.58 |
| 2462 | 11 | AVG | 13.00 | 12.94 | 15.98 | 30.00 | -14.02 | 1.48 | 17.46 | 36.02 | -18.56 |
| 2467 | 12 | AVG | 11.00 | 10.48 | 13.76 | 30.00 | -16.24 | 1.48 | 15.24 | 36.02 | -20.78 |
| 2472 | 13 | AVG | 1.39 | -0.50 | 3.56 | 30.00 | -26.44 | 1.48 | 5.04 | 36.02 | -30.98 |

Table 7-7. Average Conducted Output Power Measurements CDD (802.11n)

| | | | |
|---|--|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 26 of 98 |

7.3.2 Peak Output Power Measurement

§15.247(b.3); RSS-247 [5.4]

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | 802.11b | 802.11g | 802.11n | | | | | | |
| 2412 | 1 | PEAK | 18.93 | 18.81 | 12.56 | 30.00 | -11.07 | -2.20 | 16.73 | 36.02 | -19.29 |
| 2437 | 6 | PEAK | 14.95 | 18.86 | 14.89 | 30.00 | -11.14 | -2.20 | 16.66 | 36.02 | -19.36 |
| 2462 | 11 | PEAK | 15.21 | 18.75 | 14.75 | 30.00 | -11.25 | -2.20 | 16.55 | 36.02 | -19.47 |
| 2467 | 12 | PEAK | 15.64 | 18.31 | 18.89 | 30.00 | -11.11 | -2.20 | 16.69 | 36.02 | -19.33 |
| 2472 | 13 | PEAK | 19.01 | 9.41 | 9.78 | 30.00 | -10.99 | -2.20 | 16.81 | 36.02 | -19.21 |

Table 7-8. Peak Conducted Output Power Measurements SISO CORE0

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|---------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | 802.11b | 802.11g | 802.11n | | | | | | |
| 2412 | 1 | PEAK | 15.08 | 18.82 | 19.23 | 30.00 | -10.77 | -0.90 | 18.33 | 36.02 | -17.69 |
| 2437 | 6 | PEAK | 14.74 | 18.80 | 14.79 | 30.00 | -11.20 | -0.90 | 17.90 | 36.02 | -18.12 |
| 2462 | 11 | PEAK | 14.75 | 18.85 | 14.86 | 30.00 | -11.15 | -0.90 | 17.95 | 36.02 | -18.07 |
| 2467 | 12 | PEAK | 14.91 | 18.42 | 18.66 | 30.00 | -11.34 | -0.90 | 17.76 | 36.02 | -18.26 |
| 2472 | 13 | PEAK | 14.78 | 7.72 | 7.81 | 30.00 | -15.22 | -0.90 | 13.88 | 36.02 | -22.14 |

Table 7-9. Peak Conducted Output Power Measurements SISO CORE1

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|--------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
| | | | Core 0 | Core 1 | Summed | | | | | | |
| 2412 | 1 | PEAK | 18.81 | 18.82 | 21.83 | 30.00 | -8.17 | 1.48 | 23.31 | 36.02 | -12.71 |
| 2437 | 6 | PEAK | 18.86 | 18.80 | 21.84 | 30.00 | -8.16 | 1.48 | 23.32 | 36.02 | -12.70 |
| 2462 | 11 | PEAK | 18.75 | 18.85 | 21.81 | 30.00 | -8.19 | 1.48 | 23.29 | 36.02 | -12.73 |
| 2467 | 12 | PEAK | 17.31 | 16.87 | 20.11 | 30.00 | -9.89 | 1.48 | 21.59 | 36.02 | -14.43 |
| 2472 | 13 | PEAK | 7.95 | 5.21 | 9.80 | 30.00 | -20.20 | 1.48 | 11.28 | 36.02 | -24.74 |

Table 7-10. Peak Conducted Output Power Measurements CDD (802.11g)

| Freq [MHz] | Channel | Detector | Conducted Power [dBm] | | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Directional Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------|---------|----------|-----------------------|--------|--------|-----------------------------|-----------------------------|-----------------------------|--------------------|--------------------------|----------------------|
| | | | Core 0 | Core 1 | Summed | | | | | | |
| 2412 | 1 | PEAK | 15.39 | 15.44 | 18.43 | 30.00 | -11.57 | 1.48 | 19.91 | 36.02 | -16.11 |
| 2437 | 6 | PEAK | 15.30 | 15.45 | 18.39 | 30.00 | -11.61 | 1.48 | 19.87 | 36.02 | -16.15 |
| 2462 | 11 | PEAK | 15.25 | 15.31 | 18.29 | 30.00 | -11.71 | 1.48 | 19.77 | 36.02 | -16.25 |
| 2467 | 12 | PEAK | 13.44 | 13.29 | 16.38 | 30.00 | -13.62 | 1.48 | 17.86 | 36.02 | -18.16 |
| 2472 | 13 | PEAK | 3.88 | 1.99 | 6.05 | 30.00 | -23.95 | 1.48 | 7.53 | 36.02 | -28.49 |

Table 7-11. Peak Conducted Output Power Measurements CDD (802.11n)

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 27 of 98 |



Note:

Per ANSI C63.10-2013 and KDB 662911 D01 v02r01 Section E)1), the conducted powers at Core0 and Core1 were first measured separately during CDD transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2412MHz the average conducted output power was measured to be 12.93 dBm for Core0 and 12.97 dBm for Core1.

$$\text{Core0} + \text{Core1} = \text{CDD}$$

$$(12.93 \text{ dBm} + 12.97 \text{ dBm}) = (19.63 \text{ mW} + 19.82 \text{ mW}) = 39.45 \text{ mW} = 15.96 \text{ dBm}$$

| | | | |
|--|---|-----------------------------------|--|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 28 of 98 |

© 2020 PCTEST

V 9.5 12/16/2019

All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

7.4 Power Spectral Density

§15.247(e); RSS-247 [5.2]

Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

The maximum permissible power spectral density is 8 dBm in any 3 kHz band.

Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD

KDB 558074 D01 v05r02 – Section 8.4 DTS Maximum Power Spectral Density level in the fundamental emission

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

KDB 662911 D01 v02r01 – Section E)2) Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes


None

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 29 of 98 |

SISO Core 0 Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm / 3kHz] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--|--|-------------|-------------|
| 2412 | 1 | b | 1 | -9.40 | 8.00 | -17.40 | Pass |
| 2437 | 6 | b | 1 | -8.33 | 8.00 | -16.33 | Pass |
| 2462 | 11 | b | 1 | -9.57 | 8.00 | -17.57 | Pass |
| 2412 | 1 | g | 6 | -11.84 | 8.00 | -19.84 | Pass |
| 2437 | 6 | g | 6 | -11.88 | 8.00 | -19.88 | Pass |
| 2462 | 11 | g | 6 | -12.15 | 8.00 | -20.15 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | -14.44 | 8.00 | -22.44 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | -14.06 | 8.00 | -22.06 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | -13.66 | 8.00 | -21.66 | Pass |

Table 7-12. Conducted Power Density Measurements SISO CORE0

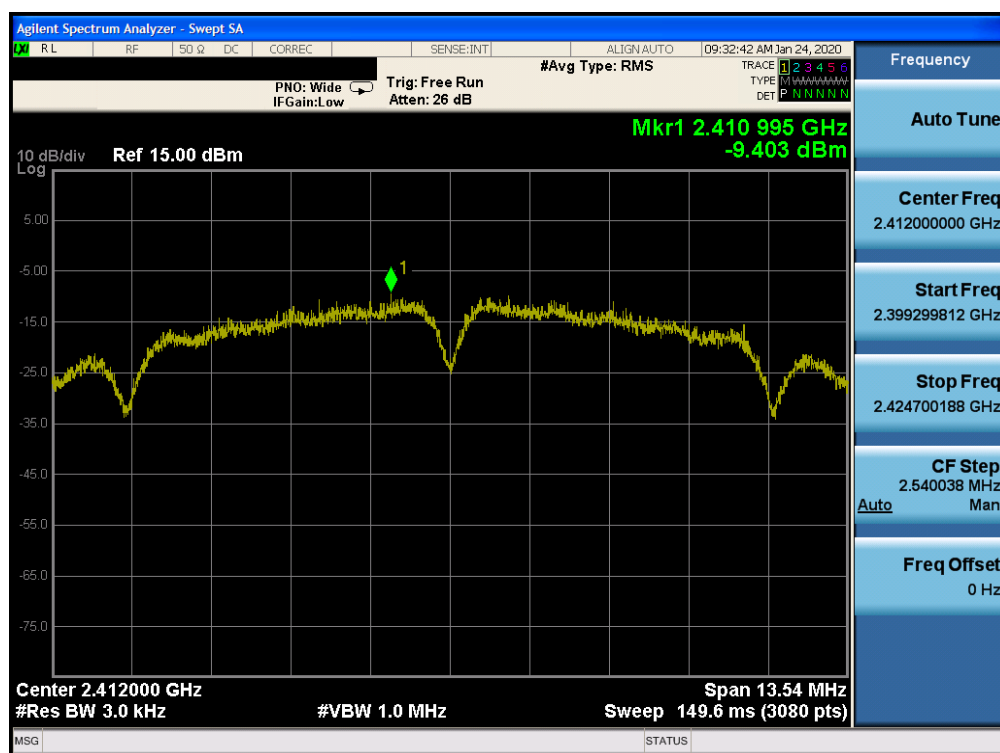


Plot 7-19. Power Spectral Density Plot SISO CORE0 (802.11b - Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 30 of 98 |

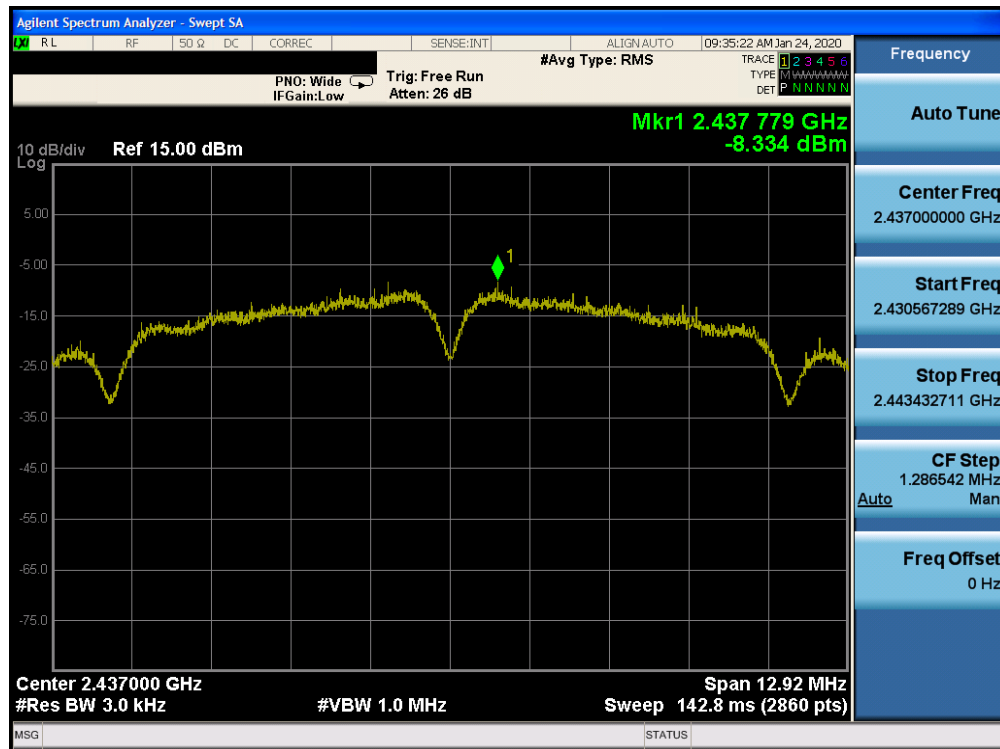


Plot 7-20. Power Spectral Density Plot SISO CORE0 (802.11b – Ch. 6)

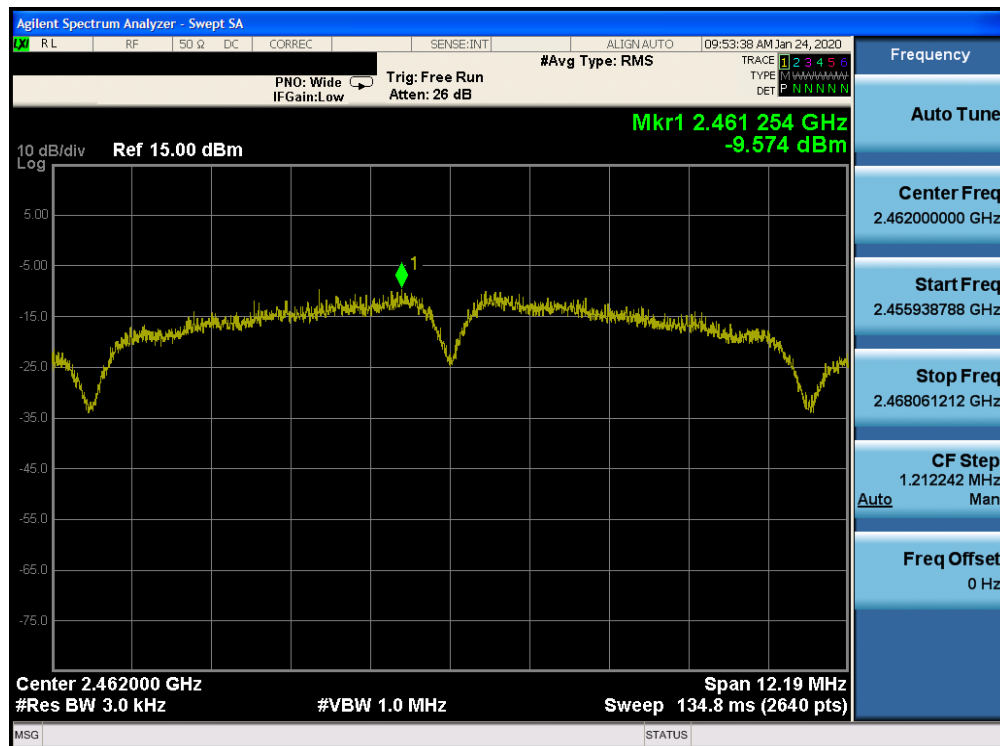


Plot 7-21. Power Spectral Density Plot SISO CORE0 (802.11b – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 31 of 98 |

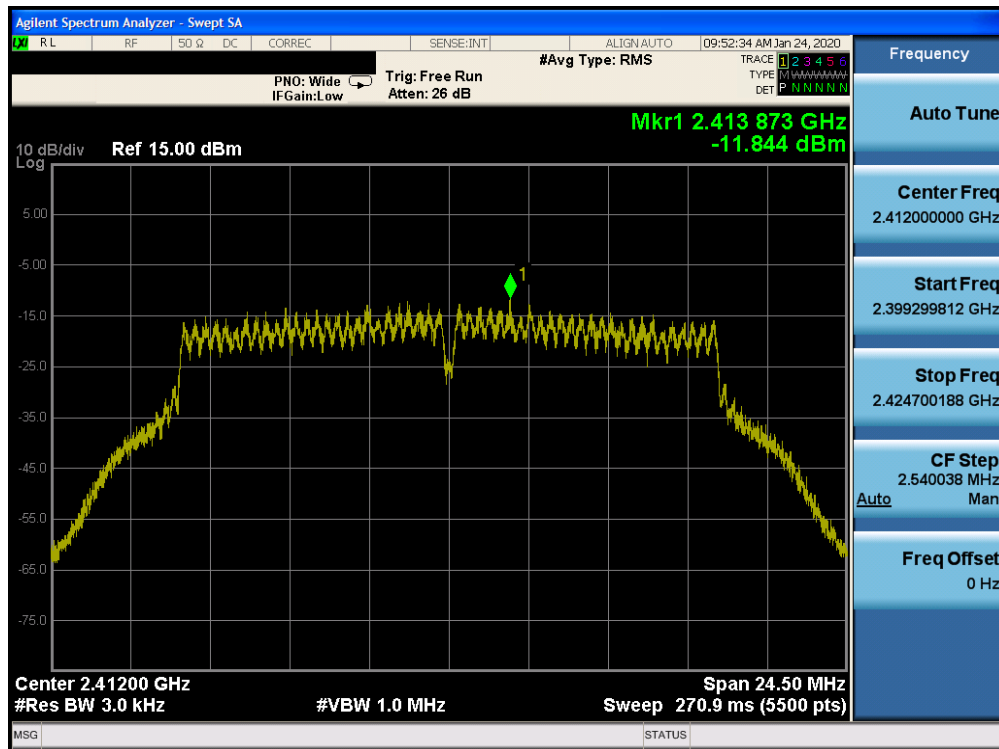


Plot 7-22. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 1)

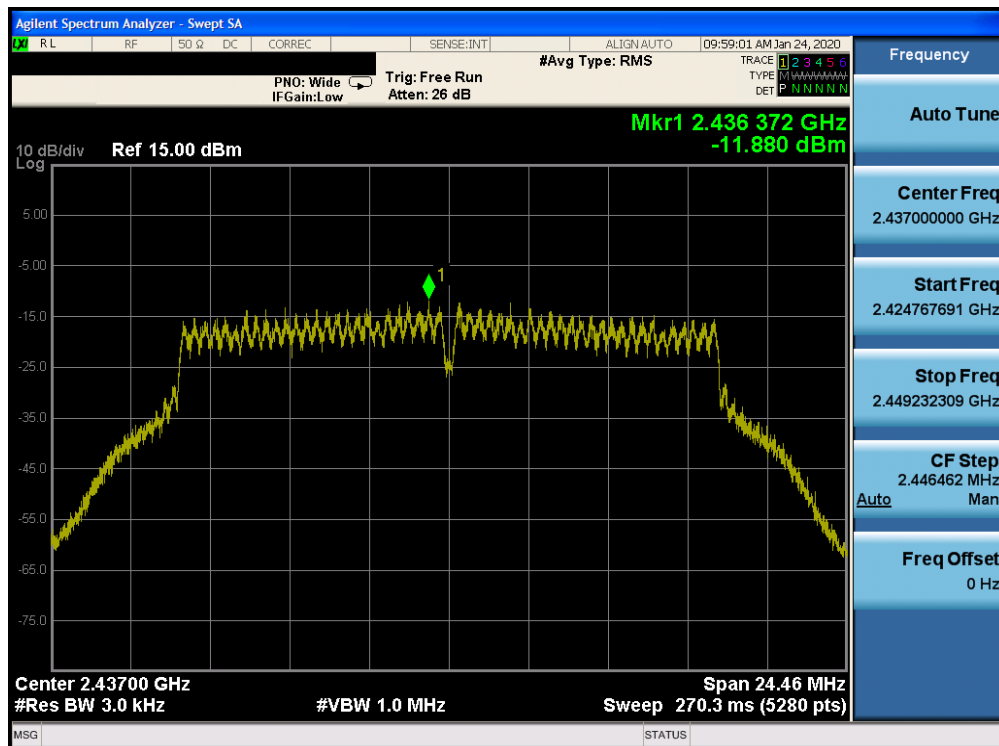


Plot 7-23. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 6)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 32 of 98 |

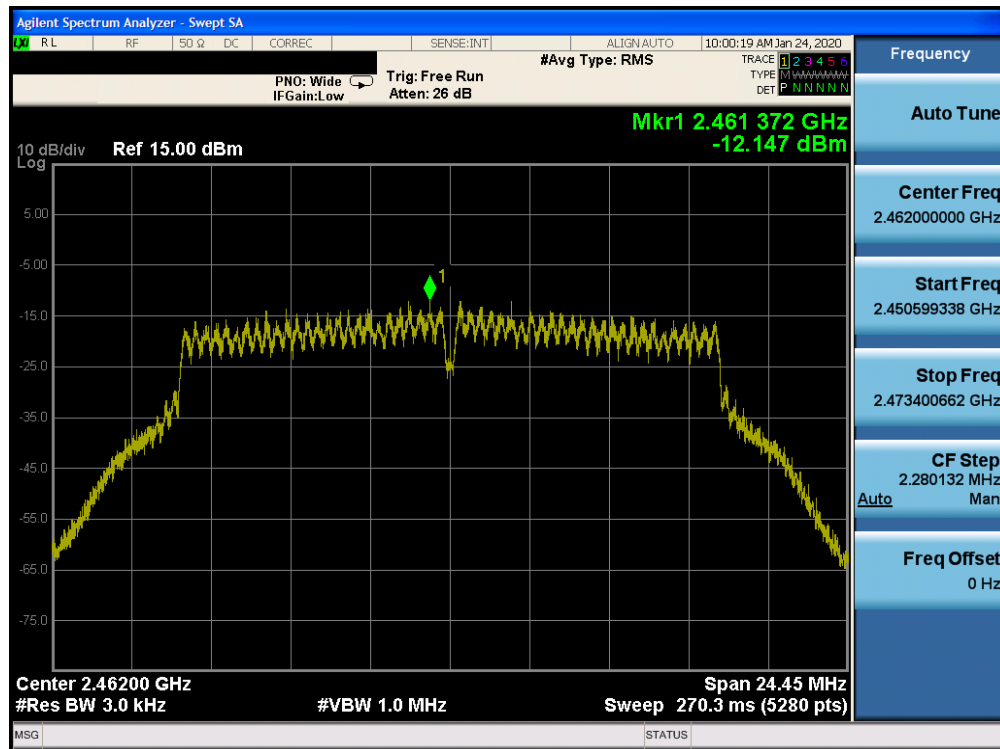


Plot 7-24. Power Spectral Density Plot SISO CORE0 (802.11g – Ch. 11)

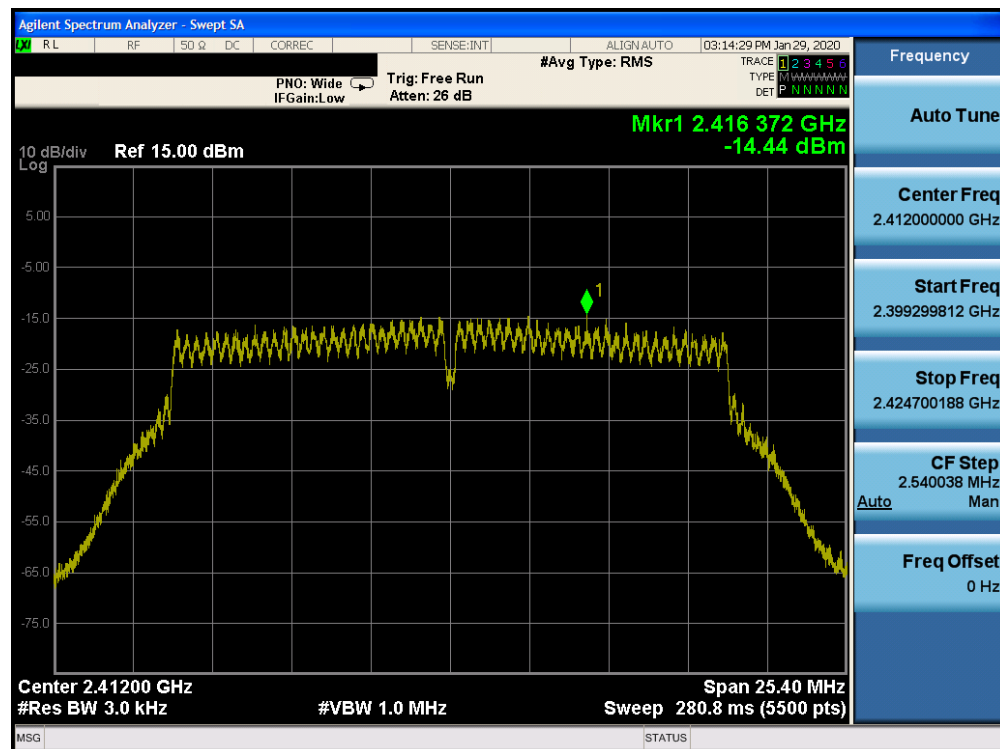


Plot 7-25. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 33 of 98 |

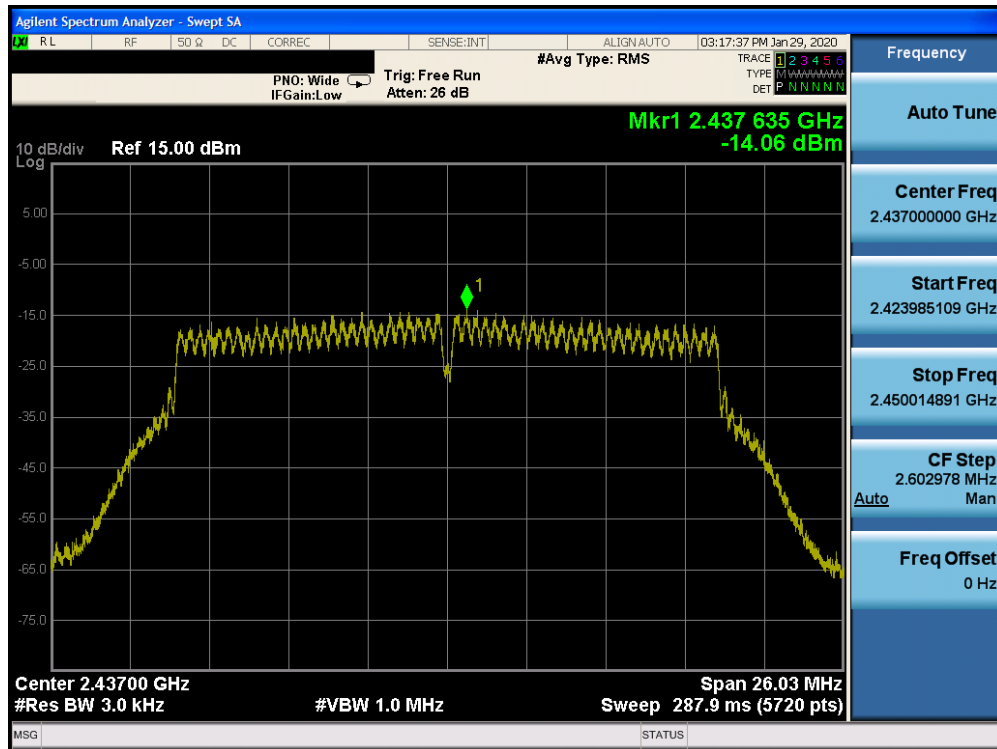

Plot 7-26. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 6)

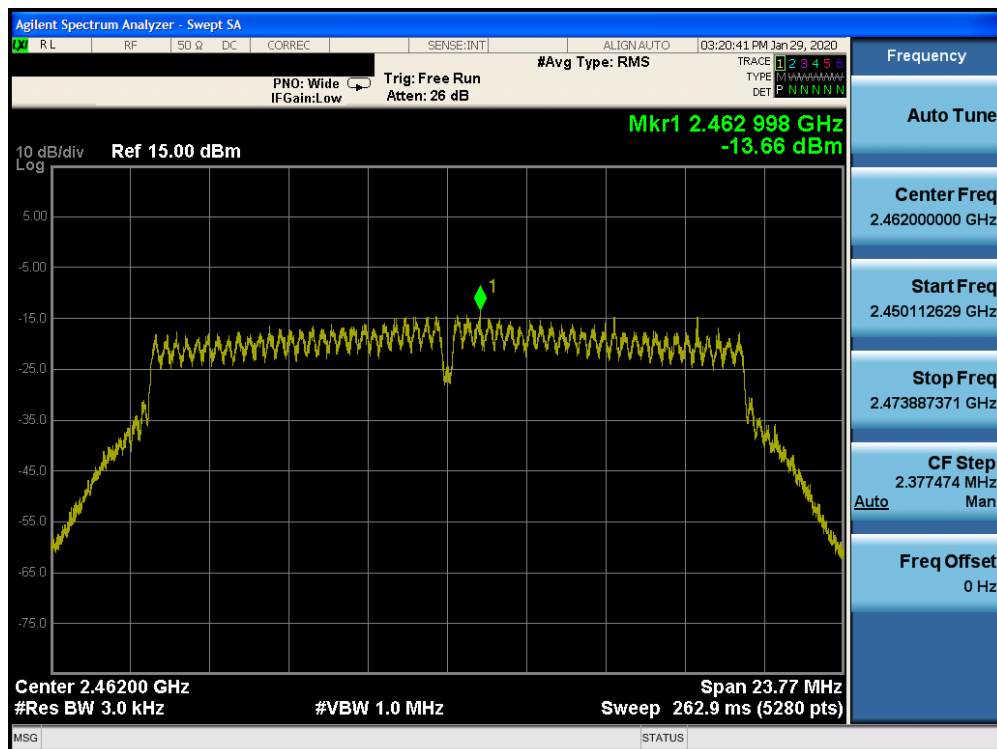


Plot 7-27. Power Spectral Density Plot SISO CORE0 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 34 of 98 |

SISO Core 1 Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Spectral Density [dBm / 3kHz] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--|--|-------------|-------------|
| 2412 | 1 | b | 1 | -11.75 | 8.00 | -19.75 | Pass |
| 2437 | 6 | b | 1 | -11.31 | 8.00 | -19.31 | Pass |
| 2462 | 11 | b | 1 | -11.05 | 8.00 | -19.05 | Pass |
| 2412 | 1 | g | 6 | -14.18 | 8.00 | -22.18 | Pass |
| 2437 | 6 | g | 6 | -14.78 | 8.00 | -22.78 | Pass |
| 2462 | 11 | g | 6 | -13.79 | 8.00 | -21.79 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | -13.84 | 8.00 | -21.84 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | -15.11 | 8.00 | -23.11 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | -14.68 | 8.00 | -22.68 | Pass |

Table 7-13. Conducted Power Density Measurements SISO CORE1

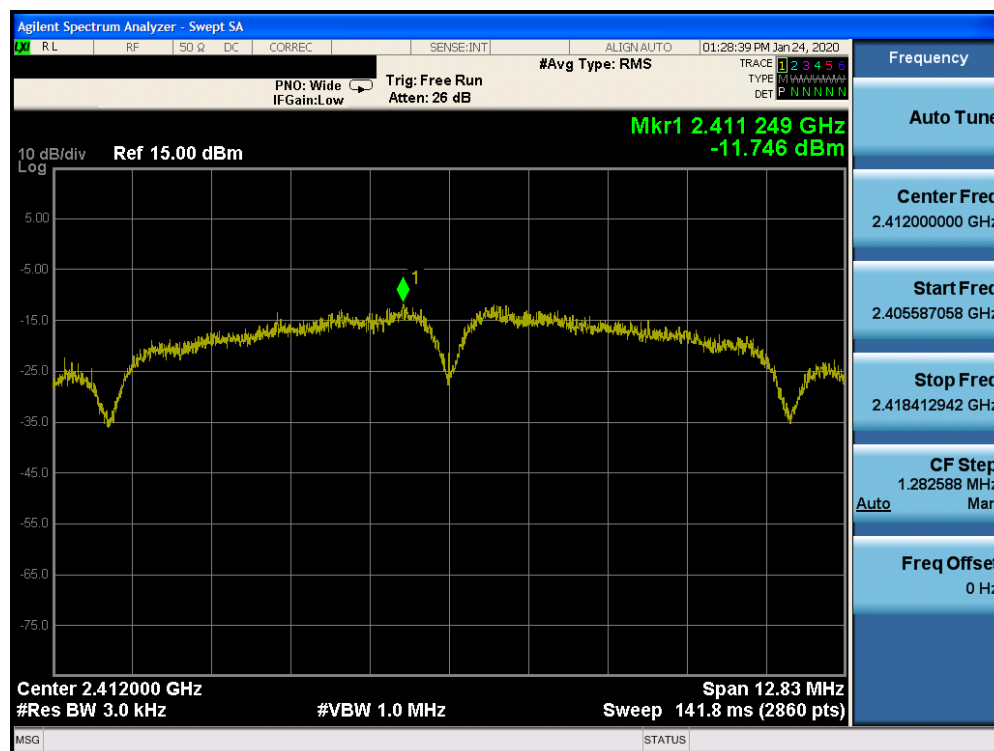


Plot 7-28. Power Spectral Density Plot SISO CORE1 (802.11b – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 35 of 98 |

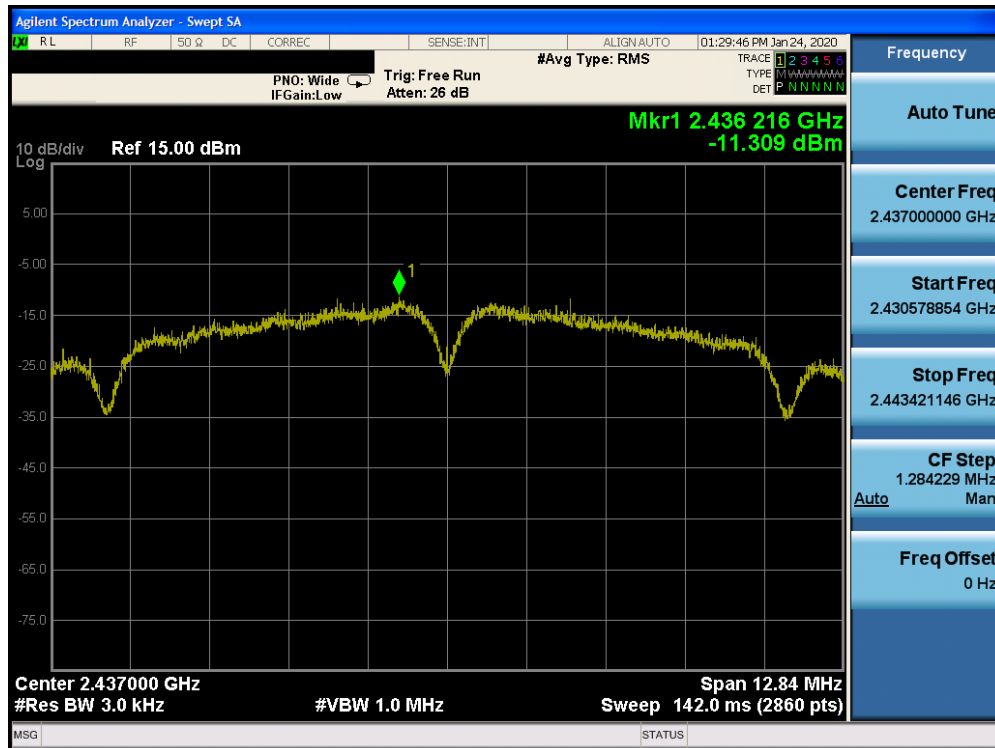


Plot 7-29. Power Spectral Density Plot SISO CORE1 (802.11b – Ch. 6)

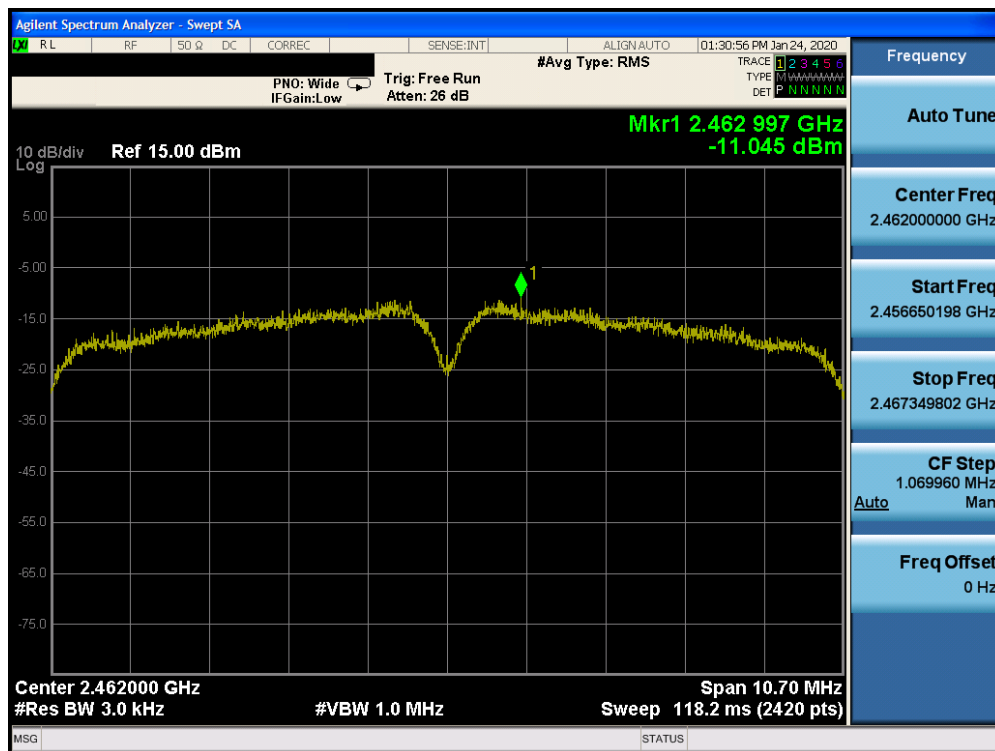


Plot 7-30. Power Spectral Density Plot SISO CORE1 (802.11b – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 36 of 98 |

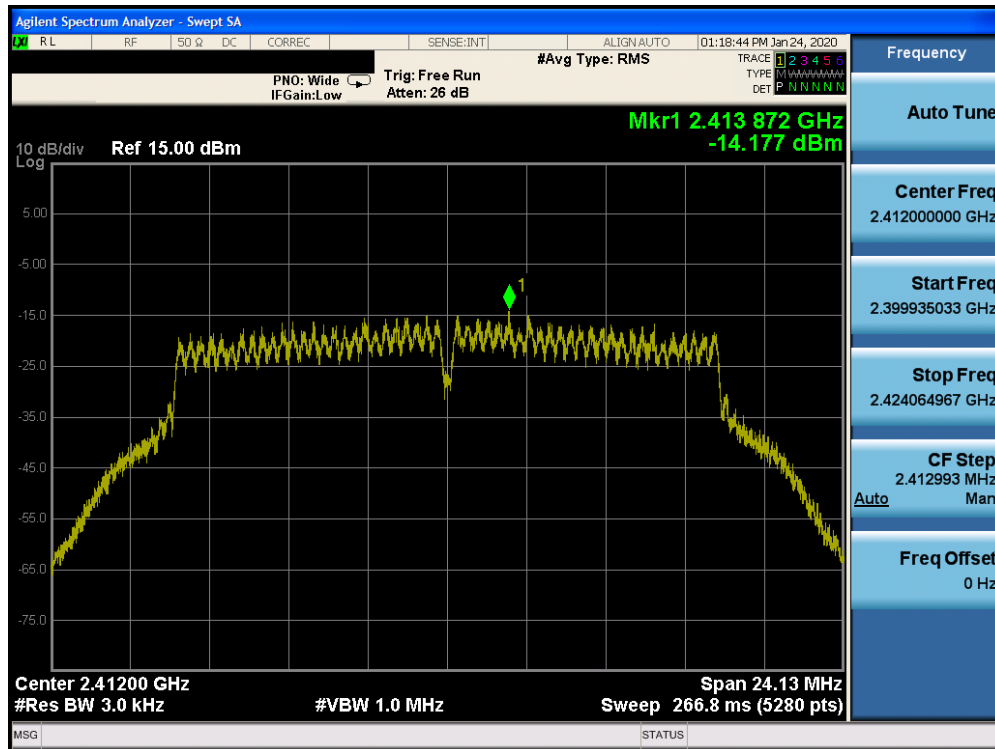


Plot 7-31. Power Spectral Density Plot SISO CORE1 (802.11g – Ch. 1)

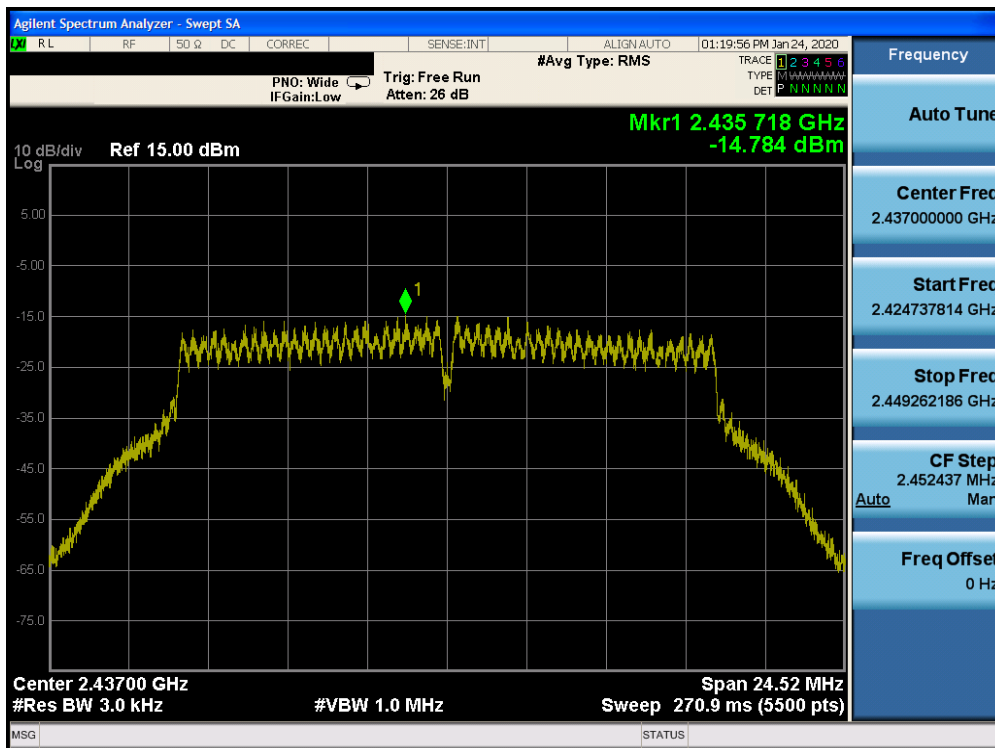


Plot 7-32. Power Spectral Density Plot SISO CORE1 (802.11g – Ch. 6)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 37 of 98 |

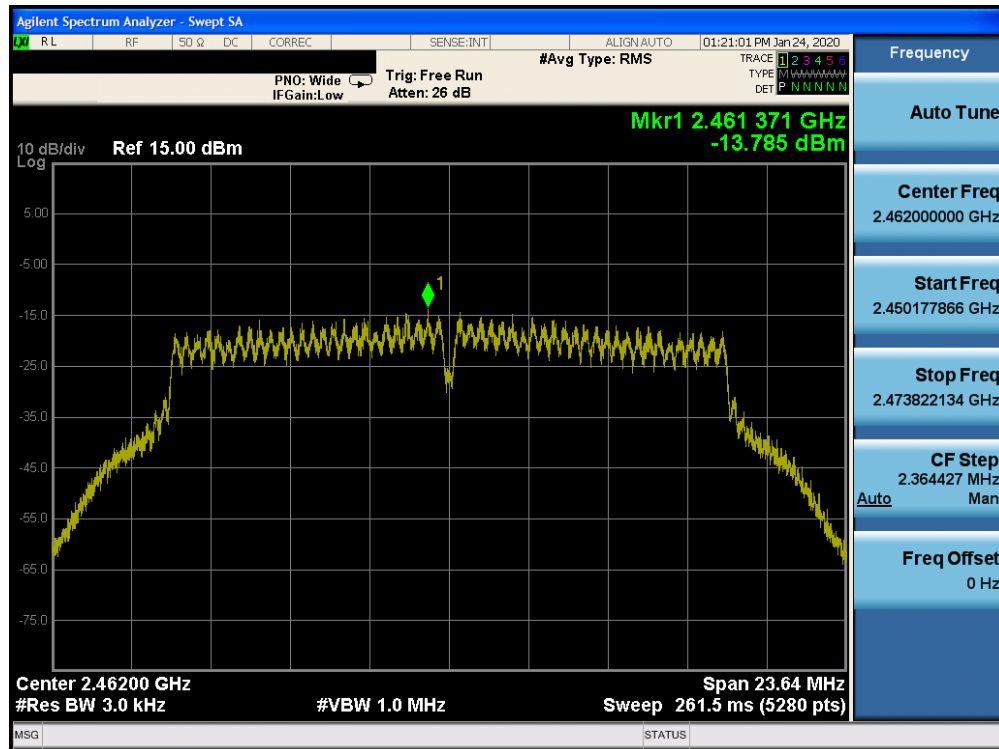


Plot 7-33. Power Spectral Density Plot SISO CORE1 (802.11g – Ch. 11)

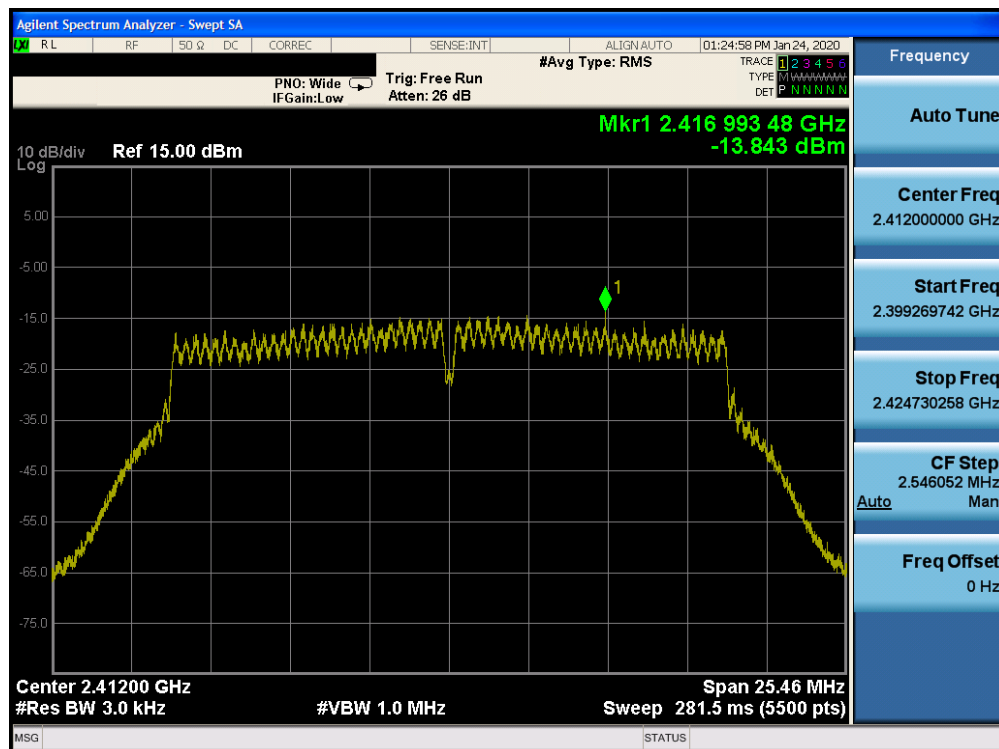


Plot 7-34. Power Spectral Density Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 38 of 98 |

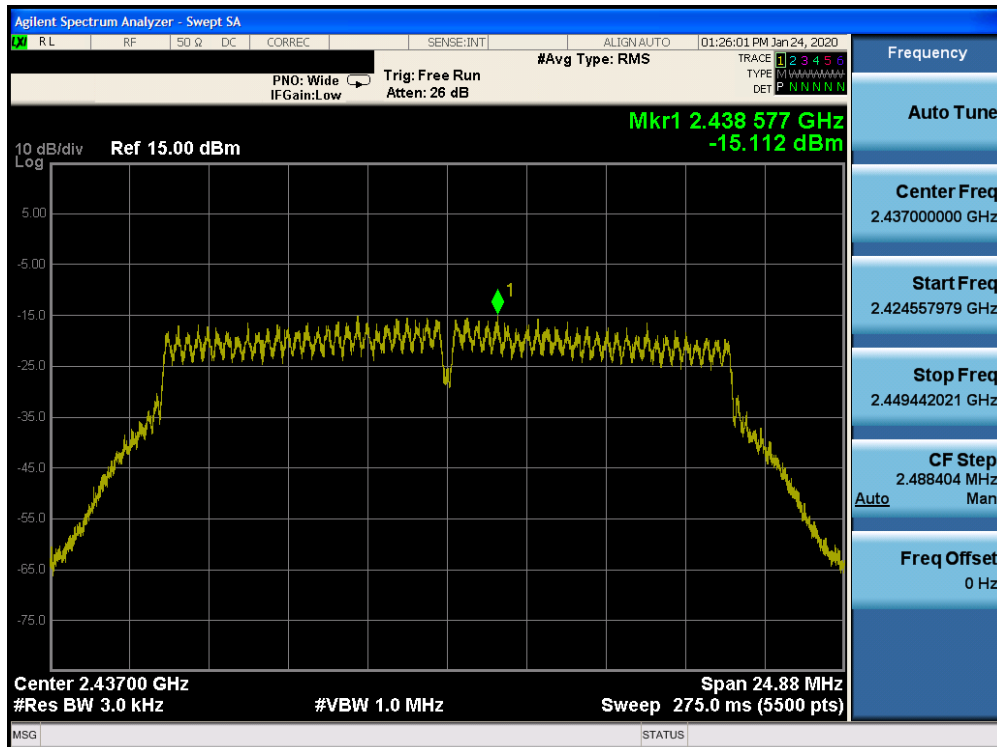

Plot 7-35. Power Spectral Density Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 6)

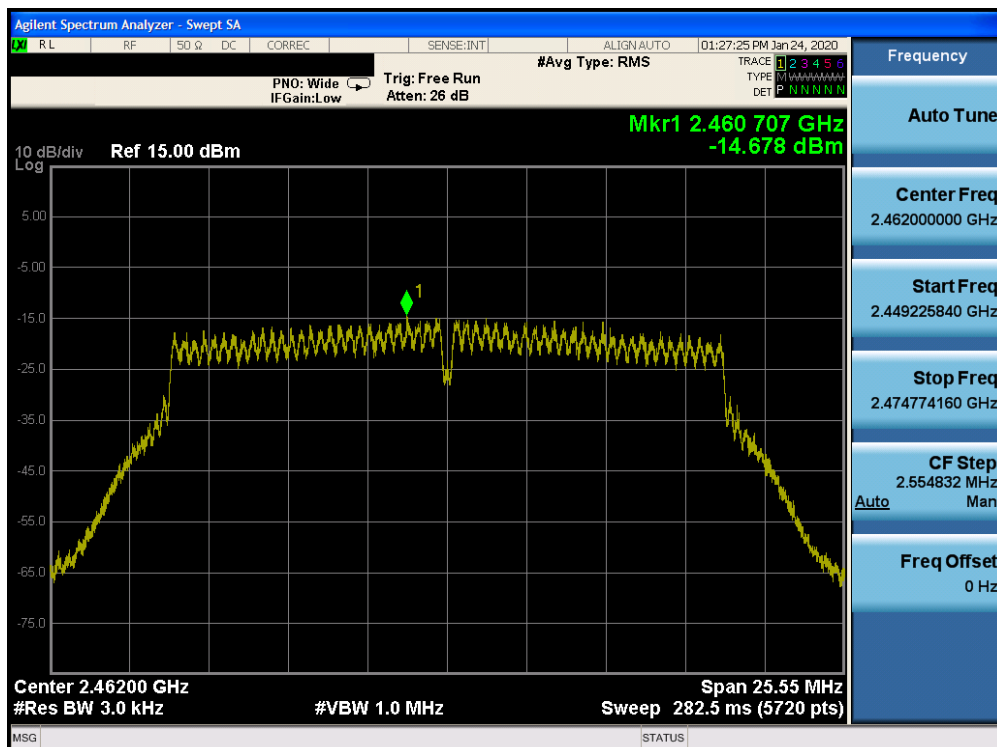

Plot 7-36. Power Spectral Density Plot SISO CORE1 (802.11n (2.4GHz) – Ch. 11)


| | | | |
|---|--|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 | PCTEST | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 39 of 98 |

CDD Power Spectral Density Measurements


| Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Core 0 Power Spectral Density [dBm / 3kHz] | Core 1 Power Spectral Density [dBm / 3kHz] | Summed Power Spectral Density [dBm / 3kHz] | Maximum Permissible Power Density [dBm / 3kHz] | Margin [dB] | Pass / Fail |
|-----------------|-------------|-------------|------------------|--|--|--|--|-------------|-------------|
| 2412 | 1 | g | 6 | -11.89 | -13.96 | -9.79 | 8.00 | -17.79 | Pass |
| 2437 | 6 | g | 6 | -11.99 | -14.53 | -10.07 | 8.00 | -18.07 | Pass |
| 2462 | 11 | g | 6 | -11.32 | -14.27 | -9.54 | 8.00 | -17.54 | Pass |
| 2412 | 1 | n | 6.5/7.2 (MCS0) | -11.95 | -13.36 | -9.59 | 8.00 | -17.59 | Pass |
| 2437 | 6 | n | 6.5/7.2 (MCS0) | -12.61 | -13.69 | -10.10 | 8.00 | -18.10 | Pass |
| 2462 | 11 | n | 6.5/7.2 (MCS0) | -12.18 | -12.75 | -9.45 | 8.00 | -17.45 | Pass |

Table 7-14.CDD Conducted Power Density Measurements

| | | | |
|---|---|----------------------------|---------------------------------|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 40 of 98 |

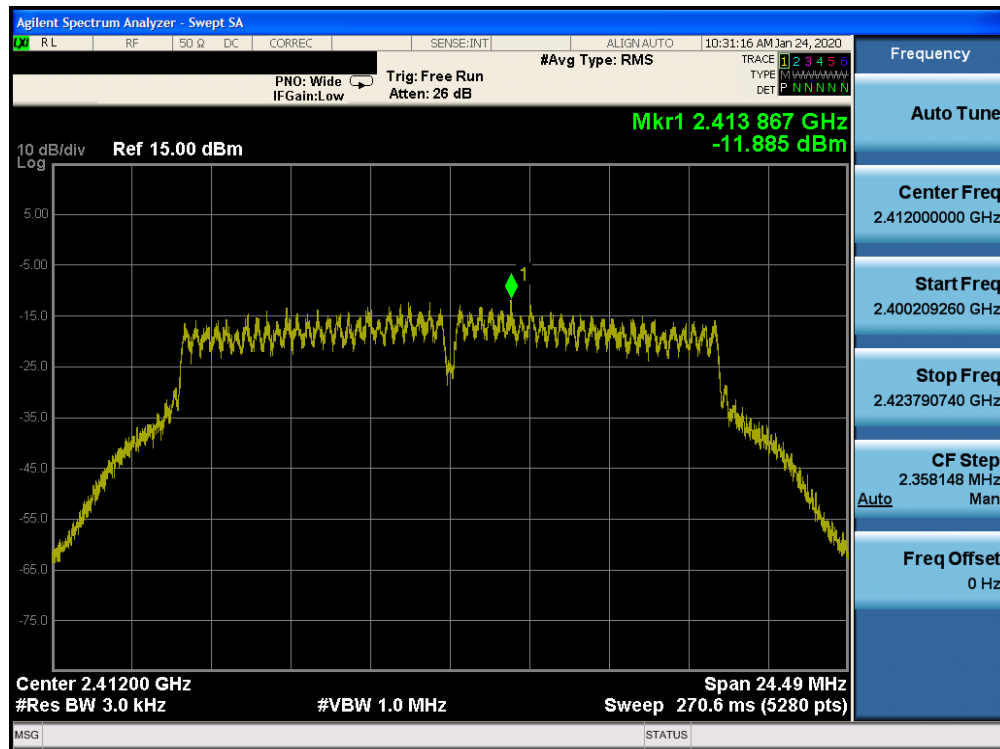


Plot 7-37. Power Spectral Density Plot CDD CORE0 (802.11g – Ch. 1)

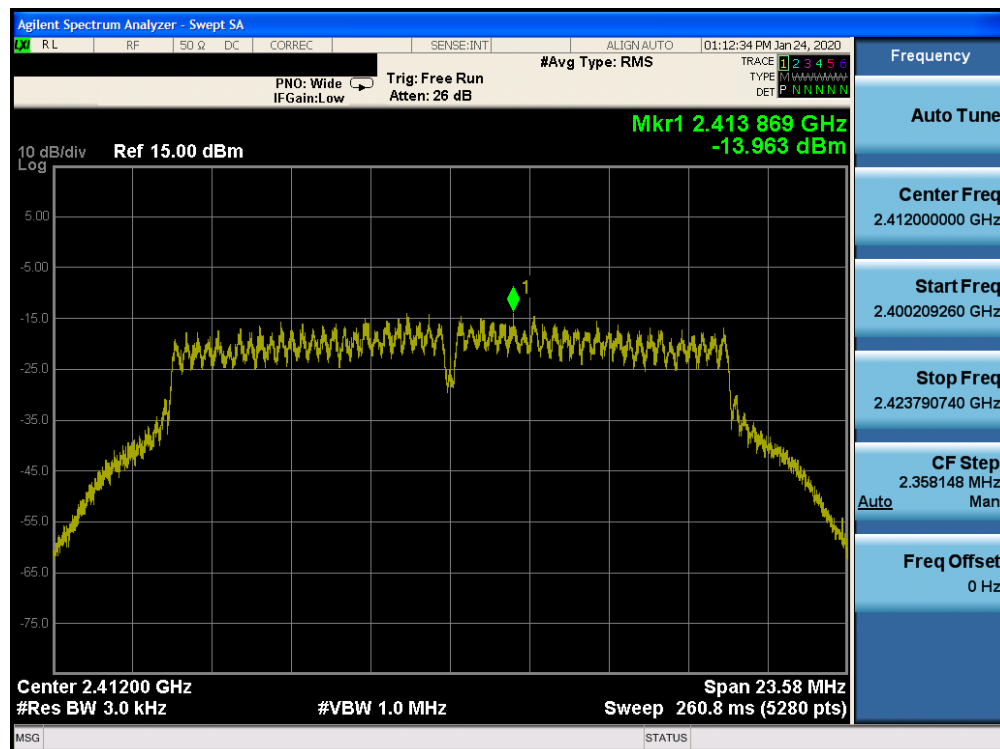


Plot 7-38. Power Spectral Density Plot CDD CORE1 (802.11g – Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 41 of 98 |

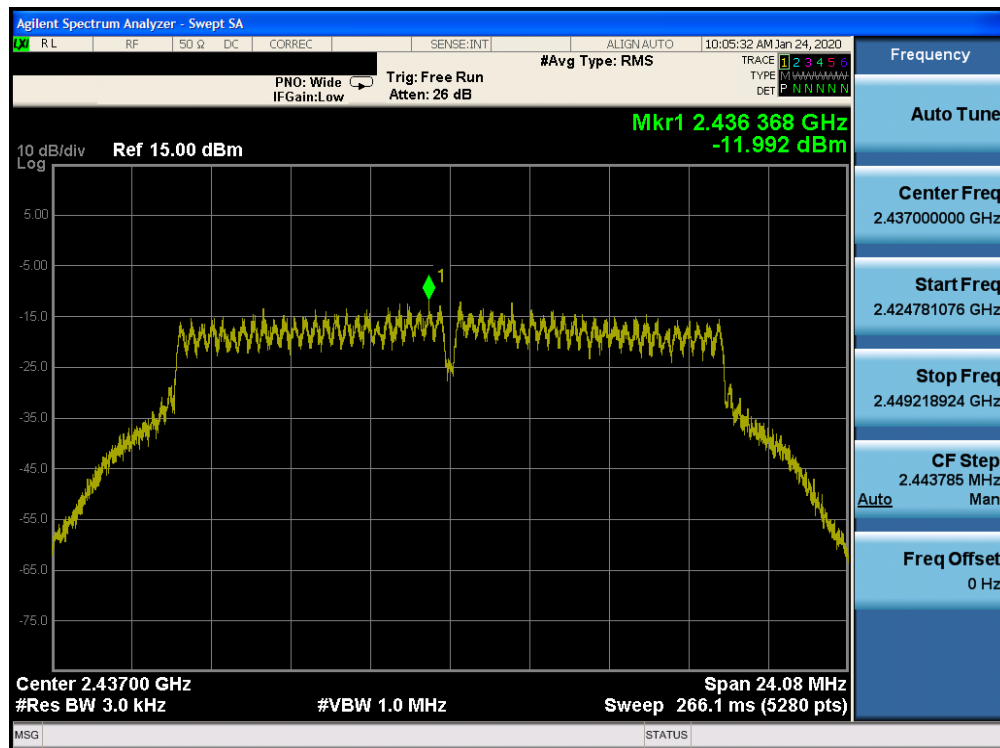


Plot 7-39. Power Spectral Density Plot CDD CORE0 (802.11g – Ch. 6)

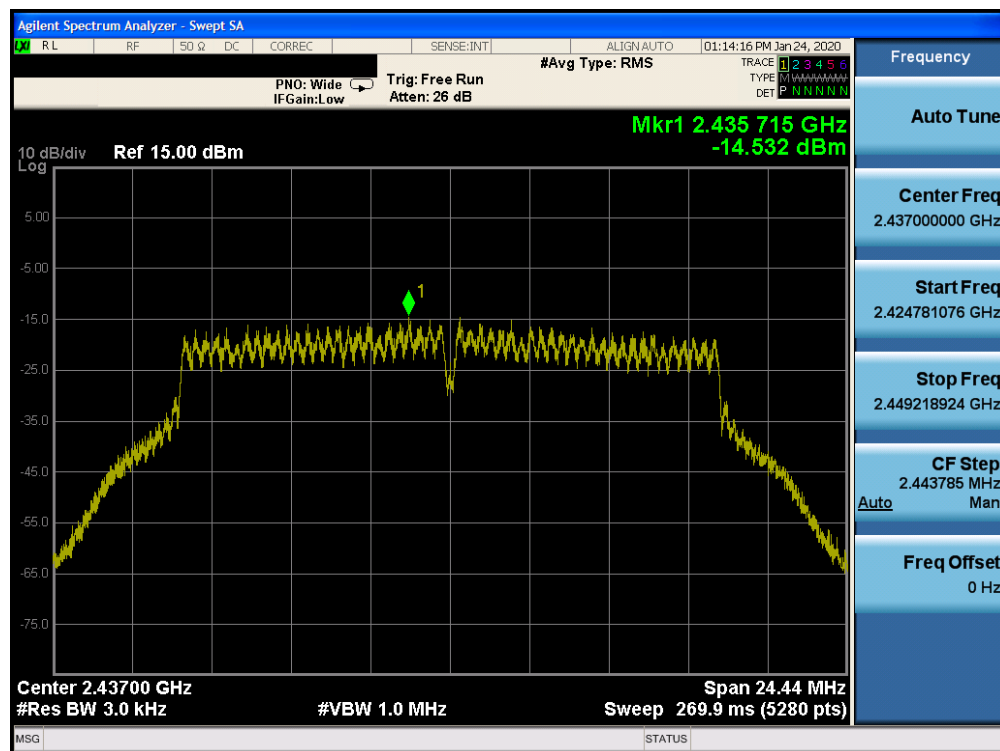


Plot 7-40. Power Spectral Density Plot CDD CORE1 (802.11g – Ch. 6)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 42 of 98 |

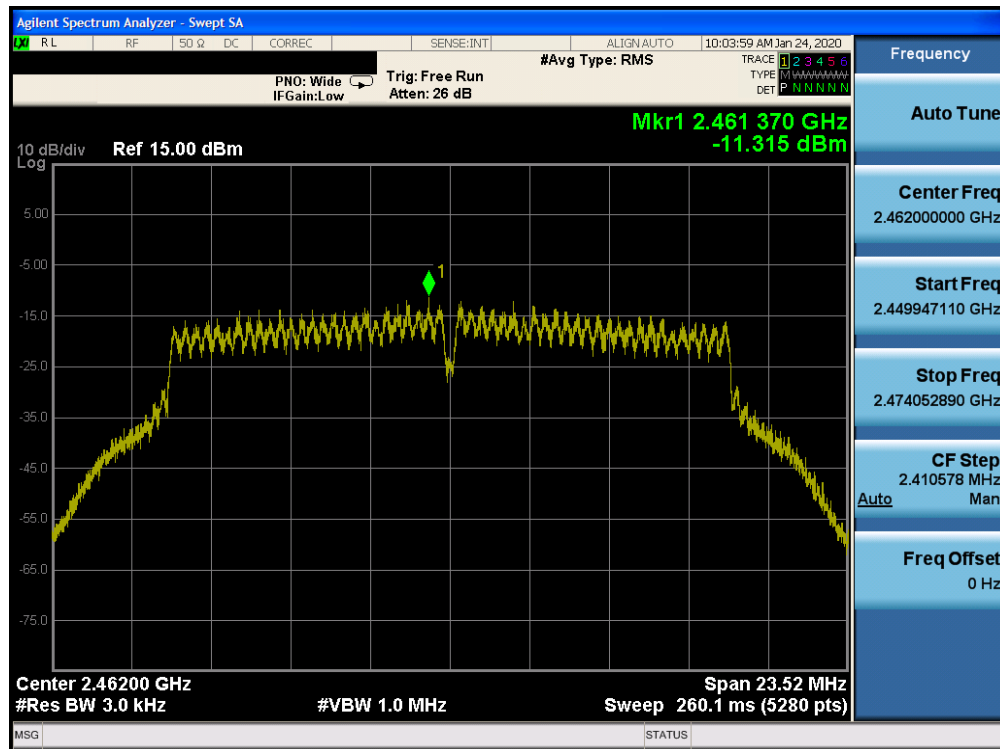


Plot 7-41. Power Spectral Density Plot CDD CORE0 (802.11g – Ch. 11)

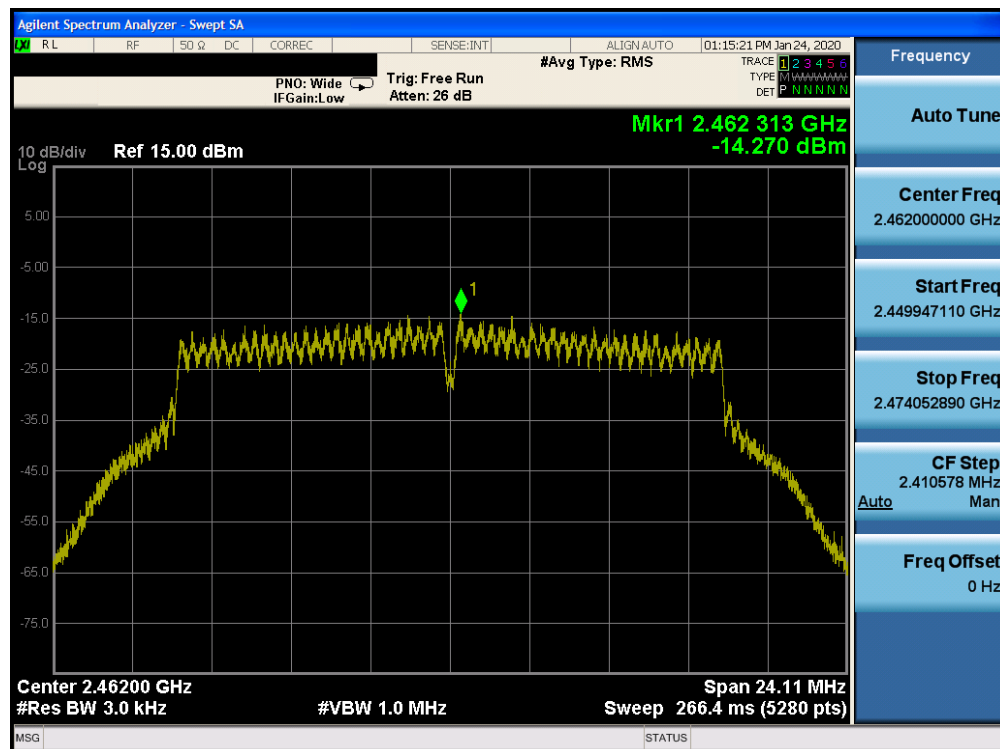


Plot 7-42. Power Spectral Density Plot CDD CORE1 (802.11g – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 43 of 98 |

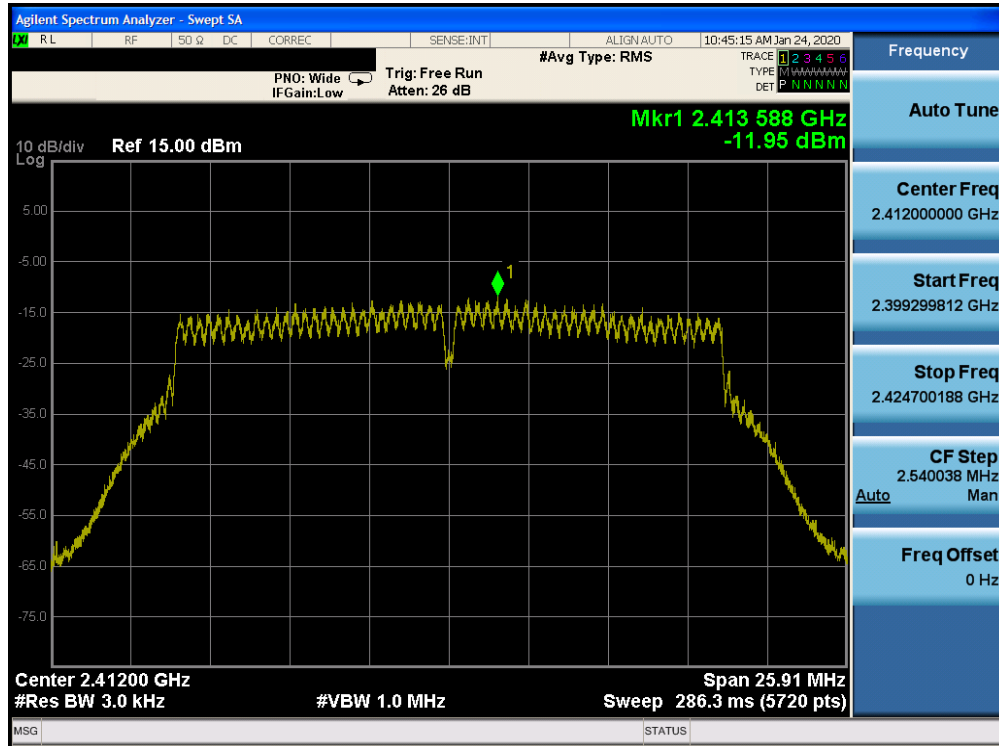


Plot 7-43. Power Spectral Density Plot CDD CORE0 (802.11n (2.4GHz) - Ch. 1)

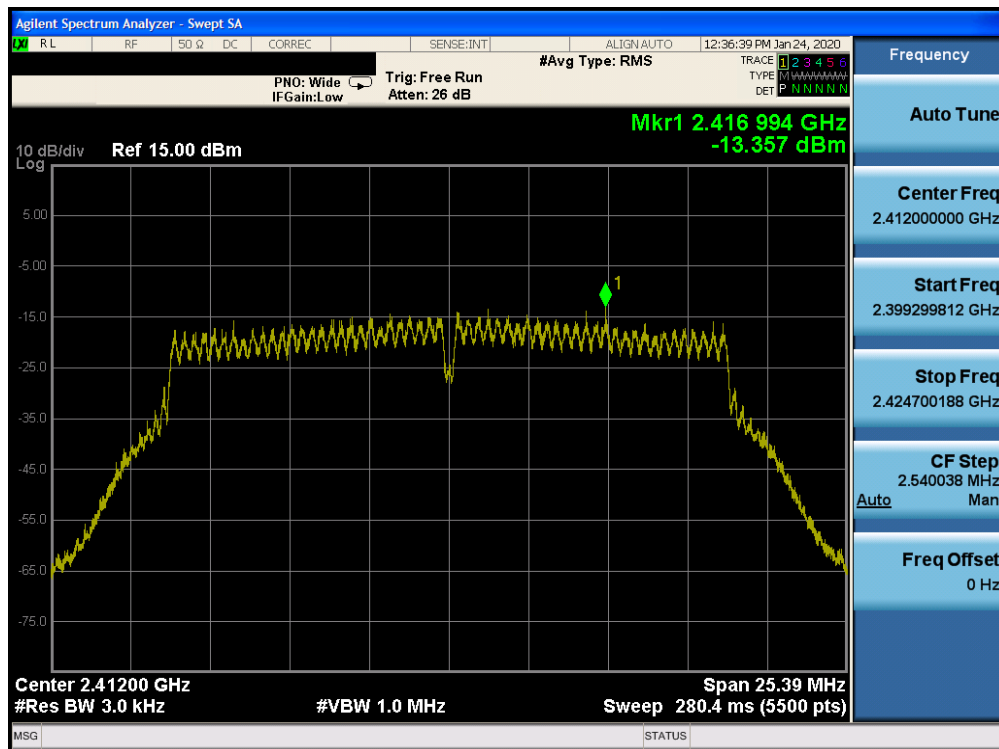


Plot 7-44. Power Spectral Density Plot CDD CORE1 (802.11n (2.4GHz) - Ch. 1)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 44 of 98 |

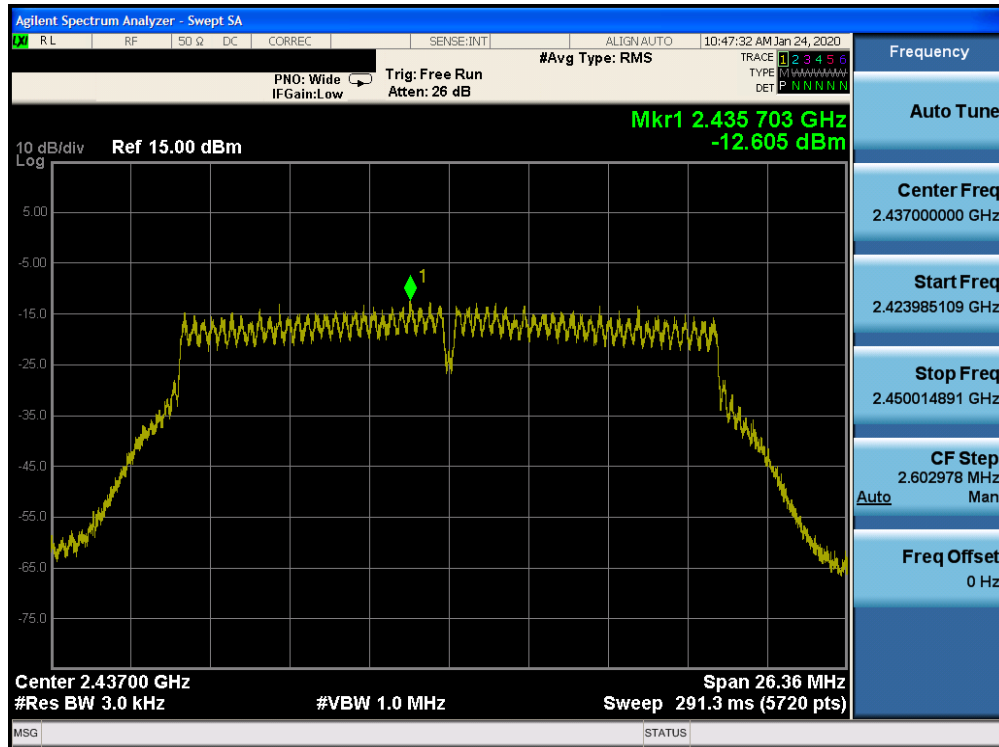


Plot 7-45. Power Spectral Density Plot CDD CORE0 (802.11n (2.4GHz) – Ch. 6)

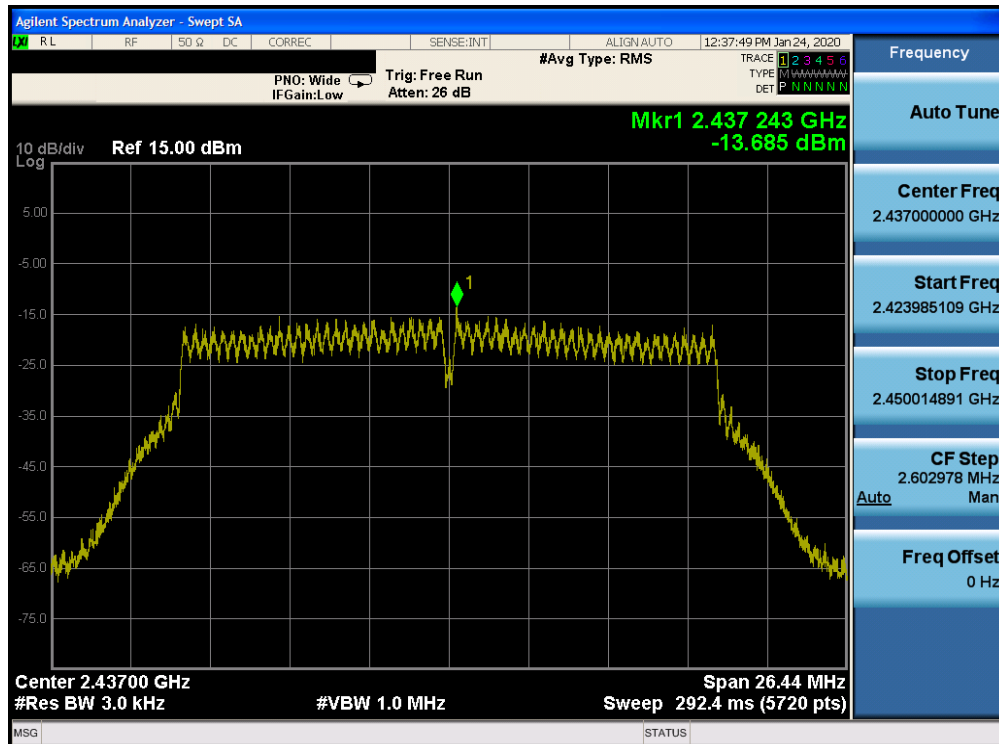


Plot 7-46. Power Spectral Density Plot CDD CORE1 (802.11n (2.4GHz) – Ch. 6)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 45 of 98 |

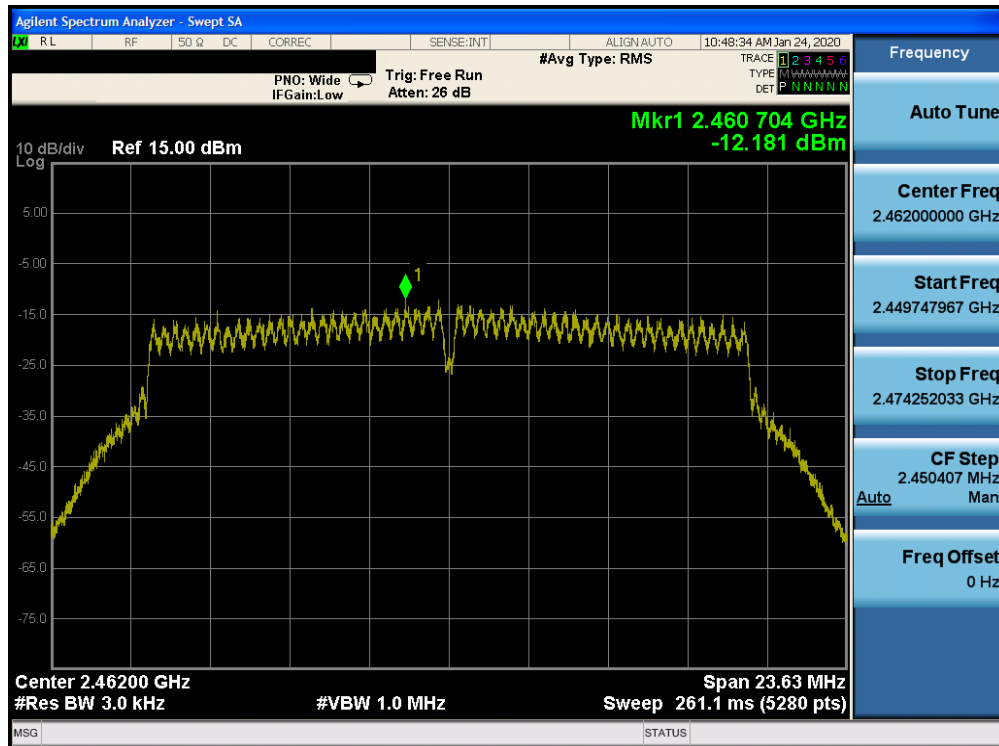

Plot 7-47. Power Spectral Density Plot CDD CORE0 (802.11n (2.4GHz) – Ch. 11)

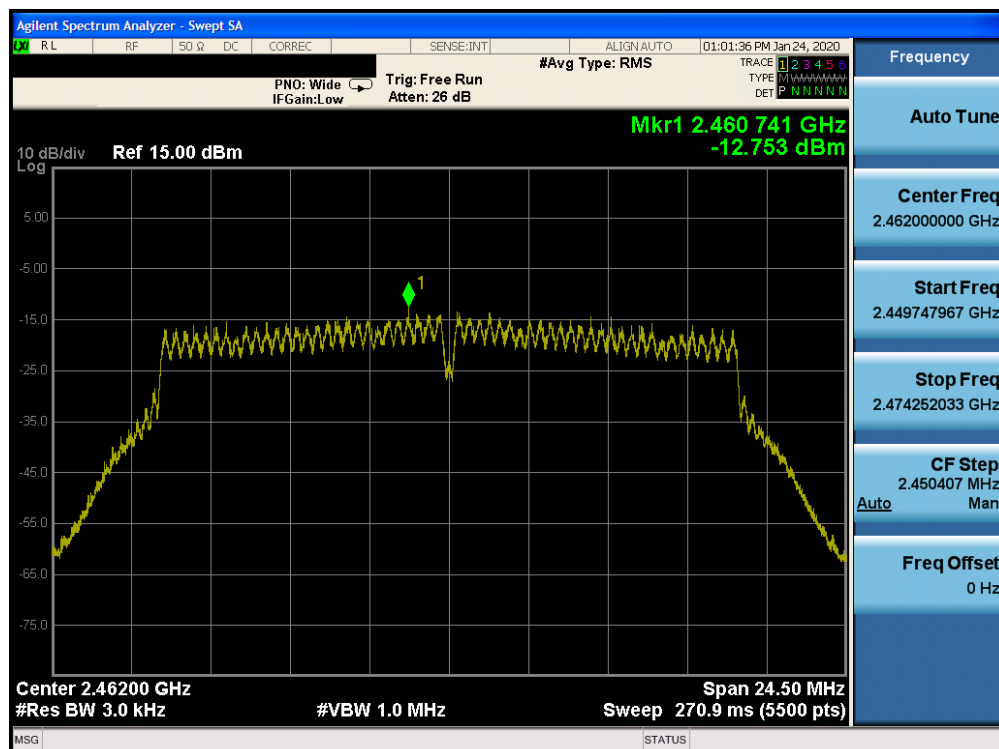

Plot 7-48. Power Spectral Density Plot CDD CORE1 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 46 of 98 |

**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 D01 v02r01 Section E)2), the power spectral density at Core0 and Core1 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample CDD Calculation:

At 2462MHz the average conducted power spectral density was measured to be -4.90 dBm for Core0 and -3.05 dBm for Core1.

$$\text{Core0} + \text{Core1} = \text{CDD}$$

$$(-4.90 \text{ dBm} + -3.05 \text{ dBm}) = (0.32 \text{ mW} + 0.50 \text{ mW}) = 0.82 \text{ mW} = -0.86 \text{ dBm}$$

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 47 of 98 |

7.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-247 [5.5]

Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, and 6.5/7.2Mbps for “n” mode as these settings produced the worst-case emissions.

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 7.4).

Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3
KDB 558074 D01 v05r02 – Section 8.7.2

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

All antenna configurations were investigated and only the worst case is reported.


| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 48 of 98 |

© 2020 PCTEST


All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

V 9.5 12/16/2019

SISO Core 0 Conducted Emissions at the Band Edge

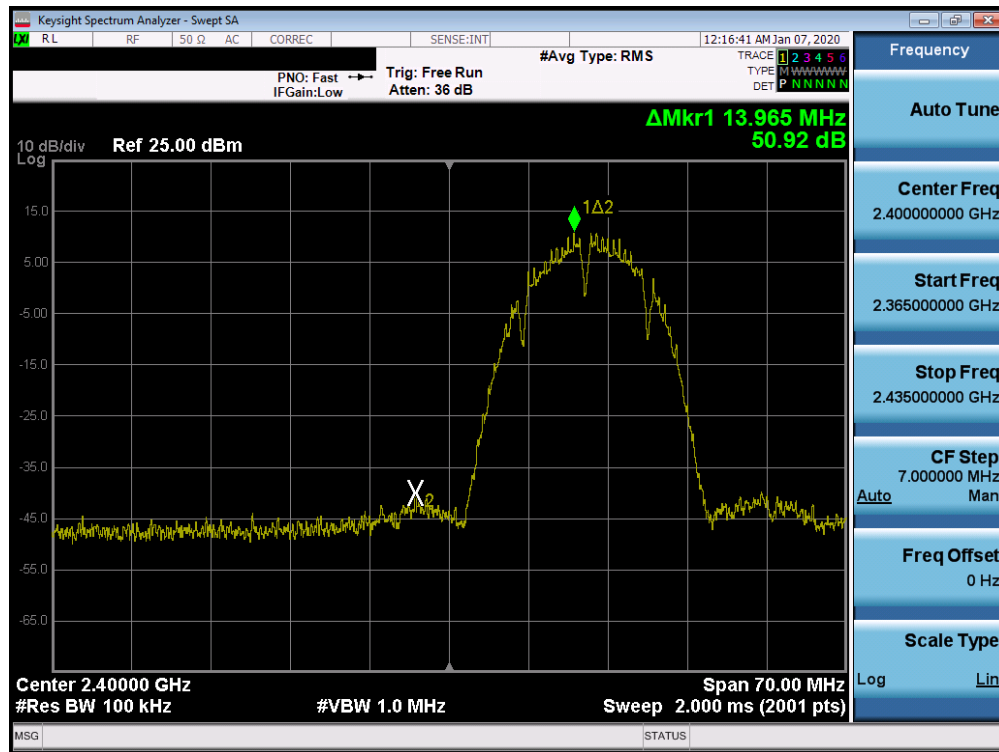


Plot 7-49. Band Edge Plot SISO CORE 0 (802.11b – Ch. 1)

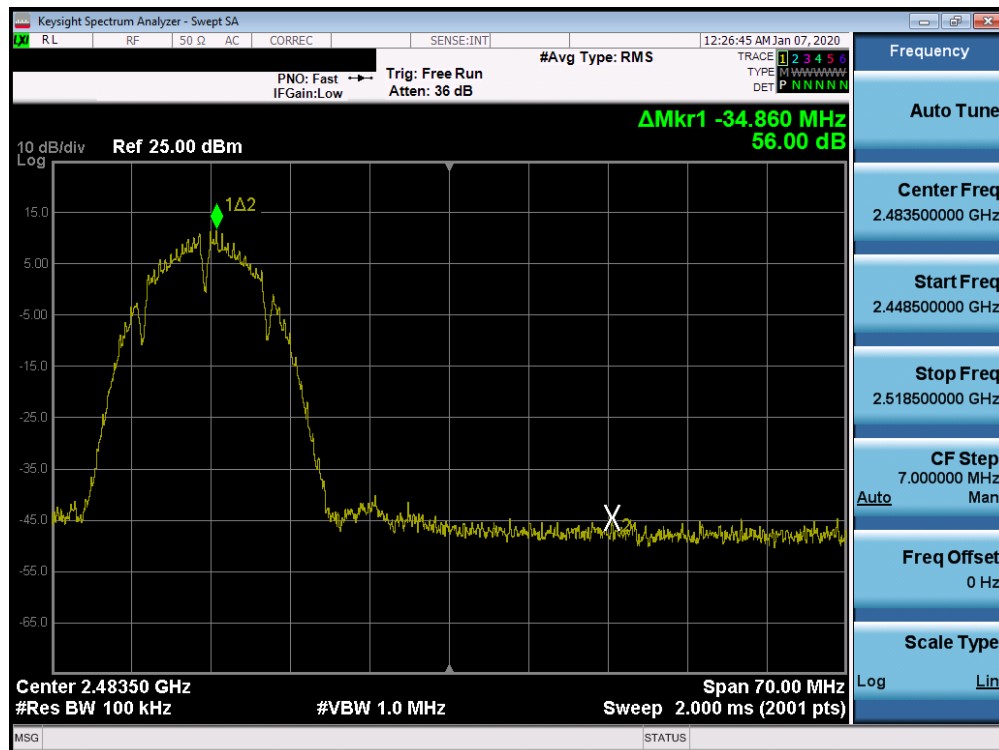


Plot 7-50. Band Edge Plot SISO CORE 0 (802.11b – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 49 of 98 |

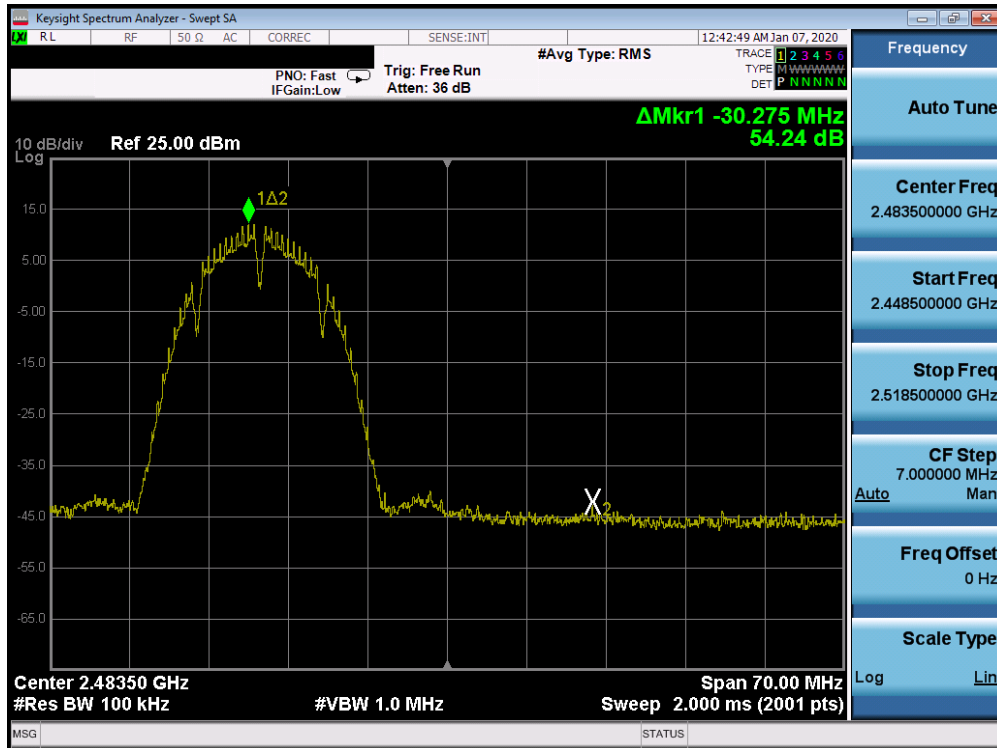


Plot 7-51. Band Edge Plot SISO CORE 0 (802.11b – Ch. 12)

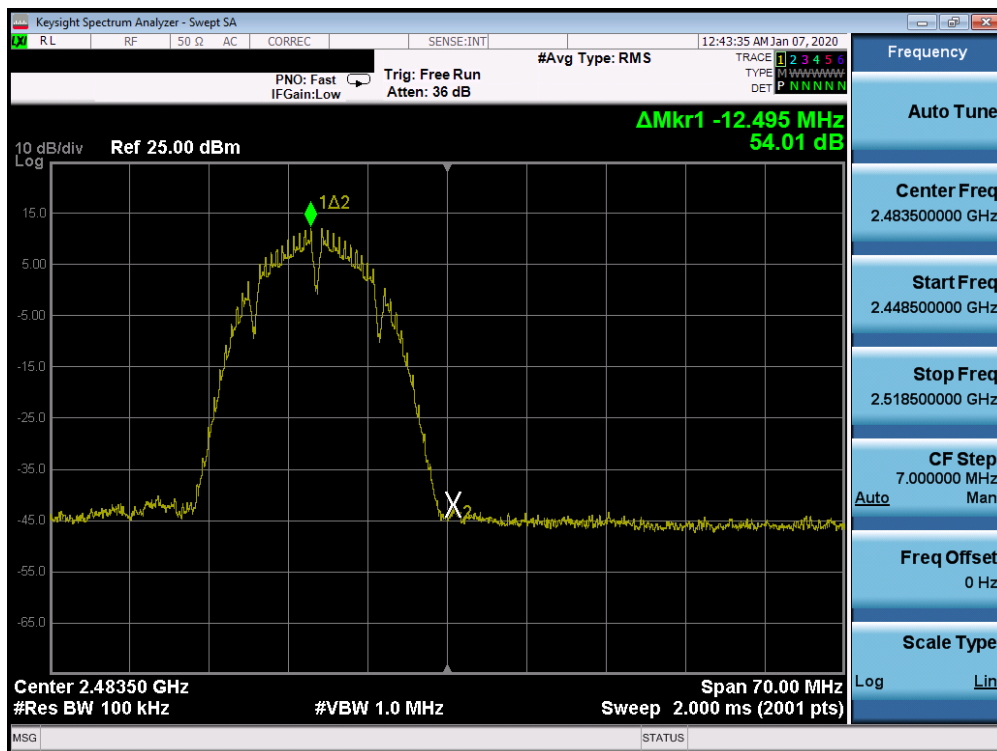


Plot 7-52. Band Edge Plot SISO CORE 0 (802.11b – Ch. 13)

| | | | |
|--|---|-----------------------------------|--|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 50 of 98 |

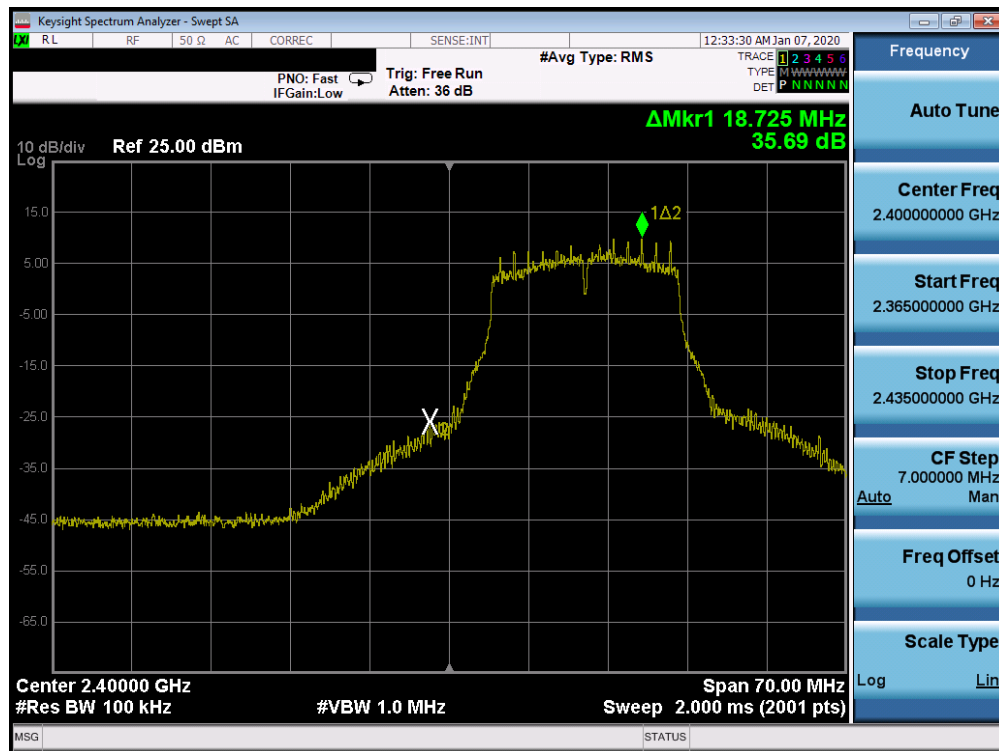


Plot 7-53. Band Edge Plot SISO CORE 0 (802.11g- Ch. 1)

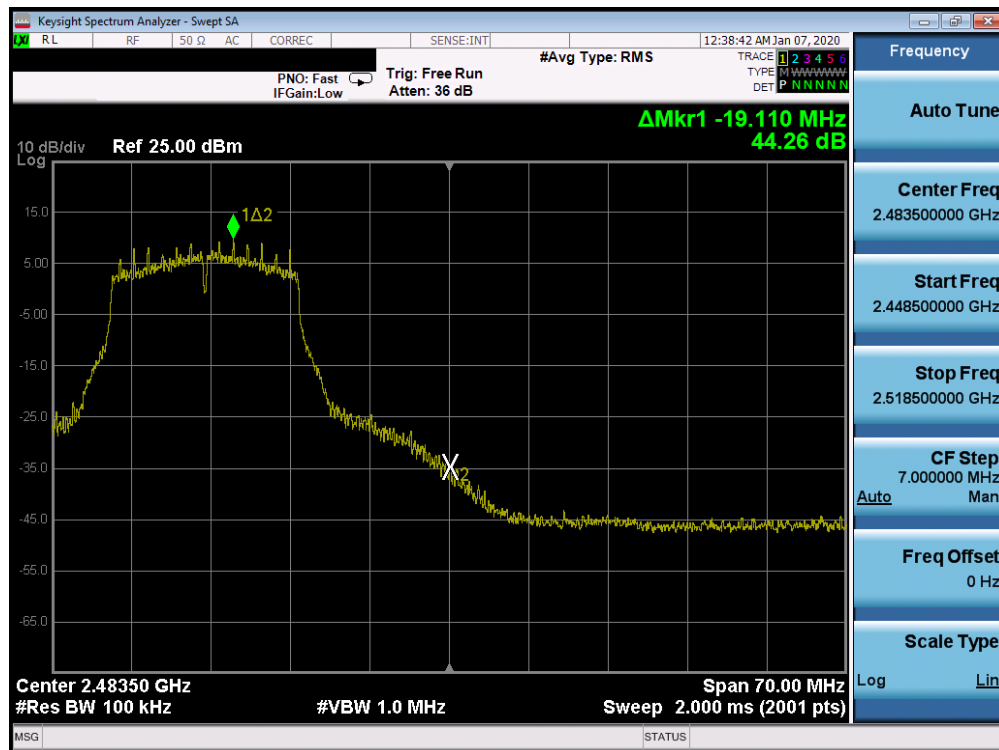


Plot 7-54. Band Edge Plot SISO CORE 0 (802.11g - Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 51 of 98 |

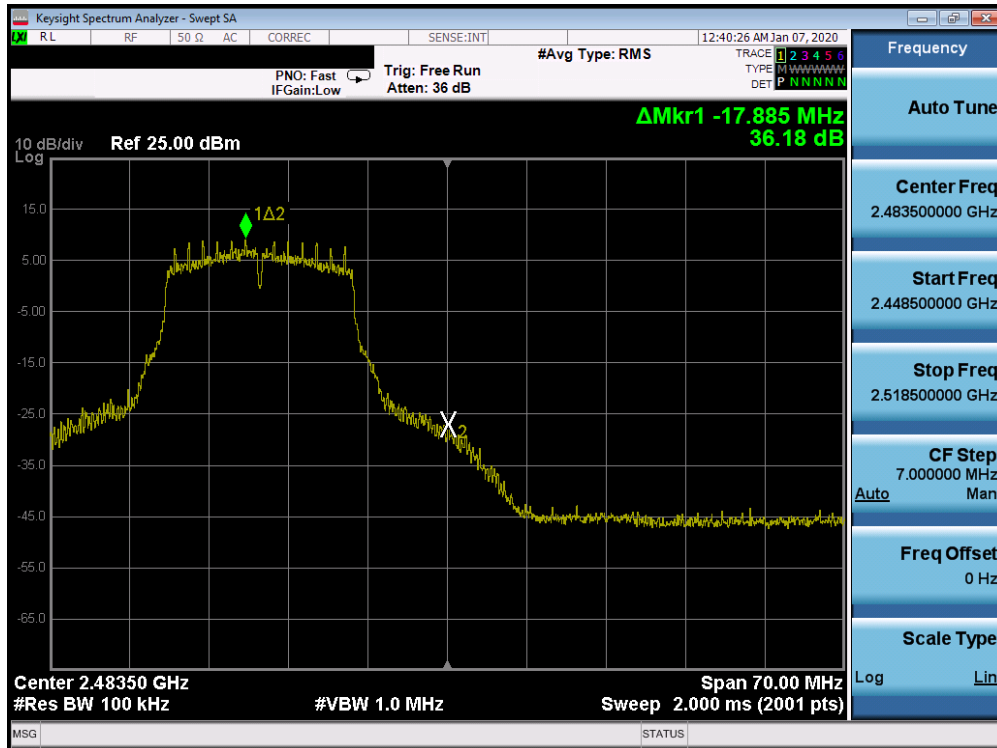


Plot 7-55. Band Edge Plot SISO CORE 0 (802.11g – Ch. 12)

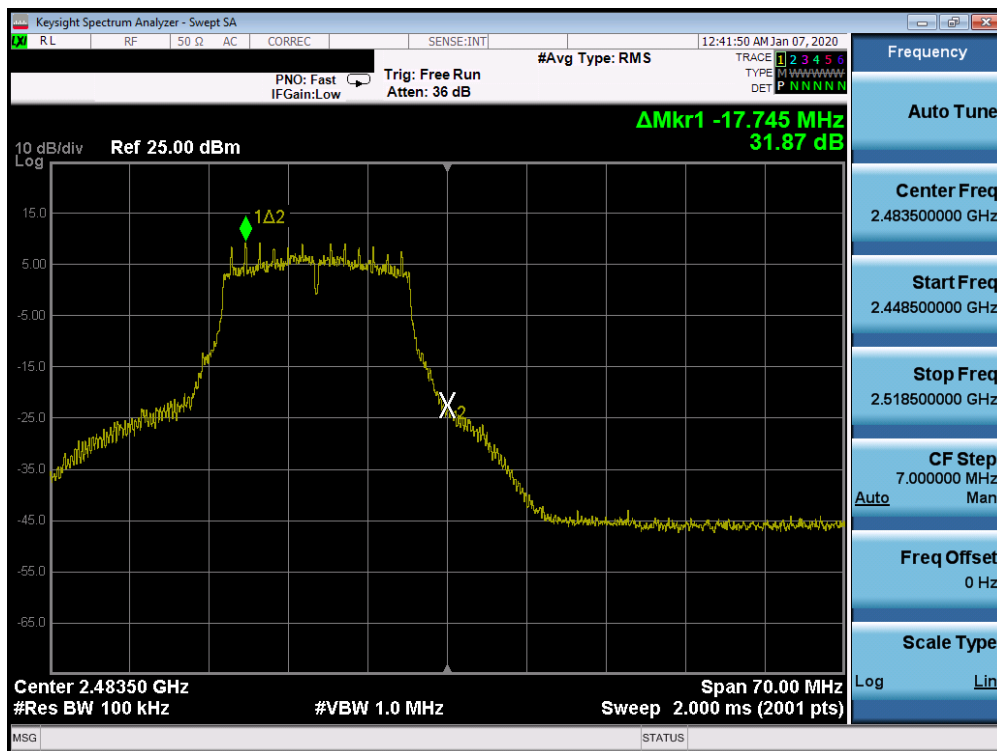


Plot 7-56. Band Edge Plot SISO CORE 0 (802.11g – Ch. 13)

| | | | |
|--|---|-----------------------------------|--|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 52 of 98 |

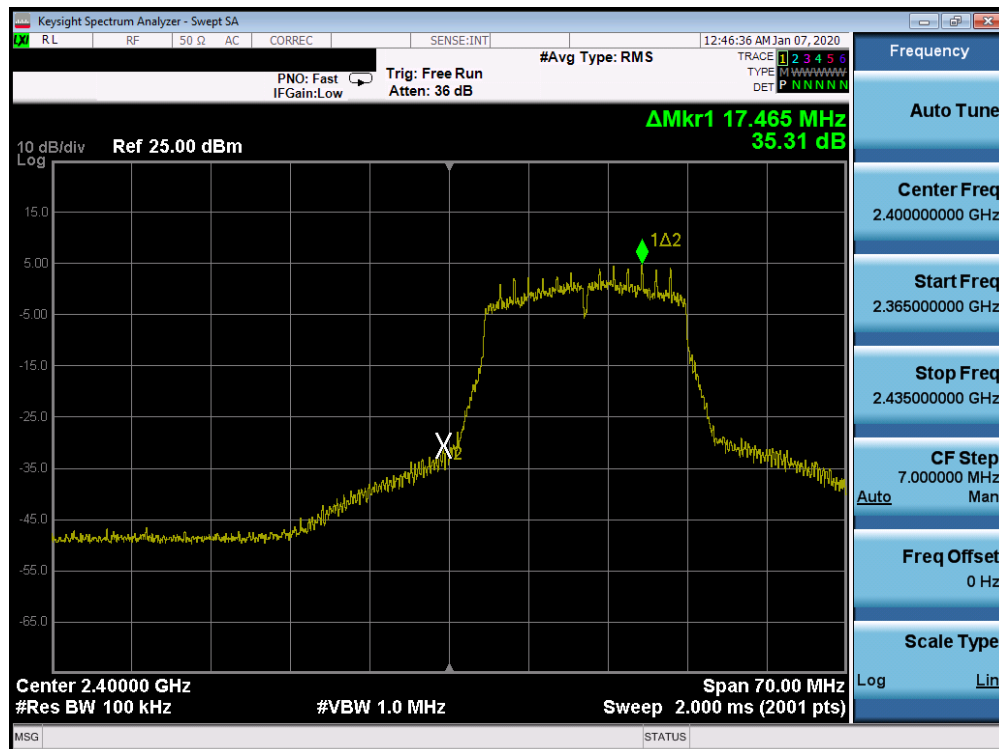


Plot 7-57. Band Edge Plot SISO CORE 0 (802.11n (2.4GHz) – Ch. 1)

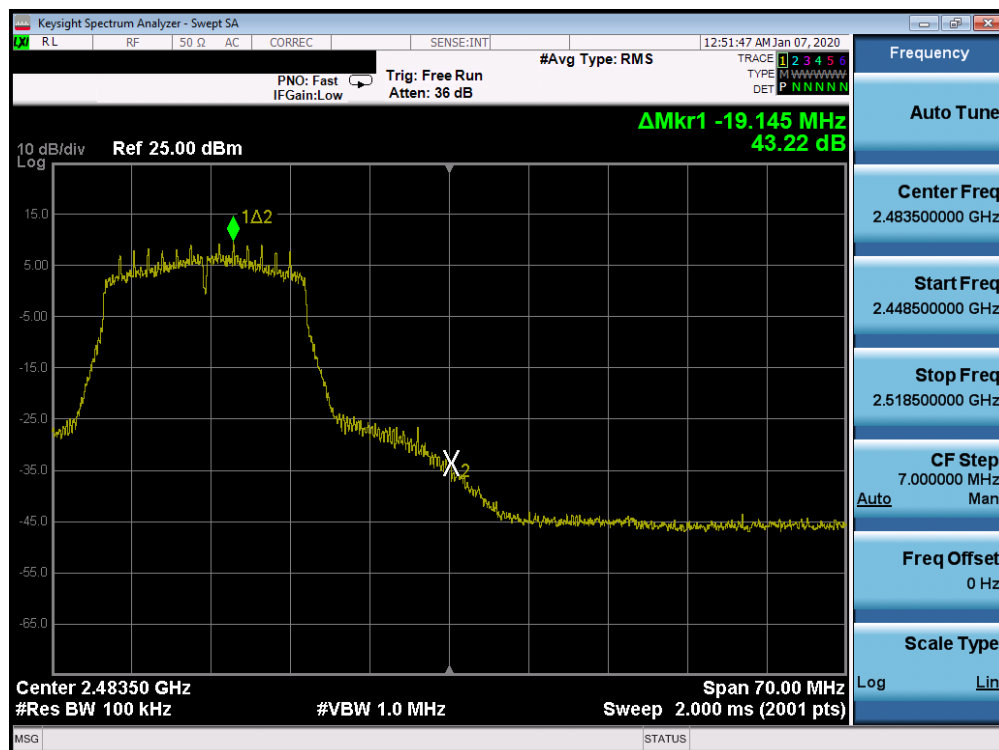


Plot 7-58. Band Edge Plot SISO CORE 0 (802.11n (2.4GHz) – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 53 of 98 |

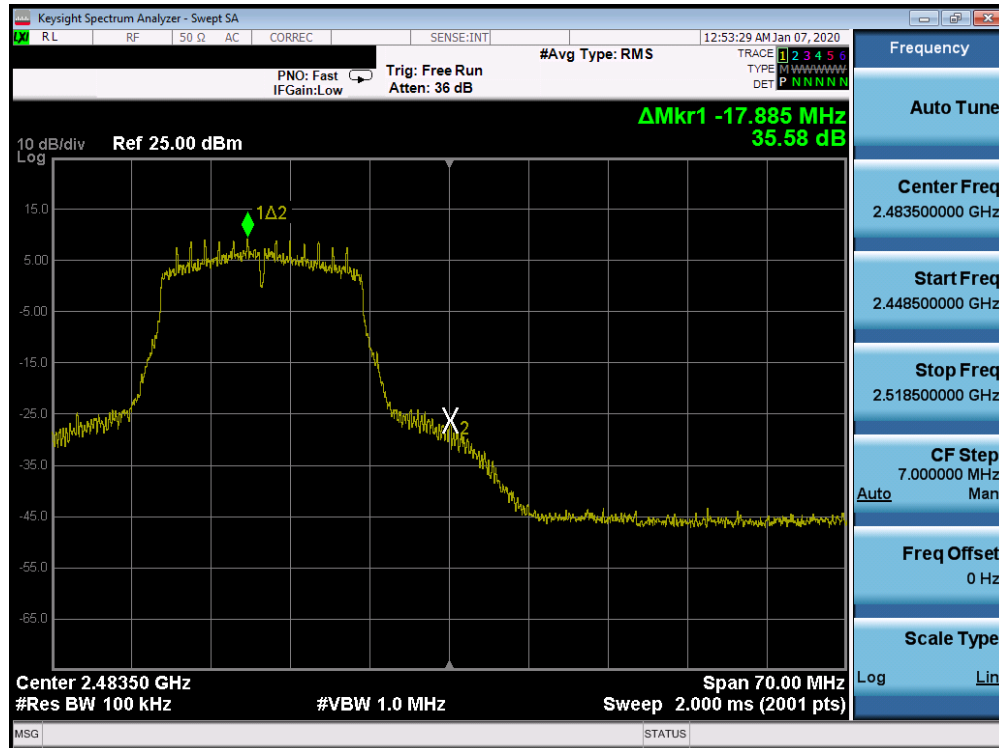


Plot 7-59. Band Edge Plot SISO CORE 0 (802.11n – Ch. 12)

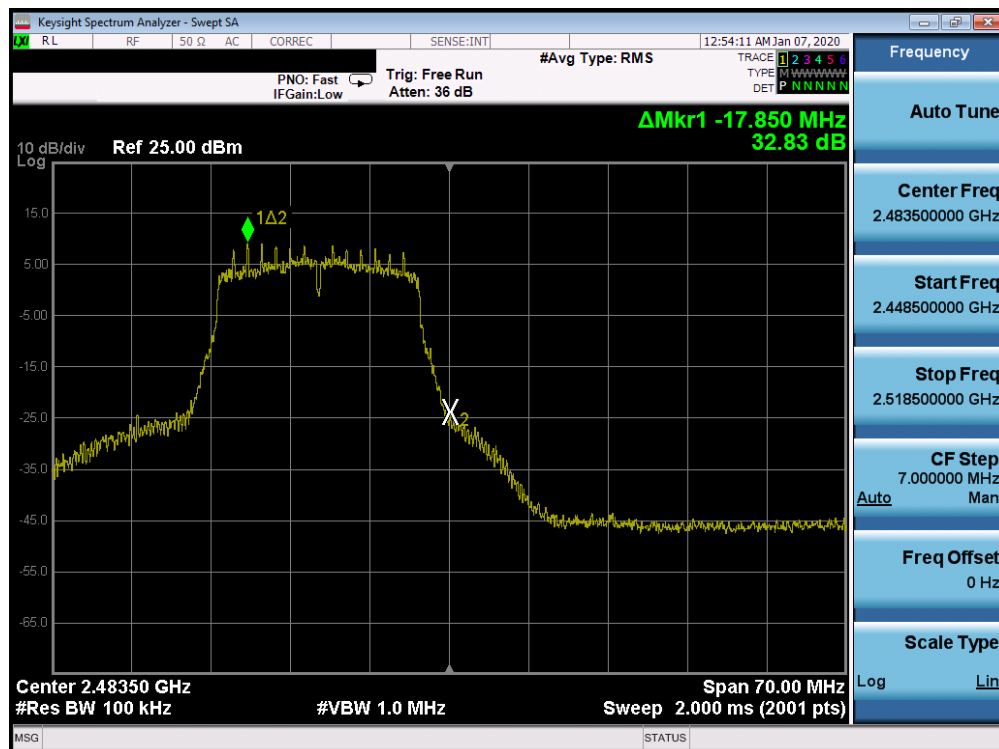


Plot 7-60. Band Edge Plot SISO CORE 0 (802.11n – Ch. 13)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 54 of 98 |

SISO Core 1 Conducted Emissions at the Band Edge

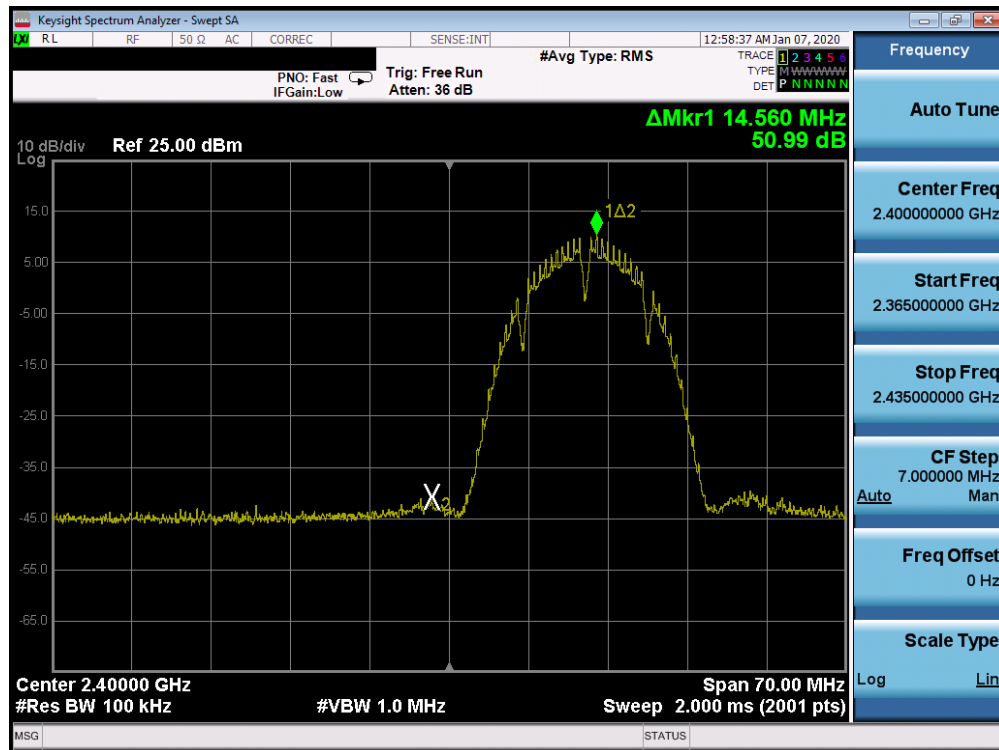


Plot 7-61. Band Edge Plot SISO CORE 1 (802.11b – Ch. 1)

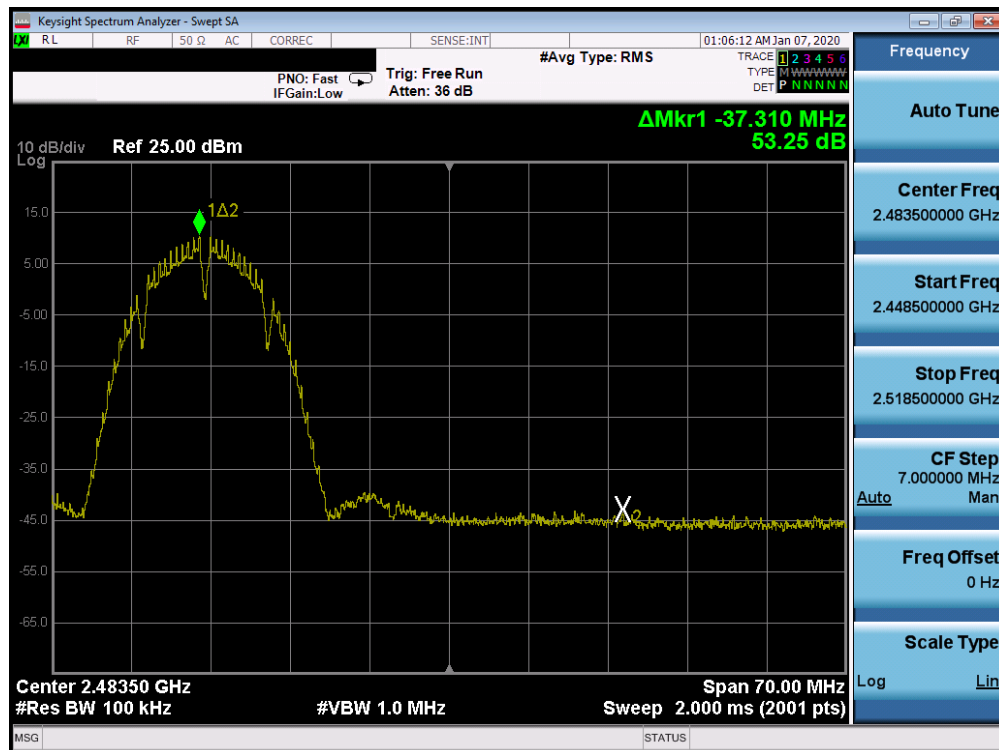


Plot 7-62. Band Edge Plot SISO CORE 1 (802.11b – Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 55 of 98 |

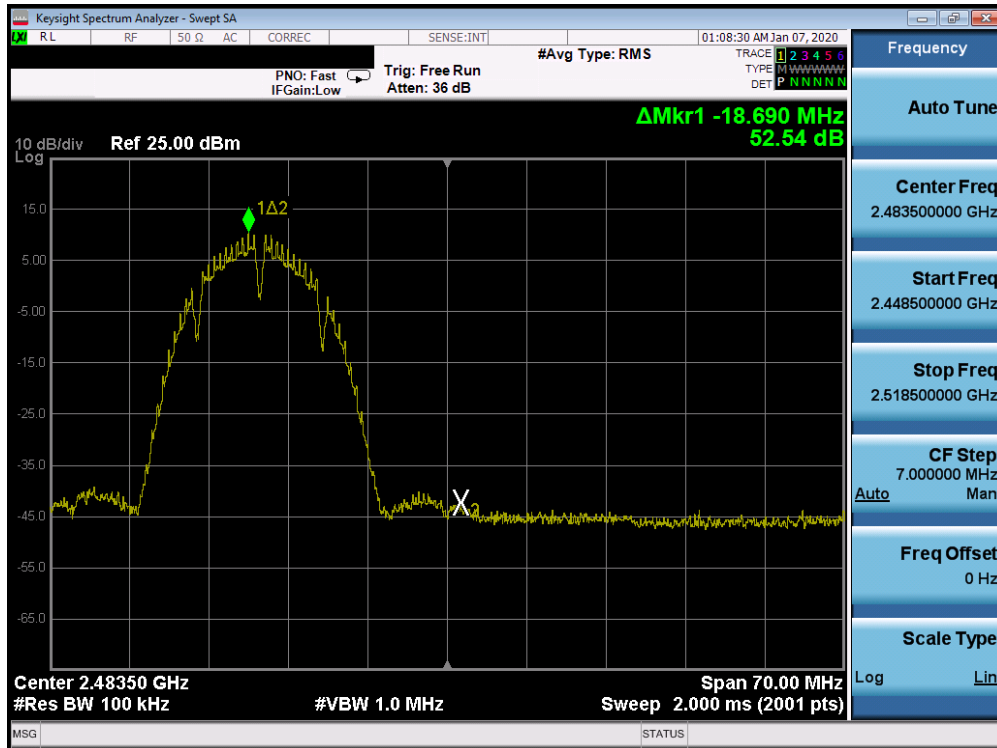


Plot 7-63. Band Edge Plot SISO CORE 1 (802.11b – Ch. 12)

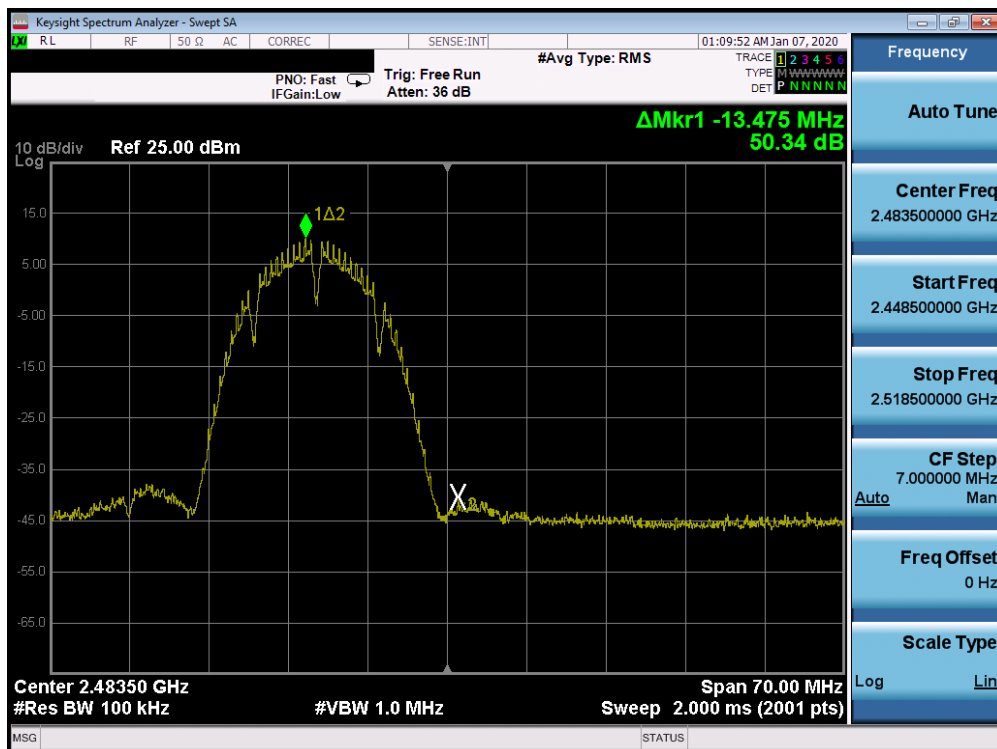

Plot 7-64. Band Edge Plot SISO CORE 1 (802.11b – Ch. 13)

| | | | |
|--|---|-----------------------------------|--|
| FCC ID: BCGA2068 |  MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 56 of 98 |

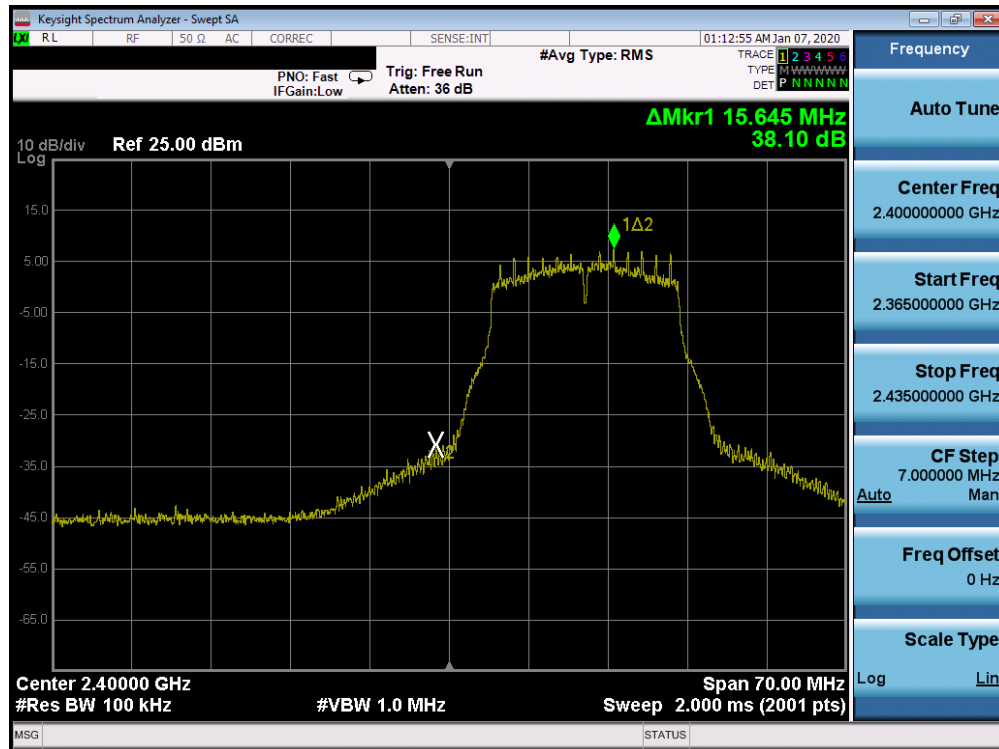

Plot 7-65. Band Edge Plot SISO CORE 1 (802.11g- Ch. 1)



Plot 7-66. Band Edge Plot SISO CORE 1 (802.11g - Ch. 11)

| | | | |
|---|---|---------------------------------------|---------------------------------|
| FCC ID: BCGA2068 |  | MEASUREMENT REPORT (CERTIFICATION) | Approved by: Quality Manager |
| Test Report S/N: 1C1912170051-06.BCG | Test Dates: 12/10/2019 - 02/11/2020 | EUT Type: Tablet Device | Page 57 of 98 |

