





FCC EMI TEST REPORT

FCC ID : U8G-P1AX13
Equipment : Peplink Pepwave Wireless Product
Brand Name : 
PEPWAVE
Model Name : MAX HD1 Dome Pro
MAX-HD1-DOM-PRO-5GH
MAX HD2 Dome Pro
MAX-HD2-DOM-PRO-LTEA-Q
Applicant : PISMO LABS TECHNOLOGY LIMITED
A8, 5/F, HK Spinners Industrial Building,
Phase 6, 481 Castle Peak Road, Cheung Sha
Wan, Hong Kong
Manufacturer : PISMO LABS TECHNOLOGY LIMITED
A8, 5/F, HK Spinners Industrial Building,
Phase 6, 481 Castle Peak Road, Cheung Sha
Wan, Hong Kong
Standard : FCC 47 CFR FCC Part 15 Subpart B Class A

The product was received on Jun. 23, 2022 and testing was performed from Jul. 10, 2022 to Jul. 19, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1. General Description	5
1.1. Product Feature of Equipment Under Test	5
1.2. Modification of EUT	5
1.3. Test Location	6
1.4. Applicable Standards	6
2. Test Configuration of Equipment Under Test	7
2.1. Test Mode	7
2.2. Connection Diagram of Test System	8
2.3. Support Unit used in test configuration and system	9
2.4. EUT Operation Test Setup	9
3. Test Result	10
3.1. Test of AC Conducted Emission Measurement	10
3.2. Test of Radiated Emission Measurement	12
4. List of Measuring Equipment.....	15
5. Measurement Uncertainty	16
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Emission Test Result	



History of this test report

Report No.	Version	Description	Issue Date
FC261637	01	Initial issue of report	May 03, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.107	AC Conducted Emission	Pass	20.92 dB under the limit at 14.960 MHz
3.2	15.109	Radiated Emission	Pass	3.19 dB under the limit at 84.920 MHz for Quasi-Peak

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. Please refer to each test results in Appendix A for measurement uncertainty.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different model name is for marketing purpose.

Reviewed by: Lewis Ho

Report Producer: Cindy Liu

1. General Description

1.1. Product Feature of Equipment Under Test

Product Feature	
General Specs LTE/5G NR, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and GPS	
Antenna Type WWAN: Omni-directional Antenna WLAN: Omni-directional Antenna GPS: Directional Antenna	
Sample information Sample 1: MAX HD1 Dome Pro and MAX-HD1-DOM-PRO-5GH with WWAN Module 1 (EM9191) Sample 2: MAX HD2 Dome Pro and MAX-HD2-DOM-PRO-LTEA-Q with WWAN Module 2 (LN920A12-WW)	
Integrated WWAN Module 1	Brand Name: Sierra Model Name: EM9191 FCC ID: N7NEM91
Integrated WWAN Module 2	Brand Name: Telit Model Name: LN920A12-WW FCC ID: RI7LN920

Remark:

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. The product will integrate the cellular module (EM9191, LN920A12-WW). Among the 2 options, at a time only 1 cellular module will be installed), therefore the cellular module is incorporated into the host for Part 15B. Equipment authorization to integrate the cellular module will follow the FCC modular approval policy and procedures.

1.2. Modification of EUT

No modifications made to the EUT during the testing.

1.3. Test Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH06-HY

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.30-2, Dingfu Vil., Linkou Dist., New Taipei City 244, Taiwan (R.O.C.) TEL: +886-2-2601-1640 FAX: +886-2-2601-1695
Test Site No.	Sporton Site No. OS04-LK

FCC designation No.: TW1093 and TW1095

1.4. Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR FCC Part 15 Subpart B Class A
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.


2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT is tested along with the peripherals, operating under possible configurations in compliant with normal operation. The maximum emissions can be identified by a pre-scan carried out in different orientations of placement pursuant to ANSI C63.4-2014. Frequency range covered: Conduction Emission (150 kHz to 30 MHz), Radiation Emission (30 MHz to the 5th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Functions Enabled
AC Conducted Emission	Mode 1: LTE Band 5 Idle + WLAN (2.4GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM A for Sample 1 Mode 2: 5G NR n78 Idle + WLAN (5GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM B for Sample 1 Mode 3: WCDMA Band V Idle + WLAN (2.4GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM A for Sample 2 Mode 4: LTE Band 5 Idle + WLAN (5GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM B for Sample 2 Mode 5: LTE Band 5 Idle + WLAN (2.4GHz) Idle + LAN Link + without PoE Box + GPS Rx + PoE Adapter + SIM A for Sample 1
Radiated Emissions	Mode 1: LTE Band 5 Idle + WLAN (2.4GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM A for Sample 1 Mode 2: 5G NR n78 Idle + WLAN (5GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM B for Sample 1 Mode 3: WCDMA Band V Idle + WLAN (2.4GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM A for Sample 2 Mode 4: LTE Band 5 Idle + WLAN (5GHz) Idle + LAN2 (802.3af PoE output) with Device + GPS Rx + PoE Adapter + SIM B for Sample 2 Mode 5: LTE Band 5 Idle + WLAN (5GHz) Idle + LAN Link + without PoE Box + GPS Rx + PoE Adapter + SIM B for Sample 2
Remark: 1. The worst case of AC is mode 1; only the test data of this mode was reported. 2. The worst case of RE is mode 4; only the test data of this mode was reported. 3. For radiation emission after pre-scanned the cellular band between 30MHz ~ 960MHz (WCDMA Band V/LTE Band 5); only the worst case for cellular band test data of this mode was reported.	

2.2. Connection Diagram of Test System

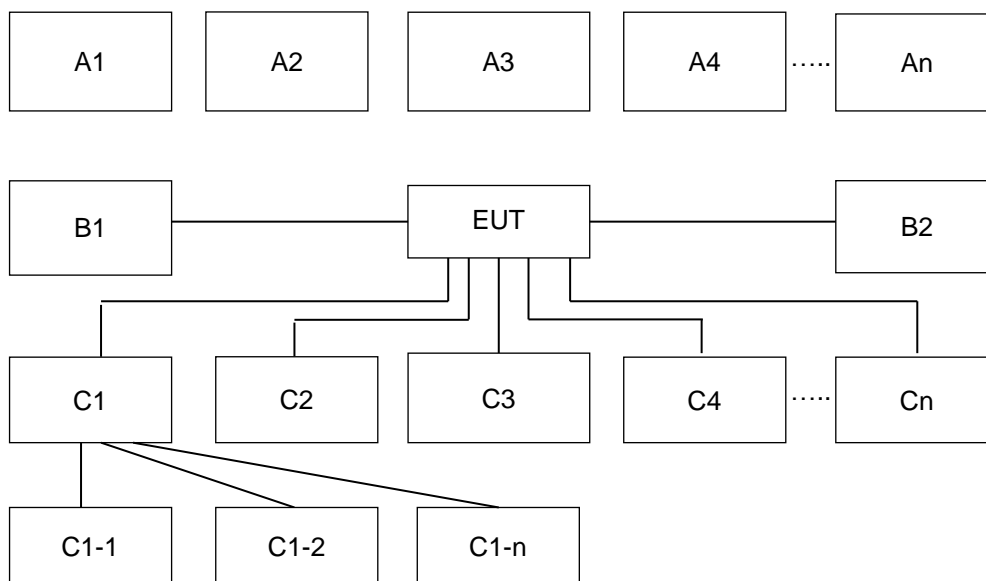

Conduction Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	2	3	4	5	-	-
A1	System Simulator	WCDMA/LTE/5GNR	X	X	X	X	X	-	-
A2	GPS Station	GPS	X	X	X	X	X	-	-
A3	Notebook	WiFi	X	X	X	X	X	-	-
No.	Power Source	Connection Type	1	2	3	4	5	-	-
B1	AC : 120V/60Hz	RJ45 Cable	X	X	X	X	X	-	-
No.	Setup Peripherals	Connection Type	1	2	3	4	5	-	-
C1	Notebook	RJ45 Cable	X	X	X	X	X	-	-
C2	Device	RJ45 Cable	X	X	X	X	-	-	-

Radiation Test Setup									
No.	Wireless Station	Connection Type	Test Mode						
			1	2	3	4	5	-	-
A1	System Simulator	GSM/UMTS/CDMA/ WCDMA/LTE	X	X	X	X	X	-	-
A2	GPS Station	GPS	X	X	X	X	X	-	-
A3	Notebook	WiFi	X	X	X	X	X	-	-
No.	Power Source	Connection Type	1	2	3	4	5	-	-
B1	AC : 120V/60Hz	AC Power Cable	X	X	X	X	X	-	-
No.	Setup Peripherals	Connection Type	1	2	3	4	5	-	-
C1	Notebook	RJ-45 Cable	X	X	X	X	X	-	-
C2	Device	RJ45 Cable	X	X	X	X	-	-	-

2.3. Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	5G Wireless Test Platform	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	Latitude3400	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
5.	POE Adapter	BILLION	BP035-560054QAX	FCC DoC	N/A	N/A
6.	Device	PEPWAVE	MAX BR1 Mini R6	N/A	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in WCDMA or LTE or 5G NR idle mode during the test. The EUT was synchronized with the BCCH, and had been continuous receiving mode by setting paging reorganization of the system simulator.

At the same time, the EUT was attached to the Notebook and executes ping via WLAN function and the following programs installed in the EUT were programmed during the test:

1. EUT links with Notebook and executes ping via RJ-45
2. Execute "GPS Test" to make the EUT receive continuous signals from GPS station.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1. Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class A>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60


3.1.2. Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3. Test Procedure

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (If Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4. Test Setup

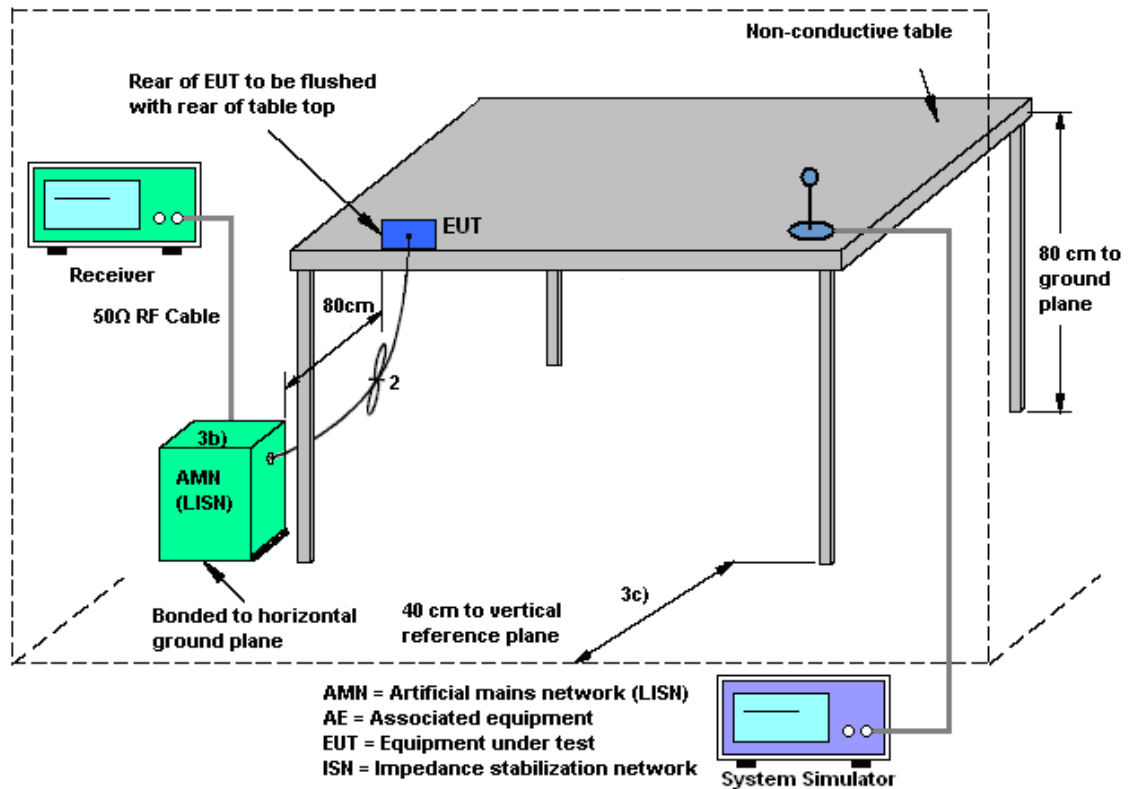

3.1.5. Test Result of AC Conducted Emission

Please refer to Appendix A.

3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class A>

Frequency (MHz)	Field Strength (microvolts/meter)	Field strength (dBuV/m)	Measurement Distance (meters)
30-88	90	39.08	10
88-216	150	43.52	10
216-960	210	46.44	10
Above 960	300	49.54	10

Remark: Follows the 15.109 (g) (2), measurements above 1000 MHz may be performed at the distance specified in the CISPR 22 publications is extrapolated to the new measurement distance using an inverse linear distance extrapolation factor (20 dB/decade).

3.2.2. Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2.3. Test Procedures


1. The EUT is placed on a turntable with 0.8 meter above ground.
2. The EUT is set 10 meters (30 M~1 G) and 3 meters (1 G~ 13 G) from the interference receiving antenna, which is mounted on the top of a variable height antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120 kHz/VBW=300 kHz for frequency below 1 GHz; RBW=1 MHz VBW=3 MHz (Peak), RBW=1 MHz/VBW=10 Hz (Average) for frequency above 1 GHz).
7. If the emission level of the EUT in peak mode is 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. For below 1 GHz:
Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
10. For above 1 GHz :
Distance extrapolation factor = 20 log (specific distance / test distance) (dB)
Corrected Reading: Antenna Factor + Path Loss + Read Level - Preamp Factor - Distance extrapolation factor = Level

3.2.4. Test Setup of Radiated Emission

For Radiated Emissions from 30 MHz to 1 GHz

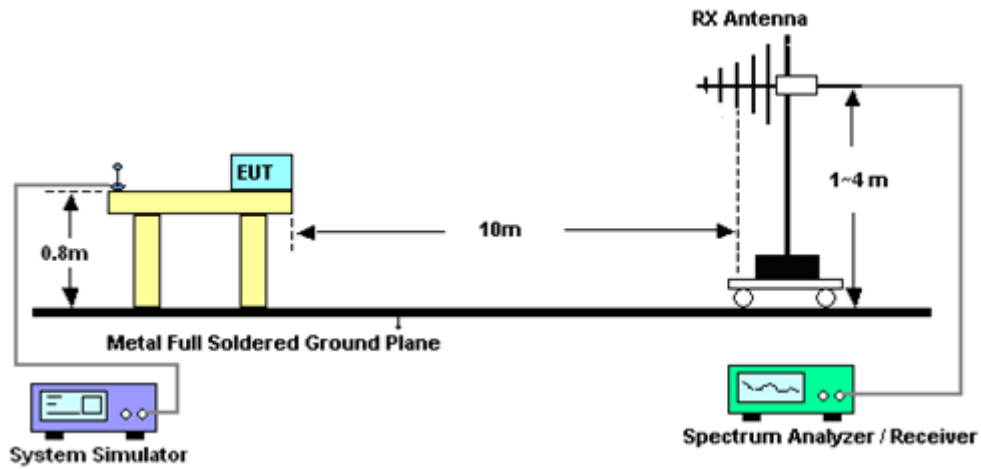

For Radiated Emissions above 1 GHz

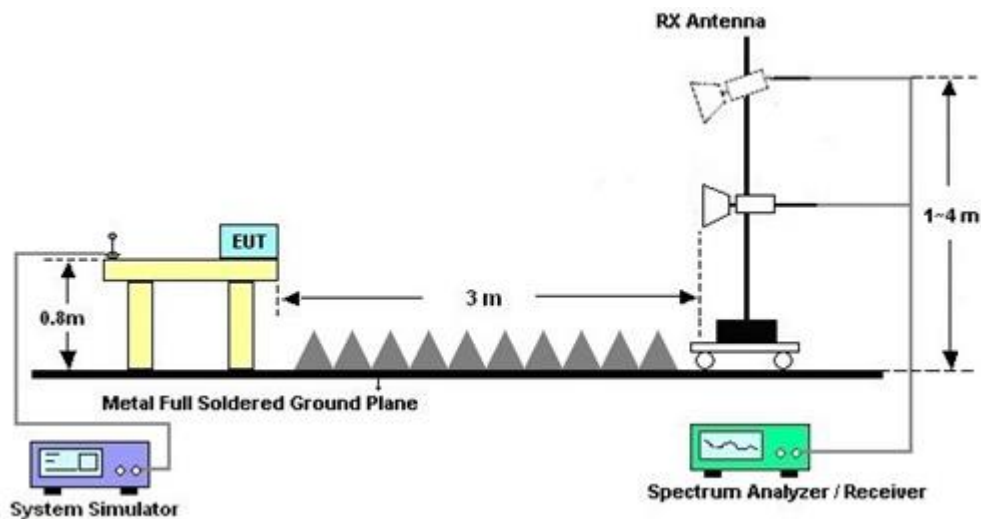

3.2.5. Test Result of Radiated Emission

Please refer to Appendix B.

4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 11, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Jul. 11, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Jul. 11, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Jul. 11, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jul. 11, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Jul. 11, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Jul. 11, 2022	Dec. 29, 2022	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 09, 2022	Jul. 10, 2022~Jul. 11, 2022	Feb. 08, 2023	Radiation (03CH06-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1156	1GHz~18GHz	Sep. 27, 2021	Jul. 10, 2022~Jul. 11, 2022	Sep. 26, 2022	Radiation (03CH06-HY)
Preamplifier	Jet-Power	JPA00101800-30-10P	1601180001	1GHz~18GHz	Jul. 19, 2021	Jul. 10, 2022~Jul. 11, 2022	Jul. 18, 2022	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_7000m	532299/2	30MHz to 40GHz	Jul. 04, 2022	Jul. 10, 2022~Jul. 11, 2022	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_3000m	532422/2	30MHz to 40GHz	Jul. 04, 2022	Jul. 10, 2022~Jul. 11, 2022	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF102_2000m	532421/2	30MHz to 40GHz	Jul. 04, 2022	Jul. 10, 2022~Jul. 11, 2022	Jul. 03, 2023	Radiation (03CH06-HY)
RF Cable	HUBER + SUHNER	SF104	802433/4	30Mhz to 18Ghz	Aug. 19, 2021	Jul. 10, 2022~Jul. 11, 2022	Aug. 18, 2022	Radiation (03CH06-HY)
Controller	INN-CO	EM1000	060782	Control Turn table & Ant Mast	N/A	Jul. 10, 2022~Jul. 11, 2022	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208212	1m~4m	N/A	Jul. 10, 2022~Jul. 11, 2022	N/A	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0-360 degree	N/A	Jul. 10, 2022~Jul. 11, 2022	N/A	Radiation (03CH06-HY)
Software	Audix	E3 6.2009-8-24(k5)	N/A	N/A	N/A	Jul. 10, 2022~Jul. 11, 2022	N/A	Radiation (03CH06-HY)
Amplifier	Agilent	8447D	2944A07468	10 kHz ~ 1.3GHz	Nov. 30, 2021	Jul. 19, 2022	Nov. 29, 2022	Radiation (OS04-LK)
Spectrum Analyzer	R&S	FSP 7	838858/037	9 kHz ~ 7 GHz	May 25, 2022	Jul. 19, 2022	May 24, 2023	Radiation (OS04-LK)
Test Receiver	R&S	ESCS 30	838251/003	9 kHz ~ 2.75 GHz	Aug. 11, 2021	Jul. 19, 2022	Aug. 10, 2022	Radiation (OS04-LK)
Bilog Antenna with 5dB Attenuator	TESEQ & EMC	CBL6112D & N-6-05	35377 & AT-N0518	30 MHz ~ 2 GHz	Jun. 25, 2022	Jul. 19, 2022	Jun. 24, 2023	Radiation (OS04-LK)
Turn Table	EMCO	2080	9711-2021	0 ~ 360 degree	NCR	Jul. 19, 2022	NCR	Radiation (OS04-LK)
Antenna Mast	EMCO	2075	9711-2115	1 m ~ 4 m	NCR	Jul. 19, 2022	NCR	Radiation (OS04-LK)
RF Cable-R10m	Woken	CFD400NL-LW	CB011	30 MHz ~ 1 GHz	Dec. 08, 2021	Jul. 19, 2022	Dec. 07, 2022	Radiation (OS04-LK)
Software	Audix	E3	Version:4	-	NCR	Jul. 19, 2022	NCR	Radiation (OS04-LK)

5. Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4 dB
--	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 261637
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

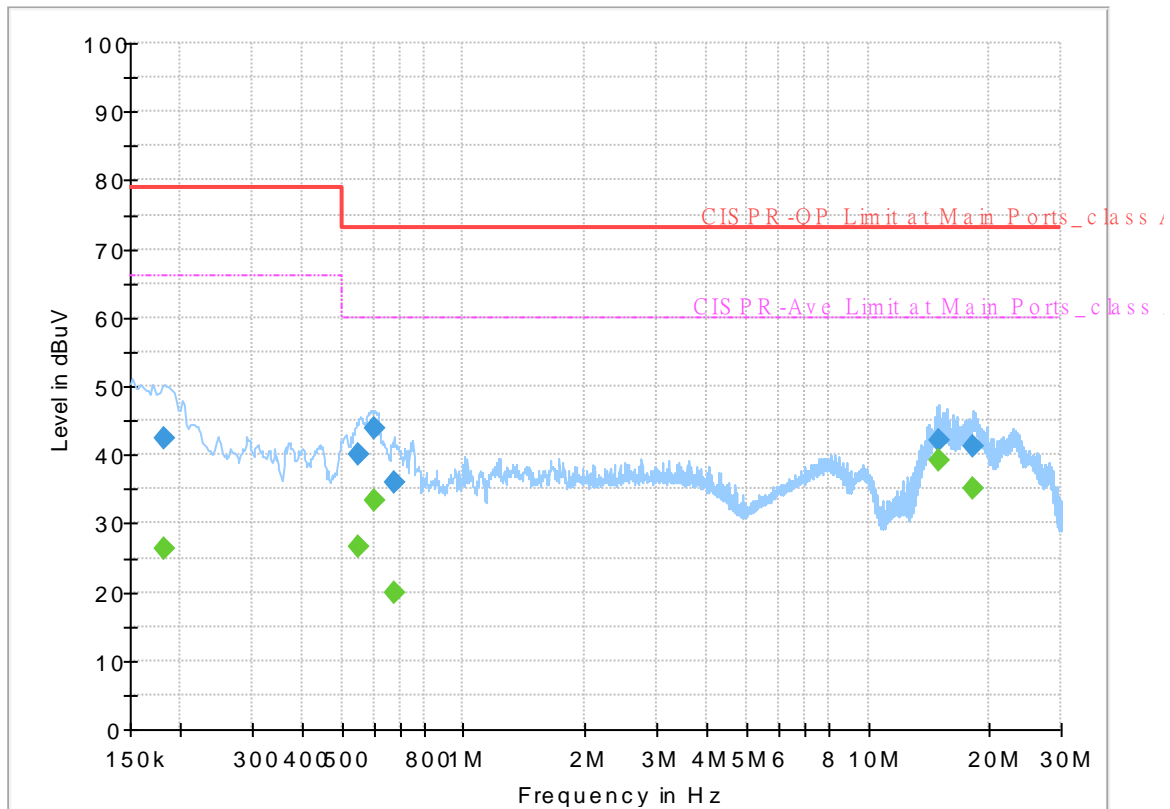


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.181500	---	26.18	66.00	39.82	L1	OFF	19.6
0.181500	42.31	---	79.00	36.69	L1	OFF	19.6
0.552750	---	26.70	60.00	33.30	L1	OFF	19.6
0.552750	39.95	---	73.00	33.05	L1	OFF	19.6
0.602250	---	33.21	60.00	26.79	L1	OFF	19.6
0.602250	43.84	---	73.00	29.16	L1	OFF	19.6
0.672000	---	19.92	60.00	40.08	L1	OFF	19.6
0.672000	35.86	---	73.00	37.14	L1	OFF	19.6
14.959500	---	39.08	60.00	20.92	L1	OFF	19.8
14.959500	42.13	---	73.00	30.87	L1	OFF	19.8
18.244500	---	35.18	60.00	24.82	L1	OFF	19.8
18.244500	41.23	---	73.00	31.77	L1	OFF	19.8

EUT Information

Report NO : 261637
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral


Full Spectrum

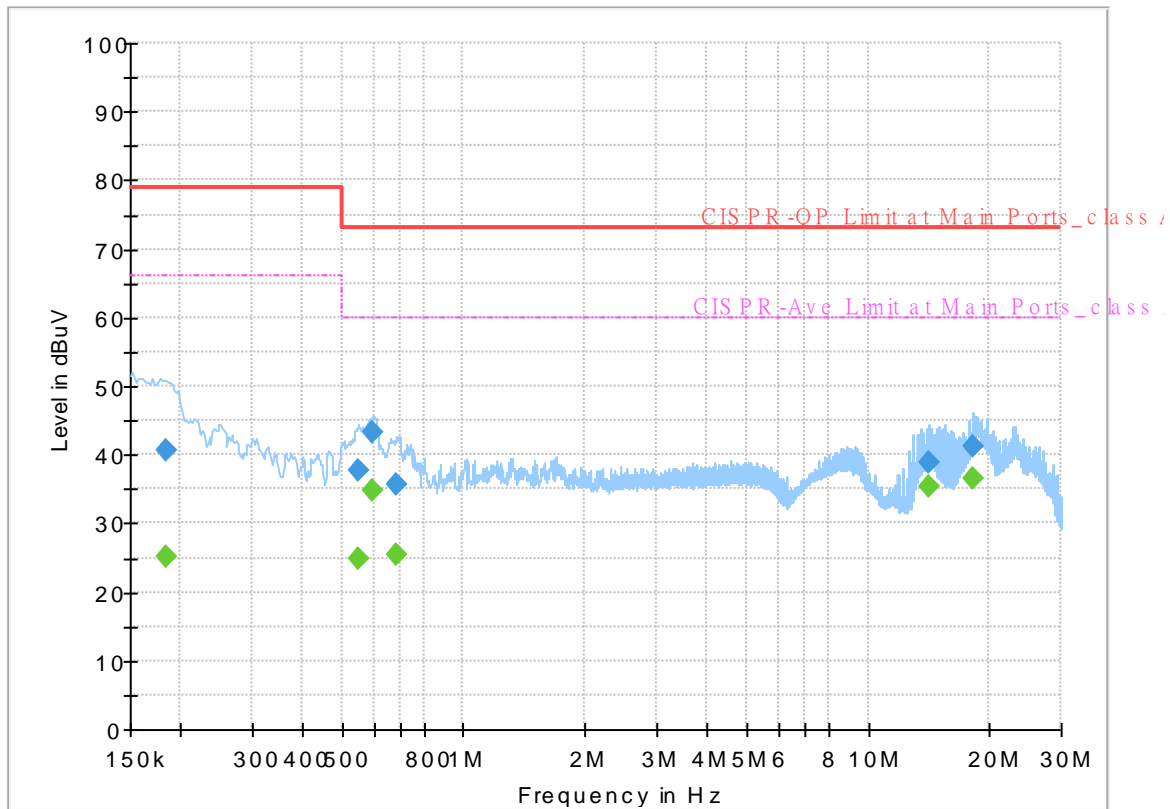

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.183750	---	25.28	66.00	40.72	N	OFF	19.6
0.183750	40.73	---	79.00	38.27	N	OFF	19.6
0.550500	---	24.89	60.00	35.11	N	OFF	19.6
0.550500	37.80	---	73.00	35.20	N	OFF	19.6
0.597750	---	34.88	60.00	25.12	N	OFF	19.6
0.597750	43.18	---	73.00	29.82	N	OFF	19.6
0.683250	---	25.49	60.00	34.51	N	OFF	19.6
0.683250	35.71	---	73.00	37.29	N	OFF	19.6
14.151750	---	35.26	60.00	24.74	N	OFF	19.9
14.151750	38.88	---	73.00	34.12	N	OFF	19.9
18.244500	---	36.52	60.00	23.48	N	OFF	19.9
18.244500	41.19	---	73.00	31.81	N	OFF	19.9

Appendix B. Radiated Emission Test Result

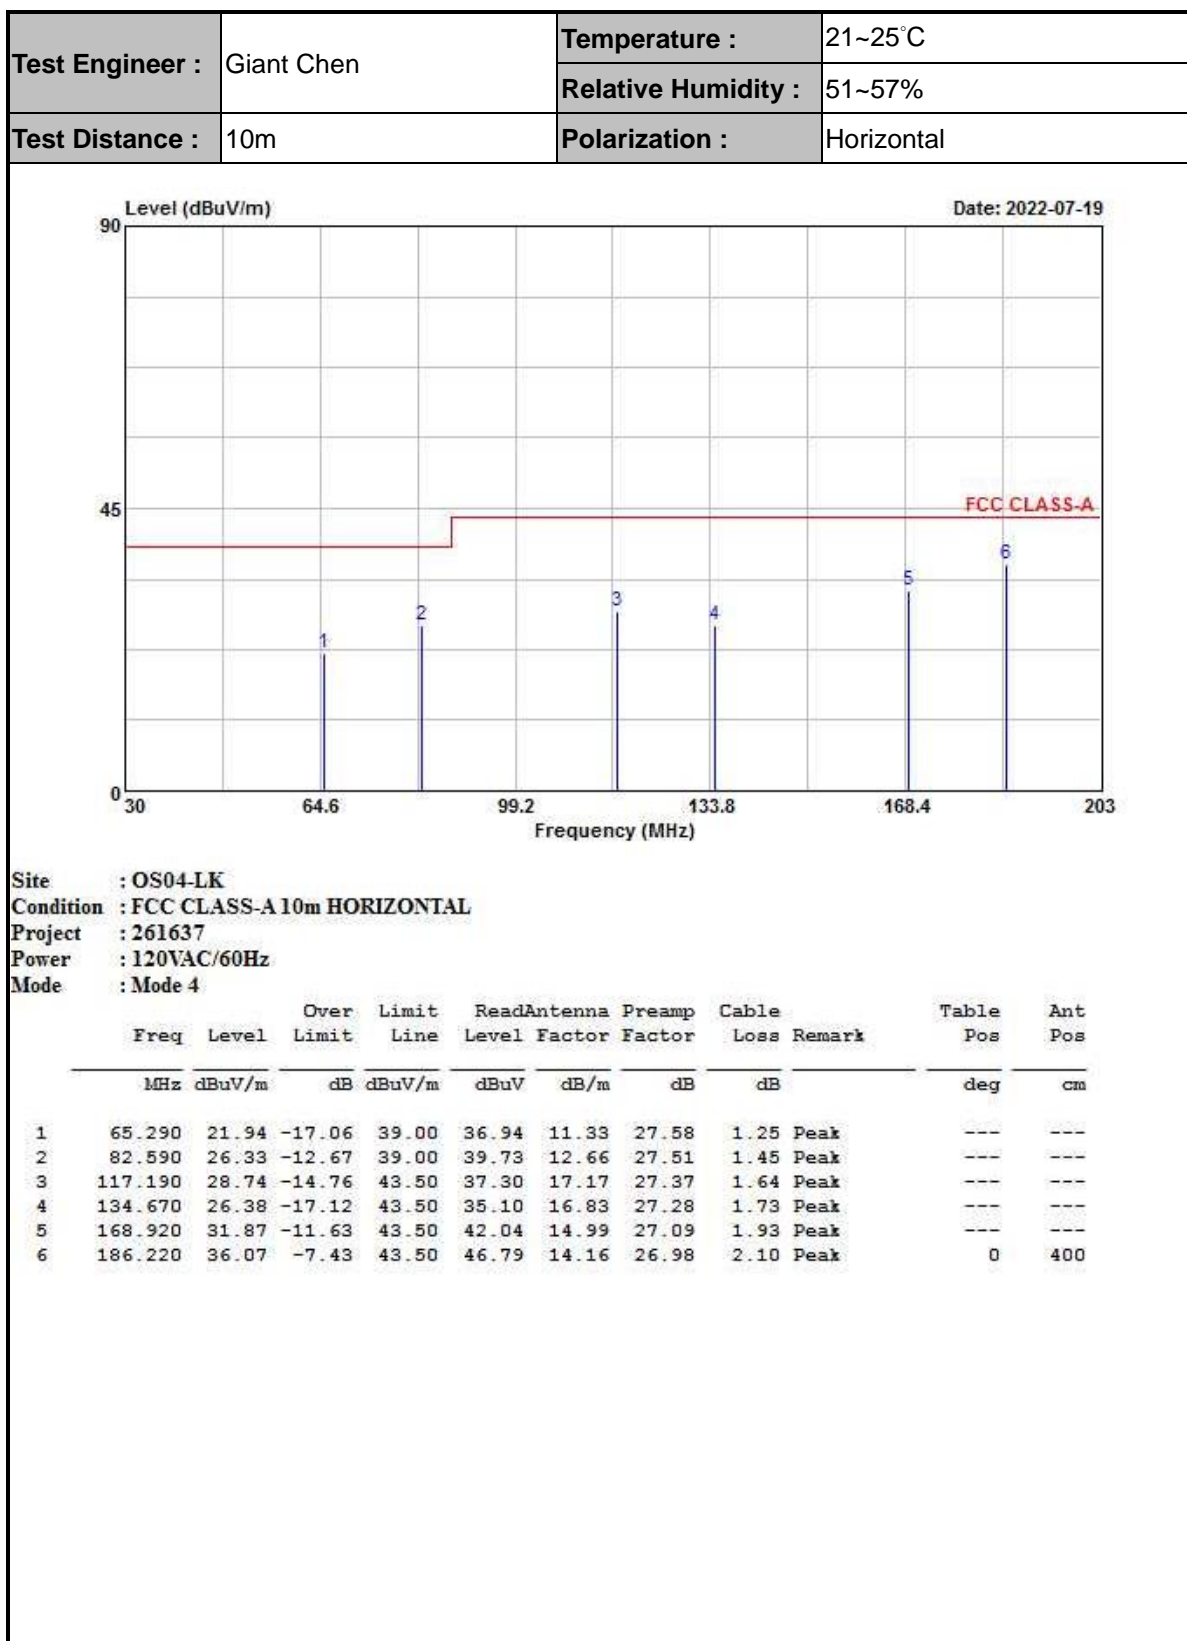




Test Engineer :	Giant Chen	Temperature :	21~25°C
		Relative Humidity :	51~57%
Test Distance :	10m	Polarization :	Horizontal
Remark :	#7 is system simulator signal which can be ignored.		

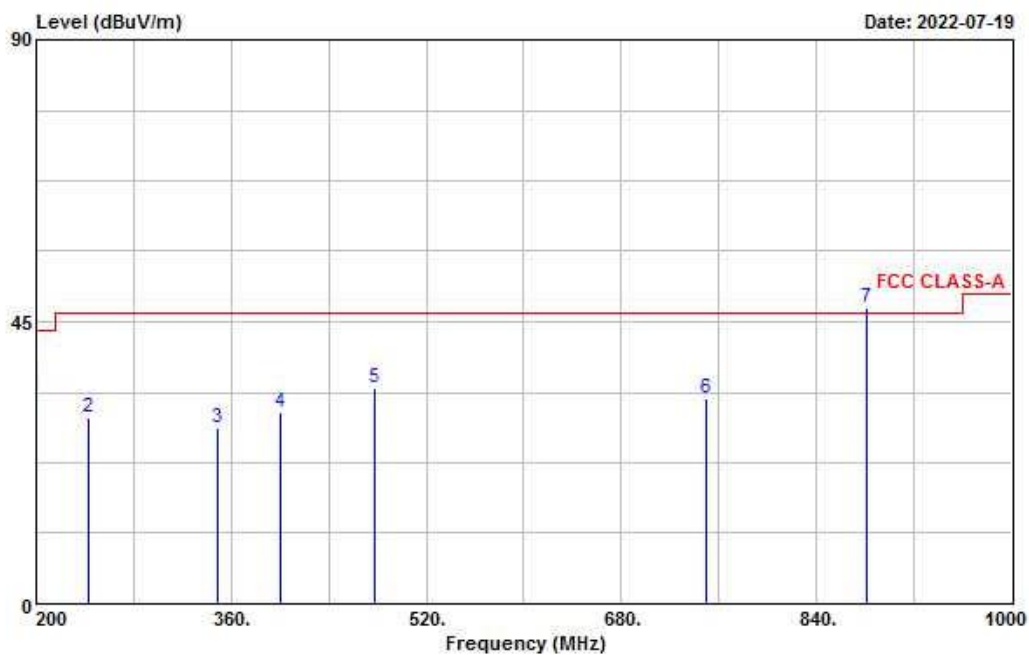

Site : OS04-LK
Condition : FCC CLASS-A 10m HORIZONTAL
Project : 261637
Power : 120VAC/60Hz
Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamplifier Factor	Cable Loss	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		deg	cm
1	200.330	33.56	-9.94	43.50	43.81	14.46	26.90	2.19 Peak	---	---
2	242.400	29.62	-16.78	46.40	37.20	16.72	26.70	2.40 Peak	---	---
3	348.800	28.12	-18.28	46.40	32.75	19.44	27.01	2.94 Peak	---	---
4	400.800	30.68	-15.72	46.40	34.04	21.00	27.43	3.07 Peak	---	---
5	477.600	34.53	-11.87	46.40	36.50	22.43	27.81	3.41 Peak	---	---
6	749.600	32.78	-13.62	46.40	30.62	25.13	27.77	4.80 Peak	---	---
7 X	881.500	47.29			43.82	25.60	27.39	5.26 Peak	---	---

Test Engineer :	Howard Hunag and Bor-Shiang Huang	Temperature :	24~27°C
		Relative Humidity :	43~46%
Test Distance :	3m	Polarization :	Horizontal

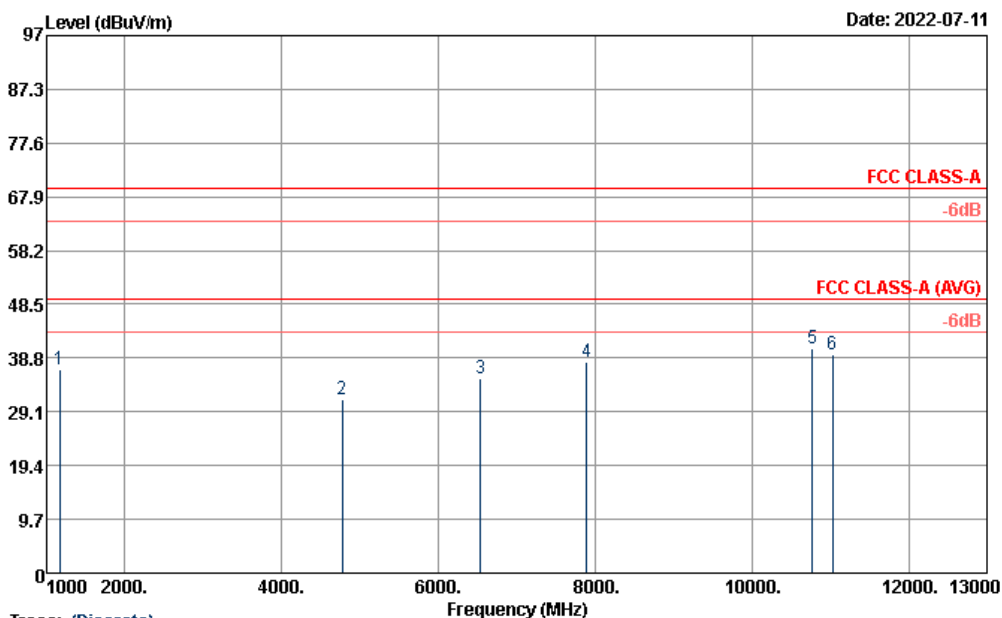


Site : 03CH06-HY
 Condition : FCC CLASS-A 3m 9120b_1156 HORIZONTAL
 Project : 261637
 Power : 120Vac/60Hz
 Memo : Mode 4

Frequency	Level	Distance extrapolation	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak
		Factor	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Average
(MHz)	(dBuV/m)	(dB)	(dB)	(dBuV/m)	(dBuV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)
1170	36.81	10.45	-32.73	69.54	79.6	25.15	6.13	63.62	-	-	P
4772	31.33	10.45	-38.21	69.54	61.4	31.16	12.46	63.24	-	-	P
65.36	35.09	10.45	-34.45	69.54	60.27	34.36	14.15	63.24	-	-	P
7894	38	10.45	-31.54	69.54	59.95	36.69	15.37	63.56	-	-	P
10774	40.65	10.45	-28.89	69.54	56.97	40.2	17.45	63.52	-	-	P
11034	39.55	10.45	-29.99	69.54	55.22	40.46	17.7	63.38	-	-	P



Test Engineer :	Giant Chen	Temperature :	21~25°C
		Relative Humidity :	51~57%
Test Distance :	10m	Polarization :	Vertical

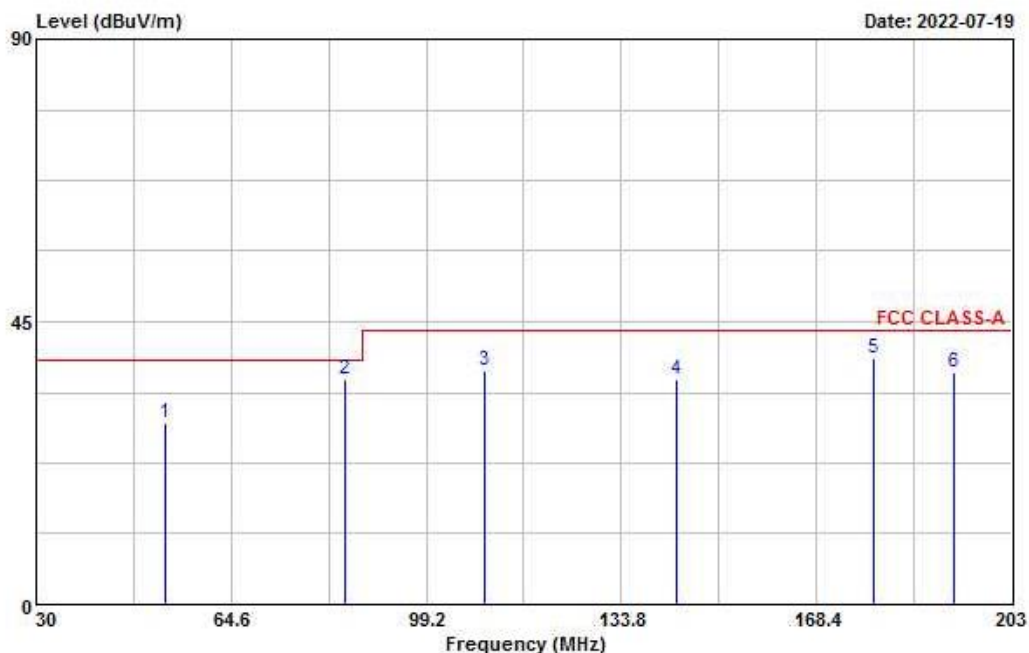


Site : OS04-LK
Condition : FCC CLASS-A 10m VERTICAL
Project : 261637
Power : 120VAC/60Hz
Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB		deg	cm
1	53.010	28.84	-10.16	39.00	42.90	12.42	27.61	1.13 Peak	---	---
2	84.920	35.81	-3.19	39.00	48.50	13.32	27.50	1.49 QP	263	100
3	109.540	37.17	-6.33	43.50	46.07	16.88	27.40	1.62 Peak	---	---
4	143.660	35.85	-7.65	43.50	45.13	16.17	27.23	1.78 Peak	---	---
5	178.434	39.12	-4.38	43.50	49.60	14.51	27.03	2.04 QP	310	100
6	192.790	36.90	-6.60	43.50	47.48	14.22	26.94	2.14 Peak	---	---



Test Engineer :	Giant Chen	Temperature :	21~25°C
		Relative Humidity :	51~57%
Test Distance :	10m	Polarization :	Vertical
Remark :	#7 is system simulator signal which can be ignored.		

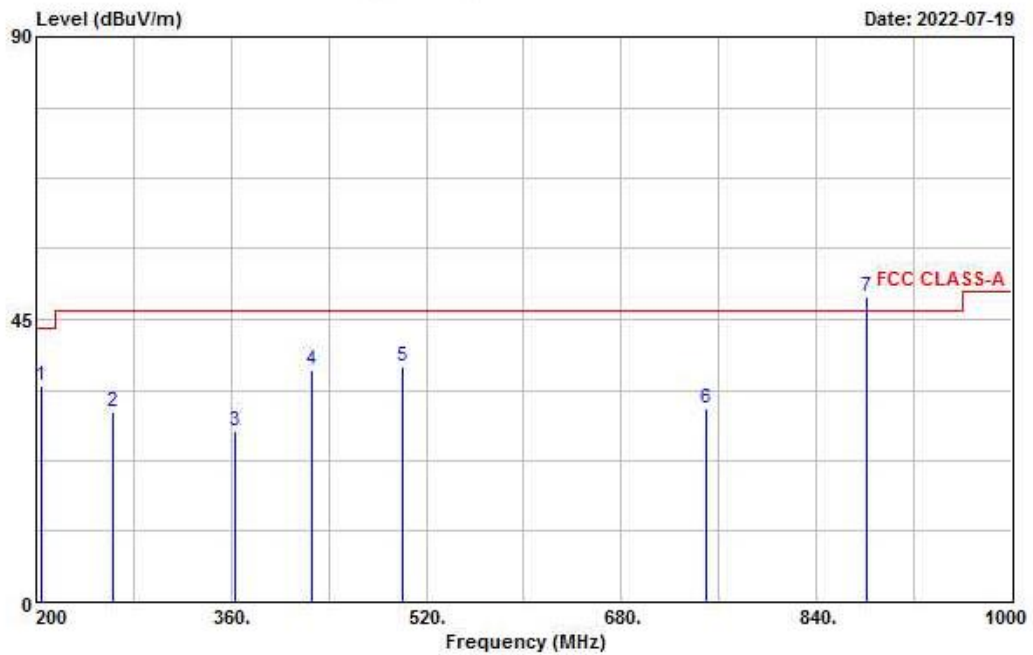


Site : OS04-LK
 Condition : FCC CLASS-A 10m VERTICAL
 Project : 261637
 Power : 120VAC/60Hz
 Mode : Mode 4

	Freq	Level	Over	Limit	ReadAntenna	Preamp	Cable		Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB	deg	cm
1	203.894	34.40	-9.10	43.50	44.50	14.57	26.88	2.21	Peak	---
2	263.200	30.22	-16.18	46.40	35.63	18.79	26.67	2.47	Peak	---
3	363.200	27.21	-19.19	46.40	31.47	19.89	27.13	2.98	Peak	---
4	426.400	36.97	-9.43	46.40	39.58	21.75	27.56	3.20	Peak	---
5	500.800	37.55	-8.85	46.40	39.36	22.63	27.93	3.49	Peak	---
6	749.600	30.75	-15.65	46.40	28.59	25.13	27.77	4.80	Peak	---
7	881.500	48.50			45.03	25.60	27.39	5.26	Peak	---



Test Engineer :	Howard Hunag and Bor-Shiang Huang	Temperature :	24~27°C
		Relative Humidity :	43~46%
Test Distance :	3m	Polarization :	Vertical

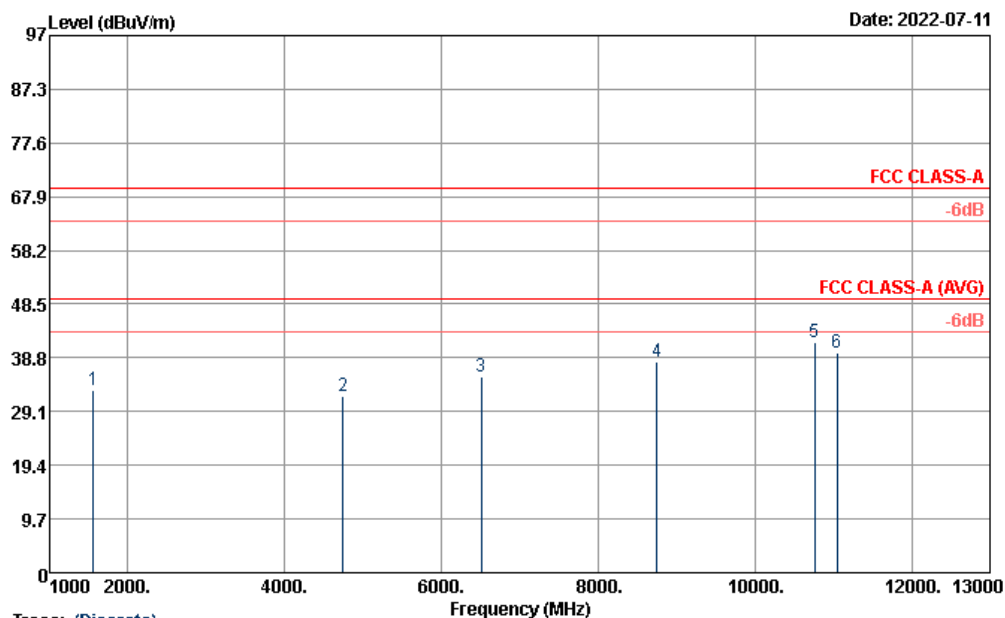

Trace: (Discrete)

Site : 03CHO6-HY
Condition : FCC CLASS-A 3m 9120D_1156 VERTICAL
Project : 261637
Power : 120Vac/60Hz
Memo : Mode 4

Frequency	Level	Distance extrapolation	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak
		Factor	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Average
(MHz)	(dBuV/m)	(dB)	(dB)	(dBuV/m)	(dBuV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)
1554	33.1	10.45	-36.44	69.54	74.56	25.34	7.09	63.44	-	-	P
4742	31.76	10.45	-37.78	69.54	62.05	31.01	12.39	63.24	-	-	P
6508	35.36	10.45	-34.18	69.54	60.54	34.39	14.08	63.2	-	-	P
8750	38.18	10.45	-31.36	69.54	58.87	37.65	15.92	63.81	-	-	P
10762	41.6	10.45	-27.94	69.54	57.99	40.15	17.44	63.53	-	-	P
11046	39.83	10.45	-29.71	69.54	55.53	40.42	17.72	63.39	-	-	P

—THE END—