



FCC PART 15.247

TEST REPORT

For

Huawei Technologies Co.,Ltd

Administration Building, Headquarters of Huawei Technologies Co.,Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

**Test Model: HUAWEI TE20
FCC ID: QIS-TE20**

Report Type: Original Report	Product Type: Videoconferencing Endpoint
Test Engineer: <u>Robin Zheng</u>	<i>Robin Zheng</i>
Report Number: <u>RDG160726004-00A</u>	
Report Date: <u>2016-08-08</u>	
Reviewed By: Jerry Zhang EMC Manager	<i>Jerry Zhang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EXTERNAL CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP	12
TEST PROCEDURE	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC§15.247(d) - SPURIOUS EMISSIONS.....	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32

TEST EQUIPMENT LIST AND DETAILS.....	32
TEST DATA	32
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	40
TEST EQUIPMENT LIST AND DETAILS.....	40
TEST DATA	40
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	42
APPLICABLE STANDARD	42
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §15.247(e) - POWER SPECTRAL DENSITY	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Huawei Technologies Co.,Ltd*'s product, model number: *HUAWEI TE20 (FCC ID: QIS-TE20)* (the "EUT") in this report was a *Videoconferencing Endpoint*, which was measured approximately: 249mm(L)×136mm(W)×151mm(H), rated input voltage:12V DC powered by adapter.

Adapter Information:

Model: HW-60-12AC14D-1

Input: AC 100-240V, 1.5A, 50/60Hz

Output: DC 12.0V, 5.0A

All measurement and test data in this report was gathered from production sample serial number: 160726004(by Dongguan BACL). The EUT was received on 2016-07-26.

Objective

This report is prepared on behalf of *Huawei Technologies Co.,Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: QIS-TE20.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 558074 558074 D01 DTS Meas Guidance v03r05.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in testing mode, which was provided by manufacturer.

For 2.4G band, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11b, 802.11g, and 802.11n20 modes were tested with Channel 1, 6 and 11.

For 802.11n40 mode were tested with Channel 3, 6 and 9.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all date rates bandwidths, and modulations.

EUT Exercise Software

The test software: 'IPOP_V40' was used in testing, which was provided by manufacturer, and configured maximum power (100% dutycycle) as following table:

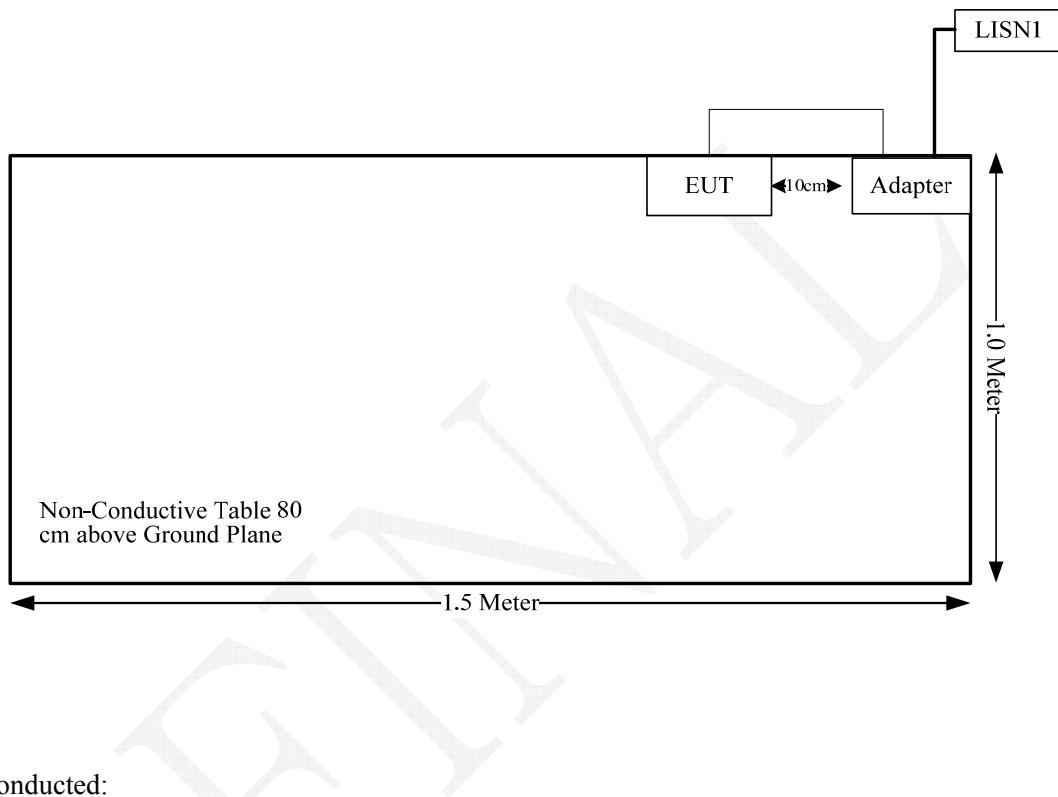
Software and version			IPOP_V40	
Mode	Channel	Frequency (MHz)	Data Rate	Chain 0
802.11 b	Low	2412	1Mbps	18
	Middle	2437	1Mbps	18
	High	2462	1Mbps	18
802.11 g	Low	2412	6Mbps	17
	Middle	2437	6Mbps	17
	High	2462	6Mbps	17
802.11 n20	Low	2412	MCS0	16
	Middle	2437	MCS0	16
	High	2462	MCS0	16
802.11 n40	Low	2422	MCS0	15
	Middle	2437	MCS0	15
	High	2452	MCS0	15

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.62	Adapter	EUT

Block Diagram of Test Setup

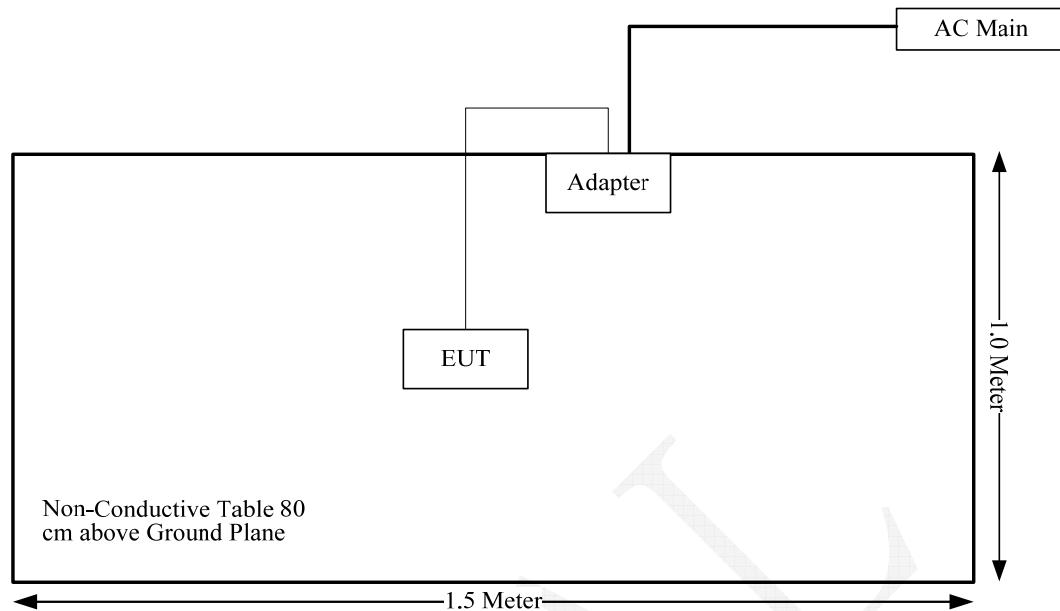
AC Line Conducted Emissions:



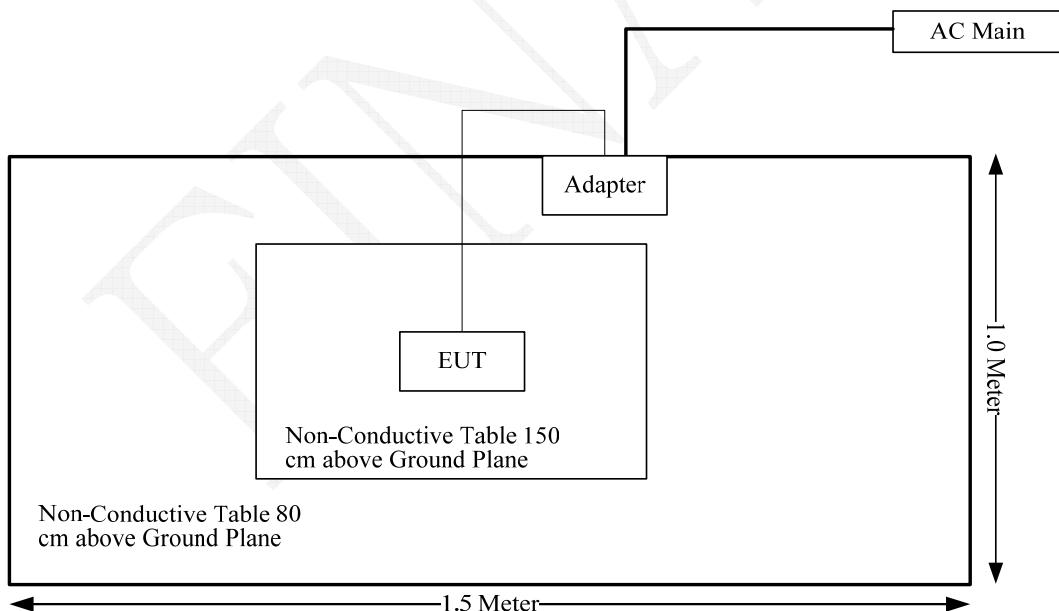
RF Conducted:



Radiated 30MHz-1GHz:



Radiated 1GHz-25GHz:



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum conducted output power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

S = PG/4πR² = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	3.00	2.00	19	79.43	20.00	0.0315	1.0

Note: The tune-up power is 17+/-2dBm.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT have an internal antenna and the gain of each antenna is 3.0 dBi at 2.4GHz band and 5GHz Band, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}}_{\text{r}}$ of Table 1, then:

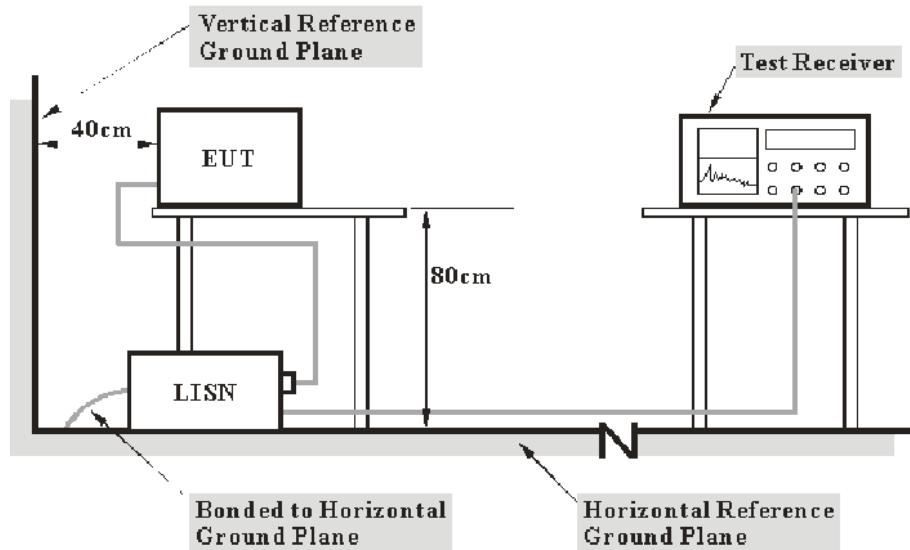
- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}}_{\text{r}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of $U_{\text{cisp}}_{\text{r}}$

Measurement	$U_{\text{cisp}}_{\text{r}}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2016-07-16	2017-07-15
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2016-05-06	2017-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.8 dB at 0.472507 MHz in the Line conducted mode

Test Data

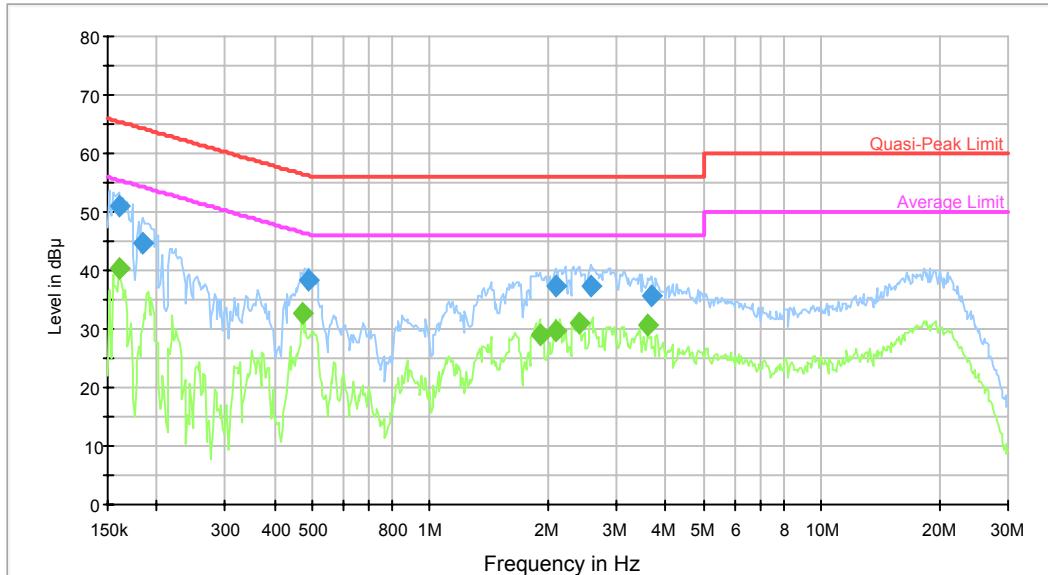
Environmental Conditions

Temperature:	29.1 °C
Relative Humidity:	60 %
ATM Pressure:	100.2 kPa

The testing was performed by Robin Zheng on 2016-08-03.

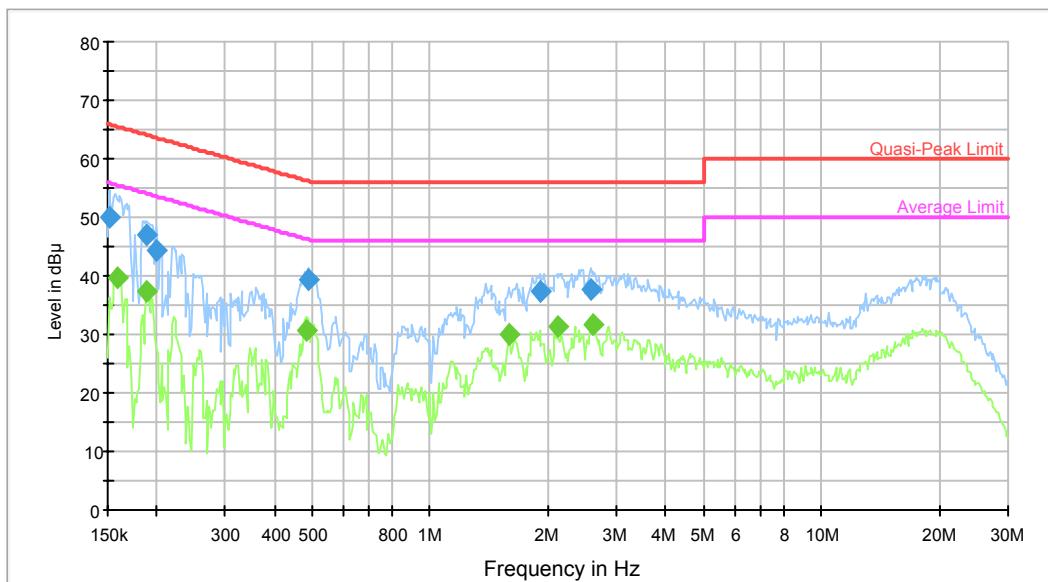
Test Mode: Transmitting

AC120 V, 60 Hz, Line:



Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.159873	51.2	9.000	L1	10.2	14.3	65.5	Compliance
0.184529	44.8	9.000	L1	10.2	19.5	64.3	Compliance
0.487810	38.4	9.000	L1	10.1	17.8	56.2	Compliance
2.096658	37.3	9.000	L1	10.4	18.7	56.0	Compliance
2.579298	37.3	9.000	L1	10.4	18.7	56.0	Compliance
3.662393	35.5	9.000	L1	10.6	20.5	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.159873	40.5	9.000	L1	10.2	15.0	55.5	Compliance
0.472507	32.7	9.000	L1	10.1	13.8	46.5	Compliance
1.905466	29.0	9.000	L1	10.4	17.0	46.0	Compliance
2.096658	29.8	9.000	L1	10.4	16.2	46.0	Compliance
2.420011	30.9	9.000	L1	10.4	15.1	46.0	Compliance
3.604490	30.5	9.000	L1	10.6	15.5	46.0	Compliance

AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.151200	50.0	9.000	N	10.2	16.0	66.0	Compliance
0.188994	46.9	9.000	N	10.2	17.2	64.1	Compliance
0.199835	44.2	9.000	N	10.2	19.4	63.6	Compliance
0.487810	39.2	9.000	N	10.1	17.0	56.2	Compliance
1.905466	37.3	9.000	N	10.4	18.7	56.0	Compliance
2.579298	37.7	9.000	N	10.4	18.3	56.0	Compliance

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.158604	39.7	9.000	N	10.1	15.8	55.5	Compliance
0.188994	37.2	9.000	N	10.2	16.9	54.1	Compliance
0.483938	30.6	9.000	N	10.1	15.7	46.3	Compliance
1.599078	30.0	9.000	N	10.4	16.0	46.0	Compliance
2.113432	31.4	9.000	N	10.4	14.6	46.0	Compliance
2.620732	31.8	9.000	N	10.4	14.2	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit;
- non - compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cispr}})$, exceeds the disturbance limit.

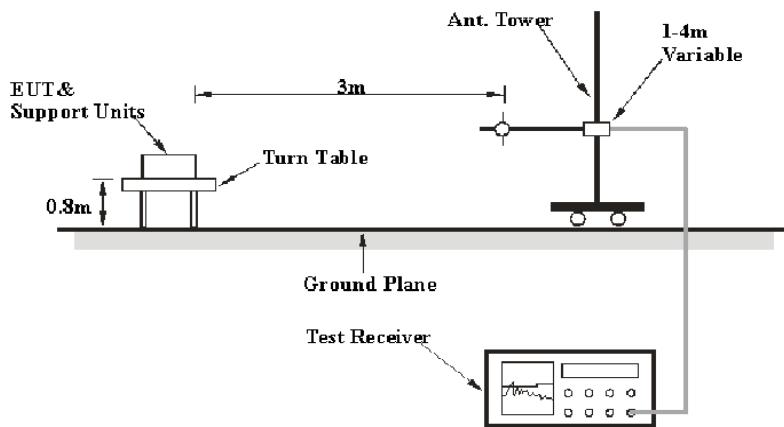
Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB. 18G~26.5GHz: 6.21 dB.

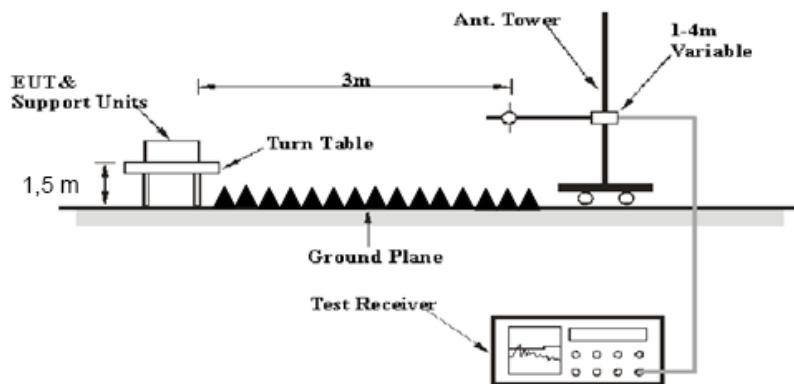
Table 2 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:



Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	3MHz	/	RMS

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2016-08-03	2017-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-07-28	2017-07-27
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
R&S	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS LINDGREN	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

0.60 dB at 185.2000 MHz in the Vertical polarization

Test Data

Environmental Conditions

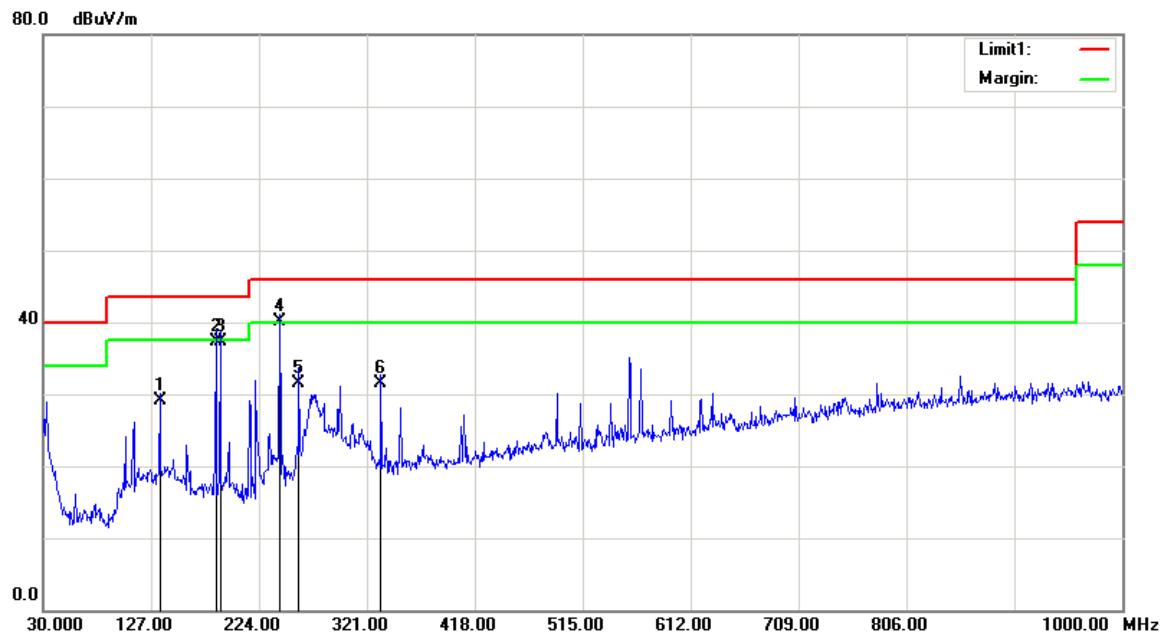
Temperature:	30.4 °C
Relative Humidity:	58 %
ATM Pressure:	100.2kPa

* The testing was performed by Robin Zheng on 2016-08-03.

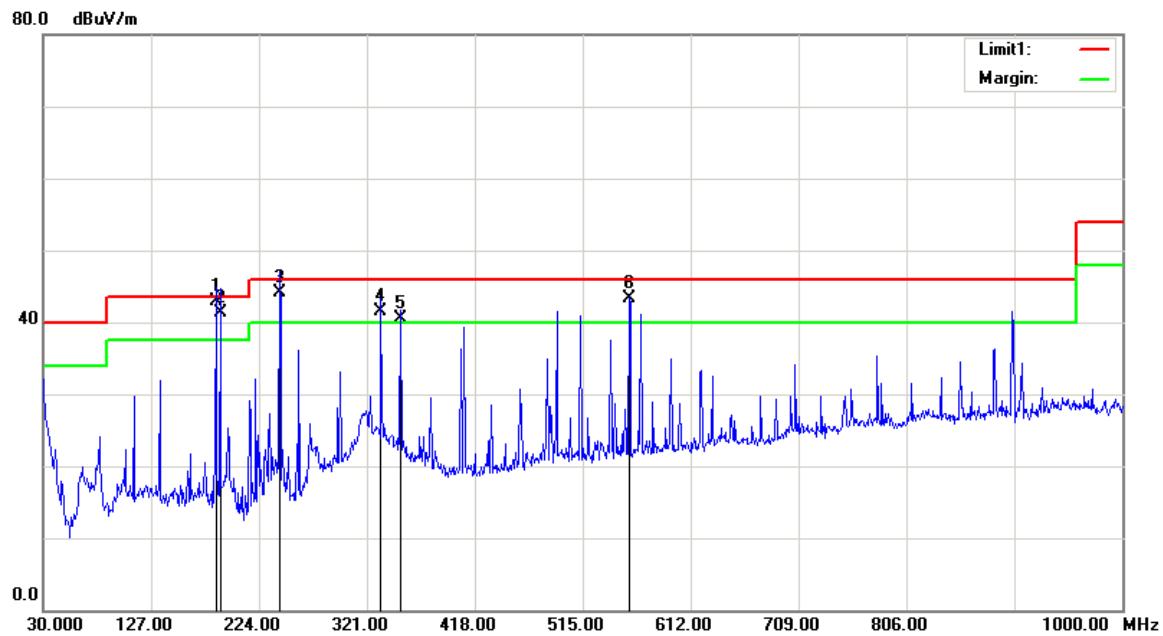
Test Mode: Transmitting

Below 1GHz

Horizontal:



Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
134.7600	35.15	QP	-6.05	29.10	43.50	14.40
185.2000	45.83	QP	-8.43	37.40	43.50	6.10
189.0800	45.60	QP	-8.30	37.30	43.50	6.20
242.4300	47.64	QP	-7.54	40.10	46.00	5.90
259.8900	38.61	QP	-7.11	31.50	46.00	14.50
333.6100	36.78	QP	-5.18	31.60	46.00	14.40

Vertical:

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
185.2000	51.33	QP	-8.43	42.90	43.50	0.60
189.0800	49.60	QP	-8.30	41.30	43.50	2.20
242.4300	51.64	QP	-7.54	44.10	46.00	1.90
333.6100	46.68	QP	-5.18	41.50	46.00	4.50
351.0700	45.26	QP	-4.66	40.60	46.00	5.40
556.7100	44.50	QP	-1.10	43.40	46.00	2.60

802.11b Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	76.62	PK	H	25.67	3.68	0.00	105.97	N/A	N/A
2412	73.92	AV	H	25.67	3.68	0.00	103.27	N/A	N/A
2412	74.89	PK	V	25.67	3.68	0.00	104.24	N/A	N/A
2412	72.12	AV	V	25.67	3.68	0.00	101.47	N/A	N/A
2390	28.05	PK	H	25.61	3.63	0.00	57.29	74.00	16.71
2390	17.53	AV	H	25.61	3.63	0.00	46.77	54.00	7.23
4824	34.58	PK	H	30.64	5.03	27.41	42.84	74.00	31.16
4824	26.95	AV	H	30.64	5.03	27.41	35.21	54.00	18.79
7236	31.03	PK	H	34.17	6.65	25.90	45.95	74.00	28.05
7236	22.84	AV	H	34.17	6.65	25.90	37.76	54.00	16.24
3201	32.59	PK	H	27.84	6.08	27.37	39.14	74.00	34.86
3201	20.04	AV	H	27.84	6.08	27.37	26.59	54.00	27.41
Middle Channel: 2437 MHz									
2437	76.23	PK	H	25.74	3.75	0.00	105.72	N/A	N/A
2437	73.68	AV	H	25.74	3.75	0.00	103.17	N/A	N/A
2437	74.52	PK	V	25.74	3.75	0.00	104.01	N/A	N/A
2437	71.65	AV	V	25.74	3.75	0.00	101.14	N/A	N/A
4874	34.82	PK	H	30.77	5.14	27.42	43.31	74.00	30.69
4874	26.33	AV	H	30.77	5.14	27.42	34.82	54.00	19.18
7311	31.27	PK	H	34.35	6.74	25.88	46.48	74.00	27.52
7311	23.59	AV	H	34.35	6.74	25.88	38.80	54.00	15.20
3252	32.88	PK	H	28.01	6.26	27.33	39.82	74.00	34.18
3252	20.36	AV	H	28.01	6.26	27.33	27.30	54.00	26.70
3668	32.82	PK	H	29.17	4.57	27.31	39.25	74.00	34.75
3668	20.33	AV	H	29.17	4.57	27.31	26.76	54.00	27.24
High Channel: 2462 MHz									
2462	75.52	PK	H	25.80	3.75	0.00	105.07	N/A	N/A
2462	72.97	AV	H	25.80	3.75	0.00	102.52	N/A	N/A
2462	73.99	PK	V	25.80	3.75	0.00	103.54	N/A	N/A
2462	71.04	AV	V	25.80	3.75	0.00	100.59	N/A	N/A
2483.5	27.67	PK	H	25.86	3.67	0.00	57.20	74.00	16.80
2483.5	15.79	AV	H	25.86	3.67	0.00	45.32	54.00	8.68
4924	36.28	PK	H	30.90	5.34	27.43	45.09	74.00	28.91
4924	28.31	AV	H	30.90	5.34	27.43	37.12	54.00	16.88
7386	31.44	PK	H	34.53	6.83	25.86	46.94	74.00	27.06
7386	23.1	AV	H	34.53	6.83	25.86	38.60	54.00	15.40
3154	33.35	PK	H	27.69	6.91	27.41	40.54	74.00	33.46
3154	20.88	AV	H	27.69	6.91	27.41	28.07	54.00	25.93

802.11g Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	80.02	PK	H	25.67	3.68	0.00	109.37	N/A	N/A
2412	69.21	AV	H	25.67	3.68	0.00	98.56	N/A	N/A
2412	78.18	PK	V	25.67	3.68	0.00	107.53	N/A	N/A
2412	67.2	AV	V	25.67	3.68	0.00	96.55	N/A	N/A
2390	42.05	PK	H	25.61	3.63	0.00	71.29	74.00	2.71
2390	20.4	AV	H	25.61	3.63	0.00	49.64	54.00	4.36
4824	33.43	PK	H	30.64	5.03	27.41	41.69	74.00	32.31
4824	20.89	AV	H	30.64	5.03	27.41	29.15	54.00	24.85
7236	31.77	PK	H	34.17	6.65	25.90	46.69	74.00	27.31
7236	20.61	AV	H	34.17	6.65	25.90	35.53	54.00	18.47
3131	33.31	PK	H	27.62	6.93	27.43	40.43	74.00	33.57
3131	20.69	AV	H	27.62	6.93	27.43	27.81	54.00	26.19
Middle Channel: 2437 MHz									
2437	79.54	PK	H	25.74	3.75	0.00	109.03	N/A	N/A
2437	68.49	AV	H	25.74	3.75	0.00	97.98	N/A	N/A
2437	77.52	PK	V	25.74	3.75	0.00	107.01	N/A	N/A
2437	66.43	AV	V	25.74	3.75	0.00	95.92	N/A	N/A
4874	33.72	PK	H	30.77	5.14	27.42	42.21	74.00	31.79
4874	21.16	AV	H	30.77	5.14	27.42	29.65	54.00	24.35
7311	32.06	PK	H	34.35	6.74	25.88	47.27	74.00	26.73
7311	20.89	AV	H	34.35	6.74	25.88	36.10	54.00	17.90
3220	33.57	PK	H	27.90	6.17	27.35	40.29	74.00	33.71
3220	20.97	AV	H	27.90	6.17	27.35	27.69	54.00	26.31
3657	33.92	PK	H	29.15	4.55	27.30	40.32	74.00	33.68
3657	21.55	AV	H	29.15	4.55	27.30	27.95	54.00	26.05
High Channel: 2462 MHz									
2462	78.84	PK	H	25.80	3.75	0.00	108.39	N/A	N/A
2462	67.72	AV	H	25.80	3.75	0.00	97.27	N/A	N/A
2462	76.77	PK	V	25.80	3.75	0.00	106.32	N/A	N/A
2462	65.44	AV	V	25.80	3.75	0.00	94.99	N/A	N/A
2483.5	42.67	PK	H	25.86	3.67	0.00	72.20	74.00	1.80
2483.5	19.31	AV	H	25.86	3.67	0.00	48.84	54.00	5.16
4924	33.76	PK	H	30.90	5.34	27.43	42.57	74.00	31.43
4924	21.24	AV	H	30.90	5.34	27.43	30.05	54.00	23.95
7386	32.15	PK	H	34.53	6.83	25.86	47.65	74.00	26.35
7386	20.92	AV	H	34.53	6.83	25.86	36.42	54.00	17.58
3325	33.67	PK	H	28.24	4.97	27.26	39.62	74.00	34.38
3325	21.32	AV	H	28.24	4.97	27.26	27.27	54.00	26.73

802.11 n ht20 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	78.36	PK	H	25.67	3.68	0.00	107.71	N/A	N/A
2412	66.39	AV	H	25.67	3.68	0.00	95.74	N/A	N/A
2412	76.37	PK	V	25.67	3.68	0.00	105.72	N/A	N/A
2412	64.76	AV	V	25.67	3.68	0.00	94.11	N/A	N/A
2390	42.54	PK	H	25.61	3.63	0.00	71.78	74.00	2.22
2390	20.31	AV	H	25.61	3.63	0.00	49.55	54.00	4.45
4824	33.56	PK	H	30.64	5.03	27.41	41.82	74.00	32.18
4824	21.32	AV	H	30.64	5.03	27.41	29.58	54.00	24.42
7236	33.37	PK	H	34.17	6.65	25.90	48.29	74.00	25.71
7236	20.89	AV	H	34.17	6.65	25.90	35.81	54.00	18.19
3245	33.61	PK	H	27.98	6.29	27.33	40.55	74.00	33.45
3245	20.58	AV	H	27.98	6.29	27.33	27.52	54.00	26.48
Middle Channel: 2437 MHz									
2437	77.98	PK	H	25.74	3.75	0.00	107.47	N/A	N/A
2437	66.29	AV	H	25.74	3.75	0.00	95.78	N/A	N/A
2437	75.57	PK	V	25.74	3.75	0.00	105.06	N/A	N/A
2437	63.86	AV	V	25.74	3.75	0.00	93.35	N/A	N/A
4874	33.92	PK	H	30.77	5.14	27.42	42.41	74.00	31.59
4874	21.64	AV	H	30.77	5.14	27.42	30.13	54.00	23.87
7311	33.68	PK	H	34.35	6.74	25.88	48.89	74.00	25.11
7311	21.2	AV	H	34.35	6.74	25.88	36.41	54.00	17.59
3211	33.96	PK	H	27.88	6.13	27.36	40.61	74.00	33.39
3211	20.88	AV	H	27.88	6.13	27.36	27.53	54.00	26.47
3870	33.51	PK	H	29.61	4.50	27.32	40.30	74.00	33.70
3870	21.51	AV	H	29.61	4.50	27.32	28.30	54.00	25.70
High Channel: 2462 MHz									
2462	77.33	PK	H	25.80	3.75	0.00	106.88	N/A	N/A
2462	66.11	AV	H	25.80	3.75	0.00	95.66	N/A	N/A
2462	74.51	PK	V	25.80	3.75	0.00	104.06	N/A	N/A
2462	63.9	AV	V	25.80	3.75	0.00	93.45	N/A	N/A
2483.5	39.24	PK	H	25.86	3.67	0.00	68.77	74.00	5.23
2483.5	18.73	AV	H	25.86	3.67	0.00	48.26	54.00	5.74
4924	34.08	PK	H	30.90	5.34	27.43	42.89	74.00	31.11
4924	21.88	AV	H	30.90	5.34	27.43	30.69	54.00	23.31
7386	33.87	PK	H	34.53	6.83	25.86	49.37	74.00	24.63
7386	21.45	AV	H	34.53	6.83	25.86	36.95	54.00	17.05
3354	34.04	PK	H	28.33	4.82	27.24	39.95	74.00	34.05
3354	21.08	AV	H	28.33	4.82	27.24	26.99	54.00	27.01

802.11 n ht40 Mode

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2422 MHz									
2422	73.99	PK	H	25.70	3.71	0.00	103.40	N/A	N/A
2422	56.53	AV	H	25.70	3.71	0.00	85.94	N/A	N/A
2422	72.9	PK	V	25.70	3.71	0.00	102.31	N/A	N/A
2422	55.13	AV	V	25.70	3.71	0.00	84.54	N/A	N/A
2390	42.06	PK	H	25.61	3.63	0.00	71.30	74.00	2.70
2390	17.86	AV	H	25.61	3.63	0.00	47.10	54.00	6.90
4844	33.96	PK	H	30.69	4.99	27.42	42.22	74.00	31.78
4844	22.58	AV	H	30.69	4.99	27.42	30.84	54.00	23.16
7266	32.74	PK	H	34.24	6.68	25.89	47.77	74.00	26.23
7266	20.29	AV	H	34.24	6.68	25.89	35.32	54.00	18.68
3210	33.62	PK	H	27.87	6.13	27.36	40.26	74.00	33.74
3210	20.11	AV	H	27.87	6.13	27.36	26.75	54.00	27.25
Middle Channel: 2437 MHz									
2437	74.24	PK	H	25.74	3.75	0.00	103.73	N/A	N/A
2437	56.65	AV	H	25.74	3.75	0.00	86.14	N/A	N/A
2437	72.4	PK	V	25.74	3.75	0.00	101.89	N/A	N/A
2437	54.95	AV	V	25.74	3.75	0.00	84.44	N/A	N/A
4874	34.16	PK	H	30.77	5.14	27.42	42.65	74.00	31.35
4874	22.72	AV	H	30.77	5.14	27.42	31.21	54.00	22.79
7311	32.76	PK	H	34.35	6.74	25.88	47.97	74.00	26.03
7311	20.44	AV	H	34.35	6.74	25.88	35.65	54.00	18.35
3115	33.75	PK	H	27.57	6.88	27.44	40.76	74.00	33.24
3115	20.27	AV	H	27.57	6.88	27.44	27.28	54.00	26.72
3770	34.27	PK	H	29.39	4.59	27.36	40.89	74.00	33.11
3770	21.88	AV	H	29.39	4.59	27.36	28.50	54.00	25.50
High Channel: 2452 MHz									
2452	74.25	PK	H	25.78	3.78	0.00	103.81	N/A	N/A
2452	56.61	AV	H	25.78	3.78	0.00	86.17	N/A	N/A
2452	71.74	PK	V	25.78	3.78	0.00	101.30	N/A	N/A
2452	54.52	AV	V	25.78	3.78	0.00	84.08	N/A	N/A
2483.5	38.25	PK	H	25.86	3.67	0.00	67.78	74.00	6.22
2483.5	17.45	AV	H	25.86	3.67	0.00	46.98	54.00	7.02
4904	34.38	PK	H	30.85	5.31	27.43	43.11	74.00	30.89
4904	22.87	AV	H	30.85	5.31	27.43	31.60	54.00	22.40
7356	33.11	PK	H	34.45	6.79	25.87	48.48	74.00	25.52
7356	20.64	AV	H	34.45	6.79	25.87	36.01	54.00	17.99
3260	33.92	PK	H	28.03	6.08	27.32	40.71	74.00	33.29
3260	20.42	AV	H	28.03	6.08	27.32	27.21	54.00	26.79

FCC§15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

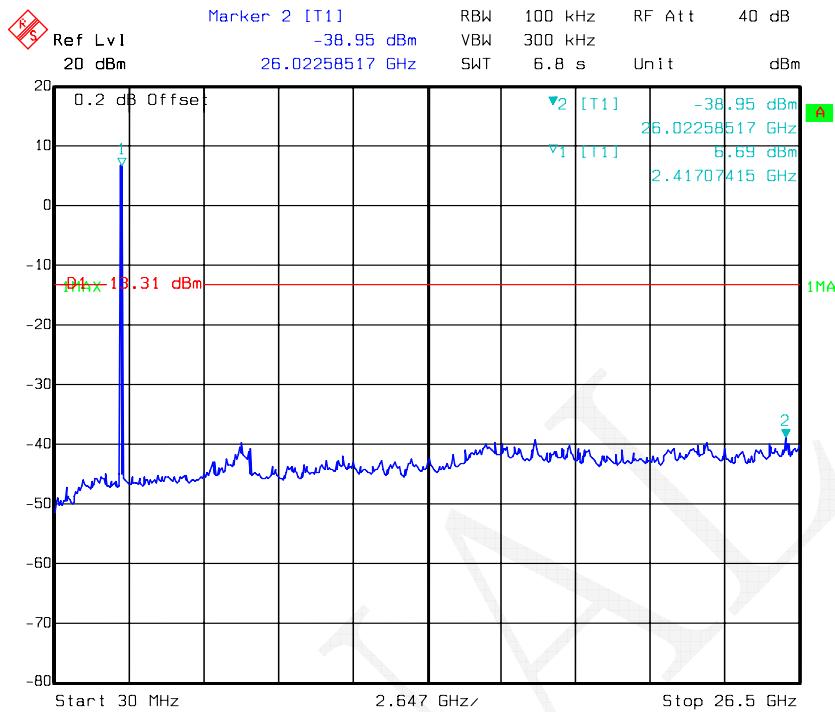
Temperature:	30.4 °C
Relative Humidity:	48 %
ATM Pressure:	100 kPa

* The testing was performed by Robin Zheng on 2016-08-06.

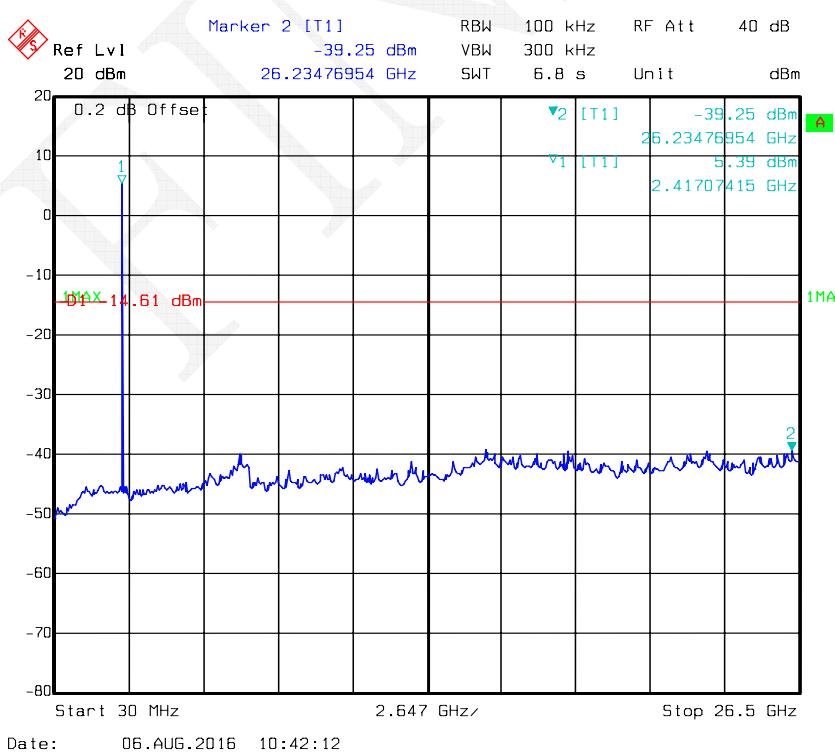
Test mode: Transmitting

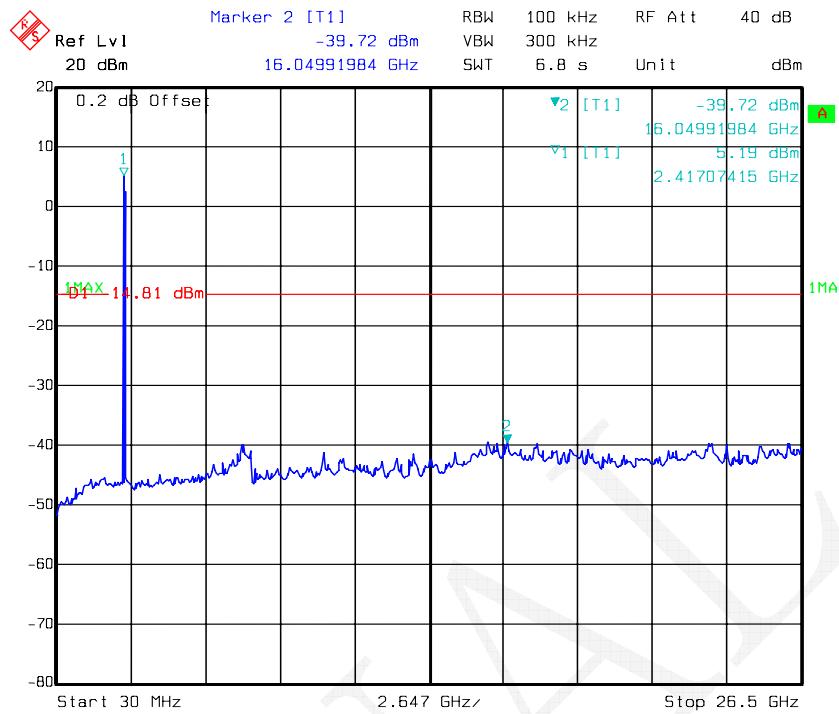
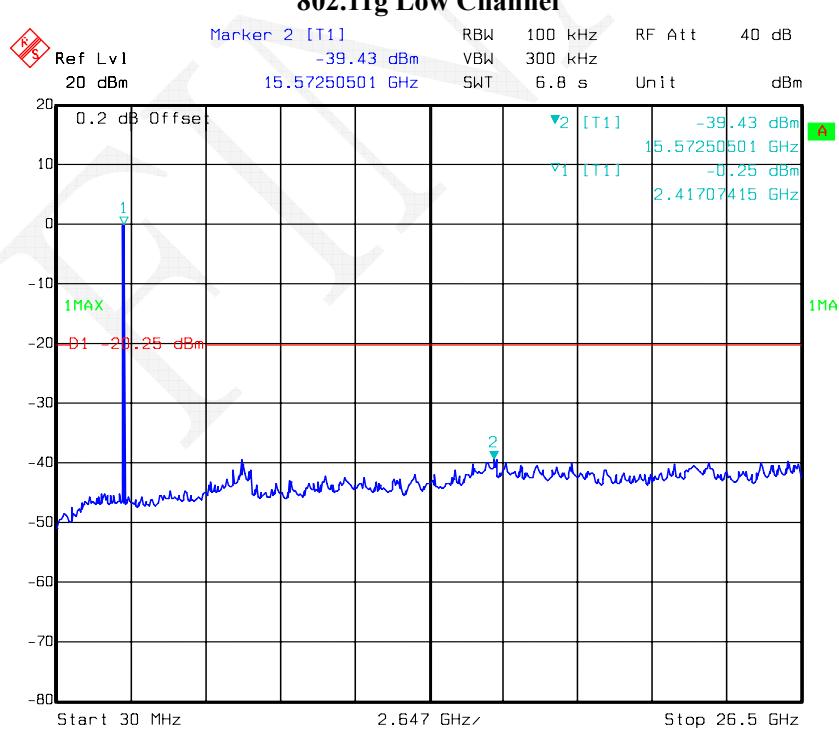
Test Result: Compliant. Please refer to following plots.

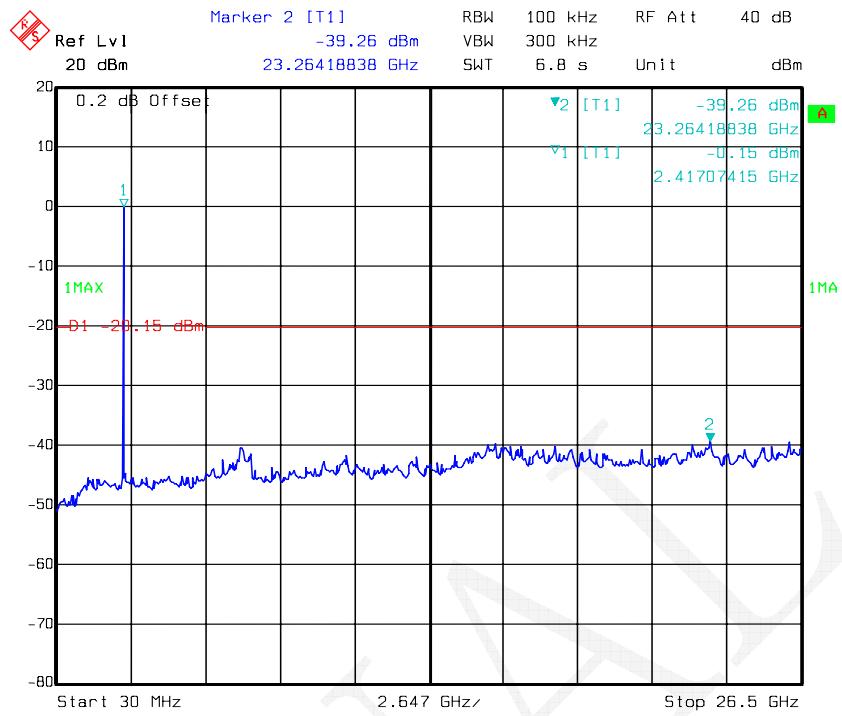
802.11b Low Channel



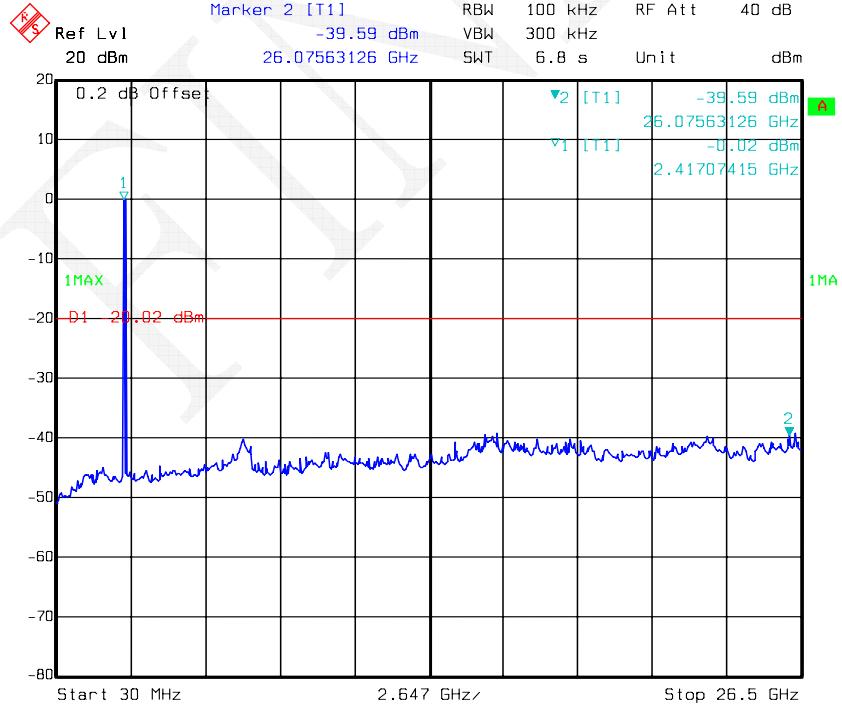
802.11b Middle Channel



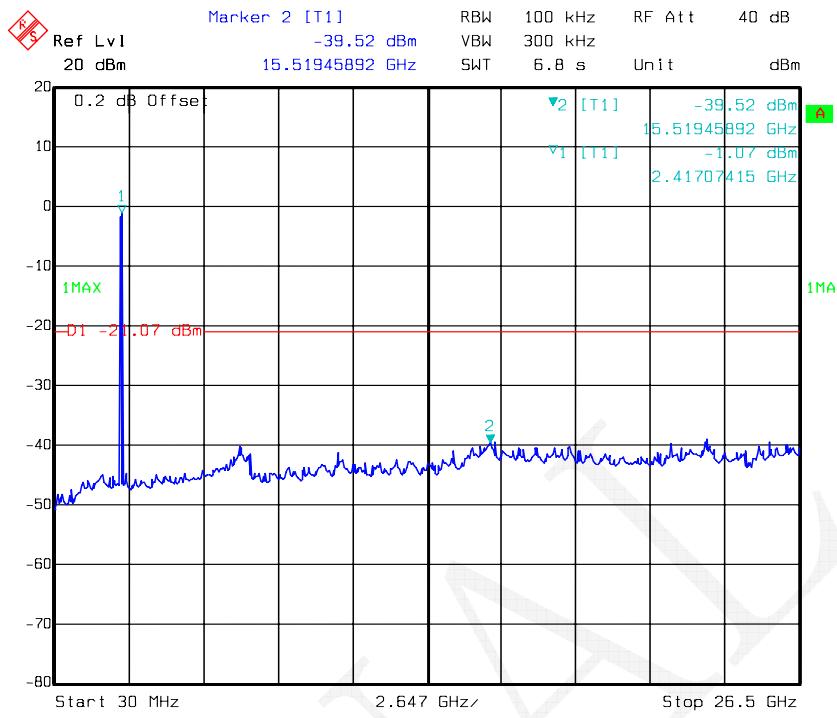
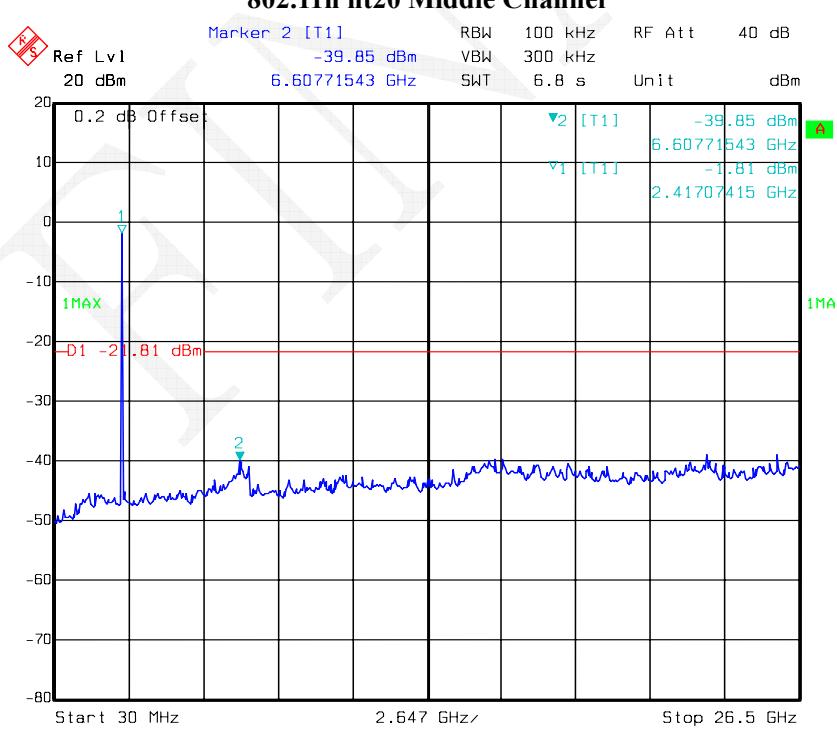
802.11b High Channel**802.11g Low Channel**

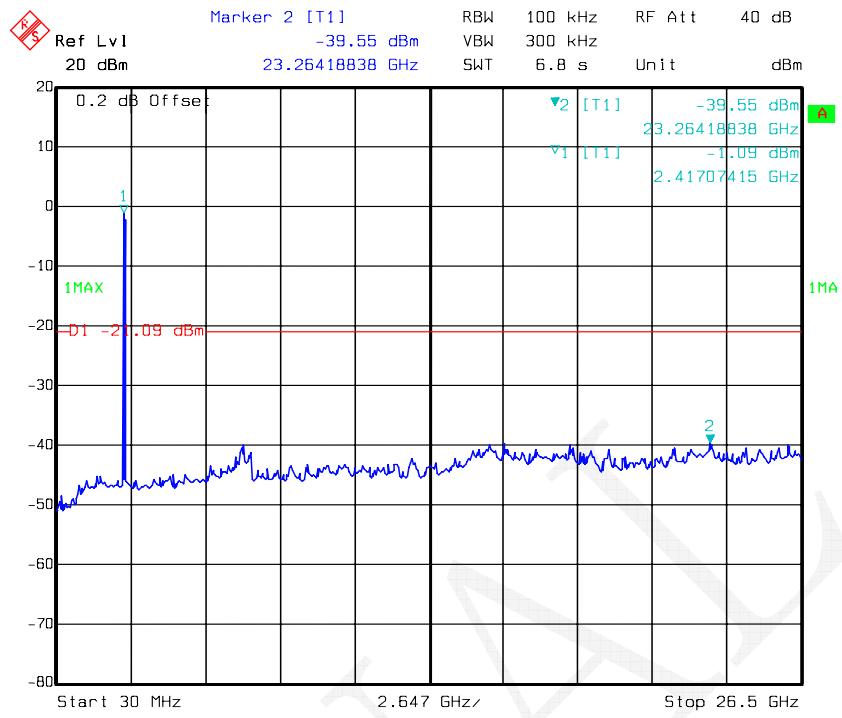
802.11g Middle Channel

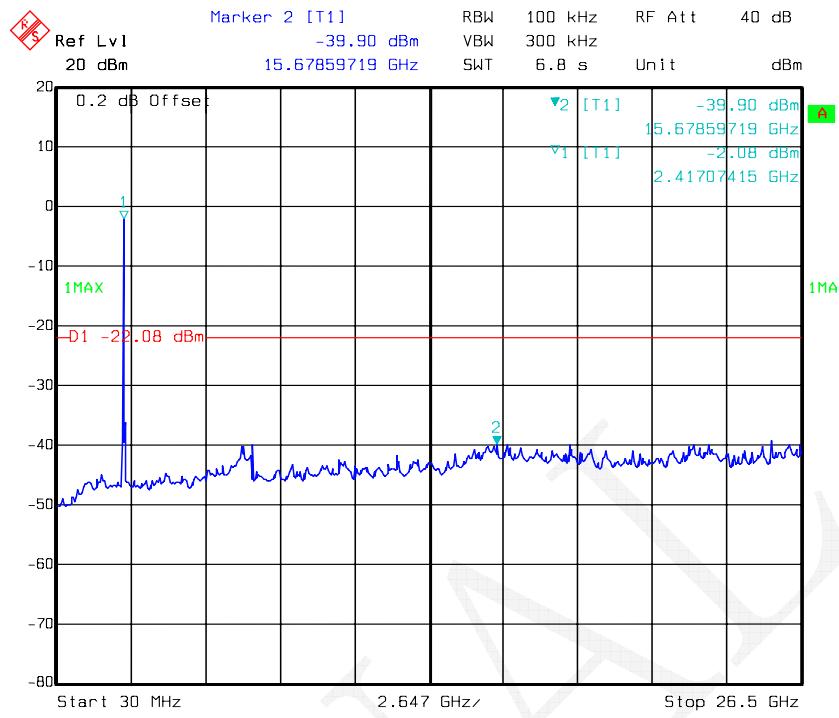
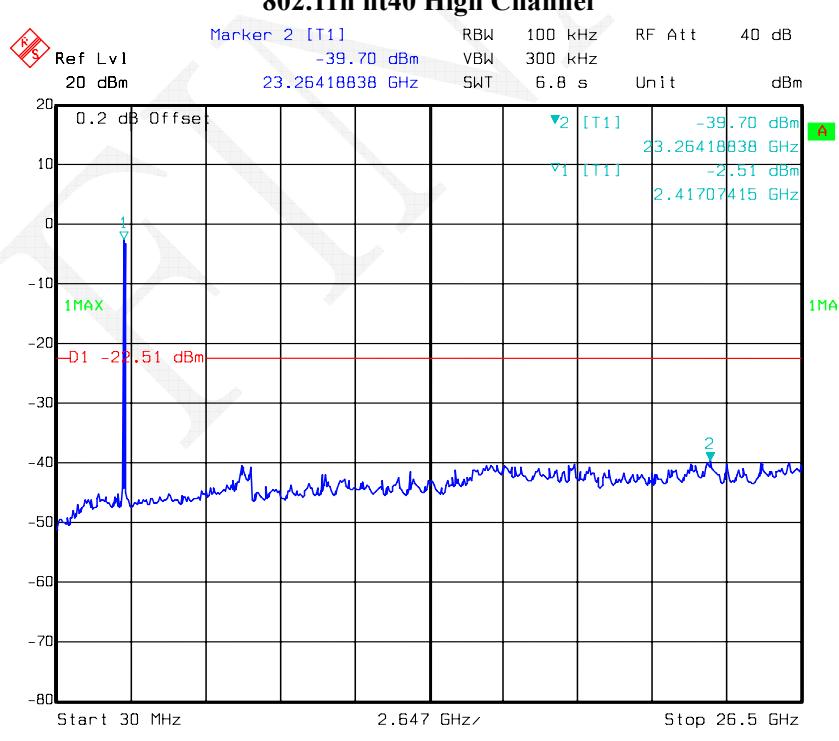
Date: 06.AUG.2016 10:47:24

802.11g High Channel

Date: 06.AUG.2016 10:48:57

802.11n ht20 Low Channel**802.11n ht20 Middle Channel**

802.11n ht20 High Channel**802.11n ht40 Low Channel**

802.11n ht40 Middle Channel**802.11n ht40 High Channel**

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-09	2017-05-09
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-09	2017-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.4°C
Relative Humidity:	48 %
ATM Pressure:	100 kPa

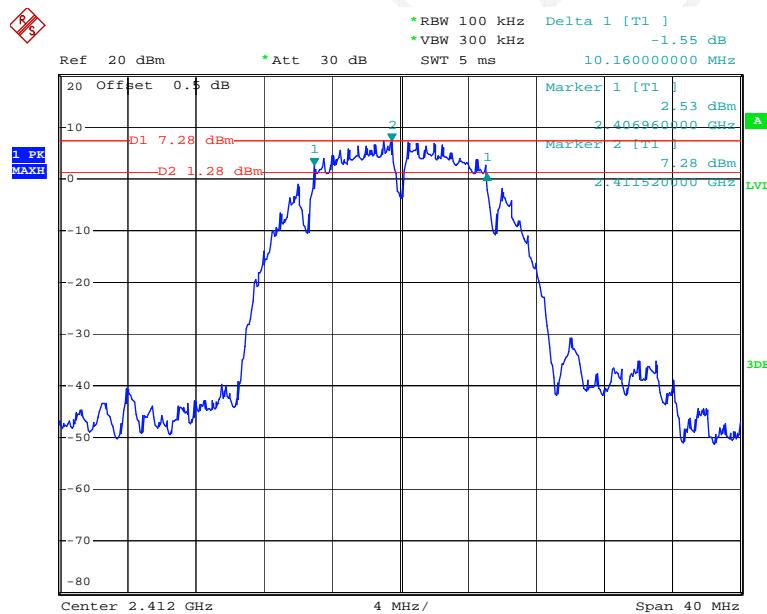
* The testing was performed by Robin Zheng on 2016-08-01.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

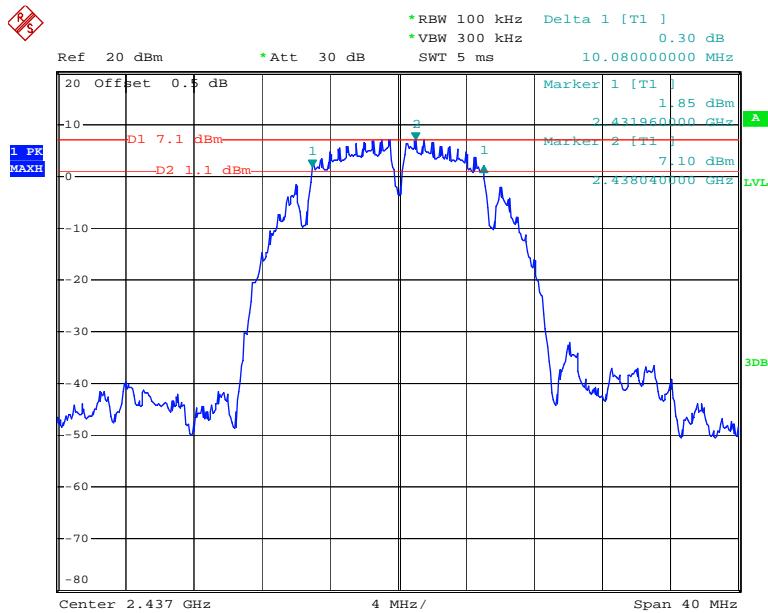
Test mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	10.16	≥0.5
	Middle	2437	10.08	≥0.5
	High	2462	10.08	≥0.5
802.11g	Low	2412	16.48	≥0.5
	Middle	2437	16.40	≥0.5
	High	2462	16.40	≥0.5
802.11n20	Low	2412	17.60	≥0.5
	Middle	2437	17.60	≥0.5
	High	2462	17.36	≥0.5
802.11 n40	Low	2422	35.84	≥0.5
	Middle	2437	36.00	≥0.5
	High	2452	36.00	≥0.5

802.11b Low Channel

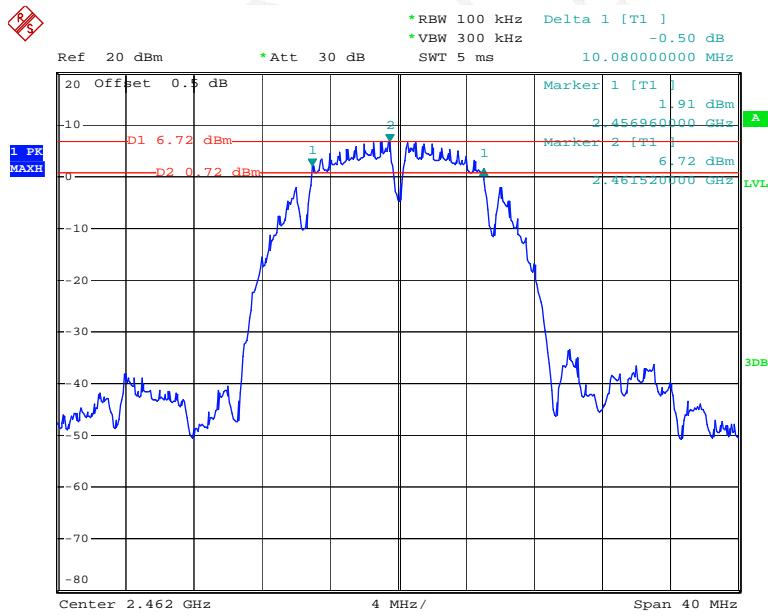


Date: 1.AUG.2016 13:57:23

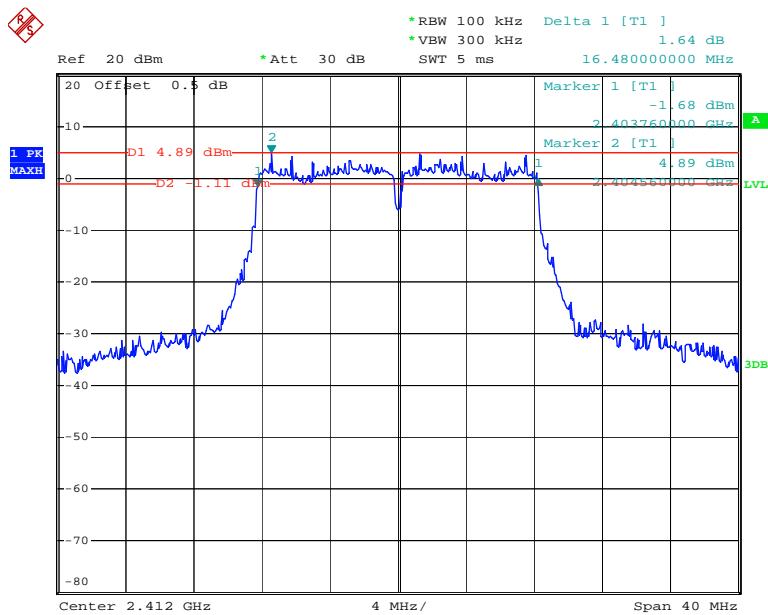
802.11b Middle Channel



802.11b High Channel

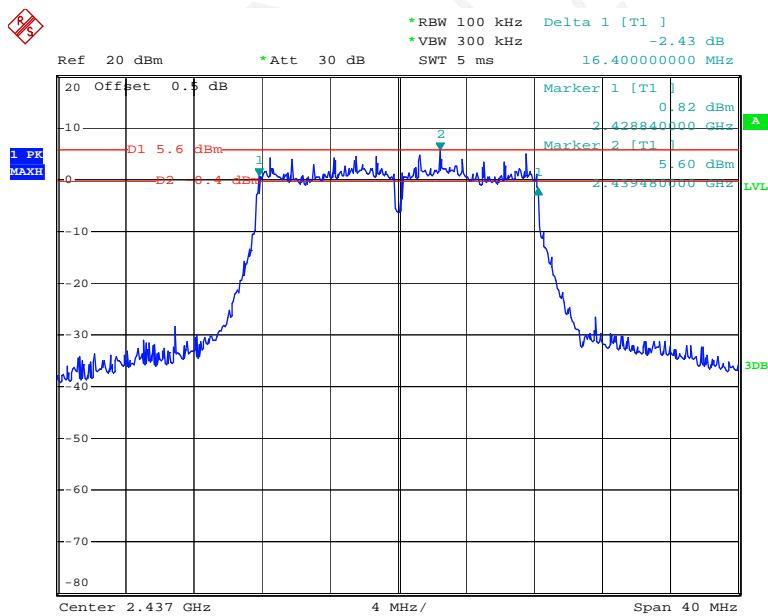


802.11g Low Channel

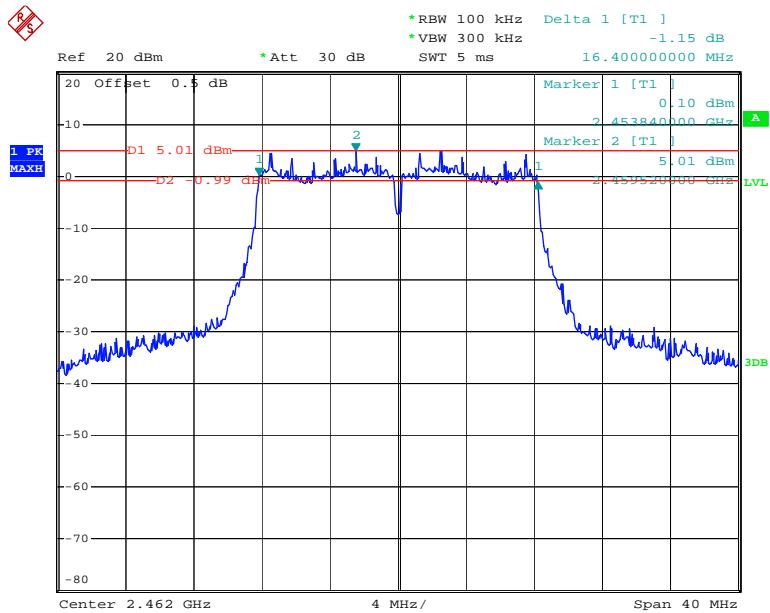


Date: 1.AUG.2016 14:50:22

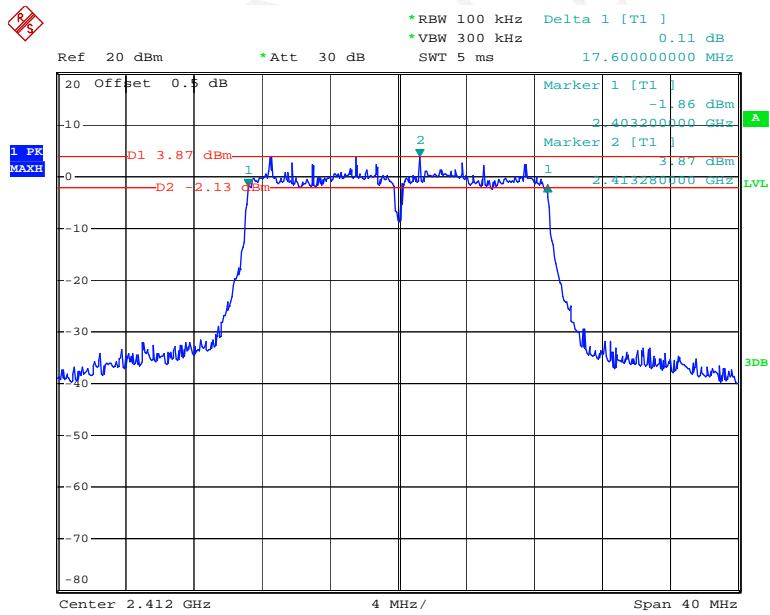
802.11g Middle Channel



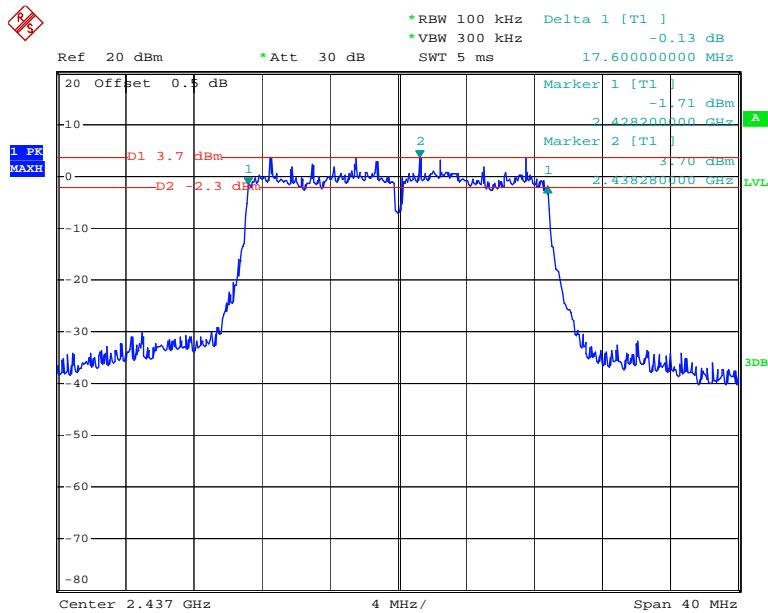
Date: 1.AUG.2016 15:02:29

802.11g High Channel

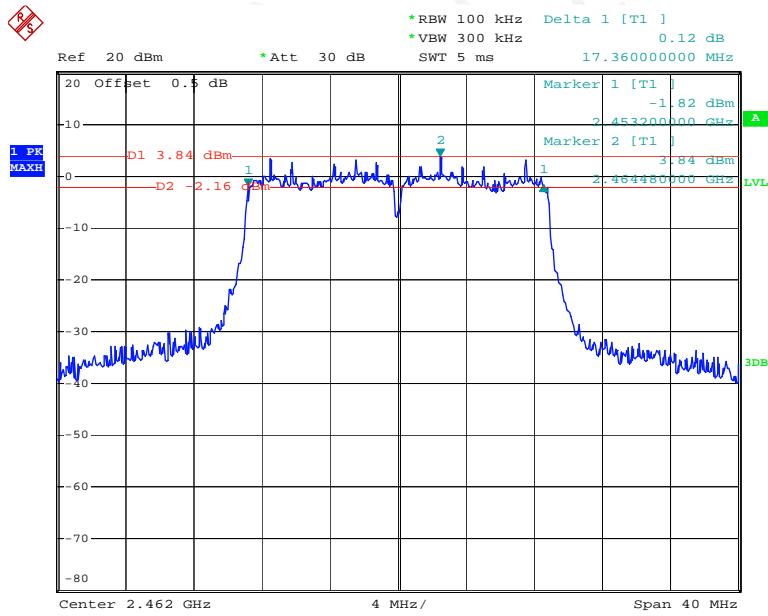
Date: 1.AUG.2016 15:04:52

802.11n ht20 Low Channel

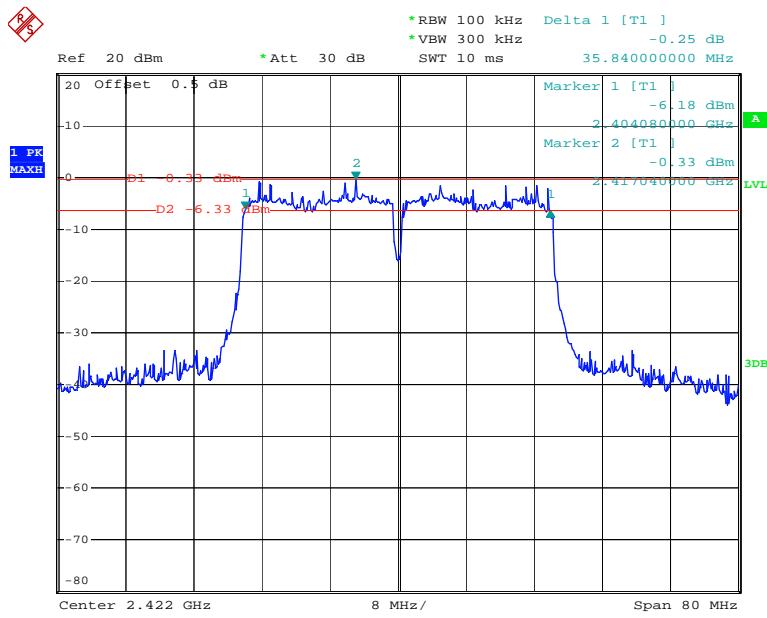
Date: 1.AUG.2016 15:15:17

802.11n ht20 Middle Channel

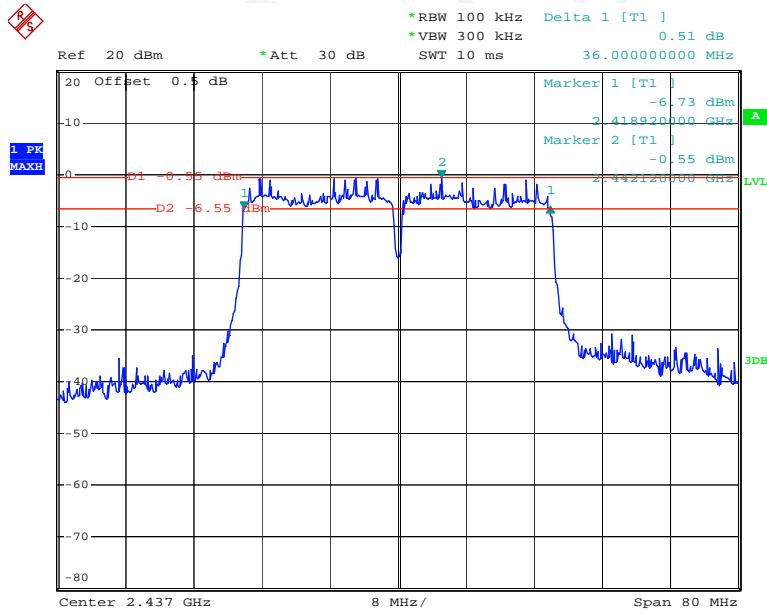
Date: 1.AUG.2016 15:12:52

802.11n ht20 High Channel

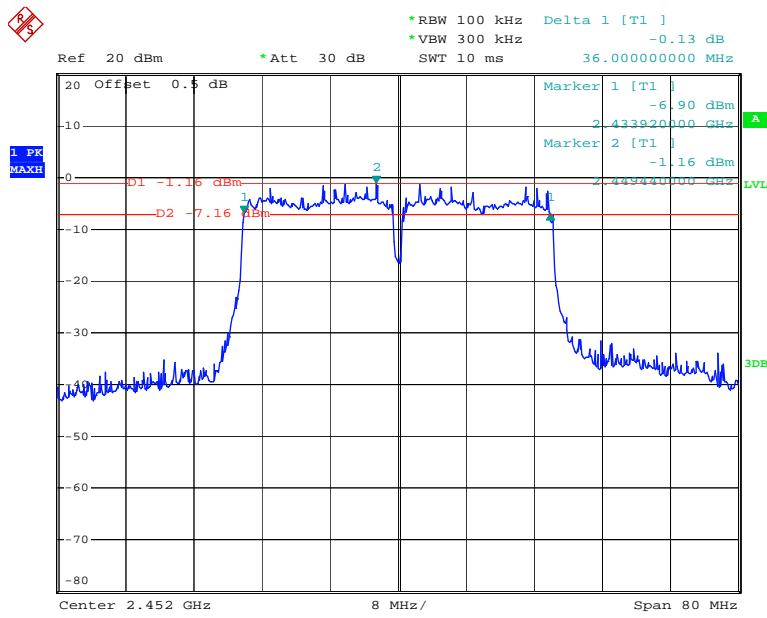
Date: 1.AUG.2016 15:10:14

802.11n ht40 Low Channel

Date: 1.AUG.2016 15:19:28

802.11n ht40 Middle Channel

Date: 1.AUG.2016 15:22:06

802.11n ht40 High Channel

Date: 1.AUG.2016 15:24:40

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	OE01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.4 °C
Relative Humidity:	48 %
ATM Pressure:	100 kPa

* The testing was performed by Robin Zheng on 2016-08-01.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table.

Test mode	Channel	Frequency (MHz)	Max Conducted Output Power (dBm)	Limit (dBm)
802.11b	Low	2412	17.35	30
	Middle	2437	17.19	30
	High	2462	16.9	30
802.11g	Low	2412	17.79	30
	Middle	2437	17.88	30
	High	2462	17.71	30
802.11n20	Low	2412	17.71	30
	Middle	2437	17.55	30
	High	2462	17.54	30
802.11n40	Low	2422	17.53	30
	Middle	2437	17.49	30
	High	2452	17.70	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

6. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
7. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
8. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
9. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
10. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2015-05-09	2016-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	OE01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

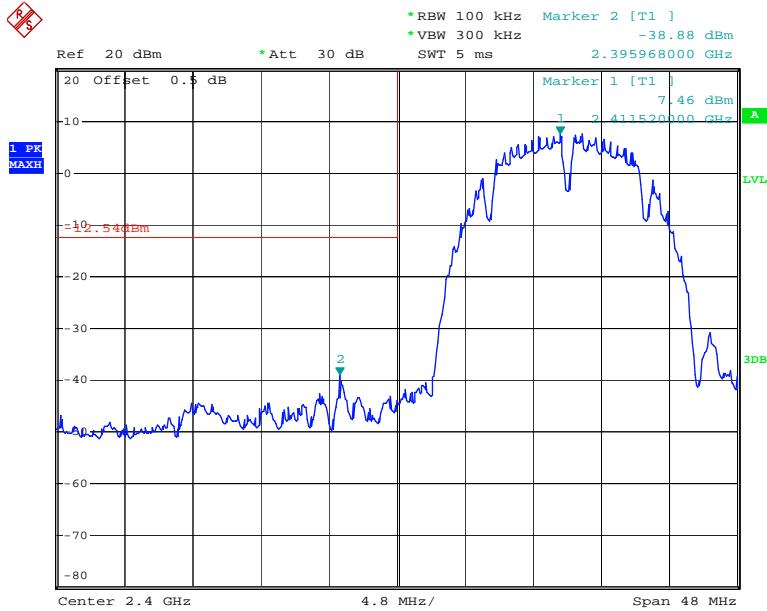
Temperature:	30.4 °C
Relative Humidity:	48 %
ATM Pressure:	100 kPa

* The testing was performed by Robin Zheng on 2016-08-01.

Test mode: Transmitting

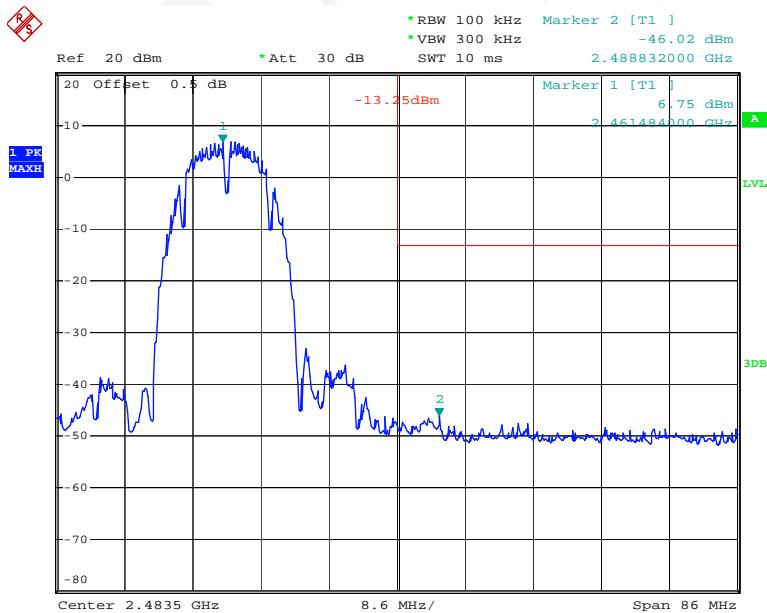
Test Result: Compliant. Please refer to following plots.

802.11b: Band Edge, Left Side

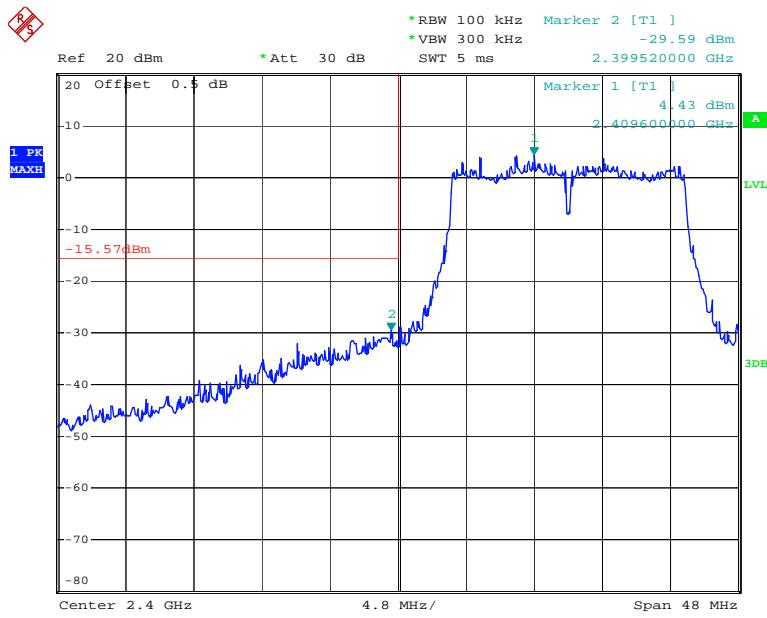


Date: 1.AUG.2016 13:59:07

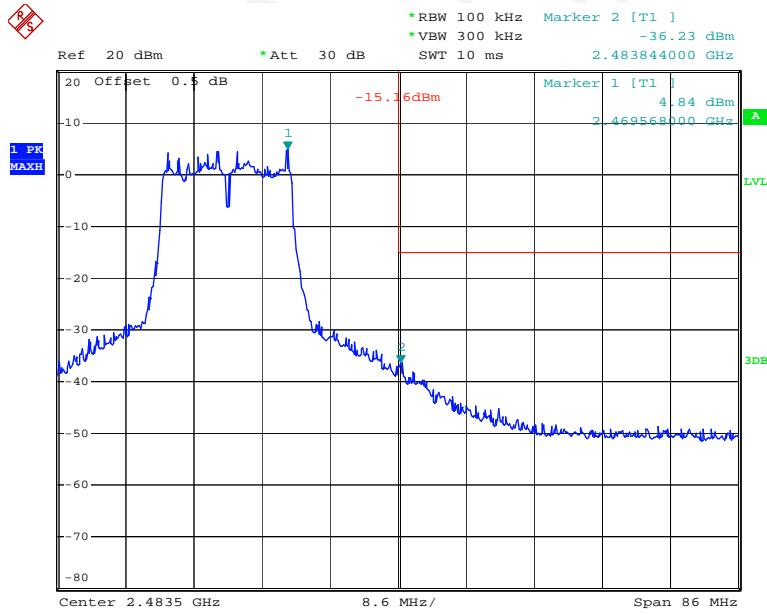
802.11b: Band Edge, Right Side



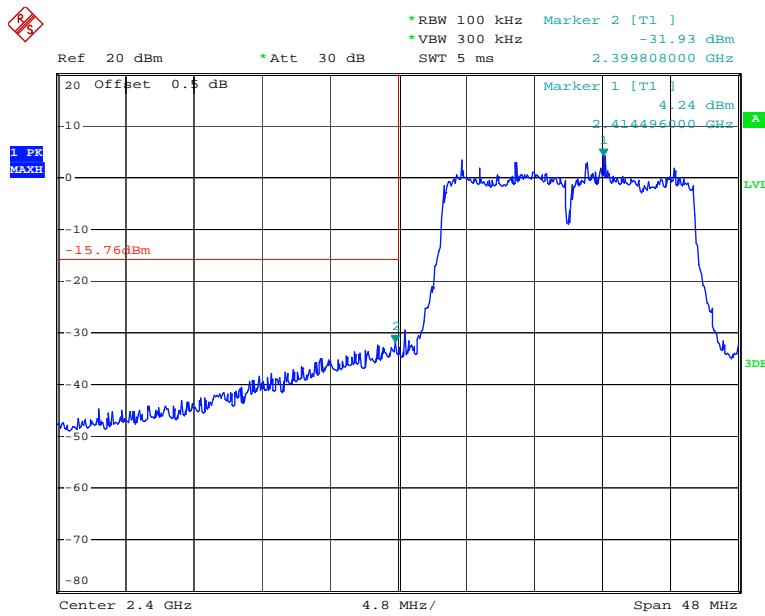
Date: 1.AUG.2016 14:03:27

802.11g: Band Edge, Left Side

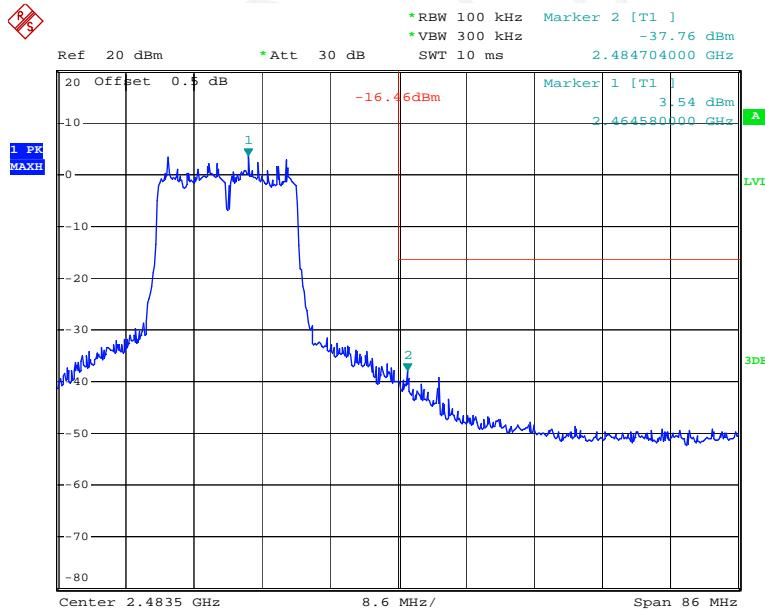
Date: 1.AUG.2016 14:52:15

802.11g: Band Edge, Right Side

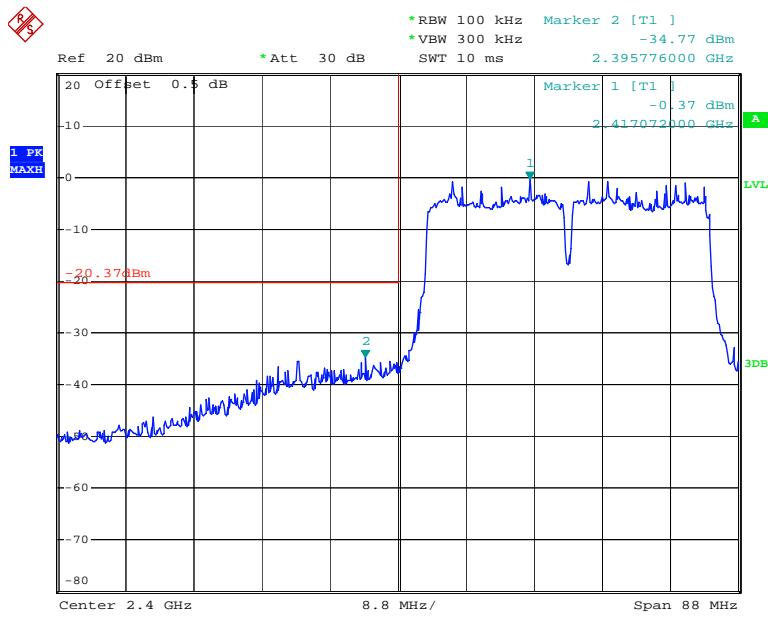
Date: 1.AUG.2016 15:08:40

802.11n ht20 Band Edge, Left Side

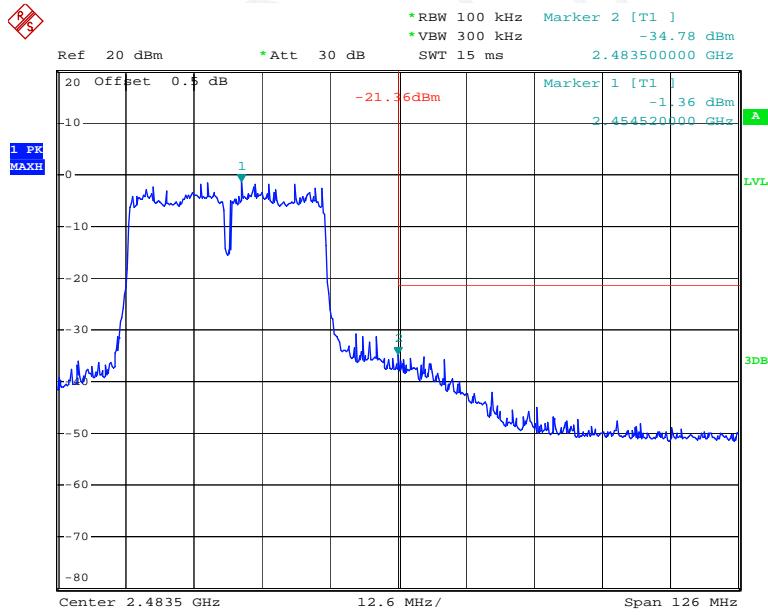
Date: 1.AUG.2016 15:17:10

802.11n ht20 Band Edge, Right Side

Date: 1.AUG.2016 15:12:07

802.11n ht40 Band Edge, Left Side

Date: 1.AUG.2016 15:21:22

802.11n ht40 Band Edge, Right Side

Date: 1.AUG.2016 15:26:38

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	DE31388	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-09	2017-05-09
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-09	2017-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	30.4 °C
Relative Humidity:	48 %
ATM Pressure:	100 kPa

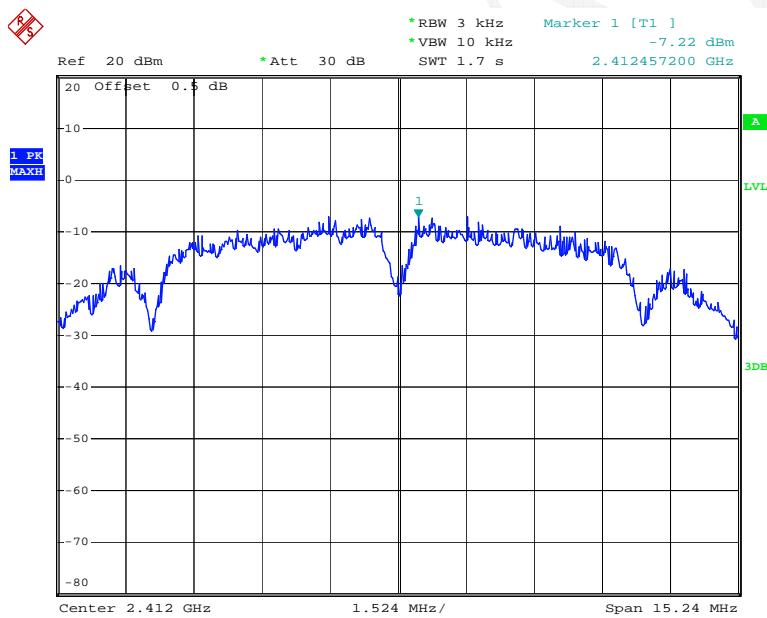
* The testing was performed by Robin Zheng on 2016-08-01.

Test Mode: Transmitting

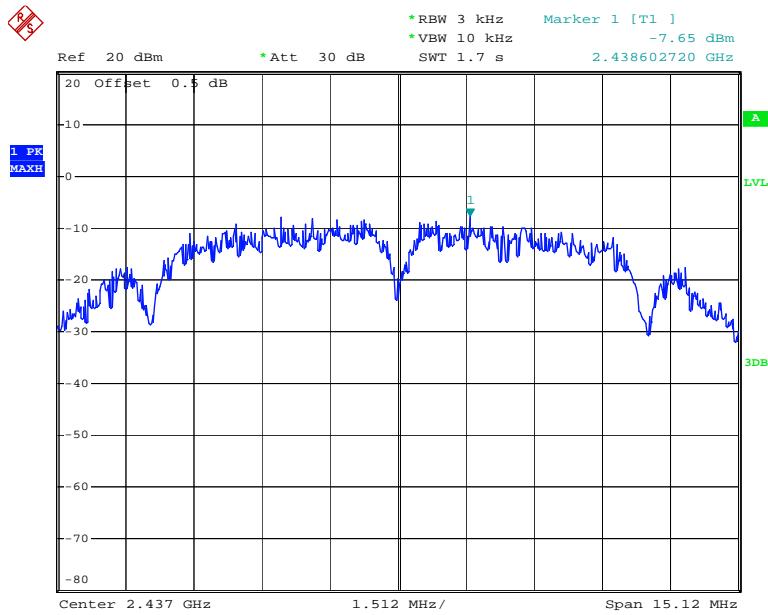
Test Result: Compliant. Please refer to the following table and plots

Test mode	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11b	Low	2412	-7.22	≤8
	Middle	2437	-7.65	≤8
	High	2462	-7.22	≤8
802.11g	Low	2412	-10.24	≤8
	Middle	2437	-10.38	≤8
	High	2462	-11.07	≤8
802.11n20	Low	2412	-10.79	≤8
	Middle	2437	-11.29	≤8
	High	2462	-11.56	≤8
802.11n40	Low	2422	-15.36	≤8
	Middle	2437	-15.42	≤8
	High	2452	-15.57	≤8

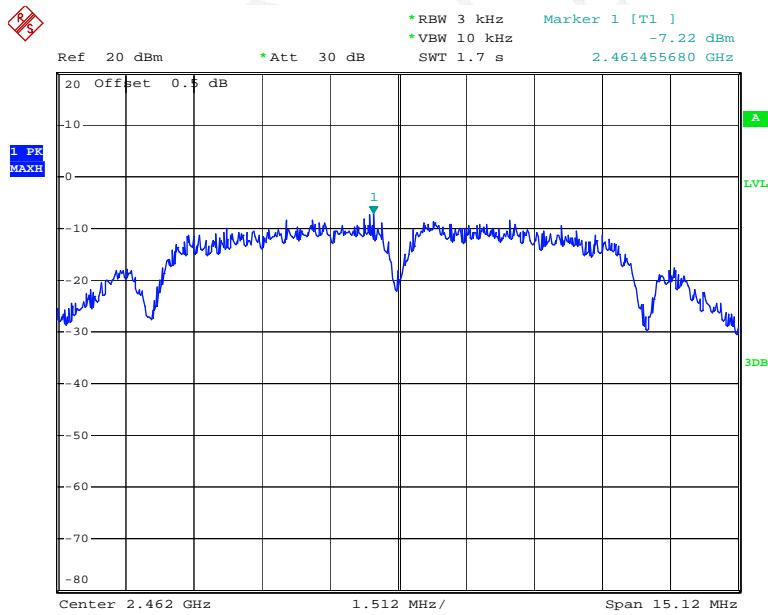
Power Spectral Density, 802.11b Low Channel



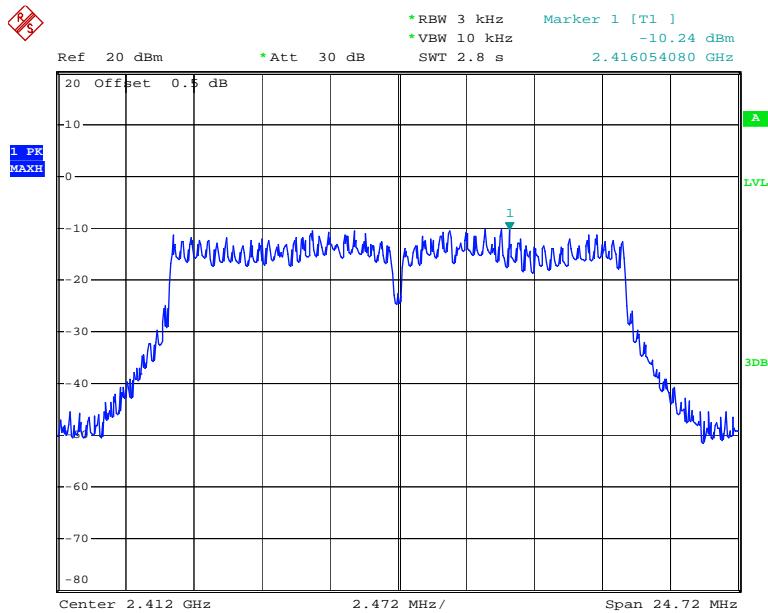
Date: 1.AUG.2016 13:58:43

Power Spectral Density, 802.11b Middle Channel

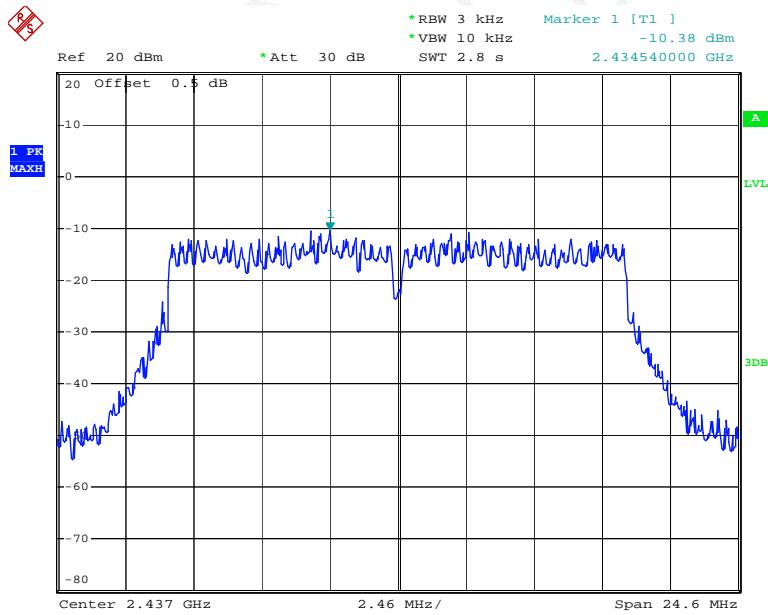
Date: 1.AUG.2016 14:01:08

Power Spectral Density, 802.11b High Channel

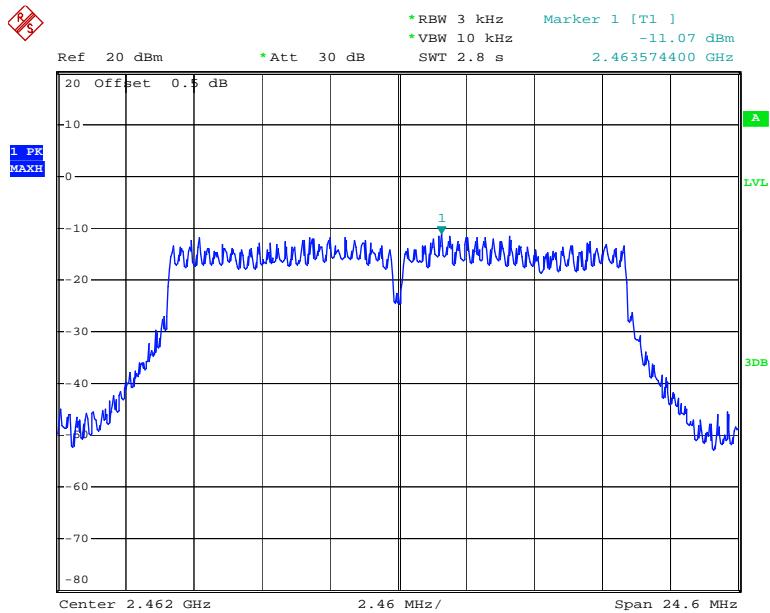
Date: 1.AUG.2016 14:05:05

Power Spectral Density, 802.11g Low Channel

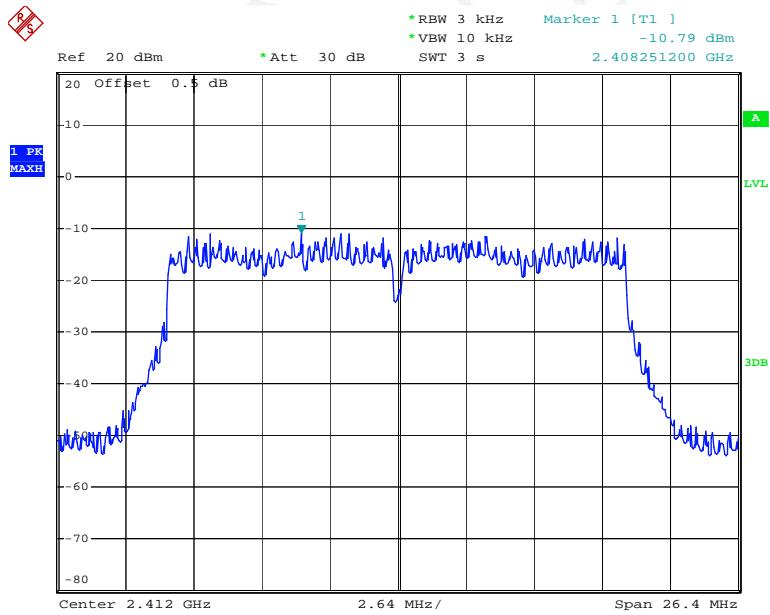
Date: 1.AUG.2016 14:51:56

Power Spectral Density, 802.11g Middle Channel

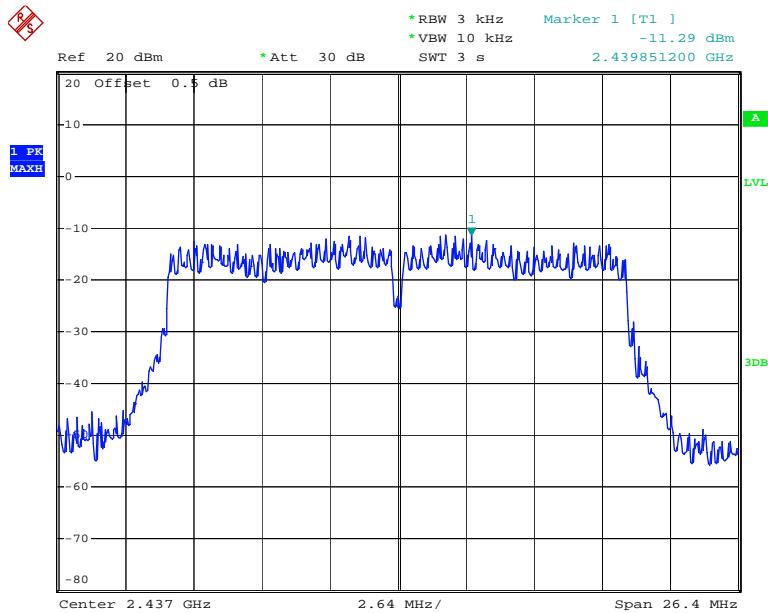
Date: 1.AUG.2016 15:04:01

Power Spectral Density, 802.11g High Channel

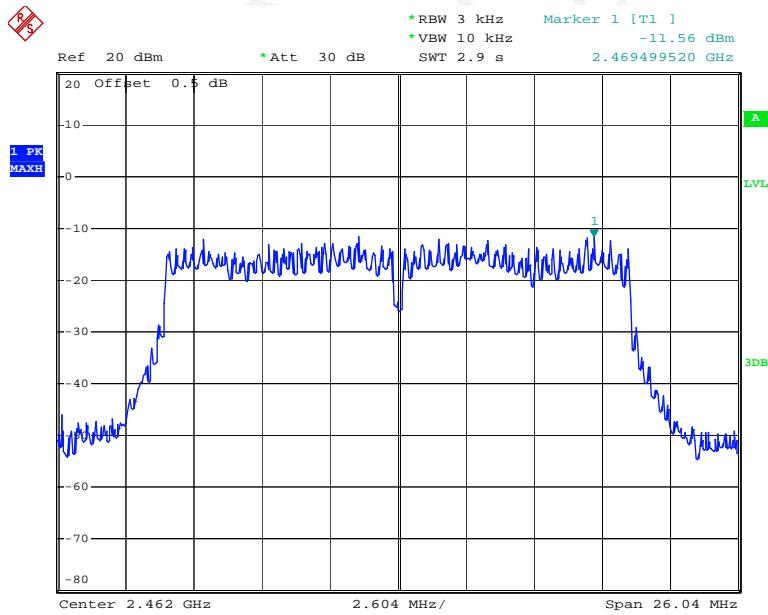
Date: 1.AUG.2016 15:09:09

Power Spectral Density, 802.11n ht20 Low Channel

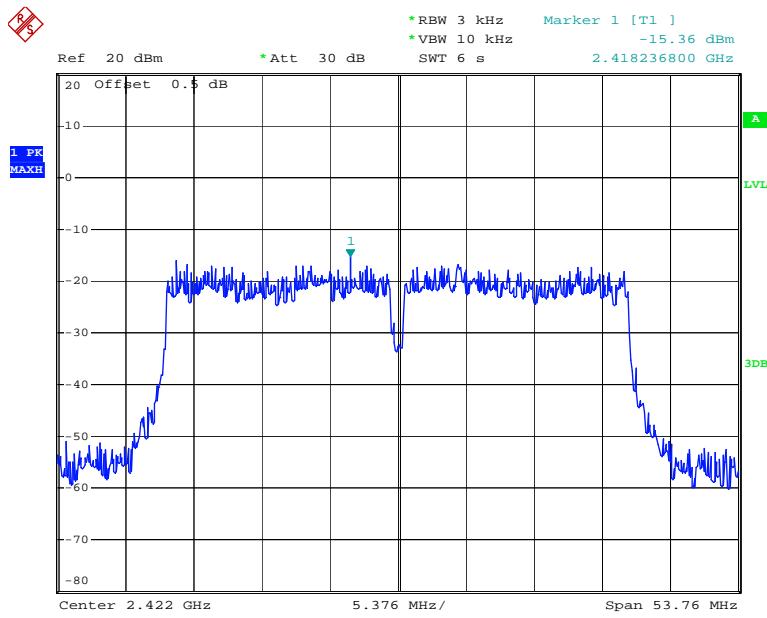
Date: 1.AUG.2016 15:18:18

Power Spectral Density, 802.11n ht20 Middle Channel

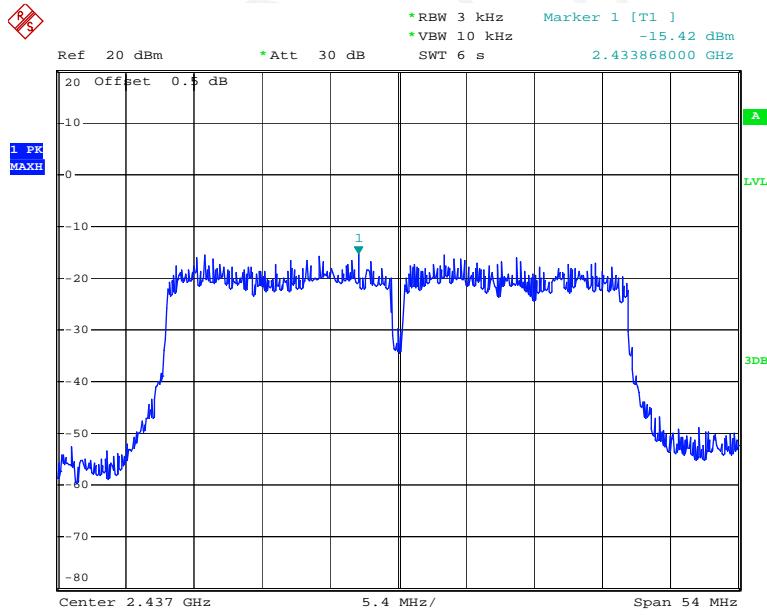
Date: 1.AUG.2016 15:14:32

Power Spectral Density, 802.11n ht20 High Channel

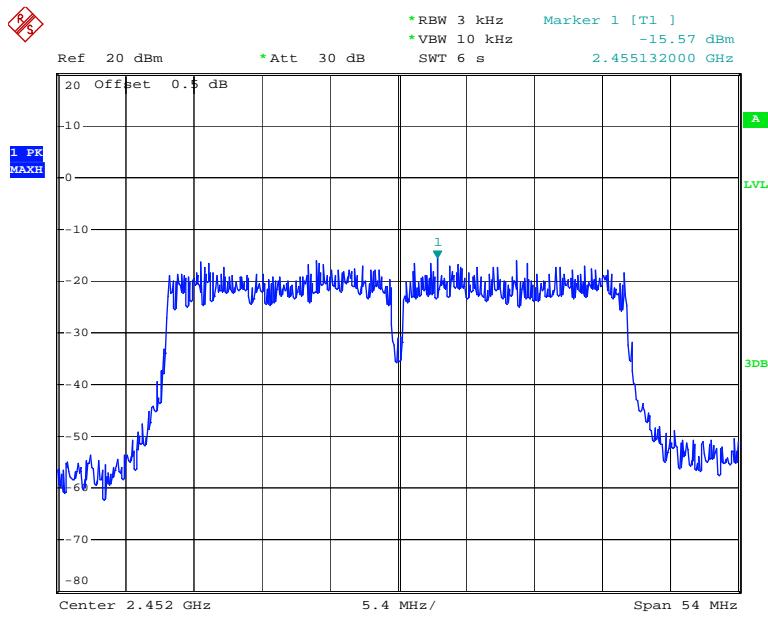
Date: 1.AUG.2016 15:11:49

Power Spectral Density, 802.11n ht40 Low Channel

Date: 1.AUG.2016 15:21:04

Power Spectral Density, 802.11n ht40 Middle Channel

Date: 1.AUG.2016 15:23:52

Power Spectral Density, 802.11n ht40 High Channel

Date: 1.AUG.2016 15:26:14

******* END OF REPORT *******