


OVERVIEW

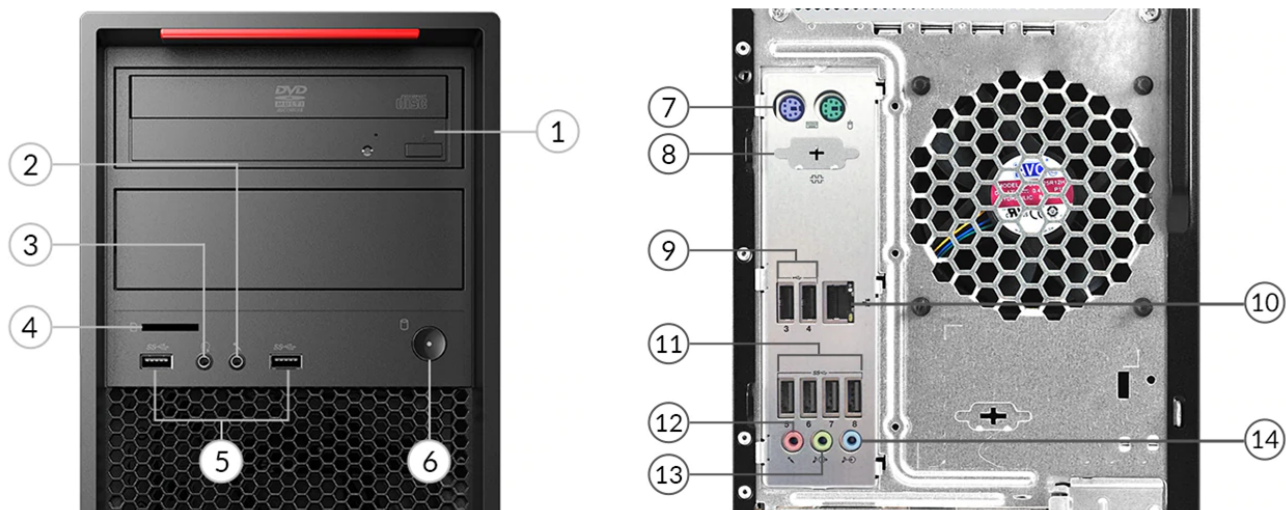

1. Optical drive *	8. Serial *
2. Microphone (3.5mm)	9. 2x USB 2.0
3. Headphone (3.5mm)	10. Ethernet (RJ-45)
4. Card reader	11. 4x USB 3.1 Gen 1
5. 2x USB 3.1 Gen 1	12. Microphone (3.5mm)
6. Power button	13. Line-out (3.5mm)
7. 2x PS/2 ports (keyboard / mouse)	14. Line-in (3.5mm)

Notes:

- Ports with \* are only available on selected models

PERFORMANCE

Processor

Processor Family

Up to one Intel® Xeon® W-2100 / W-2200 Processor

Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Xeon W-2102	4	4	2.9GHz	-	8.25MB	DDR4-2400	-
Xeon W-2104	4	4	3.2GHz	-	8.25MB	DDR4-2400	-
Xeon W-2123	4	8	3.6GHz	3.9GHz	8.25MB	DDR4-2666	-
Xeon W-2125	4	8	4.0GHz	4.5GHz	8.25MB	DDR4-2666	-
Xeon W-2133	6	12	3.6GHz	3.9GHz	8.25MB	DDR4-2666	-
Xeon W-2135	6	12	3.7GHz	4.5GHz	8.25MB	DDR4-2666	-
Xeon W-2145	8	16	3.7GHz	4.5GHz	11MB	DDR4-2666	-
Xeon W-2155	10	20	3.3GHz	4.5GHz	13.75MB	DDR4-2666	-
Xeon W-2175	14	28	2.5GHz	4.3GHz	19MB	DDR4-2666	-
Xeon W-2195	18	36	2.3GHz	4.3GHz	24.75MB	DDR4-2666	-
Xeon W-2223	4	8	3.6GHz	3.9GHz	8.25MB	DDR4 2666	-
Xeon W-2225	4	8	4.1GHz	4.6GHz	8.25MB	DDR4 2933	-
Xeon W-2235	6	12	3.8GHz	4.6GHz	8.25MB	DDR4 2933	-
Xeon W-2245	8	16	3.9GHz	4.5GHz	16.5MB	DDR4 2933	-

Processor Sockets

1x FCLGA2066

Operating System

Operating System\*\*

- Windows® 11 Pro 64 for Workstations
- Windows 11 DG Windows 10 Pro 64 for Workstations
- Windows 10 Pro 64 for Workstations
- Ubuntu Linux LTS
- Red Hat Enterprise Linux 8.5 (certified only, for detailed and latest information, please visit [Red Hat Certified Hardware](#))
- No operating system

Graphics

Discrete Graphics Support

Supports up to one NVIDIA® RTX A5000

Discrete Graphics Offering\*\*\*[]

Graphics	Memory	Power	Connector	SLI / NVlink
Quadro® P400	2GB GDDR5	30W	3x miniDP 1.4	None
Quadro P600	2GB GDDR5	45W	4x miniDP	None
Quadro P620	2GB GDDR5	40W	4x miniDP 1.4	None
Quadro P1000	4GB GDDR5	50W	4x miniDP 1.4	None
Quadro P2000	5GB GDDR5	75W	4x DP	None
Quadro P2200	5GB GDDR5	75W	4x DP 1.4	None
Quadro P4000	8GB GDDR5	120W	4x DP 1.4	None
Quadro P5000	16GB GDDR5X	180W	1x DVI-D DL, 4x DP 1.4	None
NVIDIA T400	2GB GDDR6	40W	3x miniDP 1.4	None

NVIDIA T400 4GB	4GB GDDR6	40W	3x miniDP 1.4	None
NVIDIA T600	4GB GDDR6	40W	4x miniDP 1.4	None
NVIDIA T1000	4GB GDDR6	50W	4x miniDP 1.4	None
NVIDIA T1000 8GB	8GB GDDR6	50W	4x miniDP 1.4	None
Quadro RTX 4000	8GB GDDR6	160W	3x DP 1.4, 1x VirtualLink	None
Quadro RTX 5000	16GB GDDR6	265W	4x DP 1.4, 1x VirtualLink	None
NVIDIA RTX A2000	6GB GDDR6	70W	4x miniDP 1.4a	None
NVIDIA RTX A2000 12GB	12GB GDDR6	70W	4x miniDP 1.4a	None
NVIDIA RTX A4000	16GB GDDR6 with ECC	140W	4x DP 1.4a	None
NVIDIA RTX A4500	20GB GDDR6 with ECC	200W	4x DP 1.4	NVlink
NVIDIA RTX A5000	24GB GDDR6 with ECC	230W	4x DP 1.4a	None

Notes:

1. NVIDIA Quadro RTX 5000 supports manufacture configure only, none standalone option is available.

Monitor Support

Monitor Support

Supports multiple displays via discrete graphics, the number of maximum monitors supported depends on the graphic card in use

Chipset

Chipset

Intel C422 chipset

Memory

Max Memory<sup>[1]</sup>

- Up to 128GB (4x 32GB DDR4-2666 RDIMMs)
- Up to 256GB (4x 64GB RDIMMs) DDR4-2933

Memory Type<sup>\*\*</sup>

- DDR4-2666 RDIMM ECC
- DDR4-2933 RDIMM ECC

Memory Slots

4 DDR4 DIMM slots, 4 channels capable

Memory Protection

ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support<sup>[1]</sup>

Up to 4x 3.5" SATA HDD / 2.5" SATA HDD / 2.5" SATA SSD + 5x M.2 PCIe® SSD

- 3.5" HDD up to 6TB each
- 2.5" SATA HDD up to 500GB each
- 2.5" SATA SSD up to 2TB each
- 2.5" SAS HDD up to 600GB each
- M.2 SSD up to 2TB each

Storage Type<sup>\*\*\*</sup>

Disk Type	Interface	RPM	Offering
2.5" SAS HDD	SAS 12Gb/s	10K	300GB / 600GB
2.5" SATA SSD	SATA 6Gb/s	-	256GB / 512GB / 1TB / 2TB

2.5" SATA HDD	SATA 6Gb/s	7.2K	500GB / 500GB FIPS
3.5" SATA HDD	SATA 6Gb/s	7.2K	1TB / 2TB / 4TB / 6TB
M.2 PCIe SSD	PCIe NVMe®	-	256GB / 512GB / 1TB / 2TB

Storage Controllers

Storage Controller	Type	Interface	RAID	Cache
Onboard Intel RSTe SATA RAID	Standard	SATA 6.0Gb/s	0/1/10/5	None
9440-8i PCIe	Optional	SAS 12.0Gb/s, SATA 6.0Gb/s	0/1/10/5	None
NVMe Basic	Optional	PCIe NVMe	0/1/10	None
NVMe for Intel SSD	Optional	PCIe NVMe	0/1/10/5	None

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.

Removable Storage

Optical Support

Up to two HH or 9.0mm optical drive, DVD-ROM, DVD±RW, and Blu-ray

Card Reader

- SD card reader
- 15-in-1 card reader
- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC662 codec

Speakers

Single speaker

Power Supply

Power Supply\*\*

Power	Type	Efficiency	Key Features
500W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified
625W	Fixed	92%	Autosensing, 80 PLUS Platinum qualified

DESIGN

Mechanical

Form Factor

Tower (25L)

Dimensions (WxDxH)

175 x 426 x 376 mm (6.89 x 16.77 x 14.8 inches, with feet)

Weight

14.5 kg (31.96 lbs, maximum configuration)

Bays

- 2x 3.5" disk bay (standard)
- 2x 3.5" disk bay (optional, via flex bay)

Flex Bays

2x flex bays, supports the following:

- 2x half-height optical drives
- 2x 5.25" 9.0mm optical drives

- 1x 5.25" 9.0mm optical drive + 2x 3.5"/2.5" SATA SSD/HDD
- 1x 3.5"/2.5" SATA SSD/HDD with Front Access Storage Enclosure
- 1x flex module for the following options:  
Tray 1: 9.0mm optical  
Tray 2: 15-in-1 USB 3.1 Gen 1 reader, 2x Thunderbolt™, or 4-digit diagnostic display  
Port 1 and 2: Front USB 3.1 Gen 1 Type-C or eSATA

## M.2 Slots

Up to 5x M.2 SSD:

- 2 via onboard slots
- 3 via Single M.2 to PCIe adapter

## Expansion Slots

- One PCIe 3.0 x4
- One PCIe 3.0 x8
- Two PCIe 3.0 x16

## Expansion Slots Offering

Slot 1: PCIe 3.0 x16, full height, full length, 75W, by CPU  
Slot 2: PCIe 3.0 x8, full height, full length, 25W, open ended, by CPU  
Slot 3: PCIe 3.0 x16, full height, full length, 75W, by CPU,  
Slot 4: PCIe 3.0 x4, full height, half length, 25W, open ended, by PCH

# CONNECTIVITY

## Network

### Onboard Ethernet

Gigabit Ethernet, Intel Ethernet Connection I219-LM, 1x RJ-45, supports Wake-on-LAN

### Optional Ethernet

Two additional Ethernet adapters support, up to four additional 10 GbE ports

- Gigabit Ethernet, Intel I210-T1, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Intel I350-T2, 2x RJ-45, PCIe x4
- Gigabit Ethernet, Intel X540-T2, 2x RJ-45, PCIe x8
- Gigabit Ethernet, Intel X550-T2, 2x RJ-45, PCIe x4
- Gigabit Ethernet, Bitland BN8E88, 1x RJ-45, PCIe x1
- Gigabit Ethernet, Broadcom BCM5719, 4x RJ-45, PCIe x4
- Gigabit Ethernet, Broadcom BCM5720, 2x RJ-45, PCIe x1
- 5 Gigabit Ethernet, Marvell AQtion AQN-108, 1x RJ-45, PCIe x1
- 10 Gigabit Ethernet, Intel X710-DA2, 2x SFP+, PCIe x8
- 10 Gigabit Ethernet, Marvell AQtion AQN-107, 1x RJ-45, PCIe x4

### WLAN + Bluetooth<sup>[1]</sup>

- Intel Dual-Band Wireless-AC 8265, 802.11ac Dual-Band 2x2 Wi-Fi® + Bluetooth 4.2
- No WLAN and Bluetooth

## Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

## Ports<sup>[1]</sup>

### Front Ports

- 2x USB 3.1 Gen 1
- 1x headphone (3.5mm)
- 1x microphone (3.5mm)

### Optional Front Ports<sup>\*\*\*</sup>

- 2x Thunderbolt 3 (with flex module, USB-C® form, one supports video-out)
- 1x eSATA (with flex module)
- 1x USB-C 3.1 Gen 1 (with flex module)

### Rear Ports<sup>[2]</sup>

- 2x USB 2.0
- 4x USB 3.1 Gen 1
- 2x PS/2 ports (keyboard / mouse)
- 1x Ethernet (RJ-45)

- 1x line-in (3.5mm)
- 1x line-out (3.5mm)
- 1x microphone (3.5mm)

**Optional Rear Ports**\*\*\*

- 2x USB-C 3.1 Gen 2 (via 2-port USB-C expansion card)
- 1x Thunderbolt 3
- 1x serial

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.  
USB 2.0: 480 Mbit/s;  
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;  
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;  
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;  
Thunderbolt 3/4: 40 Gbit/s;
2. For video ports on discrete graphics, please see graphics section

## SECURITY & PRIVACY

### Security

**Security Chip**

Discrete TPM 2.0, TCG certified

**Physical Locks**

Kensington® Security Slot™, 3 x 7 mm

**Chassis Intrusion Switch**

- Chassis intrusion switch
- No chassis intrusion switch

**BIOS Security**

- Administrator password
- Power-on password

## MANAGEABILITY

### System Management

**System Management**<sup>[1][2]</sup>

Intel vPro with Intel AMT 11.0

**Notes:**

1. Intel vPro offers a superset of DASH's defined capabilities.
2. Intel vPro offers a superset of DASH's defined capabilities.

### Diagnostic

**Diagnostic**

- Photo-audio transfer with Lenovo PC Diagnostics for Android™ and iOS
- ThinkStation® Diagnostics for Windows
- Front 4-digit diagnostic
- Lenovo UEFI Bootable Diagnostics
- None

## SERVICE

### Warranty

**Base Warranty**\*\*<sup>[1]</sup>

- 1-year limited onsite service
- 3-year limited onsite service with 9x5 NBD (for most models)
- No base warranty

## Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## ENVIRONMENTAL

### Operating Environment

#### Temperature

- Operating: 10°C (50°F) to 35°C (95°F)
- Storage: -40°C (-40°F) to 60°C (140°F)

#### Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

#### Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Silver
- ENERGY STAR® 8.0 (on model 30BX0095US)
- GREENGUARD®
- RoHS compliant

### ISV Certifications

#### ISV Certifications

Please visit [www.thinkworkstations.com/isv-certifications/](http://www.thinkworkstations.com/isv-certifications/)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.

