



# FCC RF Test Report

**APPLICANT** : Amazon.com Services LLC  
**EQUIPMENT** : Electronic Display Device  
**MODEL NAME** : C4A6T4  
**FCC ID** : 2A4DH-3426  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : May 29, 2022 ~ Jun. 08, 2022

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Product Specification of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 5

    1.5 Testing Location ..... 6

    1.6 Test Software..... 6

    1.7 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Carrier Frequency Channel ..... 7

    2.2 Test Mode..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 9

    2.5 EUT Operation Test Setup ..... 10

    2.6 Measurement Results Explanation Example..... 10

**3 TEST RESULT ..... 11**

    3.1 6dB and 99% Bandwidth Measurement ..... 11

    3.2 Output Power Measurement..... 28

    3.3 Power Spectral Density Measurement ..... 29

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 46

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 63

    3.6 AC Conducted Emission Measurement..... 67

    3.7 Antenna Requirements..... 69

**4 LIST OF MEASURING EQUIPMENT..... 70**

**5 UNCERTAINTY OF EVALUATION..... 71**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS**

**APPENDIX E. DUTY CYCLE PLOTS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.1	-	99% Bandwidth	-	Report only
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Amazon.com Services LLC  
410 Terry Avenue N Seattle, WA 98109-5210 United States

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Electronic Display Device
Model Name	C4A6T4
FCC ID	2A4DH-3426

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	<p>&lt; Ant 1&gt;: Bluetooth LE 1Mbps : -2.70 dBm (0.0005 W) Bluetooth LE 2Mbps : -2.50 dBm (0.0006 W)</p> <p>&lt; Ant 2&gt;: Bluetooth LE 1Mbps : -2.80 dBm (0.0005 W) Bluetooth LE 2Mbps : -2.40 dBm (0.0006 W)</p>
99% Occupied Bandwidth	<p>&lt; Ant 1&gt;: Bluetooth LE 1Mbps : 1.031 MHz Bluetooth LE 2Mbps : 2.062 MHz</p> <p>&lt; Ant 2&gt;: Bluetooth LE 1Mbps : 1.031 MHz Bluetooth LE 2Mbps : 2.058 MHz</p>
Antenna Type / Gain	<p>&lt; Ant 1&gt;: Fixed Internal PIFA Antenna with gain -0.3 dBi</p> <p>&lt; Ant 2&gt;: Fixed Internal PIFA Antenna with gain -0.1 dBi</p>
Type of Modulation	Bluetooth LE : GFSK

Note: The device does not support Ant 1+2 MIMO.

## 1.4 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.5 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO02-SZ 03CH02-SZ	CN1256	421272

### 1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO02-SZ	Rohde&Schwarz	EMC32	10.60.0.0

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_ 1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_ 1Mbps & 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_ 1Mbps & 2Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_ 1Mbps & 2Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_ 1Mbps & 2Mbps
AC Conducted Emission	Mode 1 : Turn backlight to max brightness+ Bluetooth Link + Battery+ USB cable ( Adapter AP16-US)



### 2.3 Connection Diagram of Test System

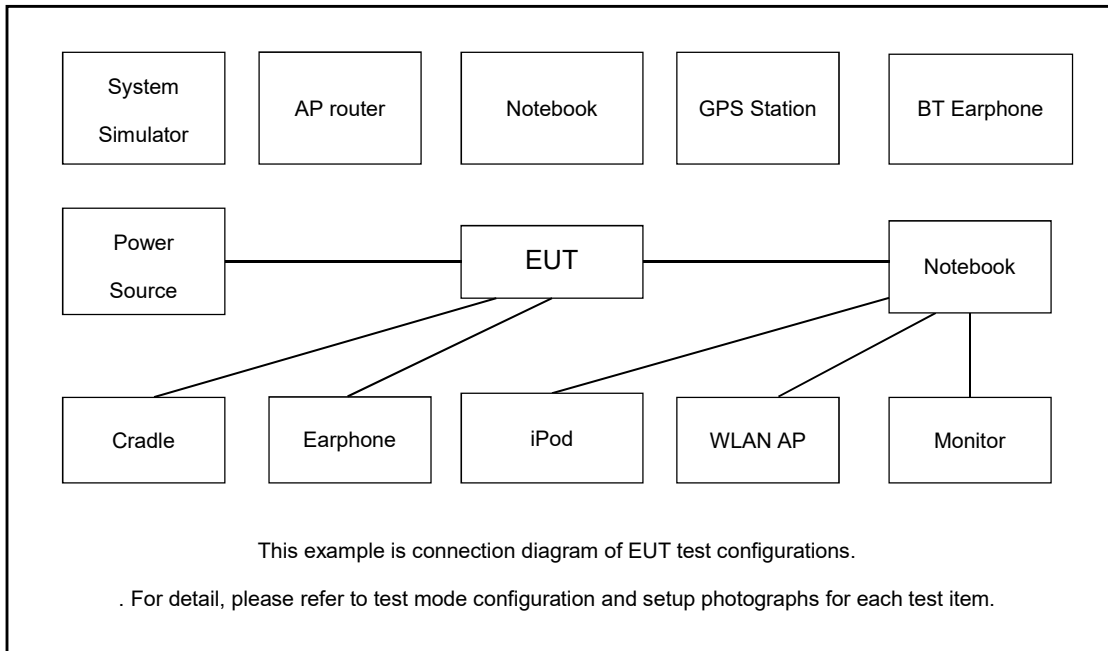

### 2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,2.7m with Core
2.	Notebook	Inspiron 15-7570	Fcc DoC	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Adapter	FANA7R	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 1.2 + 10 = 11.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

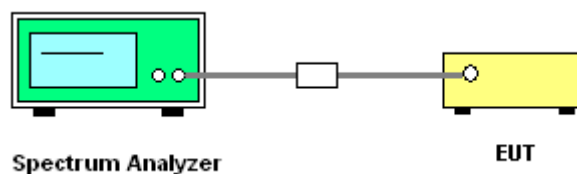




### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

< Ant 1>\_Bluetooth LE 1Mbps


#### 6 dB Bandwidth Plot on Channel 00

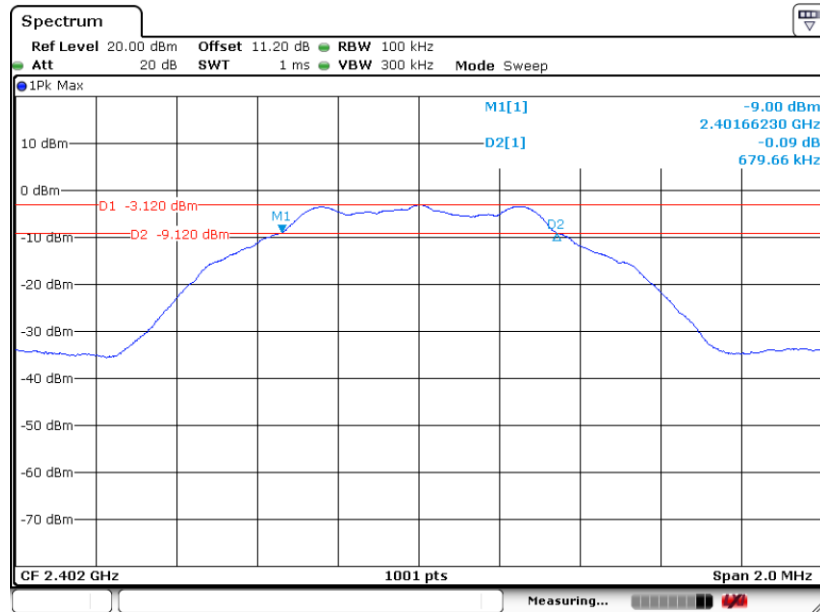

Date: 29.MAY.2022 01:20:03




6 dB Bandwidth Plot on Channel 19

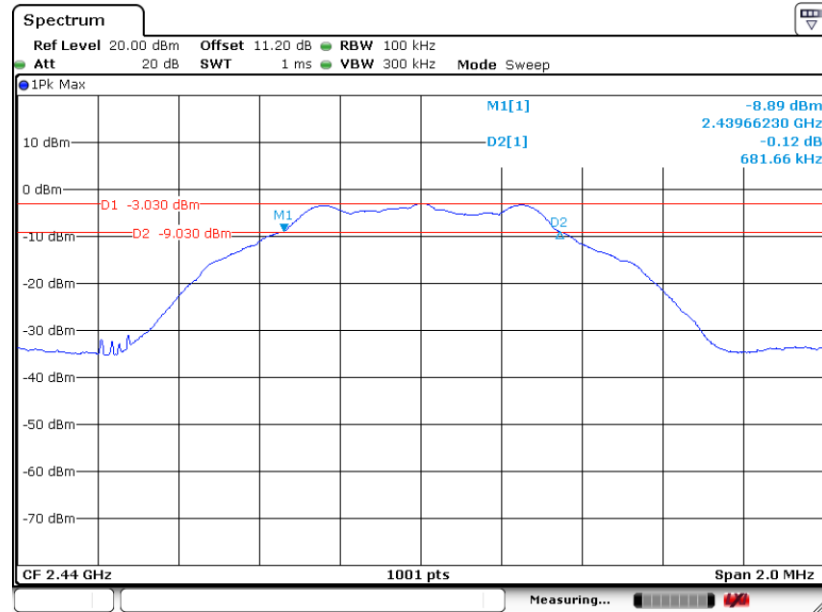

Date: 29.MAY.2022 01:21:28

6 dB Bandwidth Plot on Channel 39

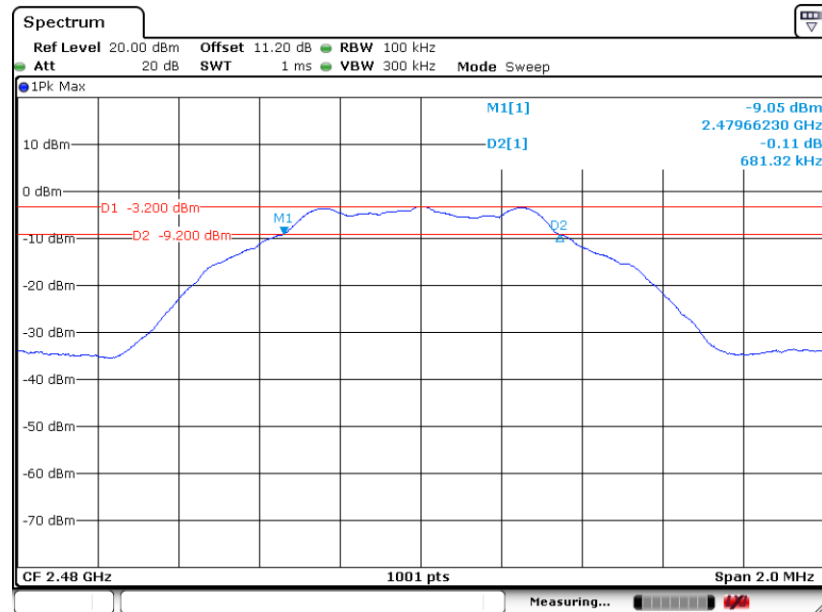


Date: 29.MAY.2022 01:22:42



< Ant 1>\_Bluetooth LE 2Mbps


6 dB Bandwidth Plot on Channel 00

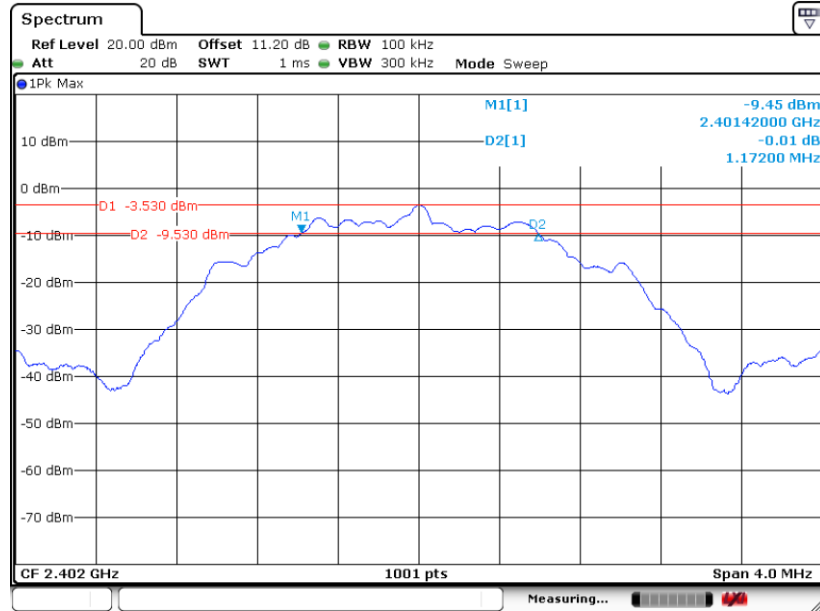


Date: 29.MAY.2022 08:32:05



6 dB Bandwidth Plot on Channel 19

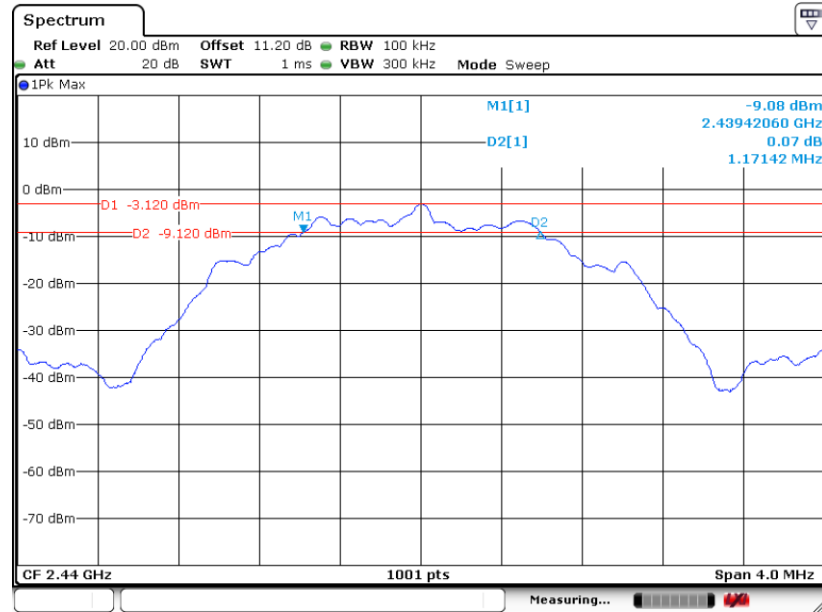


6 dB Bandwidth Plot on Channel 39

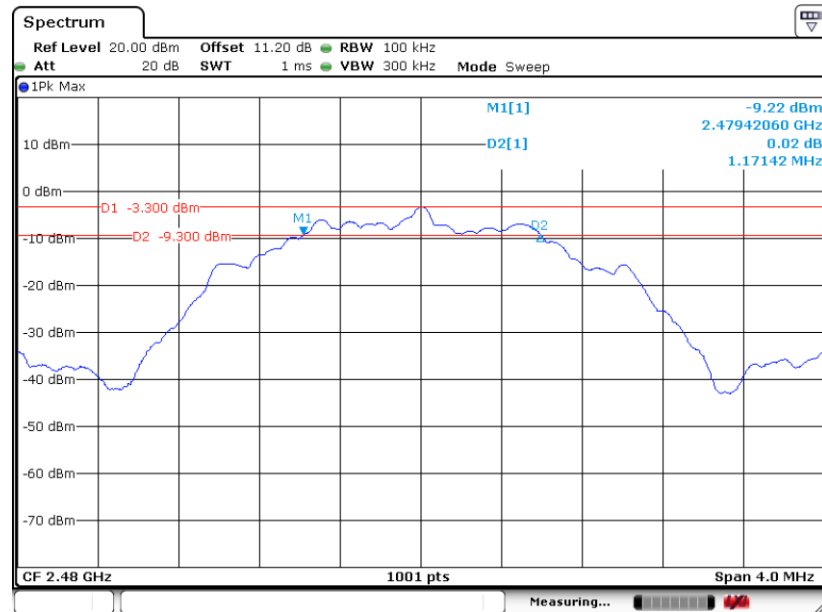



< Ant 2>\_Bluetooth LE 1Mbps

6 dB Bandwidth Plot on Channel 00

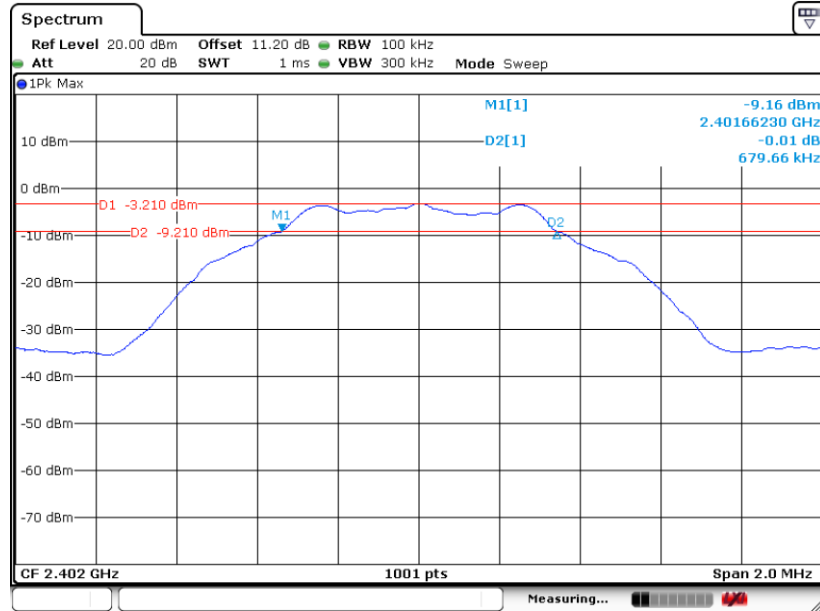


Date: 29.MAY.2022 01:27:37






6 dB Bandwidth Plot on Channel 19

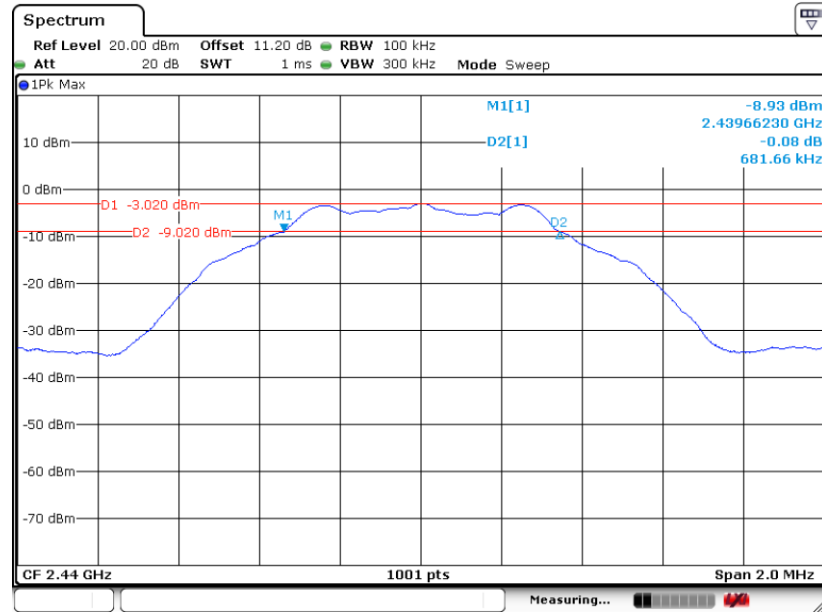

Date: 29.MAY.2022 01:28:44

6 dB Bandwidth Plot on Channel 39

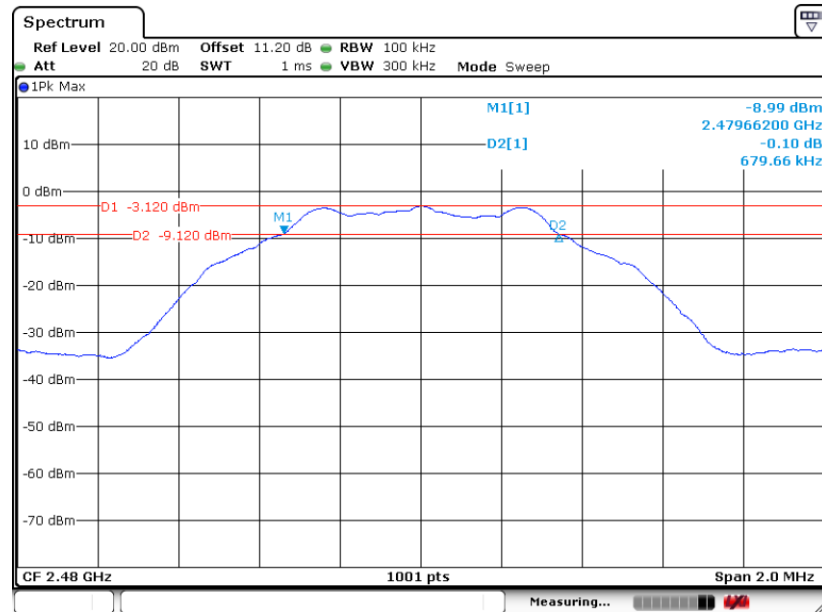


Date: 29.MAY.2022 01:29:50



< Ant 2>\_Bluetooth LE 2Mbps


6 dB Bandwidth Plot on Channel 00

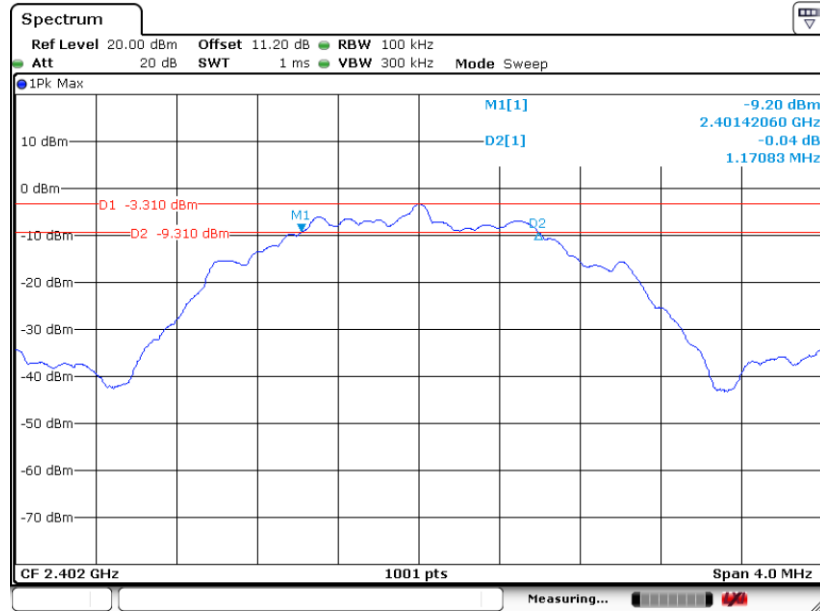


Date: 29.MAY.2022 01:31:08



6 dB Bandwidth Plot on Channel 19

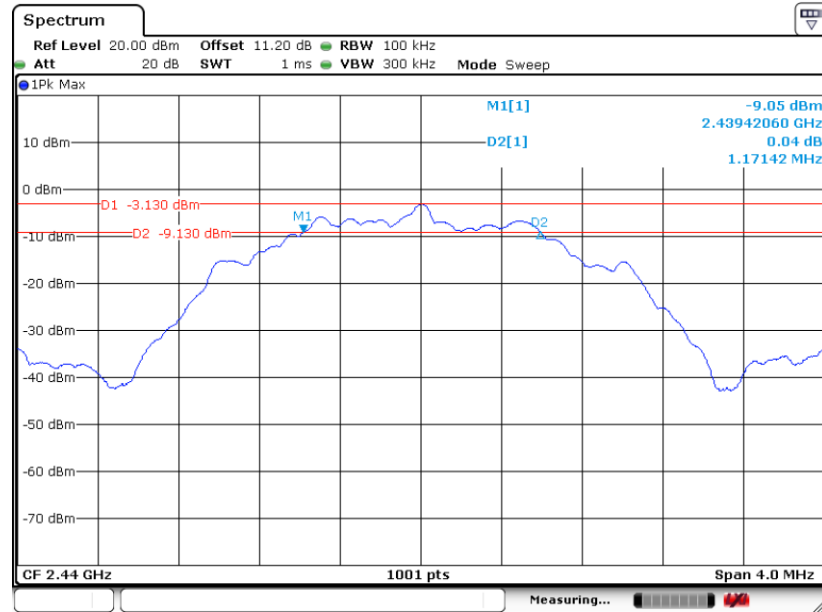

6 dB Bandwidth Plot on Channel 39

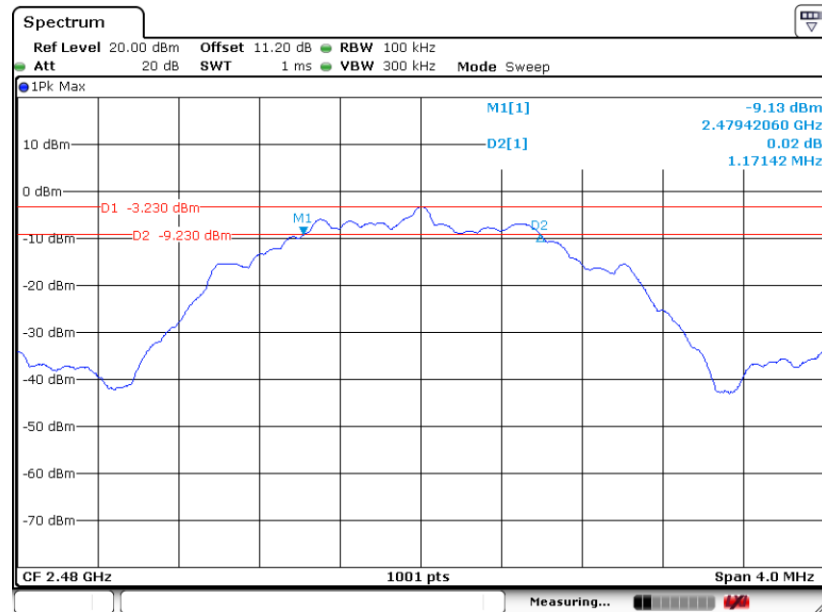




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

#### < Ant 1>\_Bluetooth LE 1Mbps


#### 99% Occupied Bandwidth Plot on Channel 00

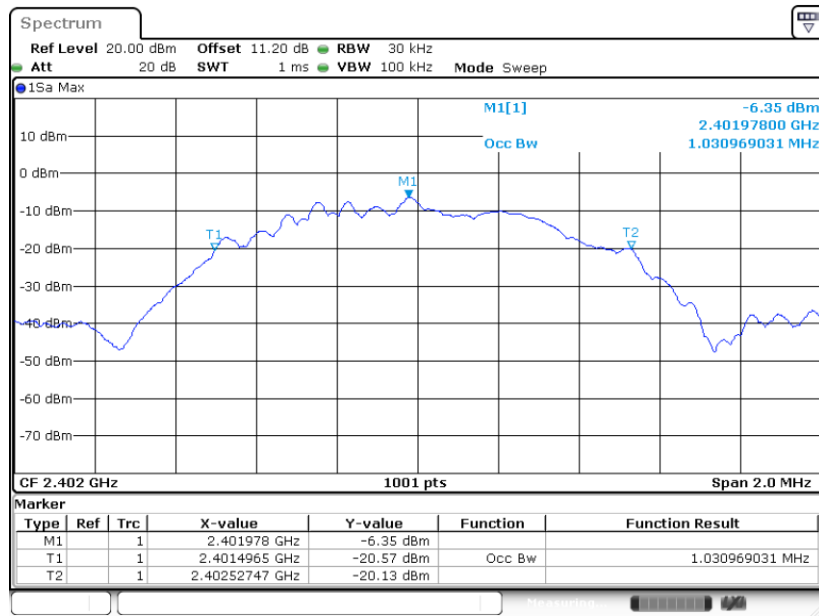

Date: 29.MAY.2022 08:09:48




99% Occupied Bandwidth Plot on Channel 19

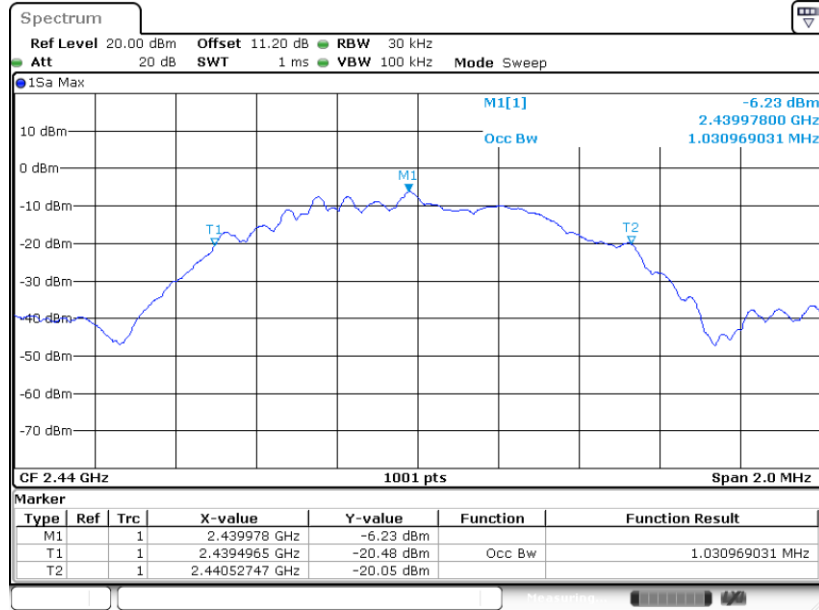

Date: 29.MAY.2022 08:12:04

99% Occupied Bandwidth Plot on Channel 39

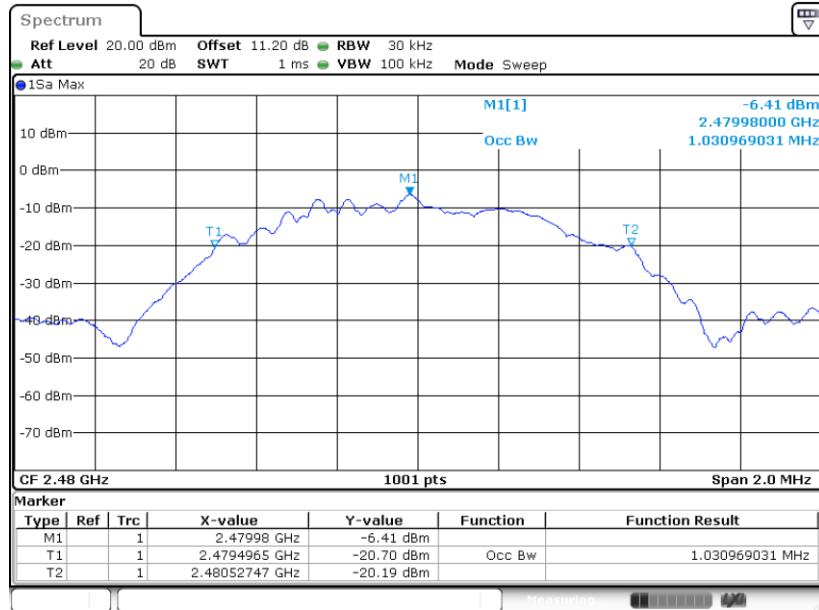


Date: 29.MAY.2022 08:14:54



< Ant 1>\_Bluetooth LE 2Mbps


99% Occupied Bandwidth Plot on Channel 00

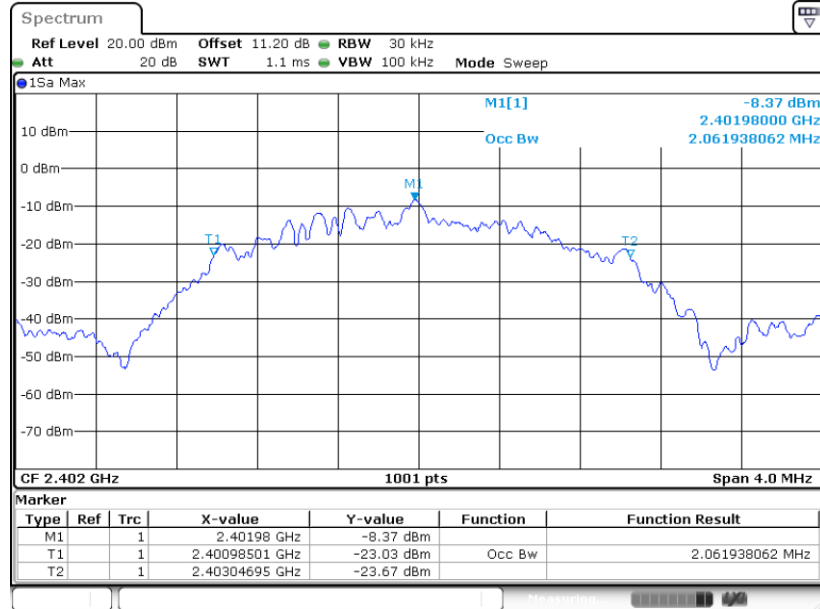

Date: 29.MAY.2022 08:44:25




### 99% Occupied Bandwidth Plot on Channel 19

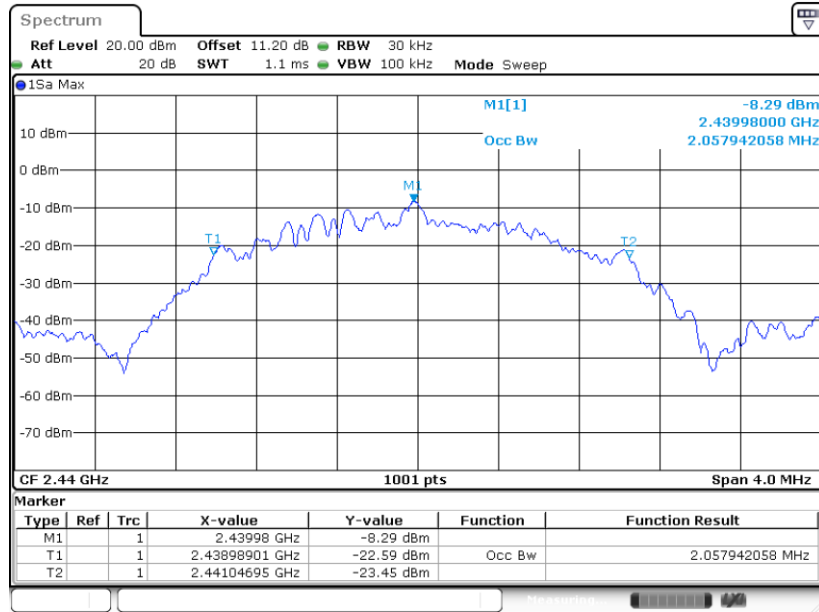

Date: 29.MAY.2022 08:40:57

### 99% Occupied Bandwidth Plot on Channel 39

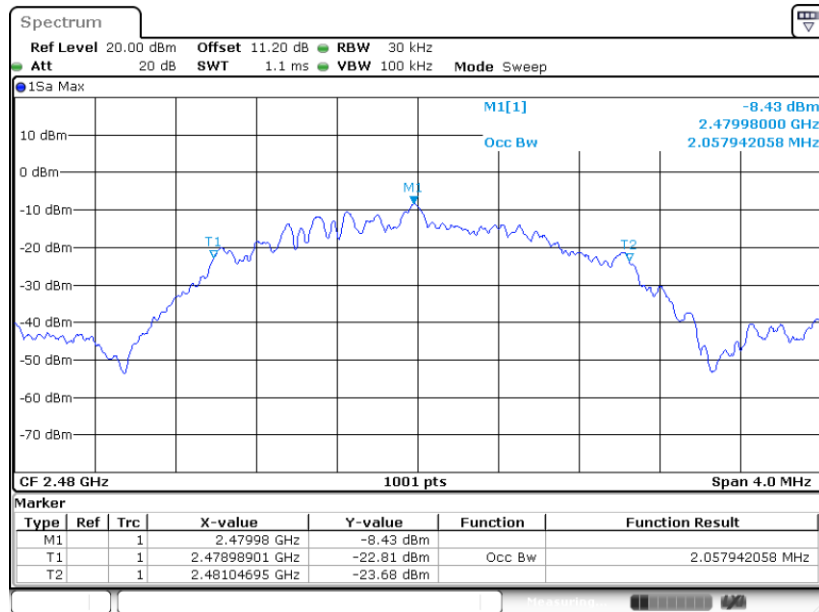


Date: 29.MAY.2022 08:48:13

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



< Ant 2>\_Bluetooth LE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

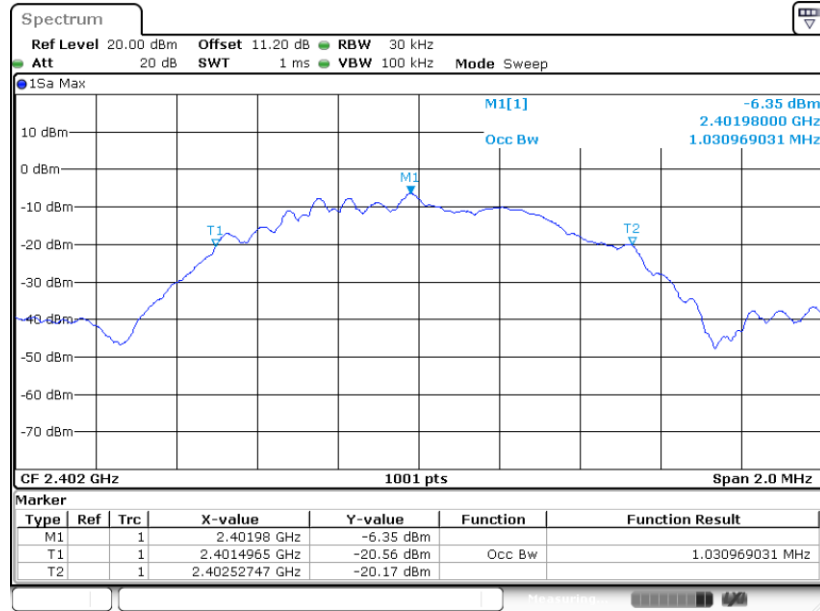


Date: 29.MAY.2022 08:53:00






99% Occupied Bandwidth Plot on Channel 19

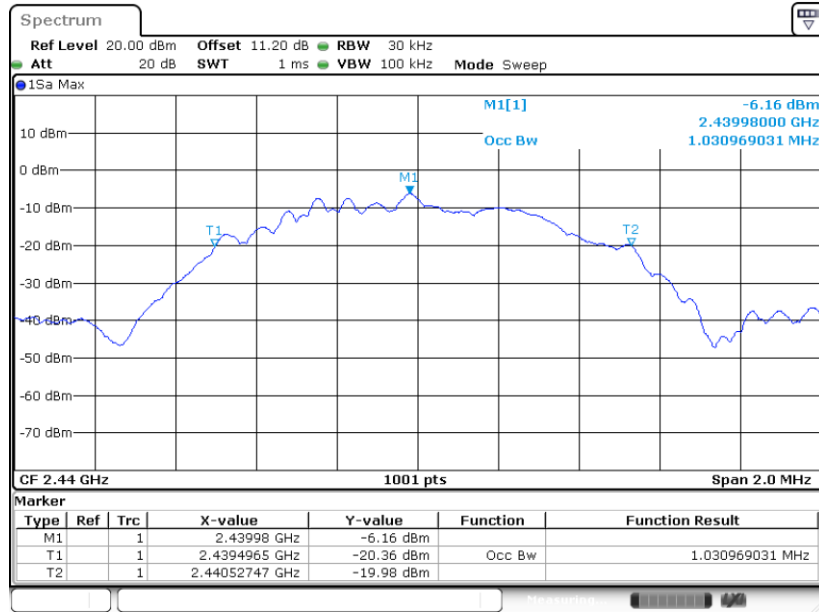

Date: 29.MAY.2022 08:55:03

99% Occupied Bandwidth Plot on Channel 39

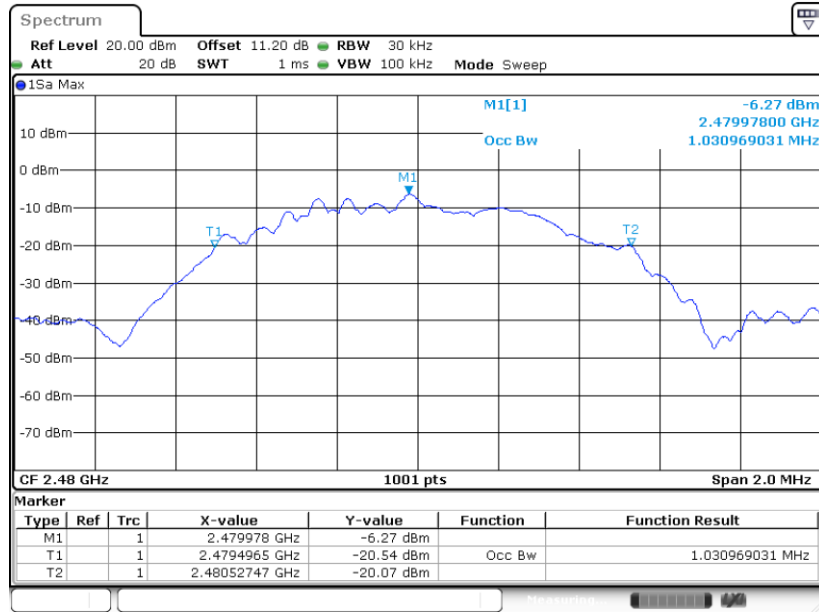


Date: 29.MAY.2022 08:57:29



< Ant 2>\_Bluetooth LE 2Mbps


99% Occupied Bandwidth Plot on Channel 00

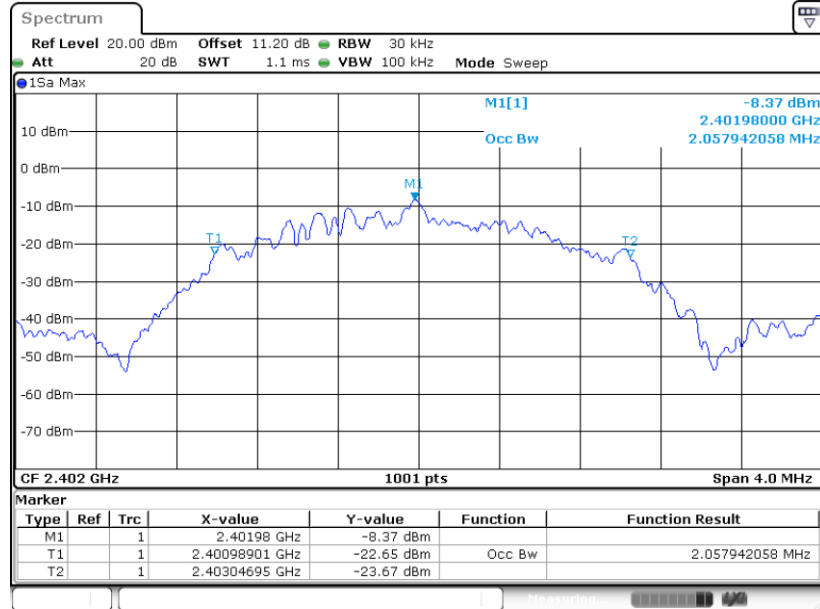

Date: 29.MAY.2022 09:03:56




99% Occupied Bandwidth Plot on Channel 19

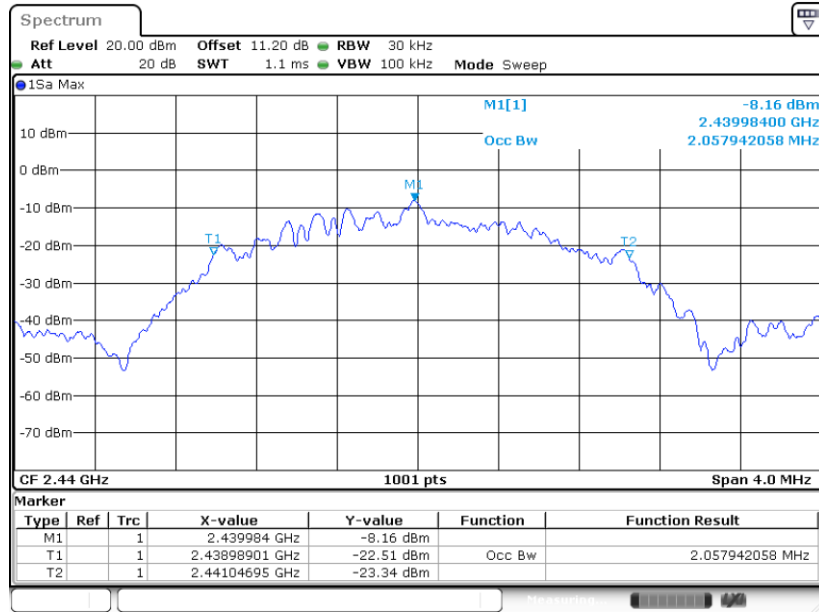

Date: 29.MAY.2022 09:07:09

99% Occupied Bandwidth Plot on Channel 39

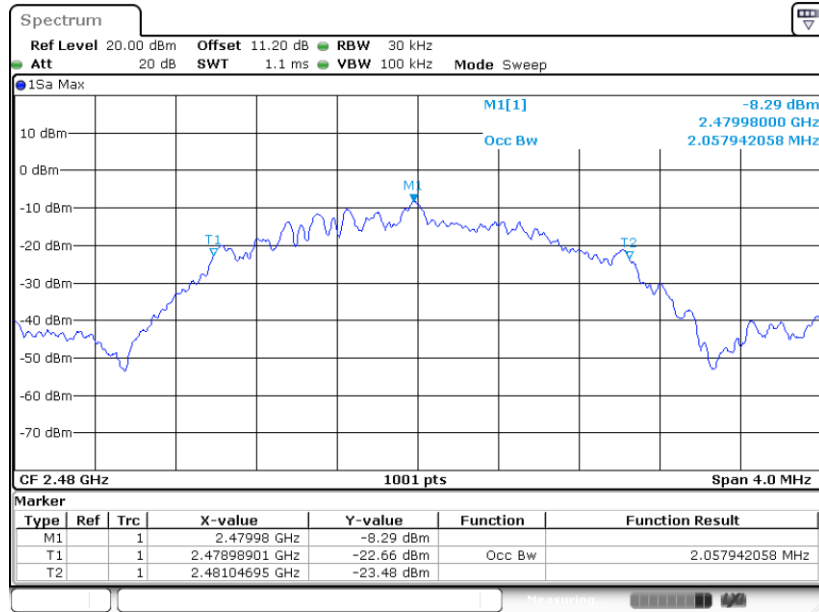

Date: 29.MAY.2022 09:10:04

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

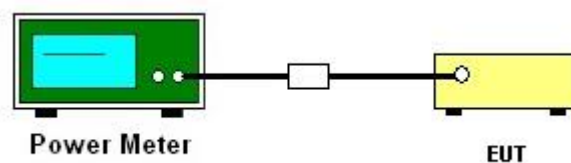

### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

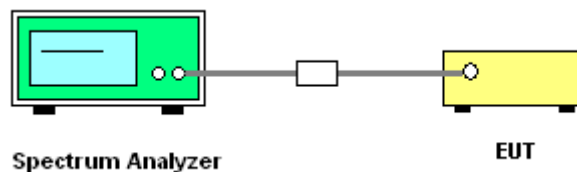

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


< Ant 1>\_Bluetooth LE 1Mbps

PSD 100kHz Plot on Channel 00

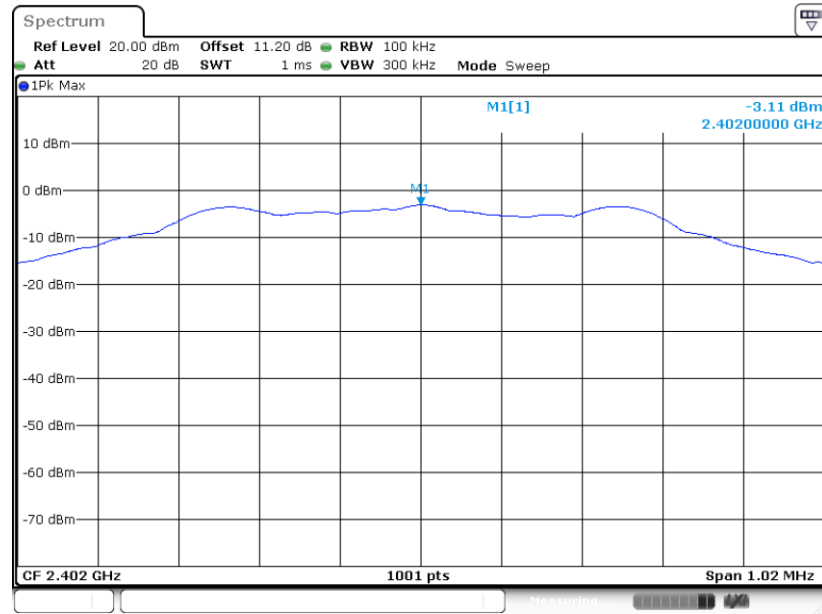

Date: 29.MAY.2022 01:20:25


PSD 100kHz Plot on Channel 19

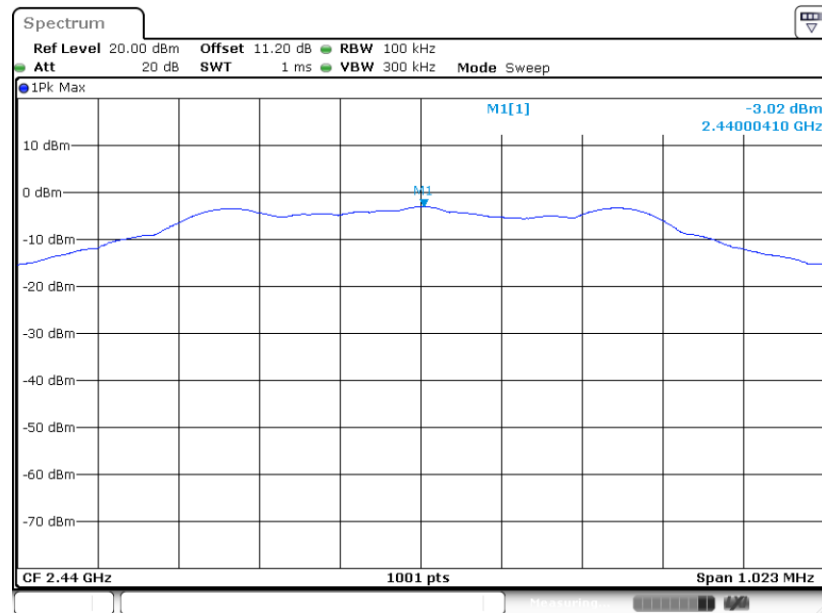

Date: 29.MAY.2022 01:21:48



PSD 100kHz Plot on Channel 39

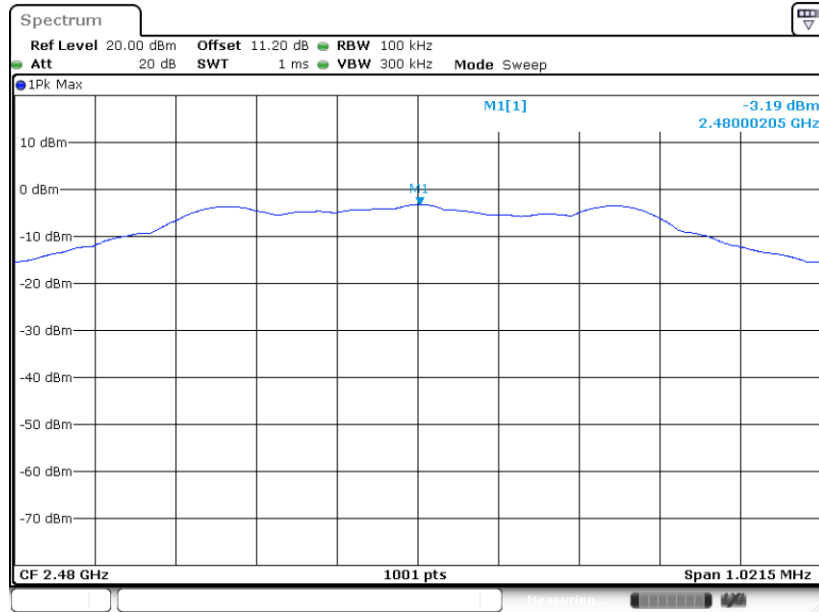


Date: 29.MAY.2022 01:23:04




< Ant 1>\_Bluetooth LE 2Mbps

PSD 100kHz Plot on Channel 00

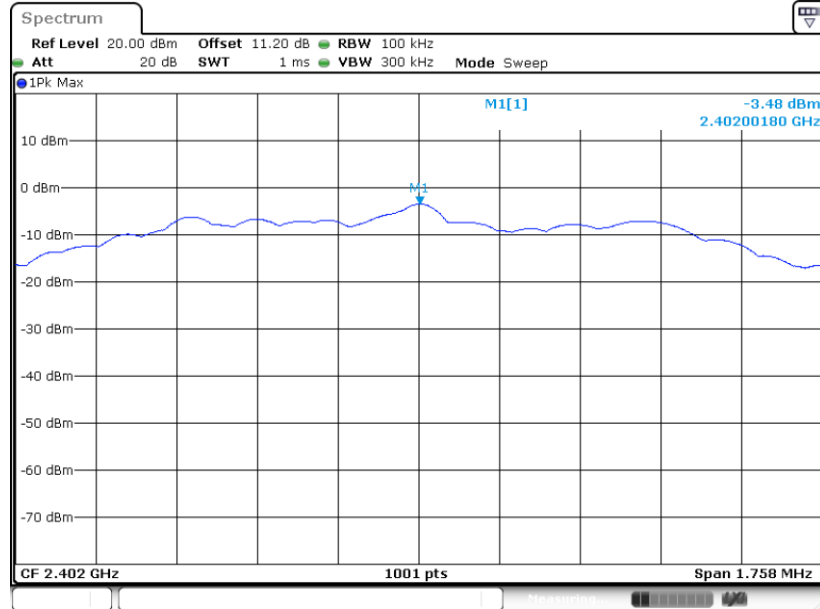

Date: 29.MAY.2022 08:32:55

PSD 100kHz Plot on Channel 19

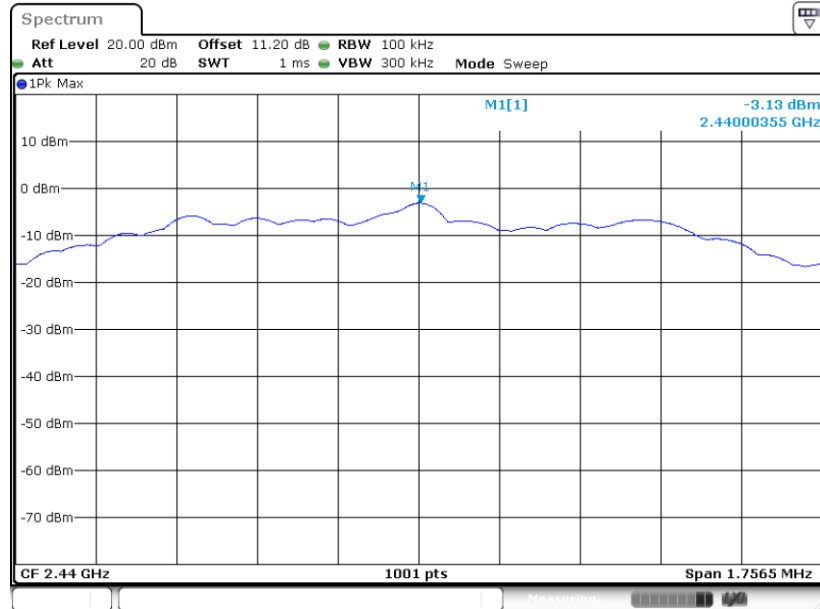


Date: 29.MAY.2022 01:25:18





PSD 100kHz Plot on Channel 39

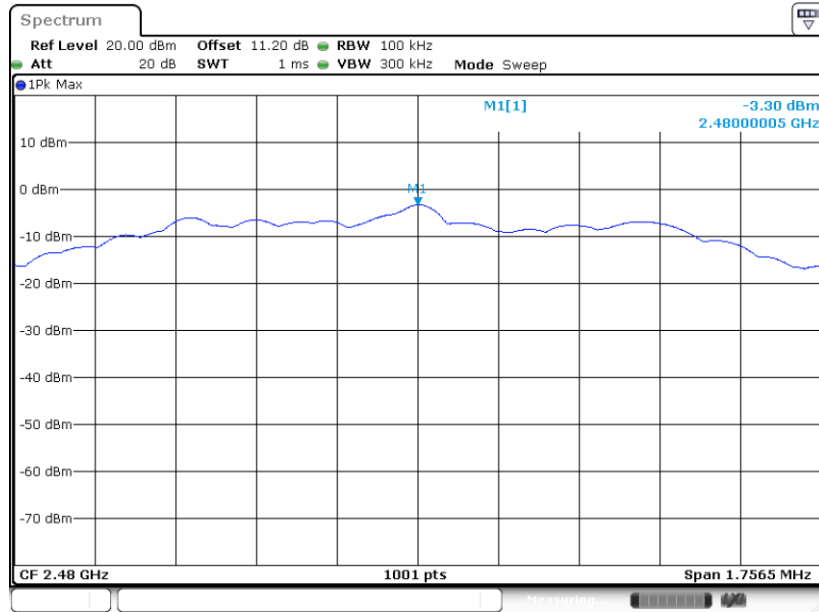


Date: 29.MAY.2022 01:26:22




< Ant 2>\_Bluetooth LE 1Mbps

PSD 100kHz Plot on Channel 00

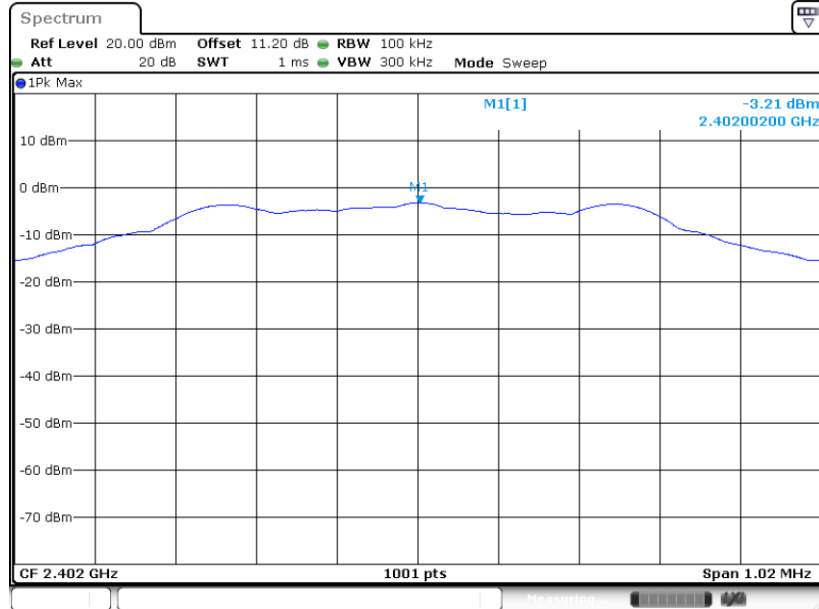

Date: 29.MAY.2022 01:27:57


PSD 100kHz Plot on Channel 19

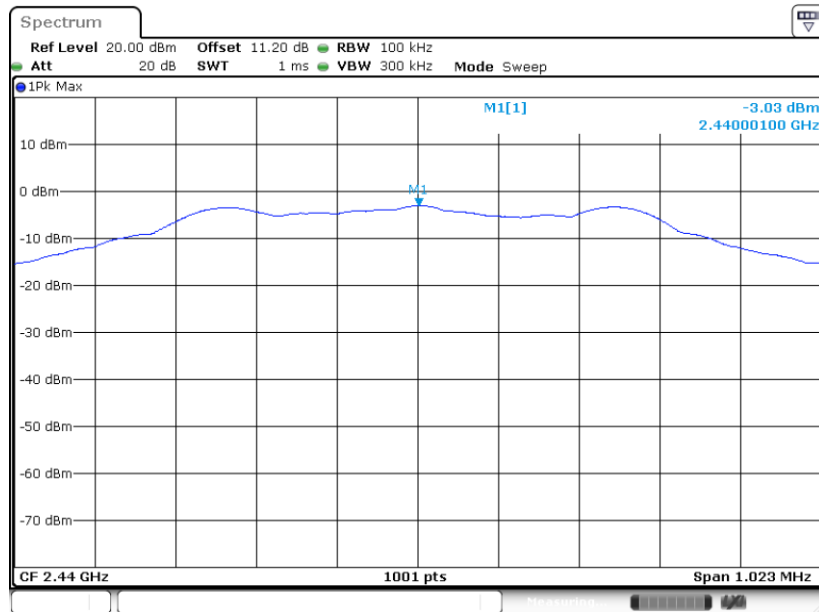

Date: 29.MAY.2022 01:29:08



PSD 100kHz Plot on Channel 39

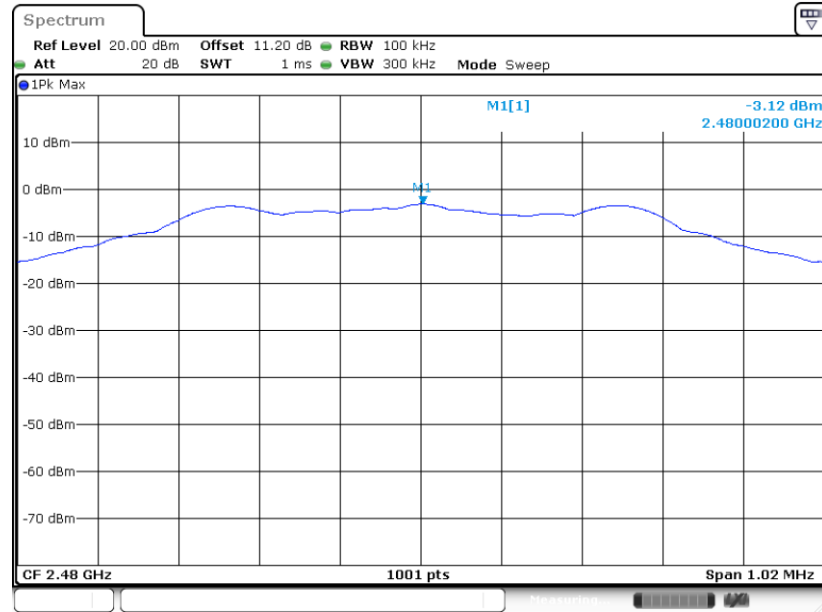


Date: 29.MAY.2022 01:30:12




< Ant 2>\_Bluetooth LE 2Mbps

PSD 100kHz Plot on Channel 00

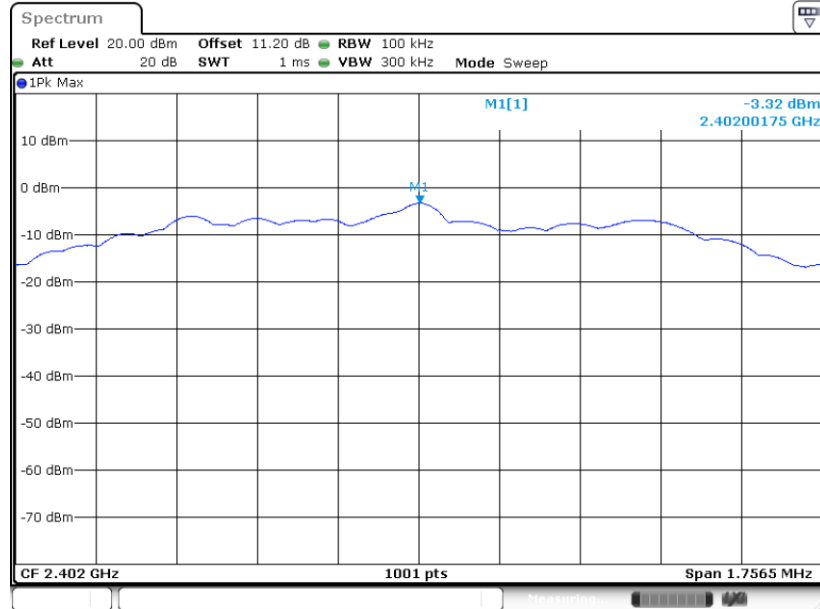

Date: 29.MAY.2022 01:31:31


PSD 100kHz Plot on Channel 19

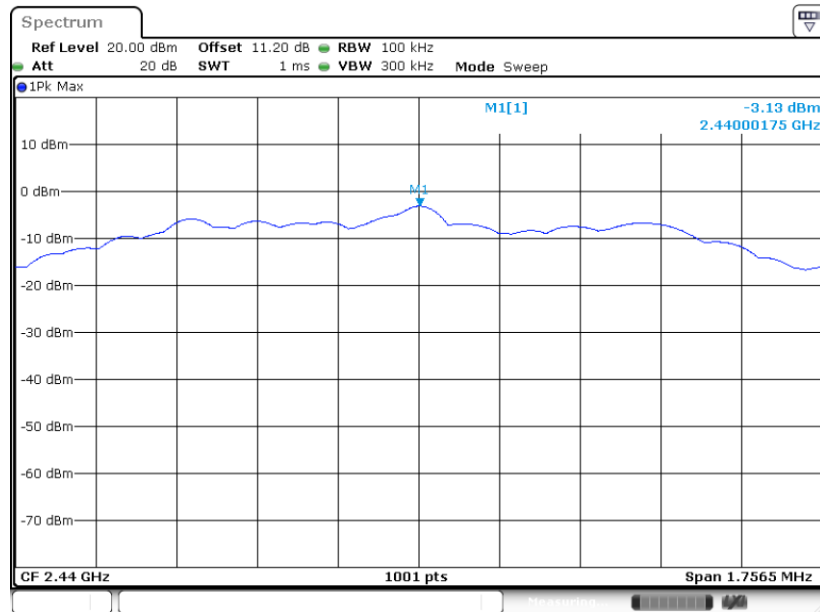

Date: 29.MAY.2022 01:33:07



PSD 100kHz Plot on Channel 39

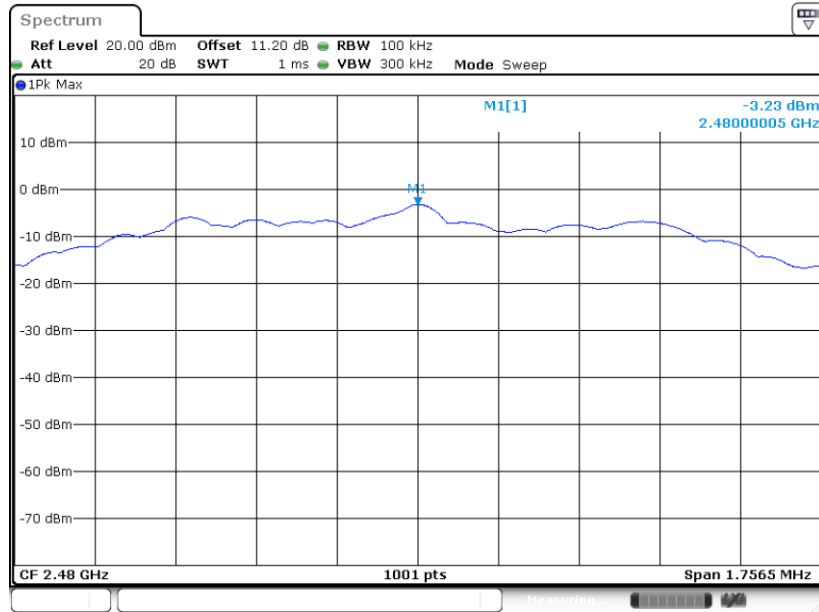


Date: 29.MAY.2022 01:34:23



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


< Ant 1>\_Bluetooth LE 1Mbps

PSD 3kHz Plot on Channel 00

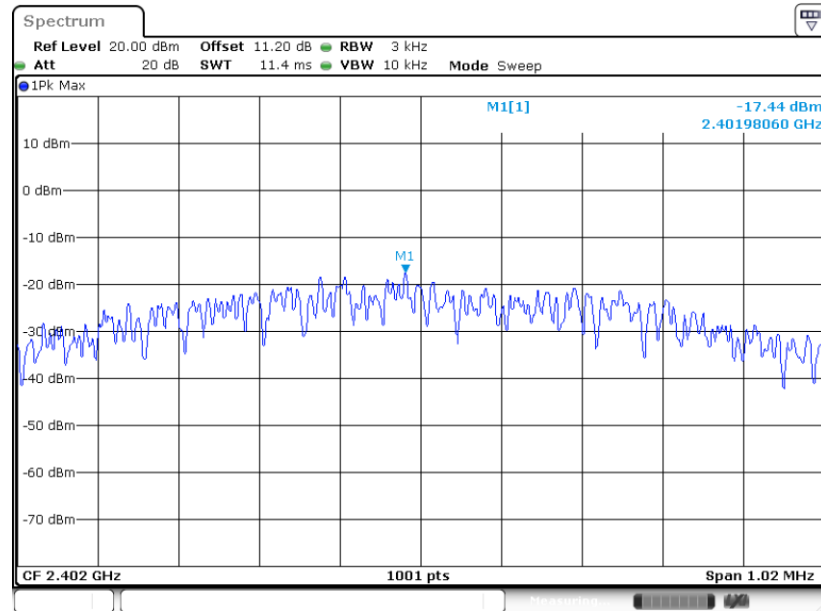

Date: 29.MAY.2022 01:20:15


PSD 3kHz Plot on Channel 19

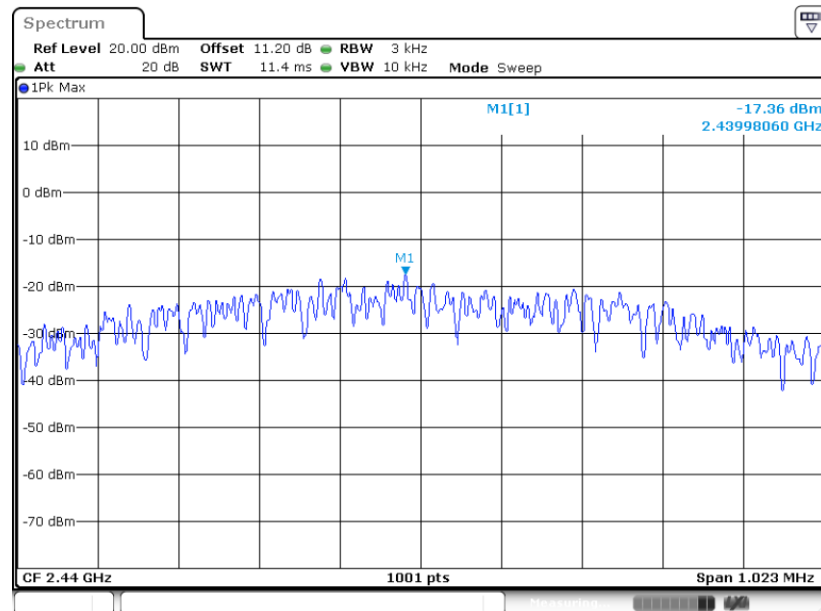

Date: 29.MAY.2022 01:21:38



PSD 3kHz Plot on Channel 39

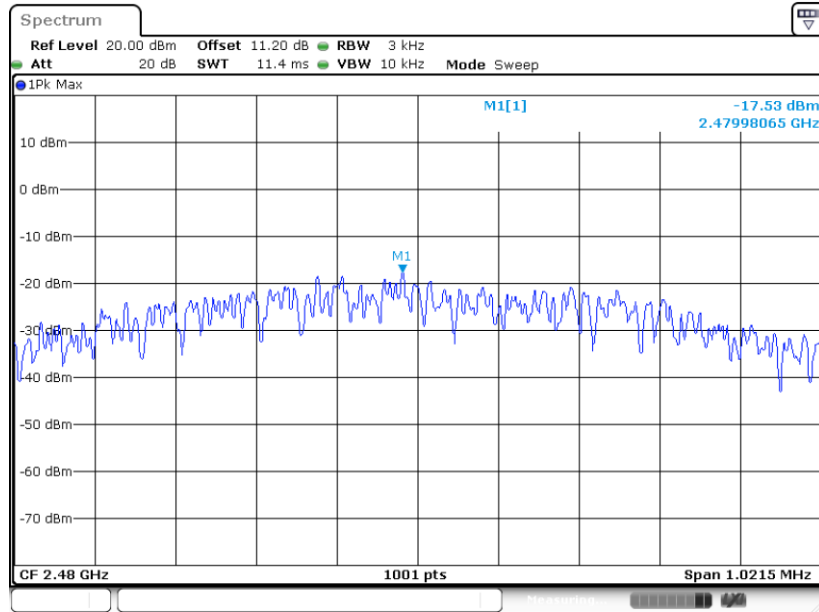


Date: 29.MAY.2022 01:22:52




< Ant 1>\_Bluetooth LE 2Mbps

PSD 3kHz Plot on Channel 00

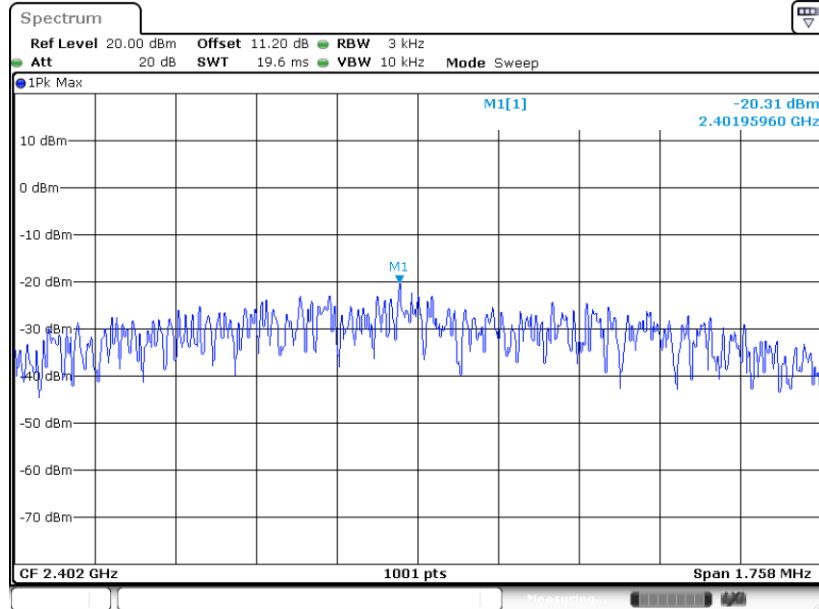

Date: 29.MAY.2022 08:32:44

PSD 3kHz Plot on Channel 19

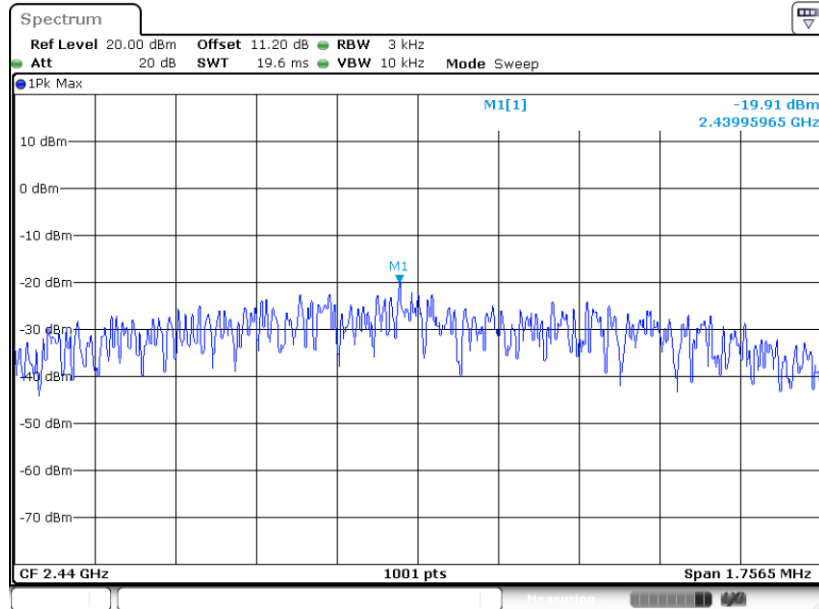


Date: 29.MAY.2022 01:25:08





PSD 3kHz Plot on Channel 39

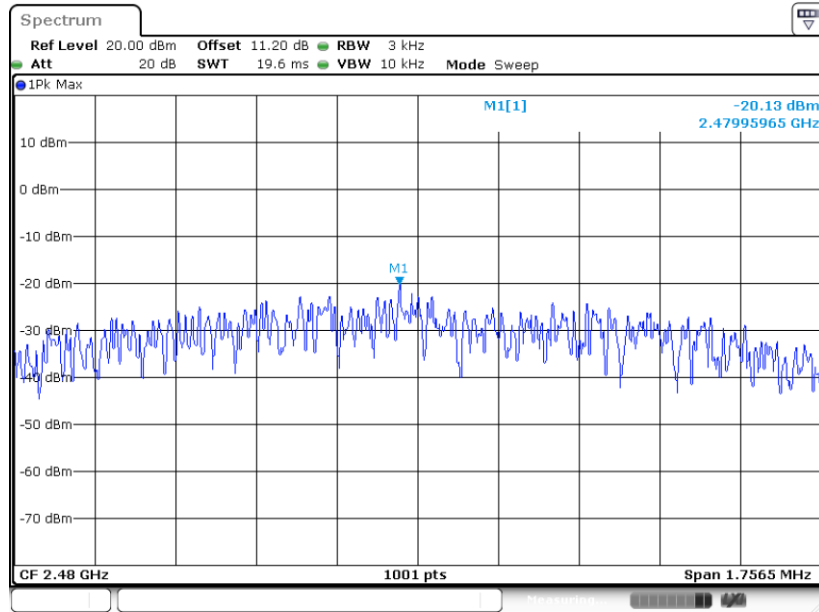


Date: 29.MAY.2022 01:26:06




< Ant 2>\_Bluetooth LE 1Mbps

PSD 3kHz Plot on Channel 00

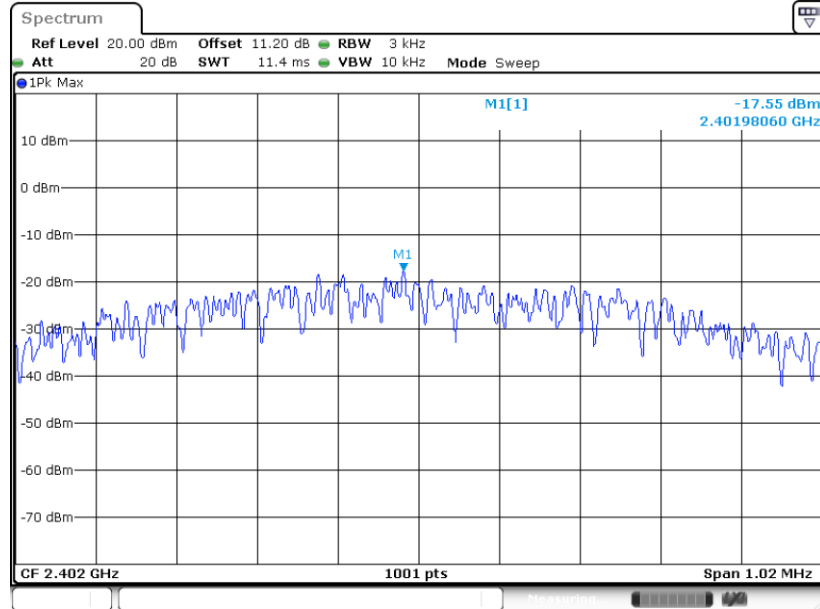

Date: 29.MAY.2022 01:27:47


PSD 3kHz Plot on Channel 19

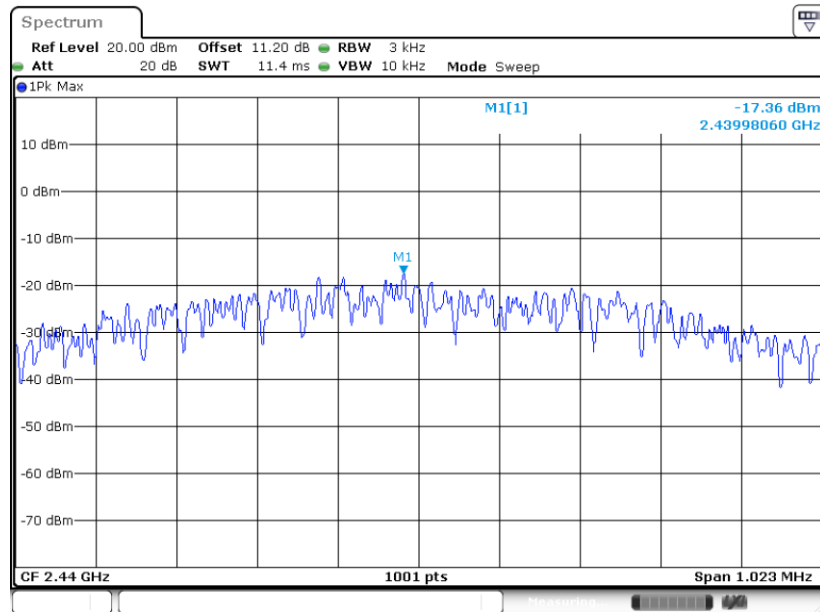

Date: 29.MAY.2022 01:28:54



PSD 3kHz Plot on Channel 39

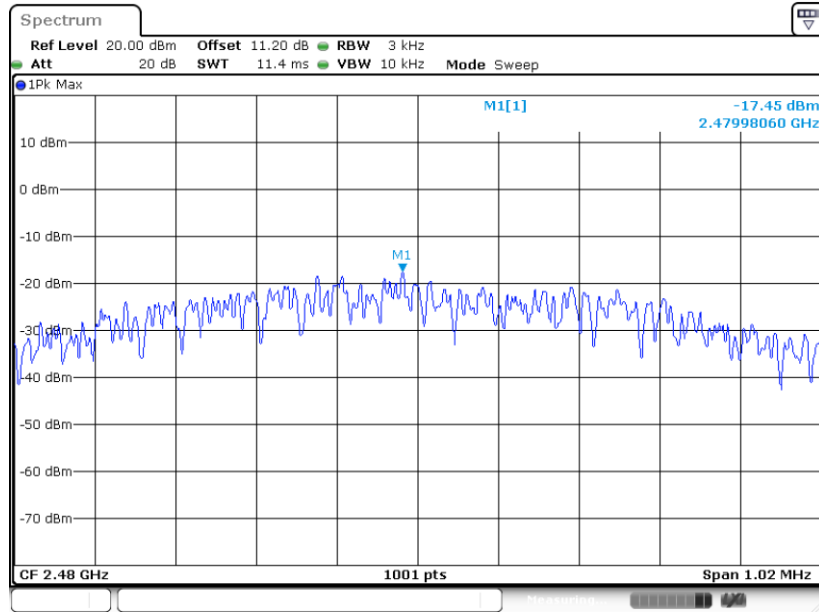


Date: 29.MAY.2022 01:30:01




< Ant 2>\_Bluetooth LE 2Mbps

PSD 3kHz Plot on Channel 00

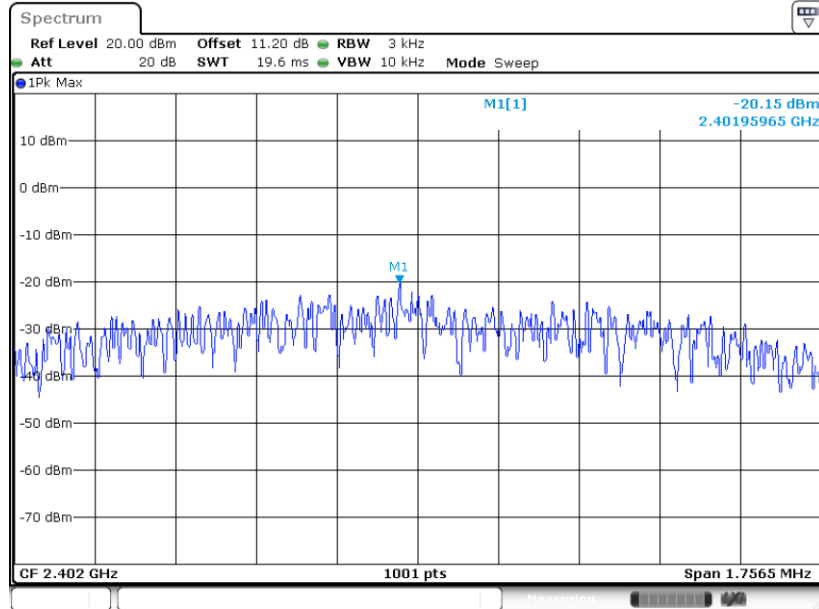

Date: 29.MAY.2022 01:31:20


PSD 3kHz Plot on Channel 19

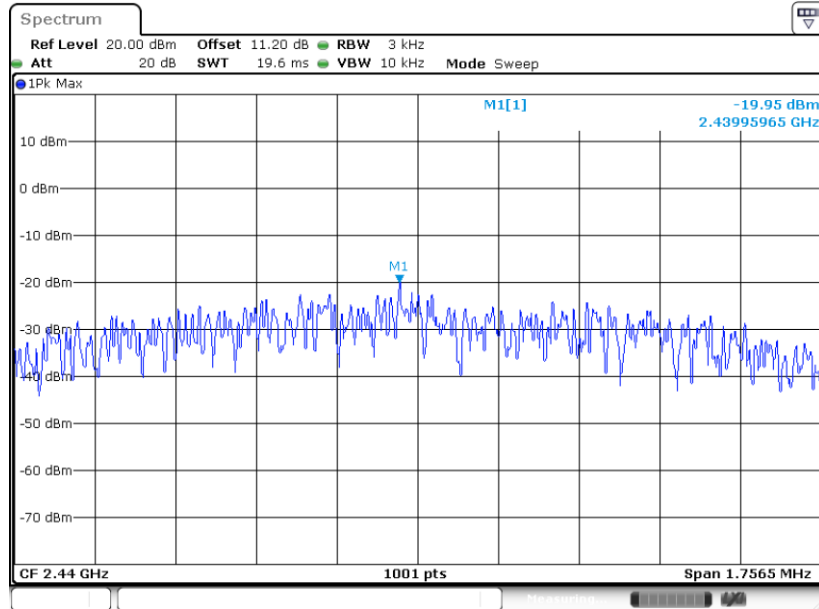

Date: 29.MAY.2022 01:32:41



PSD 3kHz Plot on Channel 39

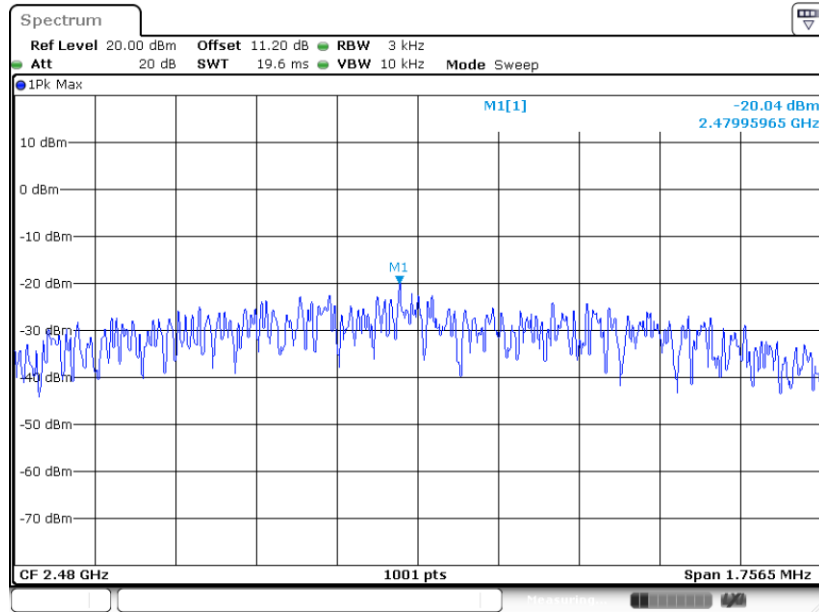

Date: 29.MAY.2022 01:34:08

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz when the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

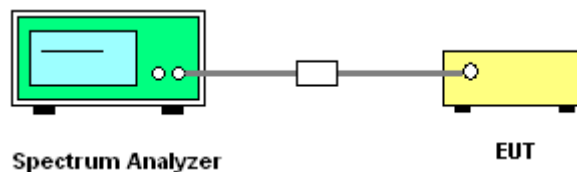




### 3.4.5 Test Result of Conducted Band Edges Plots


< Ant 1> Bluetooth LE 1Mbps

#### Low Band Edge Plot on Channel 00

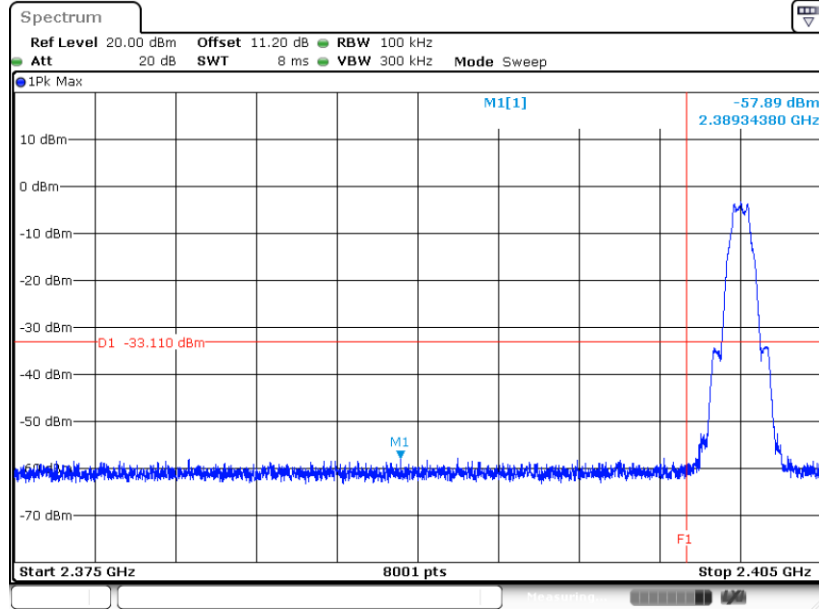

Date: 29.MAY.2022 08:08:16

#### High Band Edge Plot on Channel 39

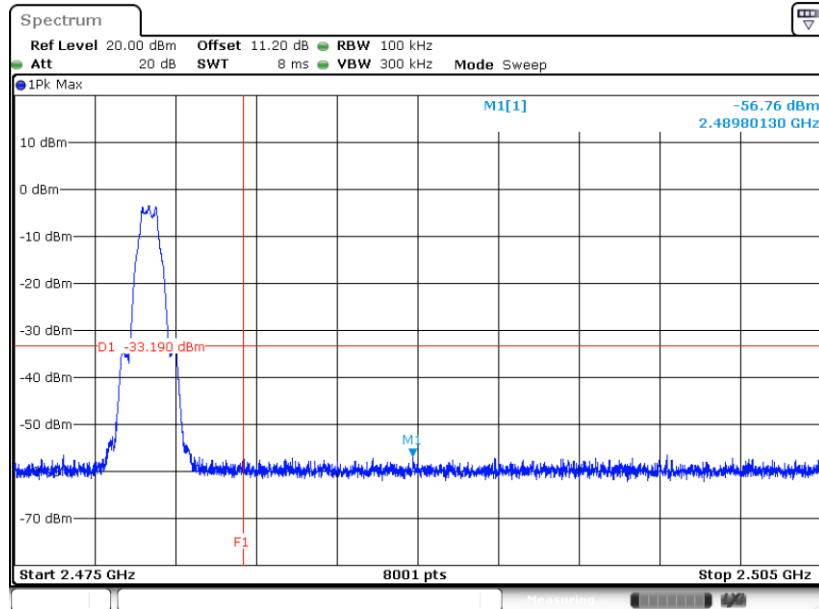


Date: 29.MAY.2022 08:13:24




< Ant 1> Bluetooth LE 2Mbps

Low Band Edge Plot on Channel 00

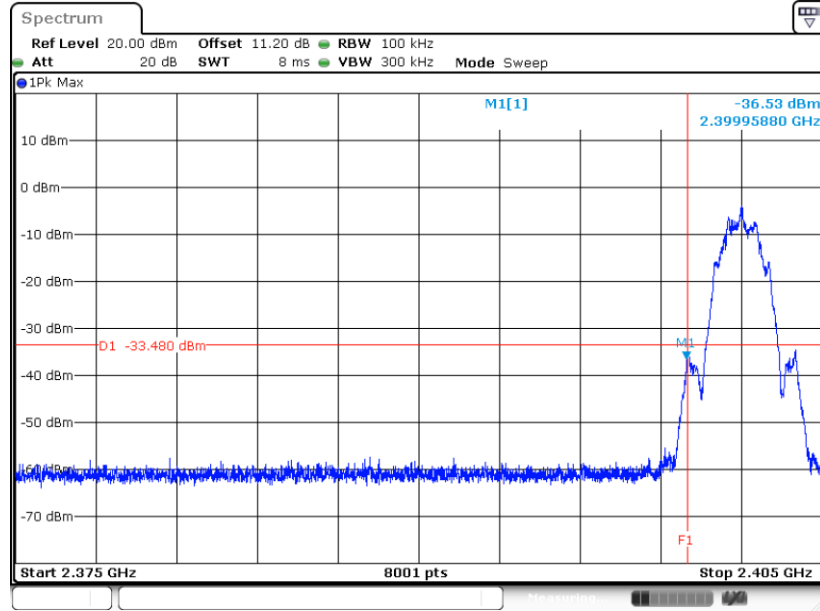

Date: 29.MAY.2022 08:34:38

High Band Edge Plot on Channel 39

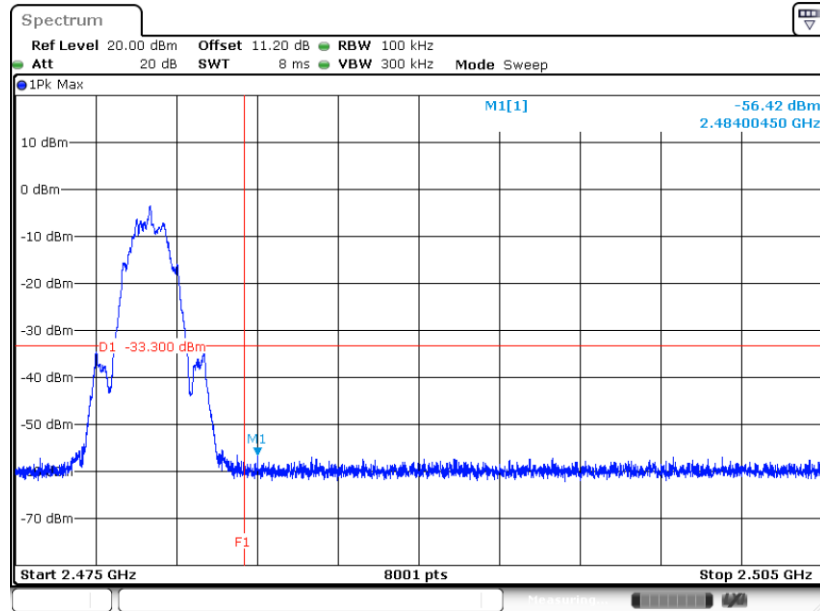


Date: 29.MAY.2022 08:46:55






< Ant 2>\_Bluetooth LE 1Mbps

Low Band Edge Plot on Channel 00

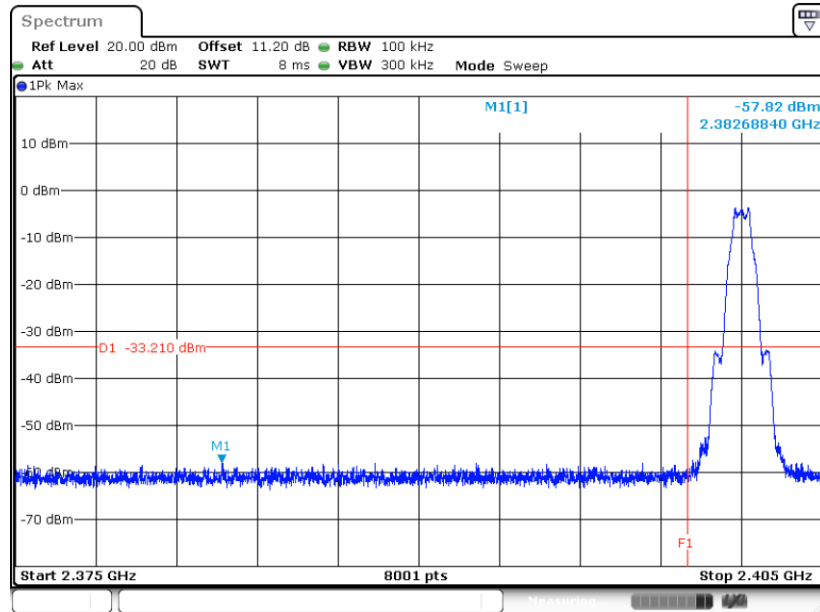

Date: 29.MAY.2022 08:52:01

High Band Edge Plot on Channel 39

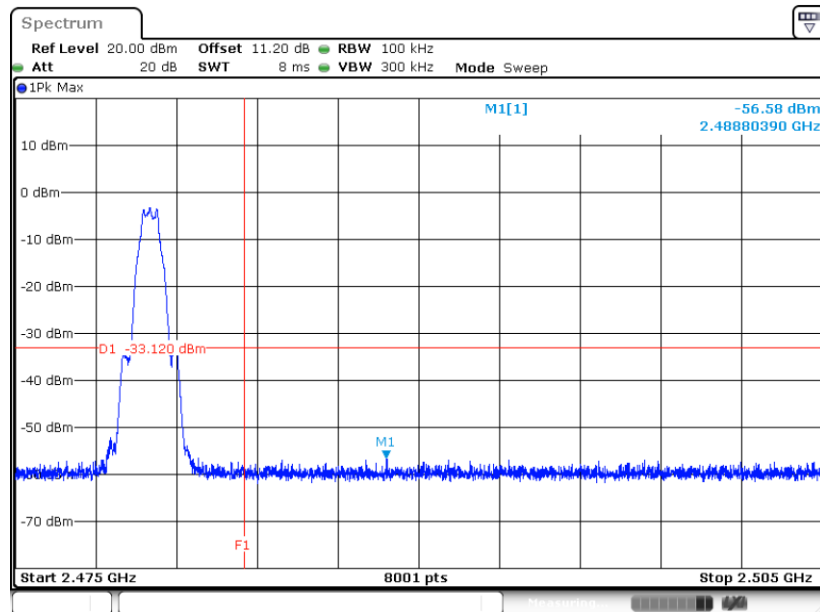


Date: 29.MAY.2022 08:56:32




< Ant 2> Bluetooth LE 2Mbps

Low Band Edge Plot on Channel 00

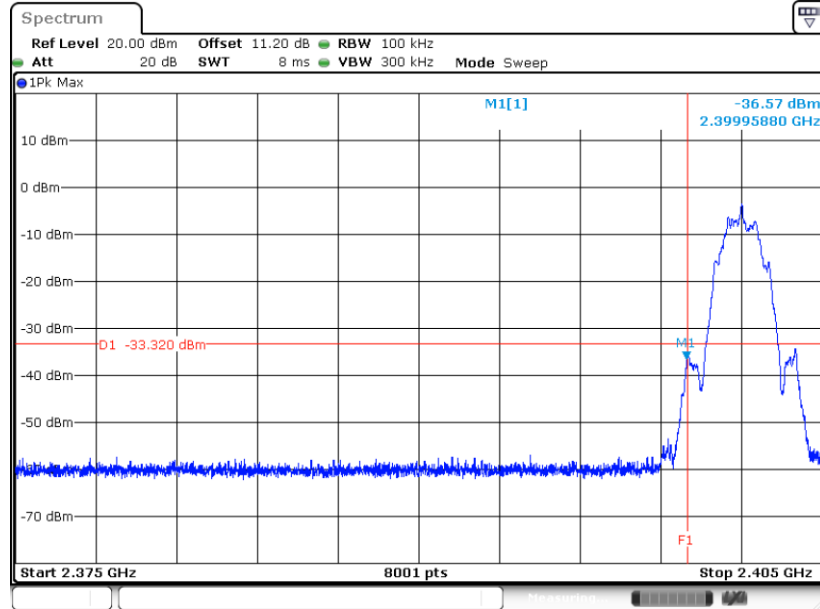

Date: 29.MAY.2022 09:01:45

High Band Edge Plot on Channel 39

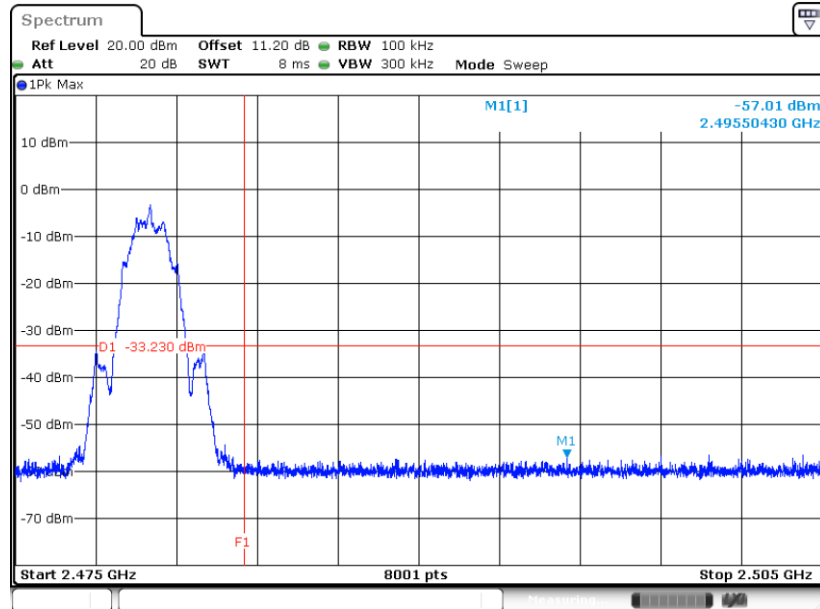

Date: 29.MAY.2022 09:08:29




### 3.4.6 Test Result of Conducted Spurious Emission Plots

< Ant 1>\_Bluetooth LE 1Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

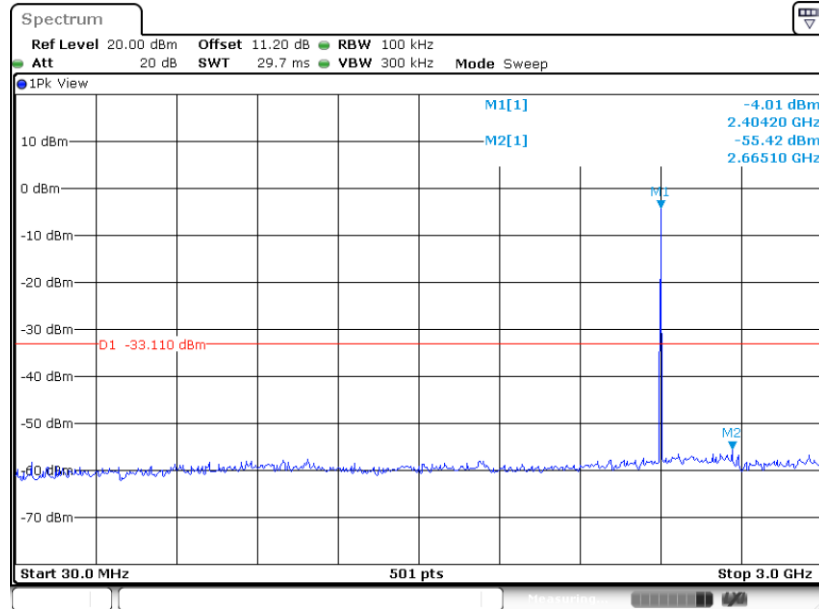

Date: 29.MAY.2022 08:08:43

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

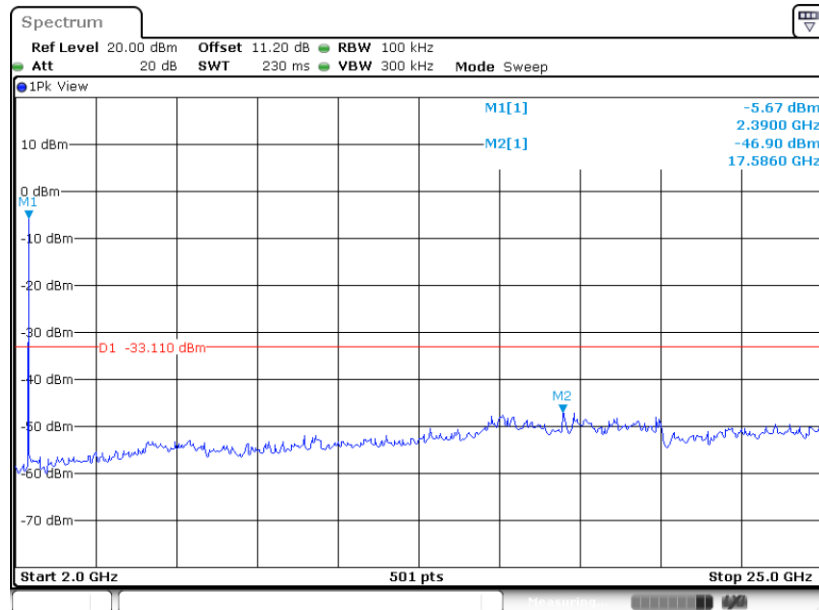

Date: 29.MAY.2022 08:09:07




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

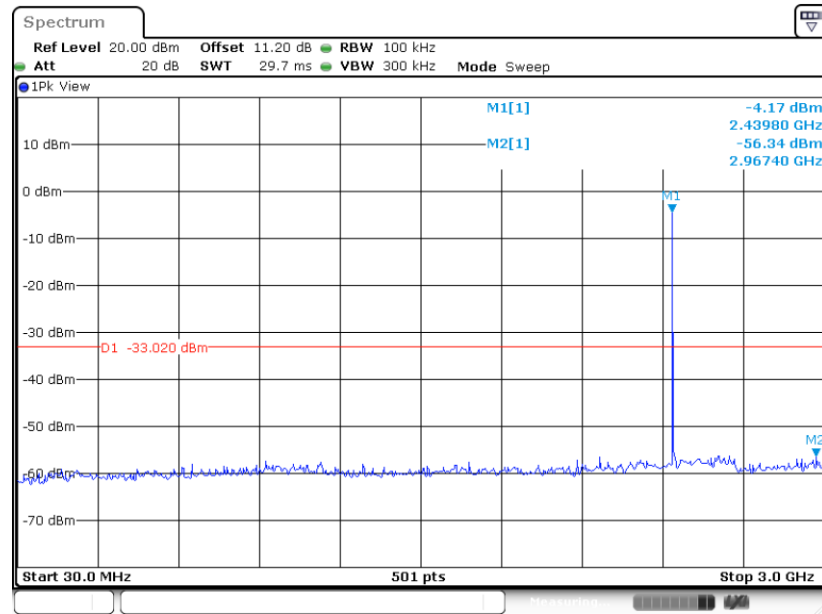

Date: 29.MAY.2022 08:11:04


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

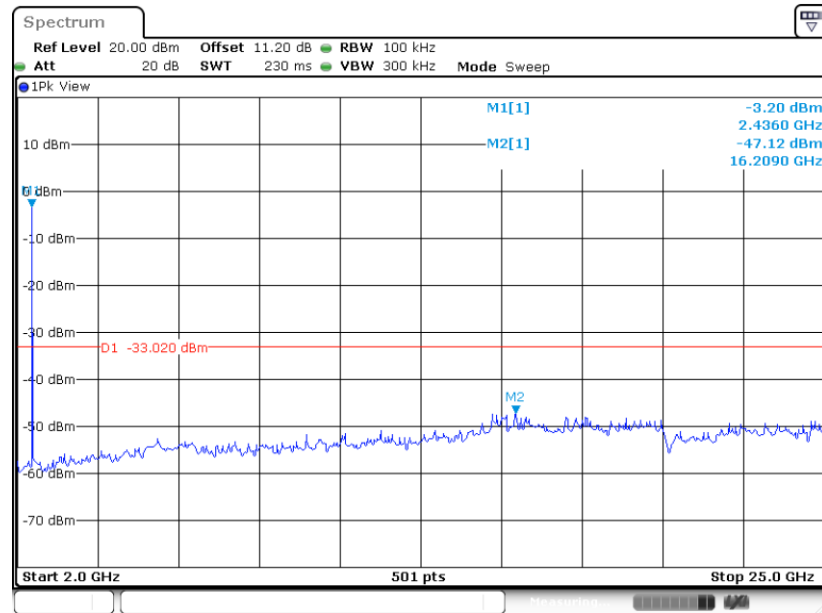

Date: 29.MAY.2022 08:11:14




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

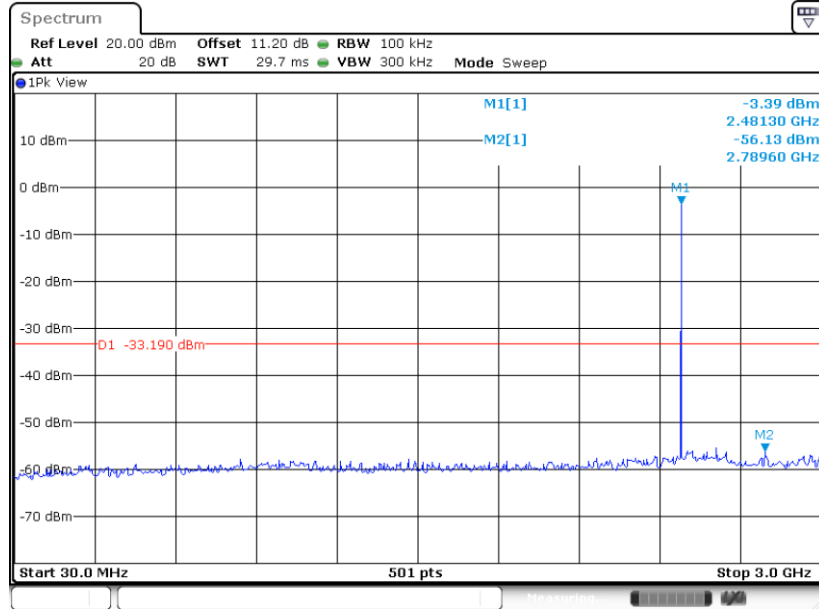

Date: 29.MAY.2022 08:13:41

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

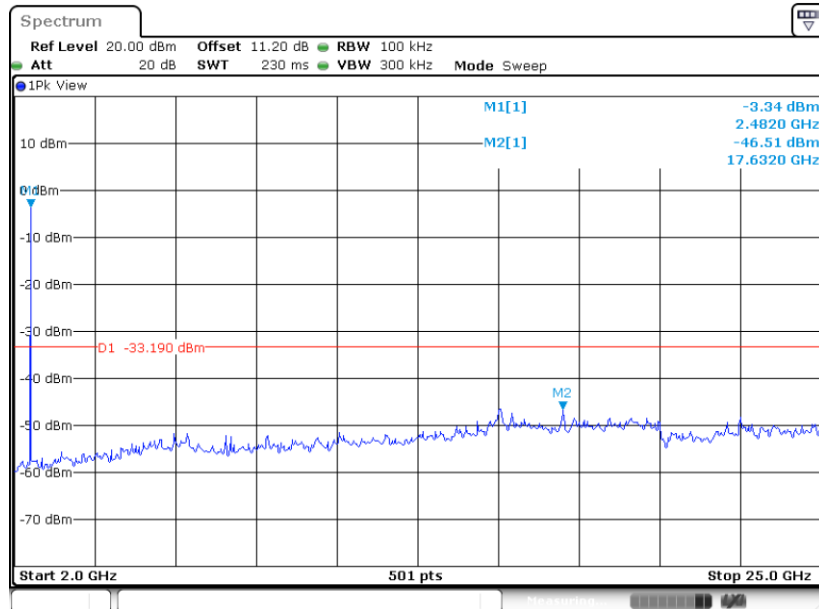


Date: 29.MAY.2022 08:13:53



< Ant 1>\_Bluetooth LE 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

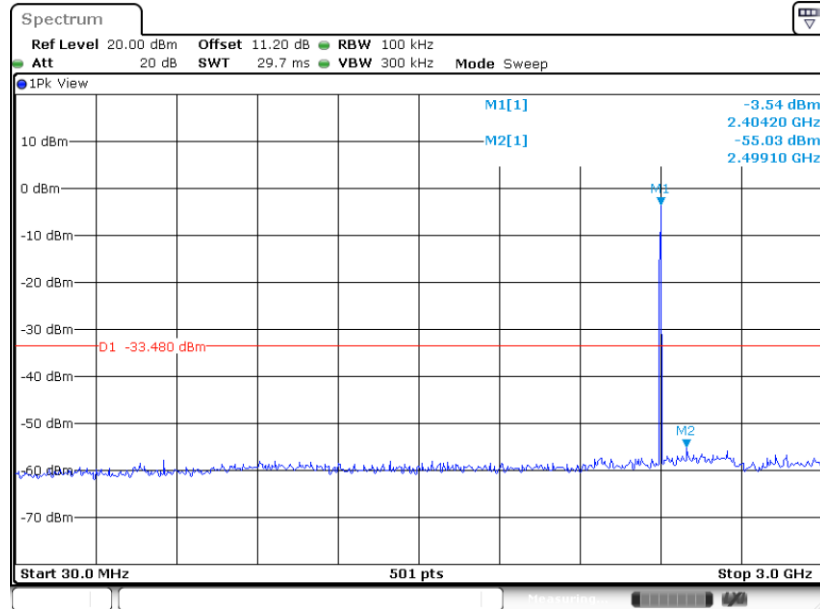

Date: 29.MAY.2022 08:43:46

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

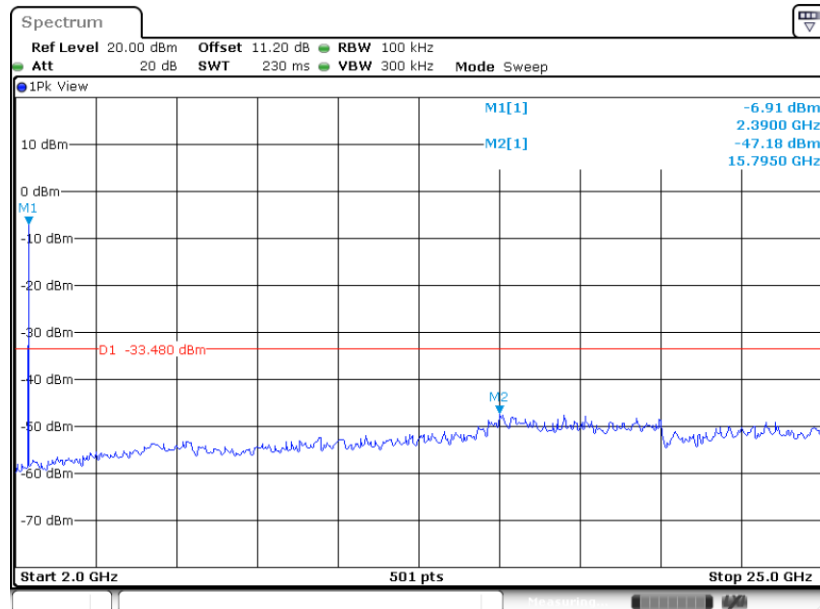

Date: 29.MAY.2022 08:44:00




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

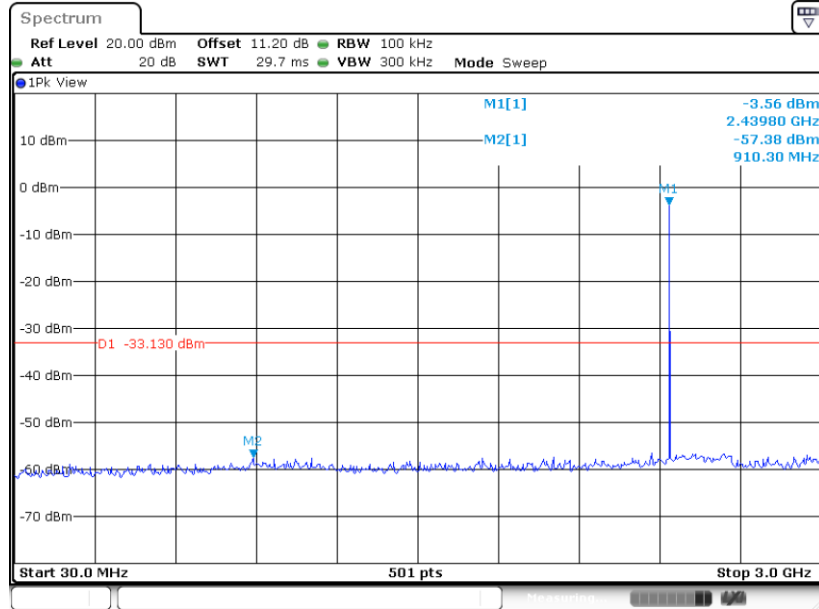

Date: 29.MAY.2022 08:41:15


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

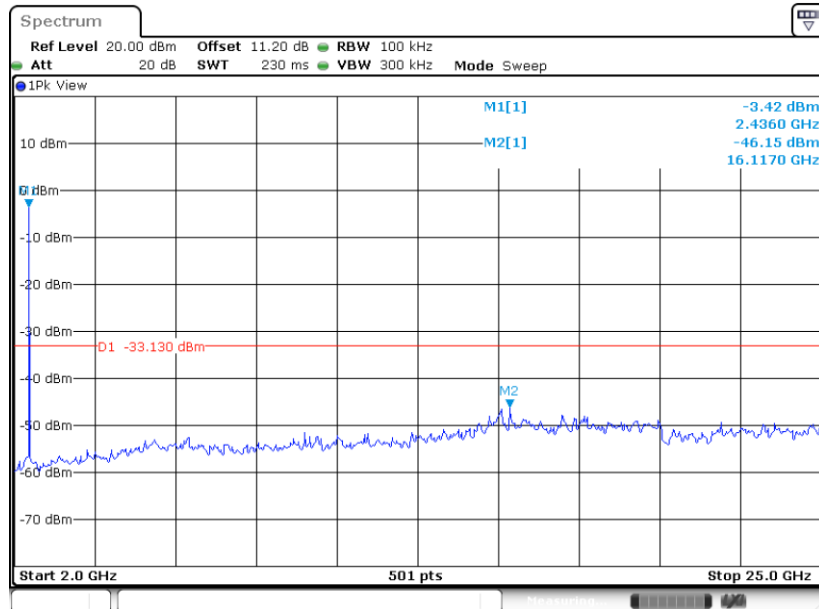

Date: 29.MAY.2022 08:41:30




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

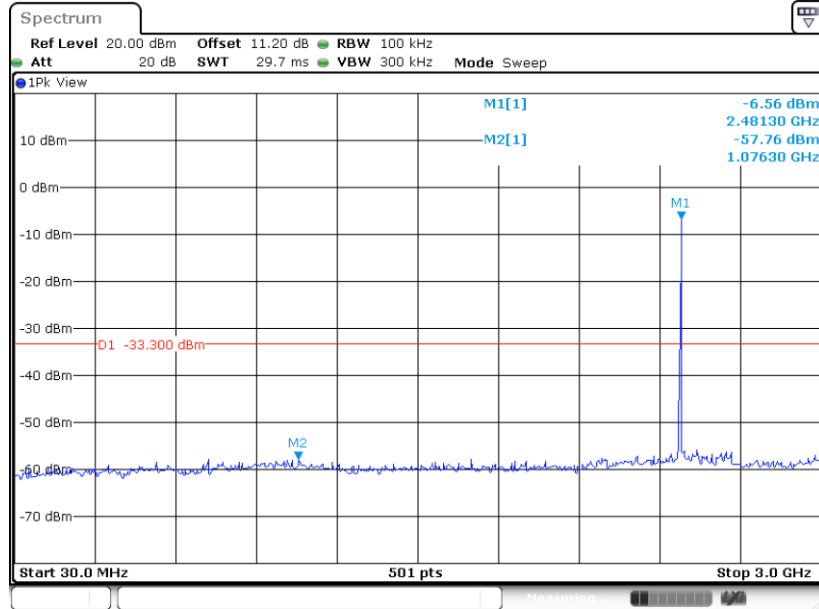

Date: 29.MAY.2022 08:47:42

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

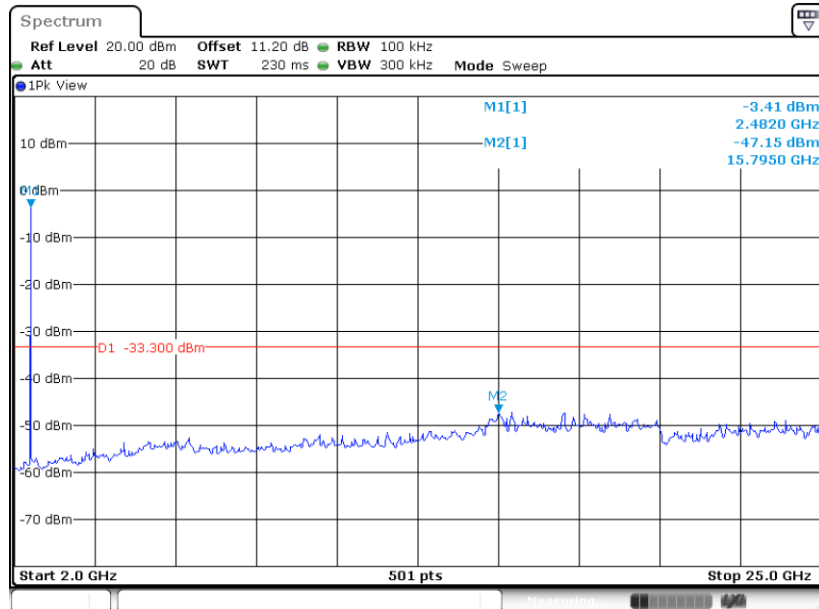

Date: 29.MAY.2022 08:47:52






< Ant 2>\_Bluetooth LE 1Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

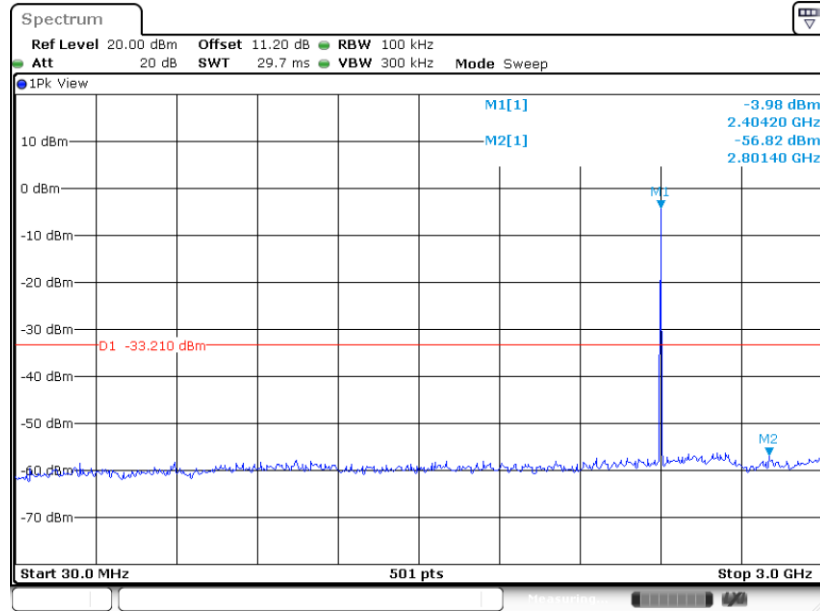

Date: 29.MAY.2022 08:52:14

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

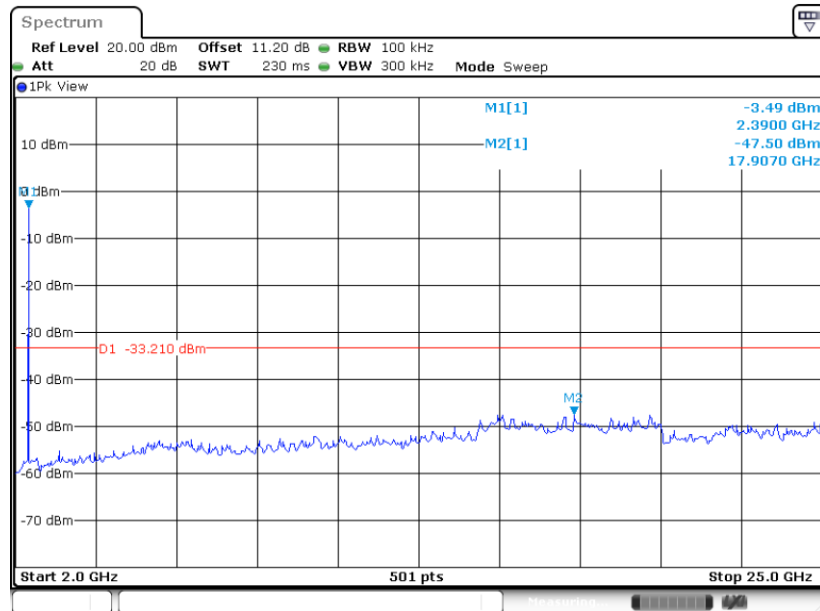

Date: 29.MAY.2022 08:52:25




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

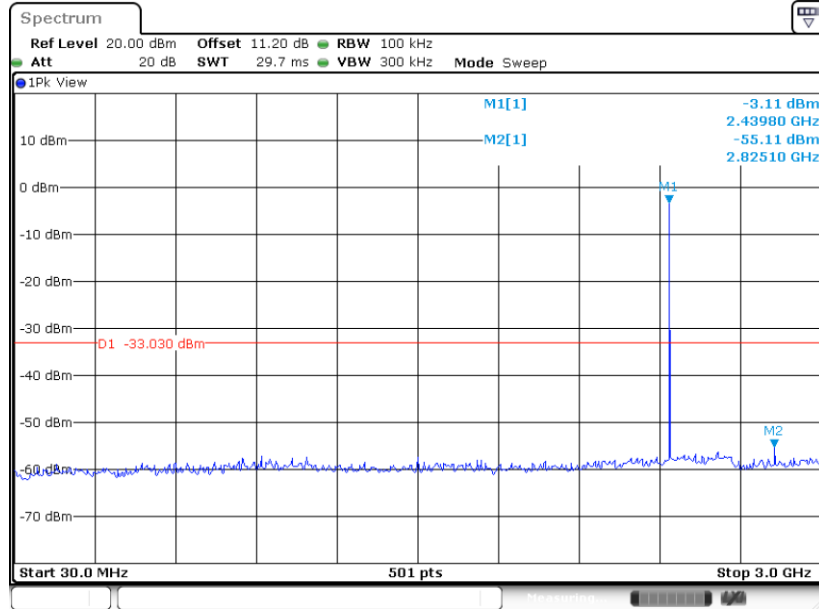

Date: 29.MAY.2022 08:54:30


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

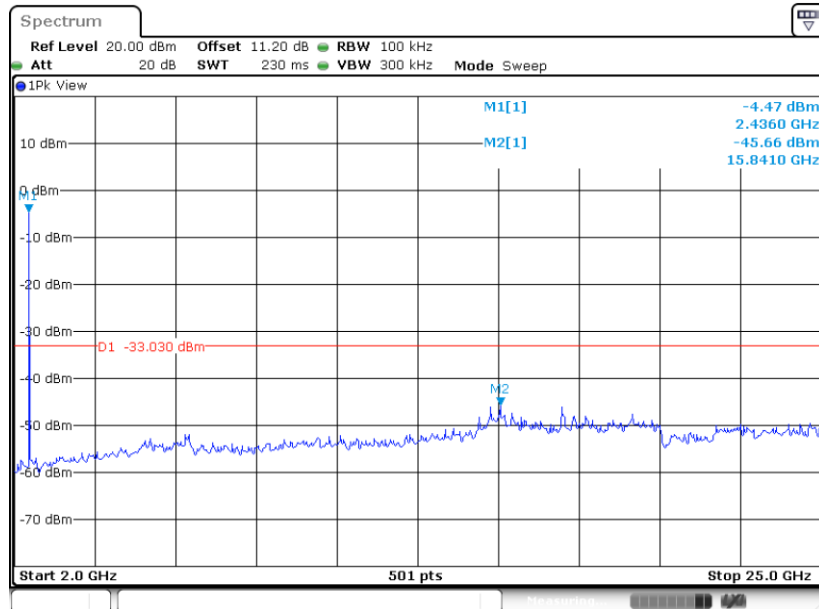

Date: 29.MAY.2022 08:54:43




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

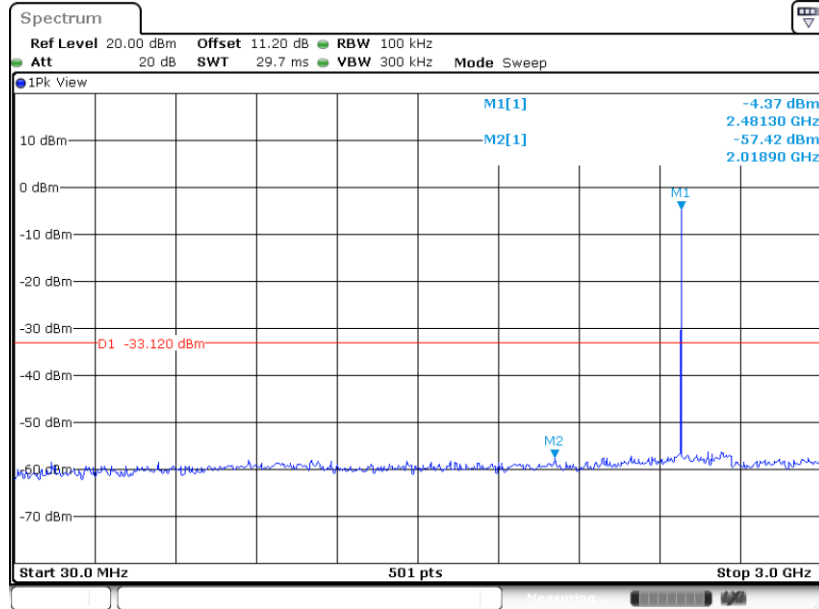

Date: 29.MAY.2022 08:57:05

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

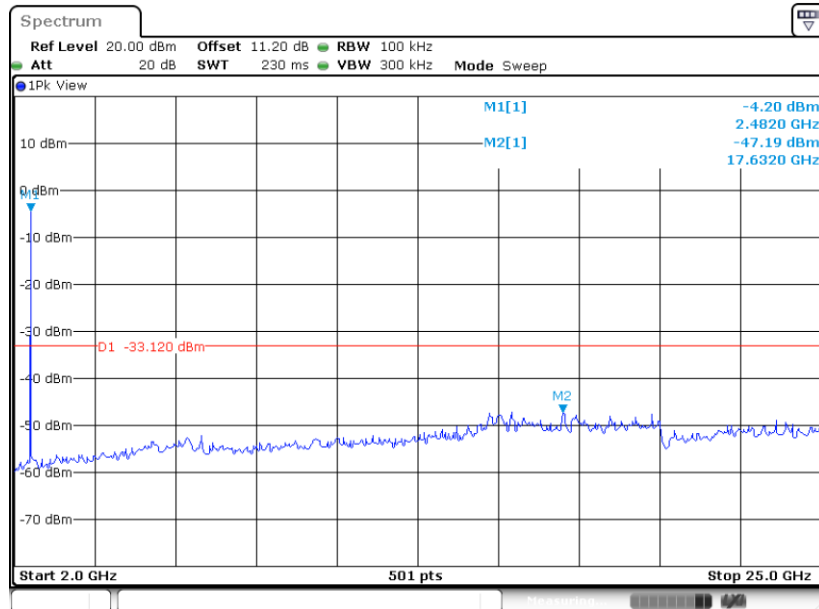


Date: 29.MAY.2022 08:57:16



< Ant 2>\_Bluetooth LE 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

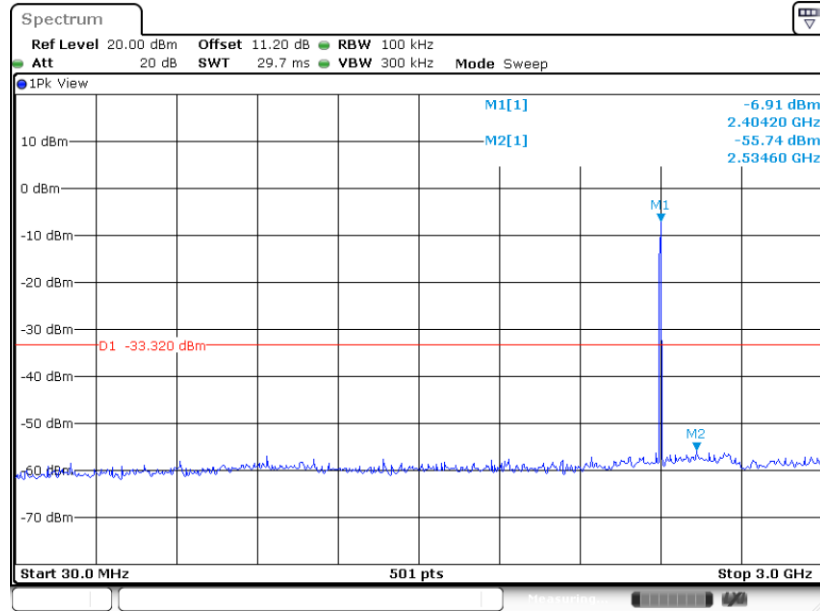

Date: 29.MAY.2022 09:02:47

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 00

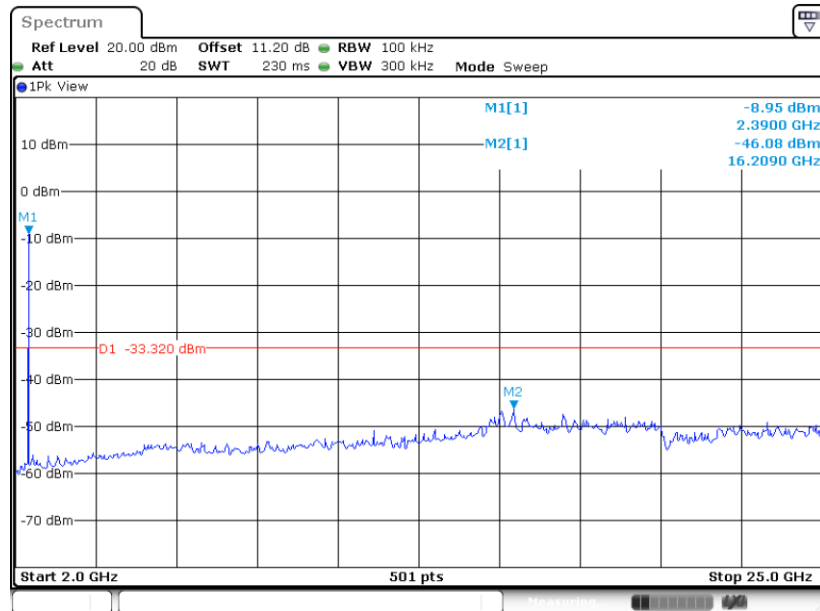

Date: 29.MAY.2022 09:03:00




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

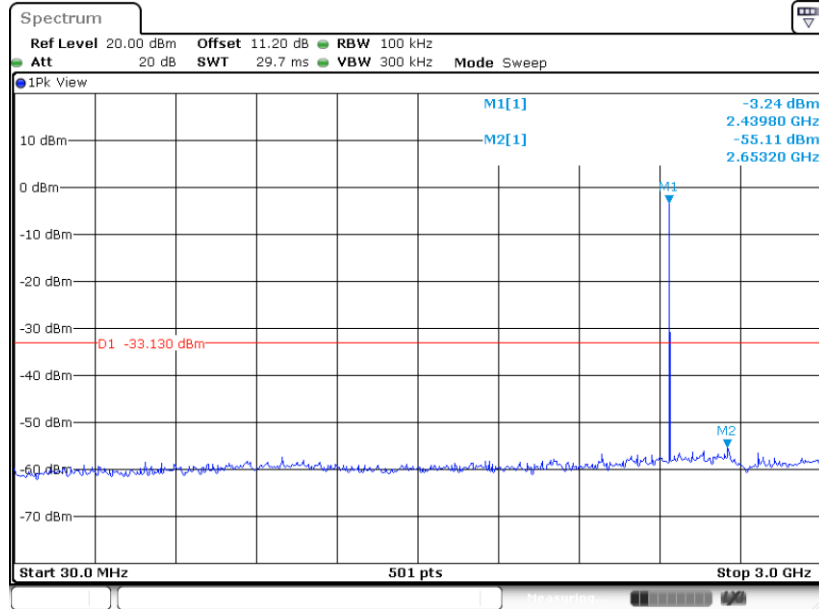

Date: 29.MAY.2022 09:06:31


### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

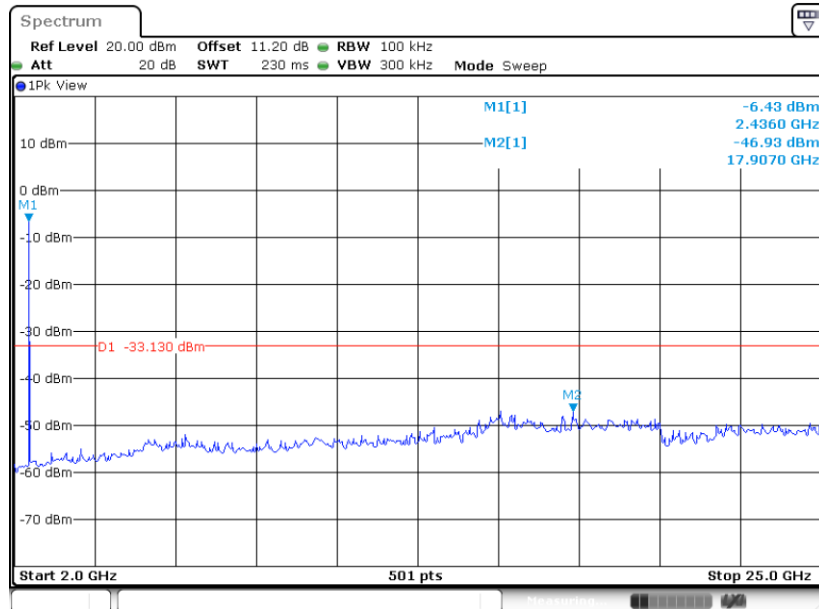

Date: 29.MAY.2022 09:06:42




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

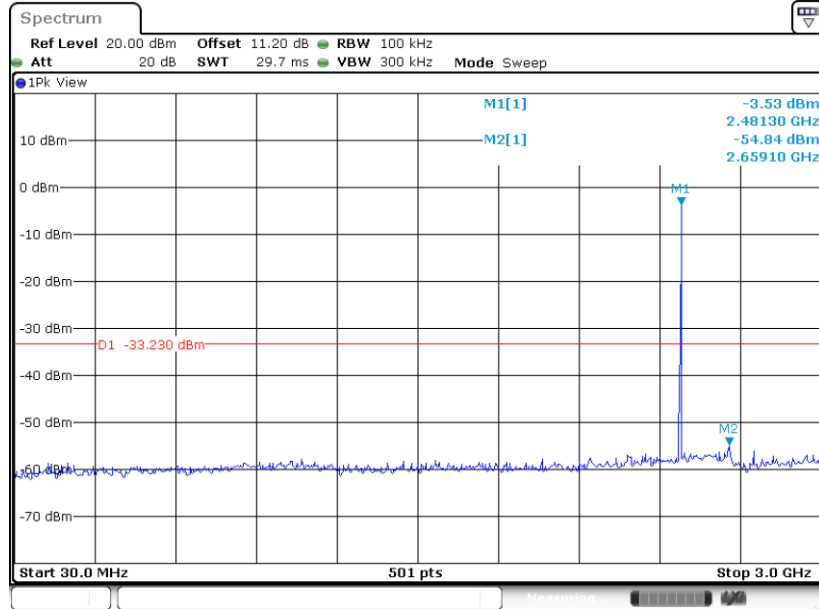

Date: 29.MAY.2022 09:09:33

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

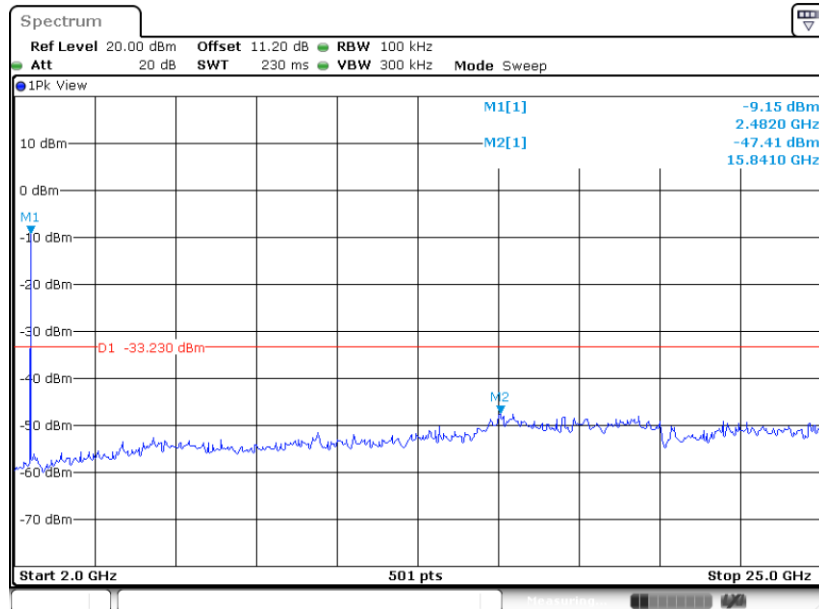

Date: 29.MAY.2022 09:09:45



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




### 3.5.4 Test Setup


For radiated emissions below 30MHz

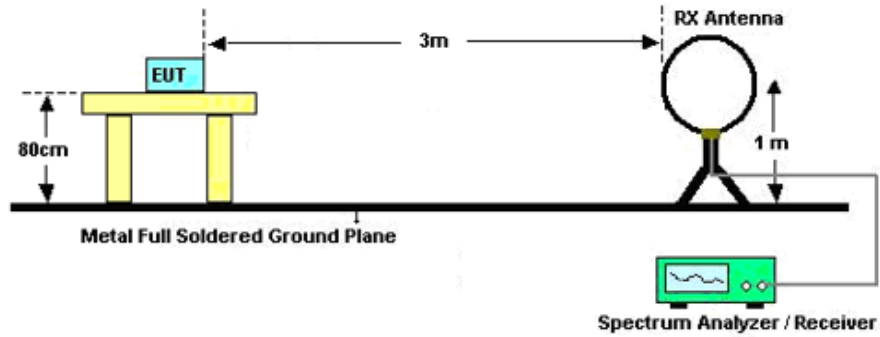

For radiated emissions from 30MHz to 1GHz

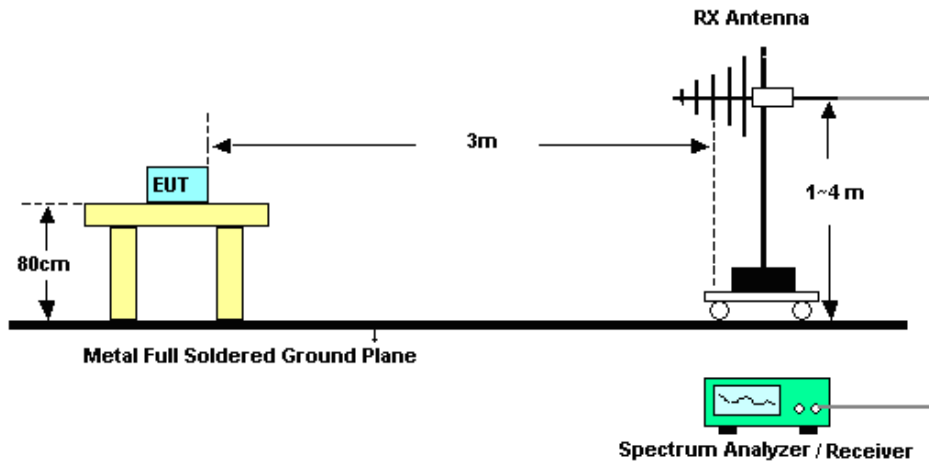

For radiated emissions above 1GHz

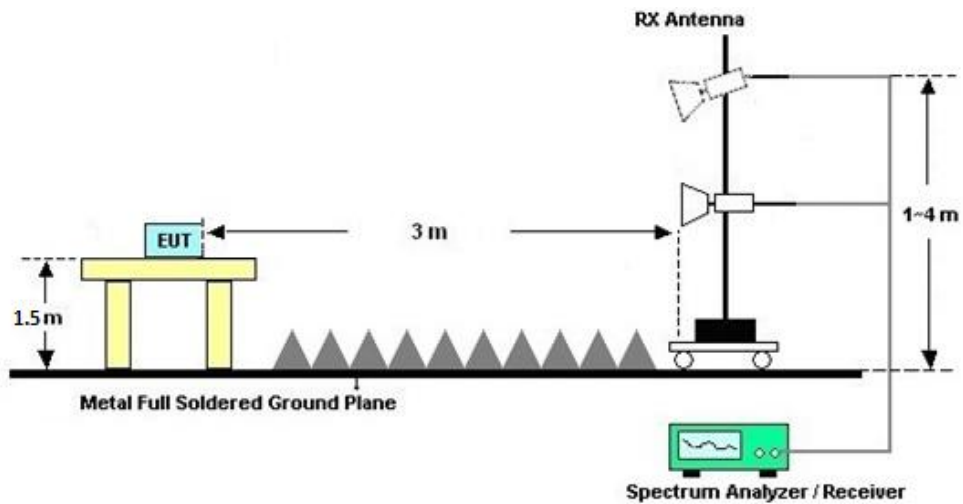



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

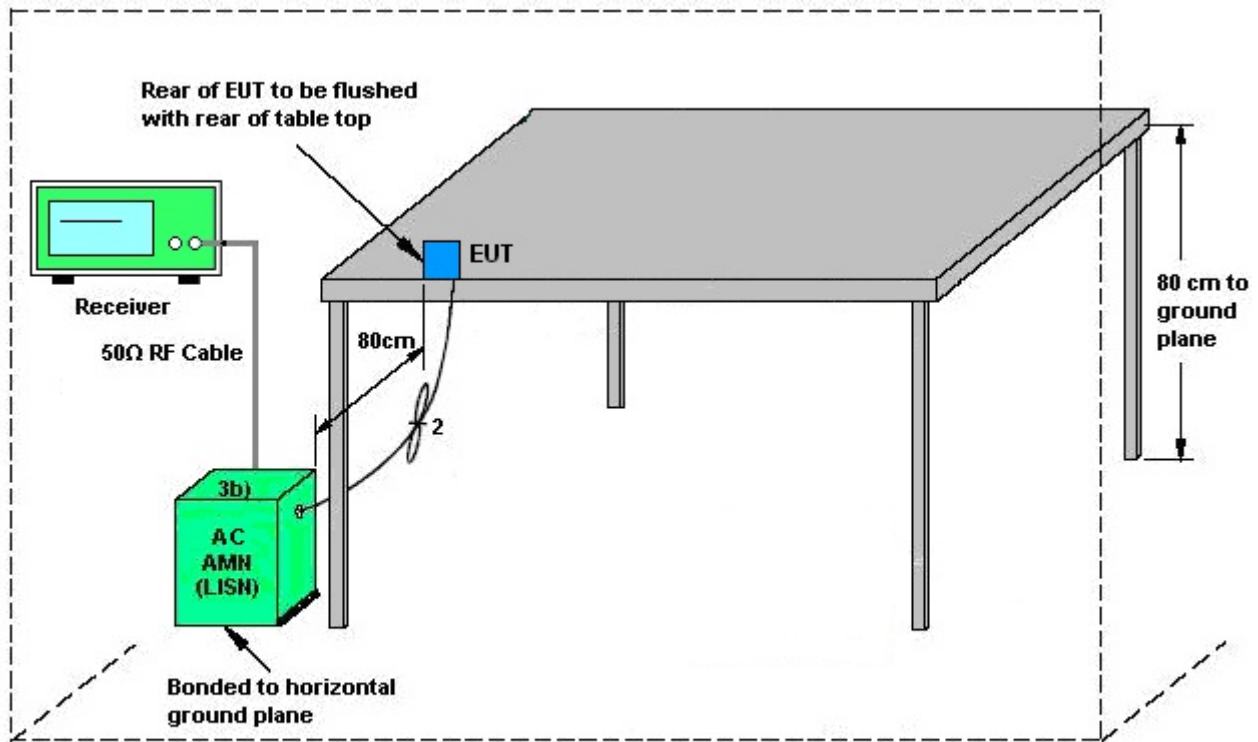

AMN = Artificial mains network (LISH)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## 3.7 Antenna Requirements

### 3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### 3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	May 29, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	May 29, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	May 29, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 22, 2021	May 30, 2022~ Jun. 08, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 14, 2021	May 30, 2022~ Jun. 08, 2022	Jul. 13, 2022	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2020	May 30, 2022~ Jun. 08, 2022	Jun. 21, 2022	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Sep. 28, 2021	May 30, 2022~ Jun. 08, 2022	Sep. 27, 2022	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 18, 2021	May 30, 2022~ Jun. 08, 2022	Jul. 17, 2022	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 10, 2022	May 30, 2022~ Jun. 08, 2022	Apr. 09, 2023	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 22, 2021	May 30, 2022~ Jun. 08, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 22, 2021	May 30, 2022~ Jun. 08, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5GHz	Oct. 22, 2021	May 30, 2022~ Jun. 08, 2022	Oct. 21, 2022	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 13, 2021	May 30, 2022~ Jun. 08, 2022	Jul. 12, 2022	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010002 470	N/A	NCR	May 30, 2022~ Jun. 08, 2022	NCR	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	May 30, 2022~ Jun. 08, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	May 30, 2022~ Jun. 08, 2022	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 14, 2021	Jun. 03, 2022	Jul. 13, 2022	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 14, 2021	Jun. 03, 2022	Jul. 13, 2022	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	NCR	Jun. 03, 2022	NCR	Conduction (CO02-SZ)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %
Conducted Power Spectral Density	±1.32 dB

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

----- THE END -----



## **Appendix A. Conducted Test Results**



**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2022/5/29	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.031	0.680	0.50	Pass
BLE	1Mbps	1	19	2440	1.031	0.682	0.50	Pass
BLE	1Mbps	1	39	2480	1.031	0.681	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.14	-2.70	30.00	-0.30	-3.00	36.00	Pass
BLE	1Mbps	1	19	2440	2.14	-2.70	30.00	-0.30	-3.00	36.00	Pass
BLE	1Mbps	1	39	2480	2.14	-3.00	30.00	-0.30	-3.30	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	Peak PSD (dBm /100kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	-17.44	-3.11	-0.30	8.00	Pass
BLE	1Mbps	1	19	2440	-17.36	-3.02	-0.30	8.00	Pass
BLE	1Mbps	1	39	2480	-17.53	-3.19	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2022/5/29	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	2	0	2402	1.031	0.680	0.50	Pass
BLE	1Mbps	2	19	2440	1.031	0.682	0.50	Pass
BLE	1Mbps	2	39	2480	1.031	0.680	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	2	0	2402	2.16	-2.80	30.00	-0.10	-2.90	36.00	Pass
BLE	1Mbps	2	19	2440	2.16	-2.80	30.00	-0.10	-2.90	36.00	Pass
BLE	1Mbps	2	39	2480	2.16	-2.90	30.00	-0.10	-3.00	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	Peak PSD (dBm /100kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	2	0	2402	-17.55	-3.21	-0.10	8.00	Pass
BLE	1Mbps	2	19	2440	-17.36	-3.03	-0.10	8.00	Pass
BLE	1Mbps	2	39	2480	-17.45	-3.12	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2022/5/29	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.062	1.172	0.50	Pass
BLE	2Mbps	1	19	2440	2.058	1.171	0.50	Pass
BLE	2Mbps	1	39	2480	2.058	1.171	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	5.05	-2.50	30.00	-0.30	-2.80	36.00	Pass
BLE	2Mbps	1	19	2440	5.05	-2.50	30.00	-0.30	-2.80	36.00	Pass
BLE	2Mbps	1	39	2480	5.05	-2.80	30.00	-0.30	-3.10	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	Peak PSD (dBm /100kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	-20.31	-3.48	-0.30	8.00	Pass
BLE	2Mbps	1	19	2440	-19.91	-3.13	-0.30	8.00	Pass
BLE	2Mbps	1	39	2480	-20.13	-3.30	-0.30	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	Ma Jie	Temperature:	21~25	°C
Test Date:	2022/5/29	Relative Humidity:	51~54	%

<b>TEST RESULTS DATA</b>								
<b>6dB and 99% Occupied Bandwidth</b>								
Mod.	Data Rate	ANT	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	2	0	2402	2.058	1.171	0.50	Pass
BLE	2Mbps	2	19	2440	2.058	1.171	0.50	Pass
BLE	2Mbps	2	39	2480	2.058	1.171	0.50	Pass

<b>TEST RESULTS DATA</b>												
<b>Average Power Table</b>												
Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
BLE	2Mbps	2	0	2402	5.01	-2.40	30.00	-0.10	-2.50	36.00	Pass	
BLE	2Mbps	2	19	2440	5.01	-2.40	30.00	-0.10	-2.50	36.00	Pass	
BLE	2Mbps	2	39	2480	5.01	-2.50	30.00	-0.10	-2.60	36.00	Pass	


<b>TEST RESULTS DATA</b>									
<b>Peak Power Density</b>									
Mod.	Data Rate	ANT	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	Peak PSD (dBm /100kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	2	0	2402	-20.15	-3.32	-0.10	8.00	Pass
BLE	2Mbps	2	19	2440	-19.95	-3.13	-0.10	8.00	Pass
BLE	2Mbps	2	39	2480	-20.04	-3.23	-0.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



### Appendix B. AC Conducted Emission Test Results

Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

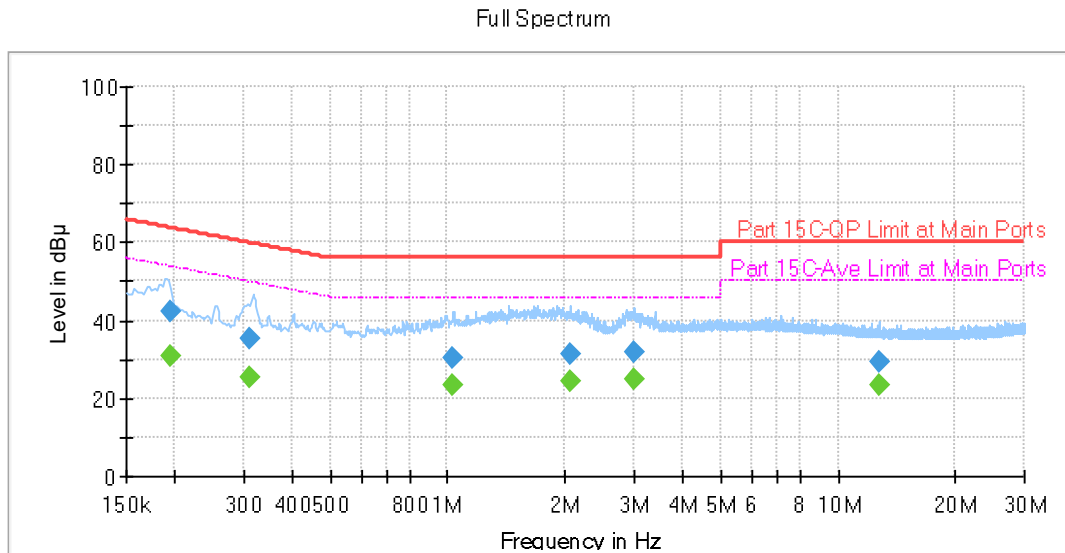


#### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.195000	42.27	---	63.82	21.55	L1	OFF	19.7
0.195000	---	30.86	53.82	22.96	L1	OFF	19.7
0.312000	35.39	---	59.92	24.53	L1	OFF	19.7
0.312000	---	25.45	49.92	24.46	L1	OFF	19.7
1.029750	30.16	---	56.00	25.84	L1	OFF	19.8
1.029750	---	23.57	46.00	22.43	L1	OFF	19.8
2.066550	31.55	---	56.00	24.45	L1	OFF	19.8
2.066550	---	24.55	46.00	21.45	L1	OFF	19.8
3.007500	31.69	---	56.00	24.31	L1	OFF	19.8
3.007500	---	25.12	46.00	20.88	L1	OFF	19.8
12.823530	29.40	---	60.00	30.60	L1	OFF	20.1
12.823530	---	23.57	50.00	26.43	L1	OFF	20.1



Test Engineer :	Zhang Tao	Temperature :	22~25°C
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

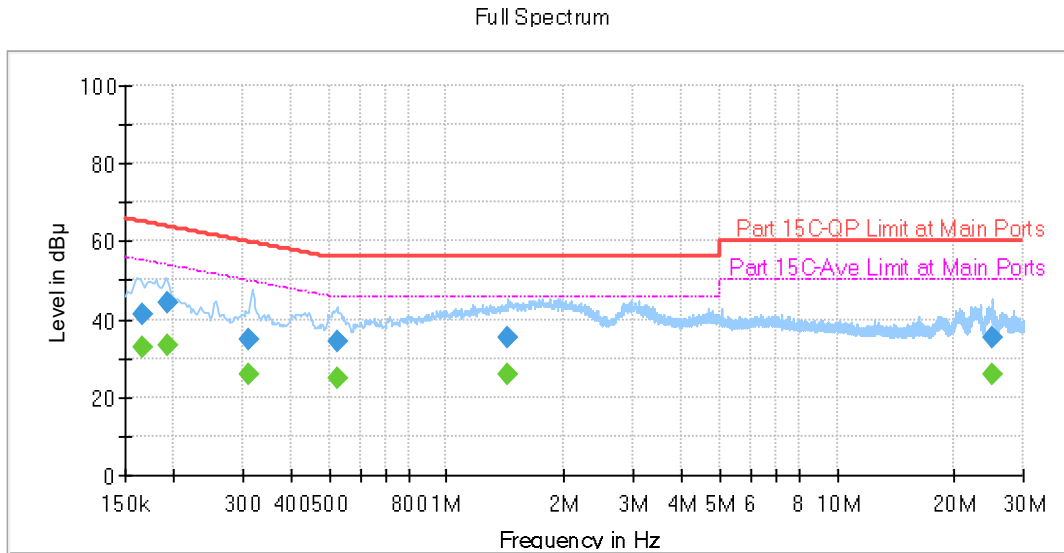

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.165480	41.20	---	65.18	23.99	N	OFF	19.7
0.165480	---	32.65	55.18	22.53	N	OFF	19.7
0.192480	44.20	---	63.93	19.72	N	OFF	19.7
0.192480	---	33.40	53.93	20.53	N	OFF	19.7
0.312000	34.70	---	59.92	25.22	N	OFF	19.7
0.312000	---	25.65	49.92	24.27	N	OFF	19.7
0.528000	34.34	---	56.00	21.66	N	OFF	19.7
0.528000	---	25.05	46.00	20.95	N	OFF	19.7
1.439250	35.26	---	56.00	20.74	N	OFF	19.8
1.439250	---	25.87	46.00	20.13	N	OFF	19.8
24.891270	35.54	---	60.00	24.46	N	OFF	20.4
24.891270	---	25.89	50.00	24.11	N	OFF	20.4

Note: Margin(dB) = Level(dBµV) – Limit Line(dBµV)



# Appendix C. Radiated Spurious Emission

< Ant 1 >

Bluetooth LE 1Mbps

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		2357.67	50.89	-23.11	74	45.94	31.7	5.51	32.26	231	191	P	H
		2378.985	41.32	-12.68	54	36.34	31.7	5.53	32.25	231	191	A	H
	*	2402	86.38	-	-	81.37	31.7	5.55	32.24	231	191	P	H
	*	2402	85.63	-	-	80.62	31.7	5.55	32.24	231	191	A	H
		2360.19	51.2	-22.8	74	46.25	31.7	5.51	32.26	148	198	P	V
		2365.755	41.58	-12.42	54	36.62	31.7	5.51	32.25	148	198	A	V
	*	2402	85.56	-	-	80.55	31.7	5.55	32.24	148	198	P	V
	*	2402	81.69	-	-	76.68	31.7	5.55	32.24	148	198	A	V
BLE CH 19 2440MHz		2361.52	51.58	-22.42	74	46.63	31.7	5.51	32.26	100	149	P	H
		2361.8	41.9	-12.1	54	36.95	31.7	5.51	32.26	100	149	A	H
	*	2440	87.21	-	-	81.74	32	5.61	32.14	100	149	P	H
	*	2440	86.44	-	-	80.97	32	5.61	32.14	100	149	A	H
		2485.58	51.66	-22.34	74	45.88	32.07	5.66	31.95	100	149	P	H
		2495.1	42.82	-11.18	54	36.89	32.1	5.68	31.85	100	149	A	H
		2385.04	50.67	-23.33	74	45.69	31.7	5.53	32.25	124	206	P	V
		2360.12	41.43	-12.57	54	36.48	31.7	5.51	32.26	124	206	A	V
	*	2440	86.29	-	-	80.82	32	5.61	32.14	124	206	P	V
	*	2440	85.55	-	-	80.08	32	5.61	32.14	124	206	A	V
		2499.86	51.45	-22.55	74	45.52	32.1	5.68	31.85	124	206	P	V
		2487.26	42.6	-11.4	54	36.82	32.07	5.66	31.95	124	206	A	V