



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	Misfit Wearables Corporation
Applicant Address	5 Brookdale Rd., Salem, NH 03079 USA
FCC ID	PT3-SH0AZB
Manufacturer's company	Misfit Wearables Corporation
Manufacturer Address	5 Brookdale Rd., Salem, NH 03079 USA

Product Name	Pedometer
Brand Name	Misfit
Model Number	SH0AZB
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2402 ~ 2480MHz
Received Date	Apr. 23, 2015
Final Test Date	May 07, 2015
Submission Type	Original Equipment

### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10 2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Note: Using 1.5m table as an alternative was permitted by the FCC per TCBC conference call of Dec. 2, 2014.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Table for Carrier Frequencies .....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Test Modes .....	4
3.5. Table for Testing Locations.....	5
3.6. Table for Supporting Units .....	5
3.7. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. Field Strength of Fundamental Emissions Measurement .....	8
4.2. 20dB Spectrum Bandwidth Measurement .....	11
4.3. Radiated Emissions Measurement .....	14
4.4. Band Edge Emissions Measurement .....	24
4.5. Antenna Requirements .....	26
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>27</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>28</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A4</b>


## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR542233	Rev. 01	Initial issue of report	May 14, 2015

## 1. VERIFICATION OF COMPLIANCE

Product Name : Pedometer  
Brand Name : Misfit  
Model Number : SH0AZB  
Applicant : Misfit Wearables Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 23, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

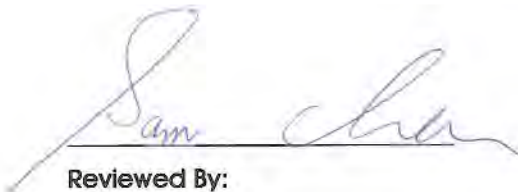

Reviewed By:

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
-	15.207	AC Power Line Conducted Emissions	Complies	Note1
4.1	15.249(a)	Field Strength of Fundamental Emissions	Complies	14.39 dB
4.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.3	15.249(a)/(d)	Radiated Emissions	Complies	1.60 dB
4.4	15.249(d)	Band Edge Emissions	Complies	5.54 dB
4.5	15.203	Antenna Requirements	Complies	-

Note1: It was supplied power by battery for EUT; It's not necessary to apply to AC Power Port Conducted emission test

### 3. GENERAL INFORMATION

#### 3.1. Product Details


Items	Description
Power Type	Battery 3V
Modulation	DSSS
Data Rate (Mbps)	GFSK: 1
Frequency Range	2402 ~ 2480MHz
Channel Number	40 (37 hopping + 3 advertising channel)
Channel Band Width (99%)	0.988 MHz
Max. Field Strength	79.61 dBuV/m at 3m (Average)
Carrier Frequencies	Please refer to section 3.2
Antenna	Please refer to section 3.3
Accessories	N/A

#### 3.2. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency
2402 ~ 2480MHz	0	2402 MHz
	1	2404 MHz
	2	2406 MHz
	:	:
	18	2438 MHz
	19	2440 MHz
	20	2442 MHz
	:	:
	37	2476 MHz
	38	2478 MHz
	39	2480 MHz

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	Printed Antenna	N/A	0	TX/RX

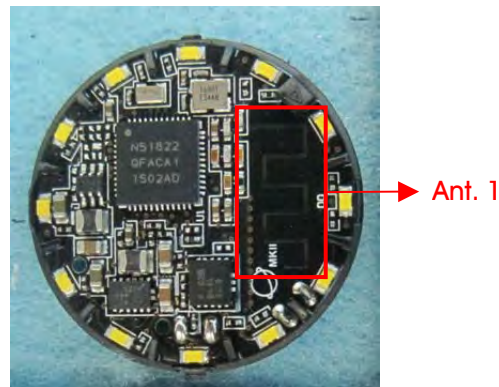

### 3.4. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
AC Power Line Conducted Emissions	-	-	-
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	0/20/39	1
Radiated Emissions 30MHz ~ 1GHz	Normal Link	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	0/20/39	1
Band Edge Emissions	CTX	0/39	1

Note: CTX=continuously transmitting

The following test modes were performed for all tests:

#### For Radiated Emission test below 1GHz:

Mode 1. Place EUT in X axis

Mode 2. Place EUT in Y axis

Mode 3. Place EUT in Z axis

Mode 2 is the worst case, so it was selected to record in this test report

#### For Radiated Emission test above 1GHz:

The EUT was performed at X axis, Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at X axis. So the measurement will follow this same test configuration.

Mode 1. Place EUT in X axis

### 3.5. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

### 3.6. Table for Supporting Units

For Test Site No.: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6220	DoC

For Test Site No.: 03CH01-CB

For Radiated Emission test below 1GHz:

Support Unit	Brand	Model	FCC ID
iPod touch	Apple	A1421	BCG-A1421

For Radiated Emission test above 1GHz:


Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC




### 3.7. Test Configurations

#### 3.7.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

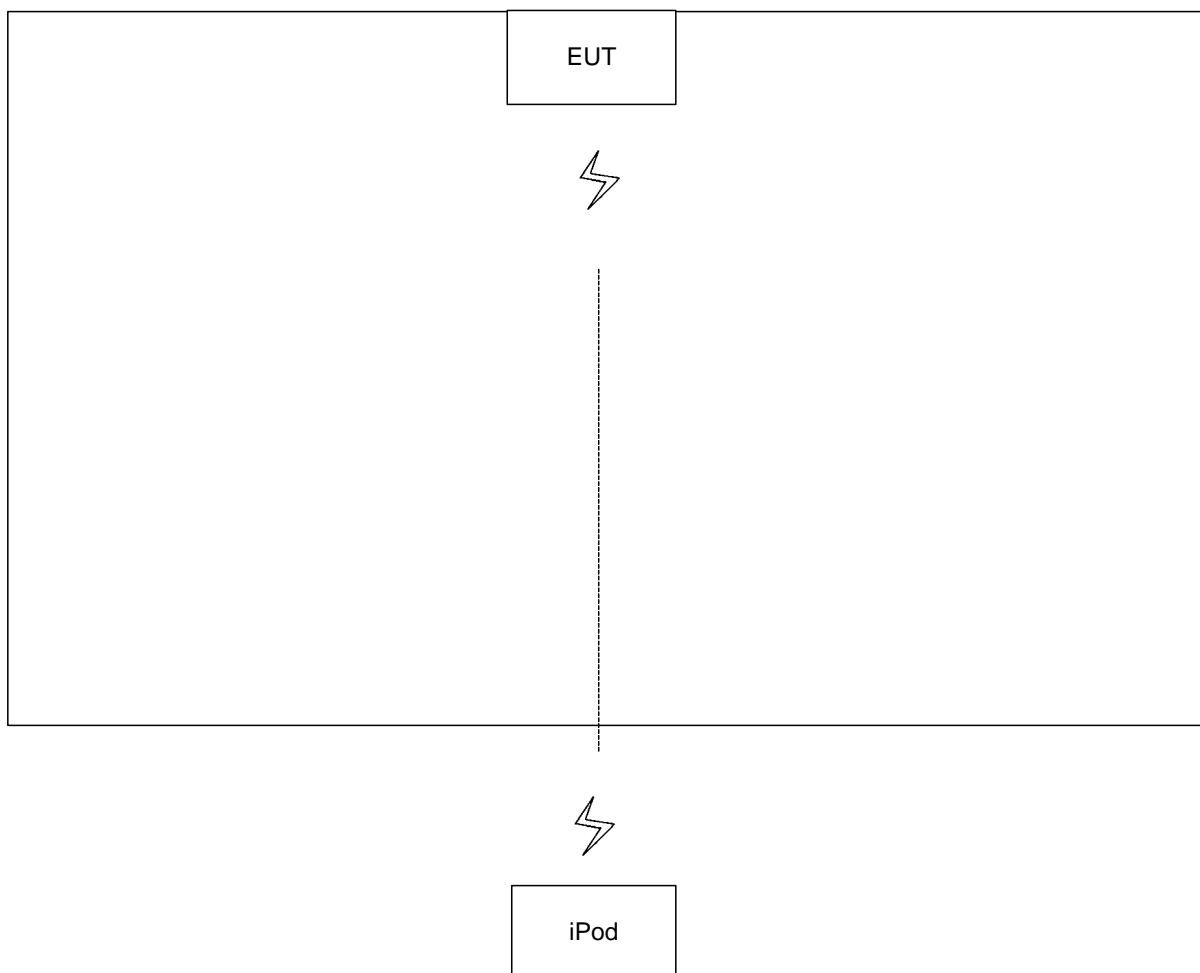

### Test Configuration: Above 1GHz

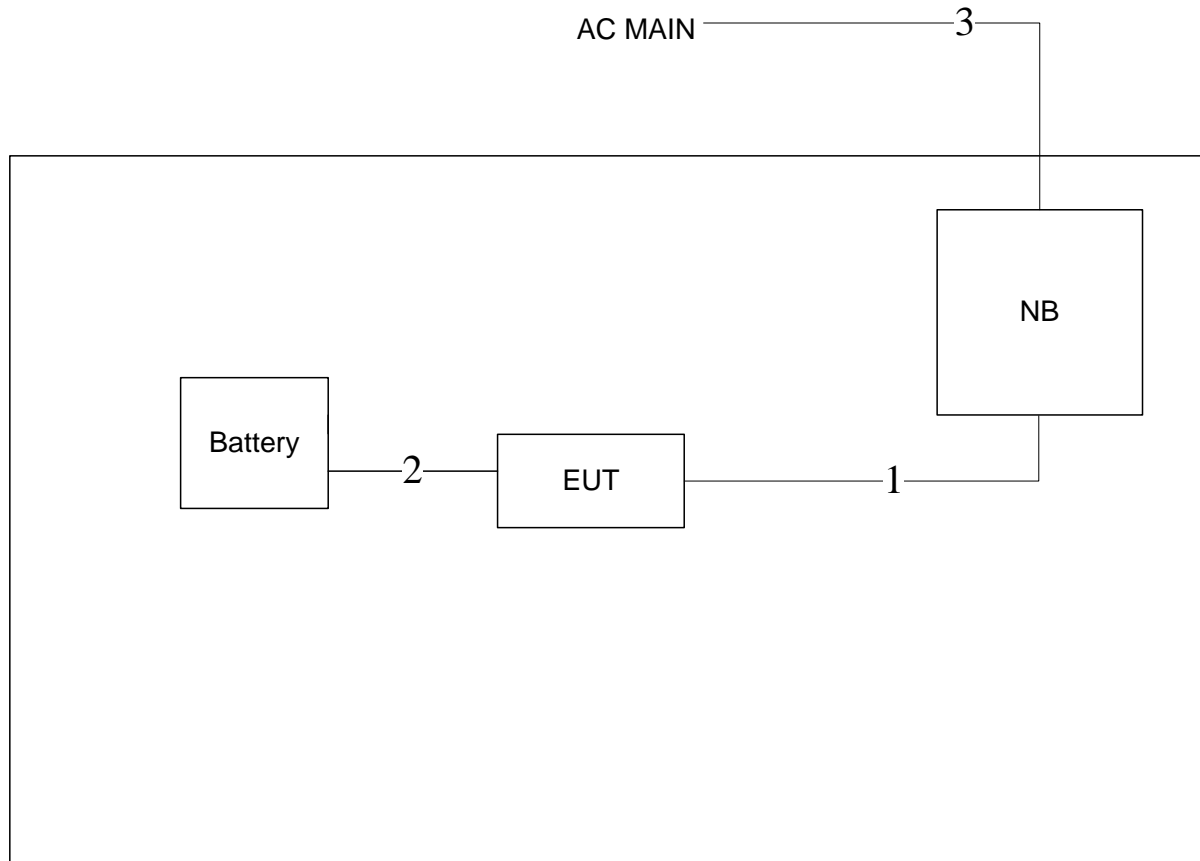

Item	Connection	Shielded	Length(m)
1	USB cable	Yes	1.7m
2	Power cable	No	0.7m
3	Power cable	No	2.7m

## 4. TEST RESULT

### 4.1. Field Strength of Fundamental Emissions Measurement

#### 4.1.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94 (Average)
	114 (Peak)

#### Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RBW	1 MHz Peak / 3MHz Peak
VBW	1 MHz Peak / 1/T Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.2. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

#### 4.1.3. Test Setup Layout

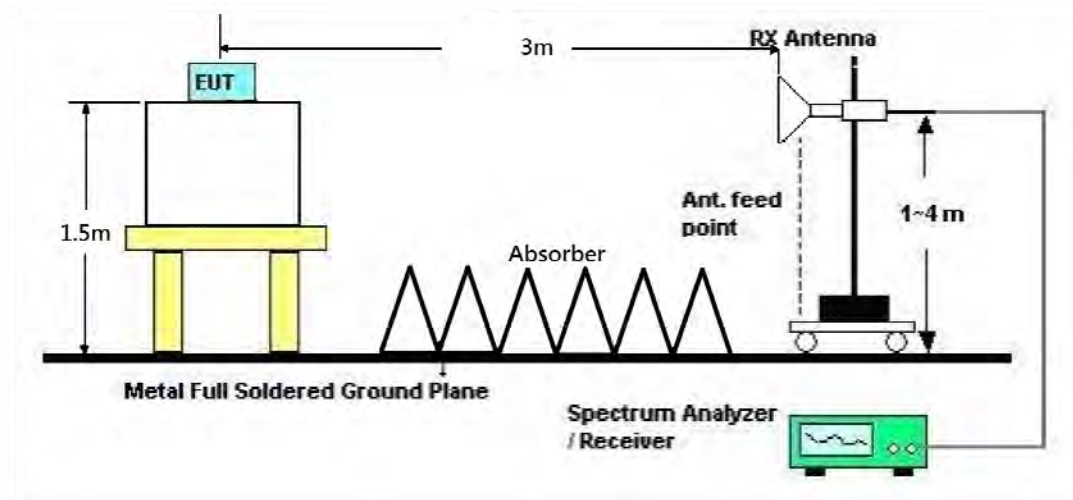

#### 4.1.4. Test Deviation

There is no deviation with the original standard.

#### 4.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.1.6. Test Result of Field Strength of Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Channel 0, 20, 39
Test Date	May 07, 2015		

##### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2402.00	76.36	94.00	-17.64	45.33	3.88	27.15	0.00	100	46 Average	VERTICAL
2	2402.22	78.86	114.00	-35.14	47.83	3.88	27.15	0.00	100	46 Peak	VERTICAL

##### Channel 20

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2441.98	79.61	94.00	-14.39	48.45	3.91	27.25	0.00	100	45 Average	VERTICAL
2	2442.31	82.28	114.00	-31.72	51.12	3.91	27.25	0.00	100	45 Peak	VERTICAL

##### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2480.00	73.07	94.00	-20.93	41.78	3.94	27.35	0.00	104	42 Average	VERTICAL
2	2480.30	75.62	114.00	-38.38	44.33	3.94	27.35	0.00	104	42 Peak	VERTICAL

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.2. 20dB Spectrum Bandwidth Measurement

### 4.2.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2402 ~ 2480MHz).

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.2.4. Test Setup Layout

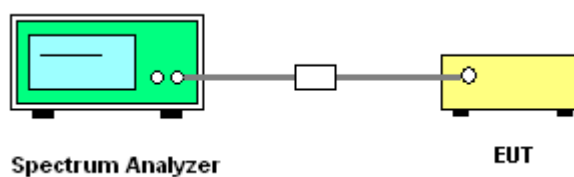

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 20dB Spectrum Bandwidth

Temperature	22°C	Humidity	63%
Test Engineer	Serway Li	Configurations	Channel 0/20/39


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2402 MHz	1.124	0.988	2401.432	-	Complies
2442 MHz	1.124	0.976	-	-	Complies
2480 MHz	1.128	0.988	-	2480.540	Complies

#### 20 dB/99% Bandwidth Plot on 2402 MHz

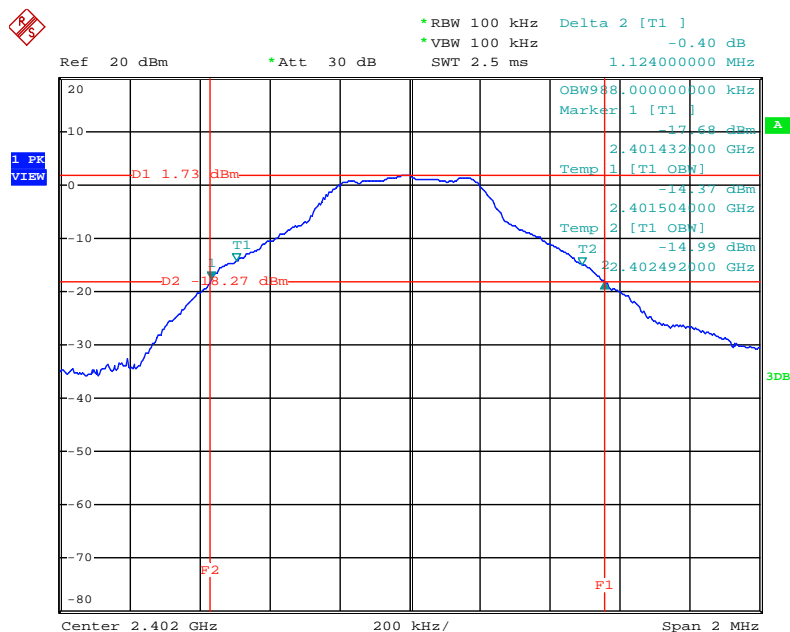


Date: 7.MAY.2015 18:43:55

### 20 dB/99% Bandwidth Plot on 2442 MHz

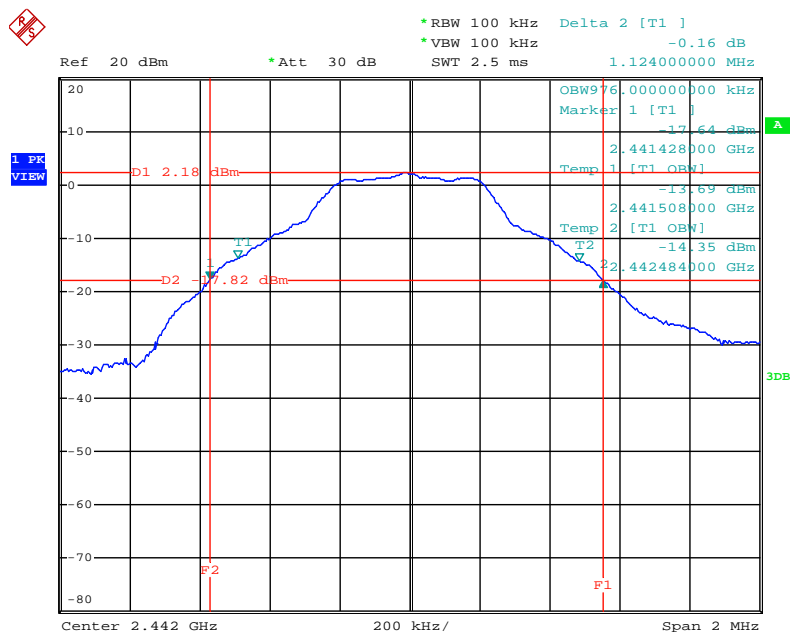

Date: 7.MAY.2015 18:38:32

### 20 dB/99% Bandwidth Plot on 2480 MHz

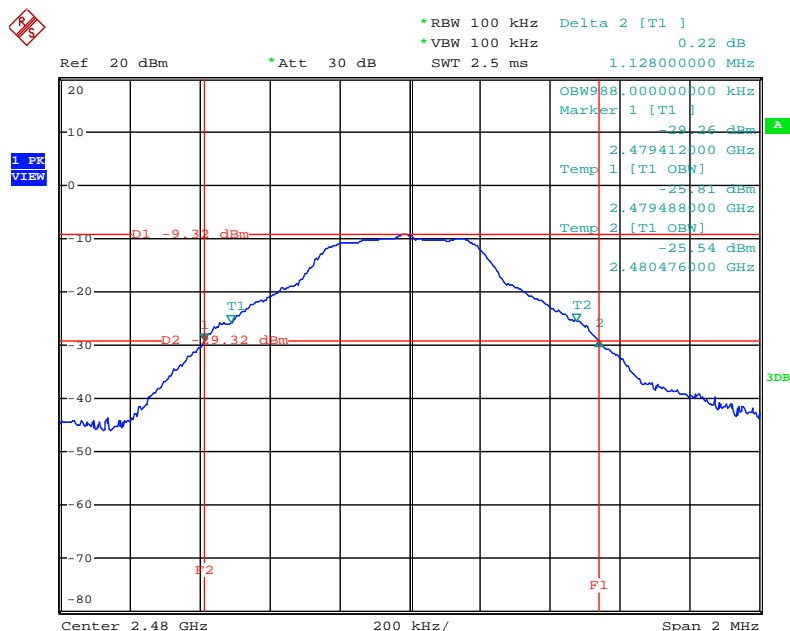

Date: 7.MAY.2015 18:46:27



### 4.3. Radiated Emissions Measurement

#### 4.3.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1 000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.3.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.3.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

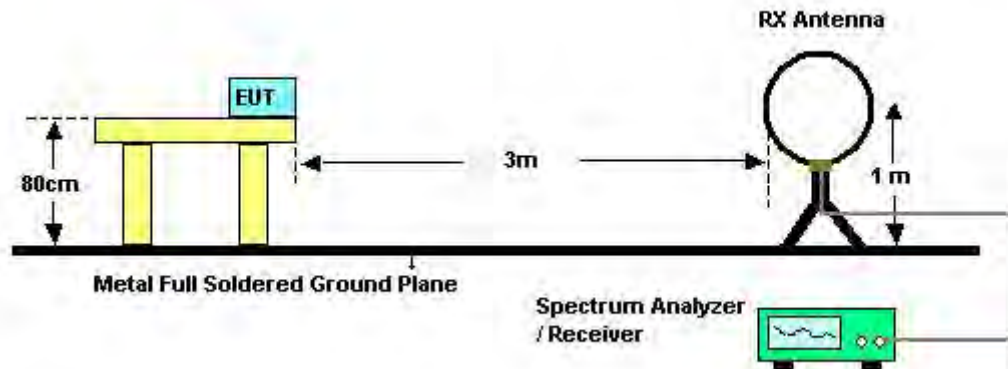

For Radiated Emissions: 30MHz~1GHz

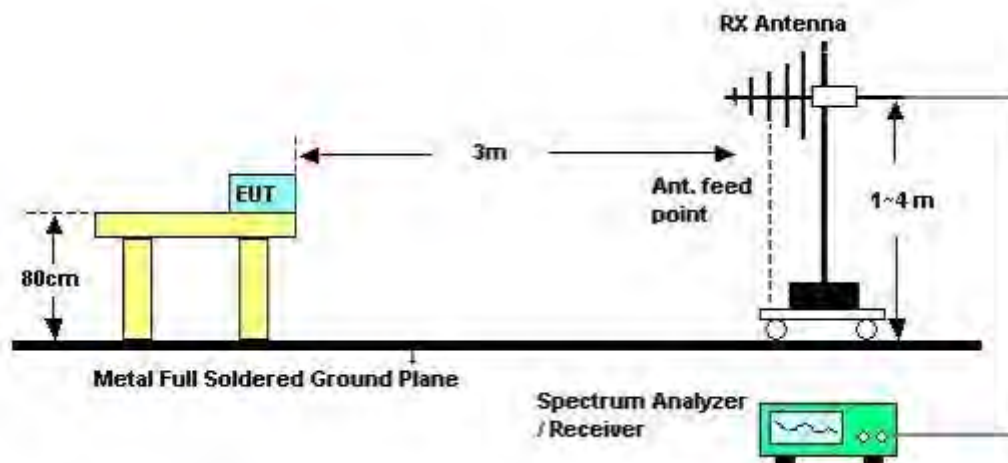

For Radiated Emissions: Above 1GHz

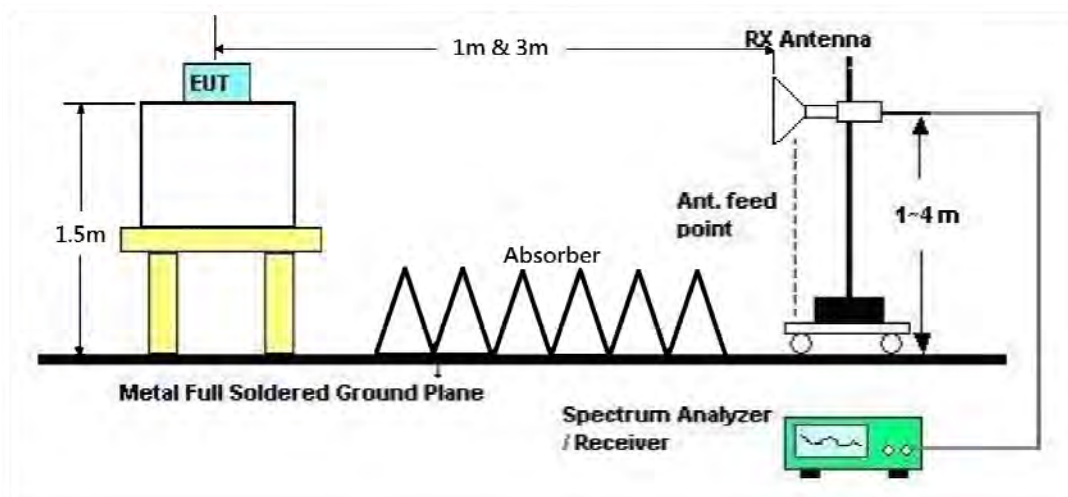

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	26°C	<b>Humidity</b>	68%
<b>Test Engineer</b>	Alex Fan	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Apr. 30, 2015	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.3.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Normal Link
Test Mode	Mode 2		

##### Horizontal

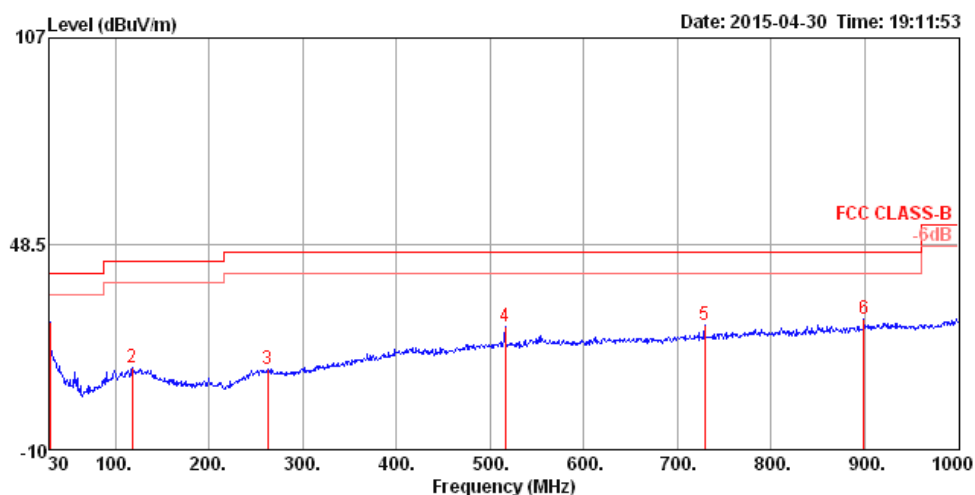

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	26.08	40.00	-13.92	33.00	0.64	17.98	25.54	200	39 HORIZONTAL	Peak
2	118.27	13.36	43.50	-30.14	28.00	1.28	11.55	27.47	400	140 HORIZONTAL	Peak
3	262.80	12.91	46.00	-33.09	28.06	1.95	12.71	29.81	100	176 HORIZONTAL	Peak
4	515.97	25.02	46.00	-20.98	32.63	2.86	17.31	27.78	200	280 HORIZONTAL	Peak
5	729.37	25.20	46.00	-20.80	30.10	3.46	19.53	27.89	300	194 HORIZONTAL	Peak
6	899.12	27.11	46.00	-18.89	29.51	3.97	20.63	27.00	100	360 HORIZONTAL	Peak

### Vertical

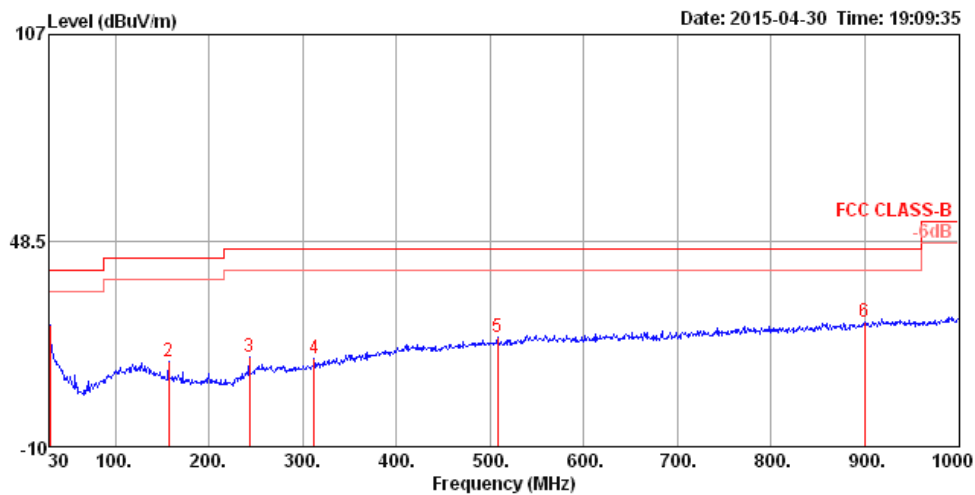

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	24.41	40.00	-15.59	31.33	0.64	17.98	25.54	200	138 VERTICAL	Peak
2	157.07	14.13	43.50	-29.37	31.53	1.51	9.67	28.58	150	187 VERTICAL	Peak
3	243.40	15.59	46.00	-30.41	32.25	1.87	11.20	29.73	125	108 VERTICAL	Peak
4	312.27	14.89	46.00	-31.11	28.94	2.16	13.44	29.65	125	117 VERTICAL	Peak
5	508.21	20.90	46.00	-25.10	28.62	2.83	17.18	27.73	100	0 VERTICAL	Peak
6	900.09	25.24	46.00	-20.76	27.61	3.97	20.64	26.98	300	250 VERTICAL	Peak

### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.3.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Channel 0
Test Date	Apr. 25, 2015		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4803.99	42.41	54.00	-11.59	35.85	6.13	33.52	33.09	63	150	Average	HORIZONTAL
2	4804.29	58.76	74.00	-15.24	52.20	6.13	33.52	33.09	63	150	Peak	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4803.94	41.90	54.00	-12.10	35.34	6.13	33.52	33.09	342	150	Average	VERTICAL
2	4804.24	57.22	74.00	-16.78	50.66	6.13	33.52	33.09	342	150	Peak	VERTICAL



Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Channel 20
Test Date	Apr. 25, 2015		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4883.96	48.45	54.00	-5.55	41.79	6.08	33.66	33.08	189	137	Average	HORIZONTAL
2	4884.61	59.14	74.00	-14.86	52.45	6.08	33.69	33.08	189	137	Peak	HORIZONTAL
3	7323.05	38.88	54.00	-15.12	27.36	8.30	36.69	33.47	318	150	Average	HORIZONTAL
4	7328.23	53.17	74.00	-20.83	41.65	8.30	36.69	33.47	318	150	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4883.95	45.48	54.00	-8.52	38.82	6.08	33.66	33.08	82	148	Average	VERTICAL
2	4884.48	58.13	74.00	-15.87	51.47	6.08	33.66	33.08	82	148	Peak	VERTICAL
3	7322.80	52.95	74.00	-21.05	41.43	8.30	36.69	33.47	314	150	Peak	VERTICAL
4	7327.01	38.88	54.00	-15.12	27.36	8.30	36.69	33.47	314	150	Average	VERTICAL

Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Channel 39
Test Date	Apr. 25, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4959.97	52.40	54.00	-1.60	45.59	6.04	33.83	33.06	190	117	Average	HORIZONTAL
2	4960.29	56.93	74.00	-17.07	50.12	6.04	33.83	33.06	190	117	Peak	HORIZONTAL
3	7439.83	52.67	74.00	-21.33	40.78	8.41	36.98	33.50	27	150	Peak	HORIZONTAL
4	7439.91	39.28	54.00	-14.72	27.39	8.41	36.98	33.50	27	150	Average	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4959.94	55.10	74.00	-18.90	48.29	6.04	33.83	33.06	183	159	Peak	VERTICAL
2	4959.95	49.24	54.00	-4.76	42.43	6.04	33.83	33.06	183	159	Average	VERTICAL
3	7440.30	53.20	74.00	-20.80	41.31	8.41	36.98	33.50	266	150	Peak	VERTICAL
4	7440.53	39.27	54.00	-14.73	27.38	8.41	36.98	33.50	266	150	Average	VERTICAL

#### Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.4. Band Edge Emissions Measurement

### 4.4.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak

### 4.4.3. Test Procedures

- The test procedure is the same as section 4.3.3, only the frequency range investigated is limited to 2MHz around bandedges.
- In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

### 4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.3.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	68%
Test Engineer	Alex Fan	Configurations	Channel 0, 20, 39
Test Date	Apr. 25, 2015		

##### Channel 0

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2360.17	60.05	74.00	-13.95	27.30	4.33	28.42	0.00	254	123 Peak	VERTICAL
2	2388.22	48.00	54.00	-6.00	15.14	4.37	28.49	0.00	254	123 Average	VERTICAL
3	2402.00	80.16			47.26	4.41	28.49	0.00	254	123 Average	VERTICAL
4	2402.00	81.54			48.64	4.41	28.49	0.00	254	123 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

##### Channel 20

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2378.86	60.00	74.00	-14.00	27.17	4.37	28.46	0.00	325	142 Peak	HORIZONTAL
2	2381.42	47.98	54.00	-6.02	15.15	4.37	28.46	0.00	325	142 Average	HORIZONTAL
3	2442.00	83.67			50.59	4.48	28.60	0.00	325	142 Average	HORIZONTAL
4	2442.32	84.87			51.79	4.48	28.60	0.00	325	142 Peak	HORIZONTAL
5	2484.46	48.46	54.00	-5.54	15.28	4.51	28.67	0.00	325	142 Average	HORIZONTAL
6	2491.67	60.54	74.00	-13.46	27.33	4.51	28.70	0.00	325	142 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2442 MHz.

##### Channel 39

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2480.00	71.56			38.38	4.51	28.67	0.00	330	117 Average	HORIZONTAL
2	2480.16	73.67			40.49	4.51	28.67	0.00	330	117 Peak	HORIZONTAL
3	2483.50	48.41	54.00	-5.59	15.23	4.51	28.67	0.00	330	117 Average	HORIZONTAL
4	2494.87	61.15	74.00	-12.85	27.90	4.55	28.70	0.00	330	117 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5. Antenna Requirements

### 4.5.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.5.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 26, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015	Radiation (10CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESR26	101289	9kHz ~ 26GHz	Aug. 22, 2014	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO 2000	N/A	1 m ~ 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Thermometer	HTC-1	HTC-1	TP-1	-50°C~70°C	Mar. 11, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Thermometer	HTC-1	HTC-1	TP-8	-50°C~70°C	Mar. 05, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%