


OVERVIEW

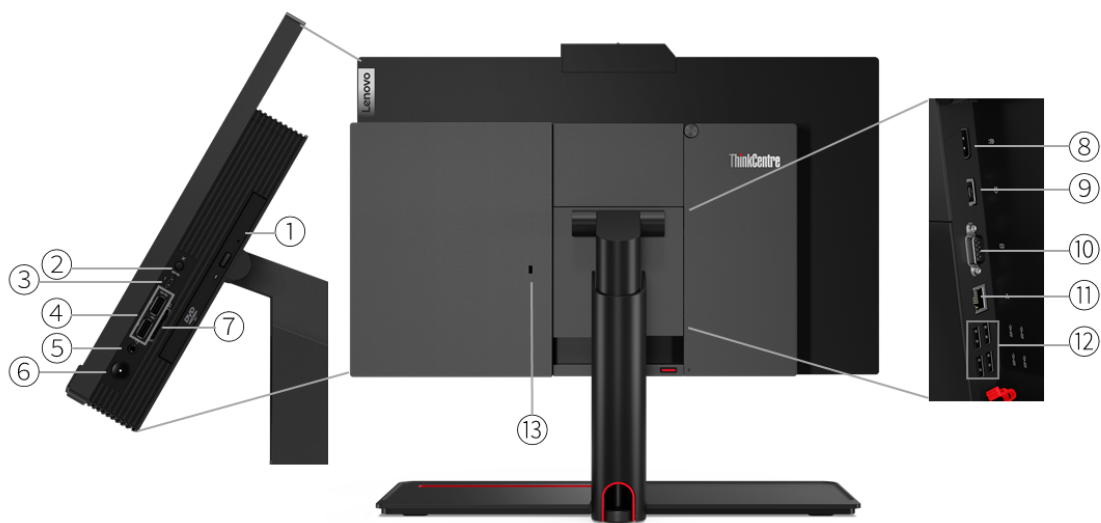

1. Optical drive *	8. DisplayPort (DP in/out combo port)
2. Microphone mute button	9. Power connector
3. USB-C 3.2 Gen 2	10. Serial or HDMI *
4. 2x USB 3.2 Gen 2	11. Ethernet (RJ-45)
5. Headphone / microphone combo jack (3.5mm)	12. 4x USB 3.2 Gen 1
6. Power button	13. Kensington Security Slot
7. Card reader *	

Notes:

- Ports with * are only available on selected models

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, 10th Generation Intel Core™ i3, or 11th Generation Intel Core i5 / i7 / i9 Processor

Processor**

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G5905	2	2	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5925	2	2	3.6GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6405	2	4	4.1GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6505	2	4	4.2GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Pentium Gold G6605	2	4	4.3GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10105	4	8	3.7GHz	4.4GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10305	4	8	3.8GHz	4.5GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10325	4	8	3.9GHz	4.7GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-11400	6	12	2.6GHz	4.4GHz	12MB	DDR4-3200	Intel UHD Graphics 730
Core i5-11500	6	12	2.7GHz	4.6GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i5-11600	6	12	2.8GHz	4.8GHz	12MB	DDR4-3200	Intel UHD Graphics 750
Core i7-11700	8	16	2.5GHz	4.9GHz	16MB	DDR4-3200	Intel UHD Graphics 750
Core i9-11900	8	16	2.5GHz	5.2GHz	16MB	DDR4-3200	Intel UHD Graphics 750

Operating System

Operating System**

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 Home 64 Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics**[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features	Remark
Intel UHD graphics 610	Integrated	Shared	1x DP 1.4b, 1x optional HDMI® 2.1	4096x2304@60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX® 12	-
Intel UHD graphics 630	Integrated	Shared	1x DP 1.4b, 1x optional HDMI 2.1	4096x2304@60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX 12	-
Intel UHD graphics 730	Integrated	Shared	1x DP 1.4b, 1x optional HDMI 2.1	4096x2304@60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX 12	-
Intel UHD graphics 750	Integrated	Shared	1x DP 1.4b, 1x optional HDMI 2.1	4096x2304@60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX 12	-
AMD Radeon™ 630	Discrete	2GB GDDR5	1x DP 1.4b, 1x optional HDMI 2.1	4096x2304@60Hz(DP), 4096x2160@60Hz(HDMI)	DirectX 12	-

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to

processor section)

Monitor Support

Monitor Support

Supports up to 3 displays via native display and 2 external monitor; supports external monitors via DisplayPort™ and optional HDMI; work as standalone monitor via DisplayPort (DP in / out combo)

Chipset

Chipset

Intel Q570 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-3200

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type^{**[2]}

- DDR4-2666
- DDR4-3200

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. Installed memory is actually 3200MHz, but may run at 2666MHz or 3200MHz depending on the memory support capability of processor

Storage

Storage Support^{[1][2]}

Up to three drives, 2x 2.5" HDD + 1x M.2 SSD

- 2.5" HDD up to 2TB each
- M.2 SSD up to 1TB

Storage Type^{***}

Disk Type	Interface	RPM	Offering	Security
2.5" SATA HDD	SATA 6Gb/s	5.4K	-	-
2.5" SATA HDD	SATA 6Gb/s	7.2K	-	-
M.2 2242 SSD	PCIe® NVMe®, PCIe 3.0 x2	-	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-	Opal
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4	-	-	Opal

RAID^[3]

RAID 0/1 support for HDDs

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. 2nd 2.5" HDD occupies ODD bay, and needs ODD to HDD bracket kit (optional, come with 2nd 2.5" HDD)
3. RAID is not preset by default, user can config RAID 0/1 according to the demand.

Removable Storage

Optical^{**}

- DVD-ROM, SATA 1.5Gb/s, slim (9.0mm)
- DVD burner (DVD±RW), SATA 1.5Gb/s, slim (9.0mm)
- None

Card Reader

- 3-in-1 card reader

- No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233 codec

Speakers

Stereo speakers, 3W x2, Dolby® Atmos®

Microphone

- Dual array microphone
- No microphone

Camera**

- 5.0-megapixel, with ThinkShutter (physical switch on/off)
- 5.0-megapixel, IR & RGB hybrid, with ThinkShutter (physical switch on/off), Windows Hello support
- No camera

Power Supply

Power Supply**

Power	Type	Efficiency	Key Features
150W	Adapter	89%	Autosensing
170W	Adapter	89%	Autosensing

DESIGN

Display

Display**[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
23.8"	FHD (1920x1080)	None	IPS	250 nits	Anti-glare	16:9	1000:1	72% NTSC	horizontal: +/- 89°, vertical: +/- 89°	Borderless design, low blue light
23.8"	FHD (1920x1080)	None	IPS	350 nits	Anti-glare	16:9	1000:1	72% NTSC	horizontal: +/- 89°, vertical: +/- 89°	Borderless design, low blue light, PrivacyGuard
23.8"	FHD (1920x1080)	Multi-touch	IPS	250 nits	Anti-glare	16:9	1000:1	72% NTSC	horizontal: +/- 89°, vertical: +/- 89°	Borderless design, low blue light

Touchscreen

- Advanced In-cell Touch (AIT), supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
- In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard**

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard folio

Mouse**

- Lenovo Calliope Mouse (USB connector), black
- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black

- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

Mechanical

Buttons

- Power button
- PrivacyGuard on/off button (PrivacyGuard model only)
- Microphone mute button

Form Factor

AIO (23.8 inches)

Dimensions (WxDxH)

Models	Dimensions
Models (with full function monitor stand, with ODD, with PrivacyGuard, with camera)	541 x 200 x 414.2-494.2 mm (21.3 x 7.9 x 16.3-19.5 inches)
Models (with full function monitor stand, with ODD, without PrivacyGuard, with camera)	541 x 200 x 414.2-494.2 mm (21.3 x 7.9 x 16.3-19.5 inches)
Models (with full function monitor stand, without ODD, with PrivacyGuard, with camera)	541 x 200 x 414.2-494.2 mm (21.3 x 7.9 x 16.3-19.5 inches)
Models (with full function monitor stand, without ODD, without PrivacyGuard, with camera)	541 x 200 x 414.2-494.2 mm (21.3 x 7.9 x 16.3-19.5 inches)
Models (without stand, with ODD, with PrivacyGuard, with camera)	541 x 61.3 x 340.5 mm (21.3 x 2.4 x 13.4 inches)
Models (without stand, with ODD, without PrivacyGuard, with camera)	541 x 57.8 x 340.5 mm (21.3 x 2.3 x 13.4 inches)
Models (without stand, without ODD, with PrivacyGuard, with camera)	541 x 49.5 x 340.5 mm (21.3 x 1.9 x 13.4 inches)
Models (without stand, without ODD, without PrivacyGuard, with camera)	541 x 46 x 340.5 mm (21.3 x 1.8 x 13.4 inches)
Models (with UltraFlex IV stand, with ODD, without PrivacyGuard, with camera)	Lowest in flat mode: 541 x 312.8 x 227.4 mm (21.3 x 12.3 x 9.0 inches) Highest in vertical mode: 541 x 232.7 x 467.7 mm (21.3 x 9.2 x 18.4 inches)
Models (with UltraFlex IV stand, without ODD, without PrivacyGuard, with camera)	Lowest in flat mode: 541 x 312.8 x 227.4 mm (21.3 x 12.3 x 9.0 inches) Highest in vertical mode: 541 x 232.7 x 467.7 mm (21.3 x 9.2 x 18.4 inches)

Weight

Models	Weight
Models (with full function monitor stand, with ODD, with PrivacyGuard, with camera)	Around 8.71 kg (19.2 lbs)
Models (with full function monitor stand, with ODD, without PrivacyGuard, with camera)	Around 7.84 kg (17.3 lbs)
Models (with full function monitor stand, without ODD, with PrivacyGuard, with camera)	Around 8.39 kg (18.5 lbs)
Models (with full function monitor stand, without ODD, without PrivacyGuard, with camera)	Around 7.51 kg (16.6 lbs)
Models (with UltraFlex IV stand, with ODD, without PrivacyGuard, with camera)	Around 8.58 kg (18.9 lbs)
Models (with UltraFlex IV stand, without ODD, without PrivacyGuard, with camera)	Around 8.26 kg (18.2 lbs)
Models (without stand, with ODD, with PrivacyGuard, with camera)	Around 6.45 kg (14.2 lbs)
Models (without stand, with ODD, without PrivacyGuard, with camera)	Around 5.57 kg (12.3 lbs)
Models (without stand, without ODD, with PrivacyGuard, with camera)	Around 6.13 kg (13.5 lbs)
Models (without stand, without ODD, without PrivacyGuard, with camera)	Around 5.25 kg (11.6 lbs)

Case Color

Black

Bays^[1]

- 2x 2.5" disk bay (2nd 2.5" HDD occupies ODD bay)
- 1x slim ODD bay

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

Toolless cover and stand assembly / removal

Stand**

- Full function monitor stand, supports -5° to +30° tilt, up to 80mm lift
- UltraFlex IV stand, supports -5° to +70° tilt, up to 164mm lift (flat mode) / up to 115mm lift (vertical mode)
- No stand

Mounting

Supports VESA mount 100mm

Others

Supports Smart Power On

Notes:

1. 2nd 2.5" HDD needs ODD to HDD bracket kit (optional, come with 2nd 2.5" HDD)

CONNECTIVITY

Network^[1]**Optional Ethernet**

No optional Ethernet

WLAN + Bluetooth®^[2]**

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, Intel vPro technology support, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, Intel vPro technology support, M.2 Card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- No WLAN and Bluetooth

Notes:

1. This system does not support Power Over Ethernet (PoE). If the system is used in a PoE environment, then a Network Isolator is required to prevent possible damage to the system, PoE equipment, or both.
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation

Ports^[1]**Rear Ports^{[1][2]}**

- 4x USB 3.2 Gen 1
- 1x DisplayPort
- 1x Ethernet (RJ-45)

Optional Rear Ports**

- 1x HDMI
- 1x serial

Right Ports

- 2x USB 3.2 Gen 2
- 1x USB-C® 3.2 Gen 2 (support data transfer and 5V@3A charging)
- 1x headphone / microphone combo jack (3.5mm)

Optional Right Ports

1x card reader

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

- USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
 - USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
 - Thunderbolt™ 3/4: 40 Gbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable

Monitor Cable***

- DP to VGA dongle
- DP to dual DP dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot™, 3 x 7 mm

Chassis Intrusion Switch

- Chassis intrusion switch
- No chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

Other Security

(Optional) ThinkShutter camera cover

BIOS Security

- Administrator password
- Power-on password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Self-healing BIOS
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management^[1]

- Intel vPro
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**^[1]

- 1-year limited onsite service
 - 3-year limited onsite service
 - No base warranty
-

Notes:

1. More information of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

ENVIRONMENTAL

Operating Environment

Temperature

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: -20°C (-4°F) to 60°C (140°F)

Humidity

Operating: 20% to 80%

Altitude

- Operating: 0 m (0 ft) to 3048 m (10,000 ft)
- Storage: 0 m (0 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Silver
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 8.0
- TCO edge
- RoHS compliant

Other Certifications

Other Certifications

- (Optional) TÜV Rheinland® Eye Comfort Certification
- TÜV Rheinland Low Blue Light
- (Optional) TÜV Rheinland Ultra Low Noise

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel