

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

SHALLOW DEPTH WORKTOP

WTR20HC Solid Door Worktop Refrigerator Hydrocarbon Series

MODEL: WTR20HC



3 Year Parts/Labor Warranty **Additional 4 Year Compressor Warranty**

CABINET CONSTRUCTION

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- · 4" Removable backsplash for flexibility and ease of cleaning
- Full electronic control
- · Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)

OPTIONS & ACCESSORIES

- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Additional shelves
- · Shelf clips
- Glass door option
- · Right or left hinged door
- Lock (solid doors only)
- · Wire shelf divider
- Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- · Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F




















MODEL	WTR20HC	
EXTERNAL DIMENSIONAL DATA		
Width Overall	20"	
Depth Overall with Handle & Bumper	24 ½"	
Height Overall with 6" Casters	36 1⁄8"	
Number of Doors	1	
Depth with Door Open 90°	40 3/4"	
Door Opening	15 %" x 18 ⅓"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	2.25	
Internal Width Overall (in)	16"	
Internal Depth Overall (in)	8 1/4"	
Internal Height Overall (in)	19 ½"	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	2.0	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams)	0.1323/60	
SHIPPING DATA		
Gross Weight - Crated	116 lbs	
Height - Crated	35"	
Width - Crated	23"	
Depth - Crated	26"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

Worktop Refrigerator - Shallow Depth Model: WTR20HC

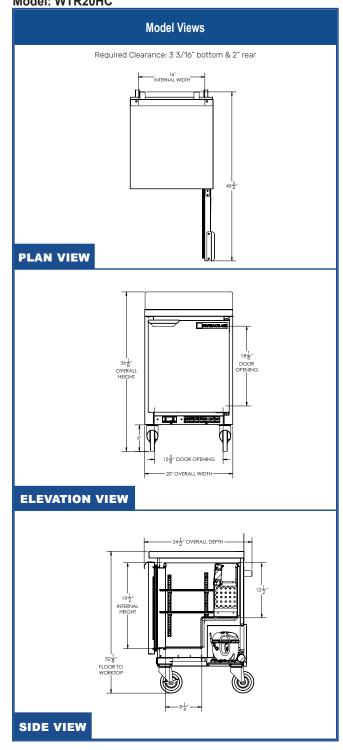

ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

