



PROUDLY AUSTRALIAN OWNED  
DESIGNED & ASSEMBLED IN MELBOURNE



PREMIUM GERMAN MADE  
MOTOR SYSTEMS




- Model Number** X3M09S
- Hood Mounting** Built In (Undermount) - Flush or Proud Install
- Cooking Coverage** Suits 75cm - 100cm Cooking Surfaces
- Filtration** S-Flow Baffle Filters 3x (H-25) - Dishwasher Safe
- Lighting** LED 4x (Warm White 1.0W) - Front Panel
- Finish** **AISI304 1.2mm** Food Grade Stainless Steel
- Controls** LED Backlit 4 Button *mastermind* Electronic Control with LED Speed Indicator
- Speed Settings** 3 Speed + Boost Mode
- Timer Function** Programmable Timer (10min Increments)  
Auto fan shut off after 2-hours of inactivity
- Outlet** Top or Back Duct Outlet
- Ducting (Remote)** Dia. 200mm Acoustic Flexi Ducting - Five (5) Meter Length (Supplied)
- Ducting (On Board)** Optional On Board Motor Ducting Kits Available  
Ultra Motor - Dia. 200mm (Recommended)  
Power Motor - Dia. 150mm (Recommended)
- Hood Width** 860mm
- Hood Depth** 280mm
- Hood Height** 330mm (Top Duct Outlet - Plus 25mm)
- Installation Height** 700 - 750mm\* (Recommended)  
600mm\* (Minimum)  
\* Clearance above the highest point of the cooktop to the underside of hood

**Your Hood. Your Colour. Your Way.**

Available Finishes (Stainless Steel Finish Standard)



**Dimensioned Drawing**

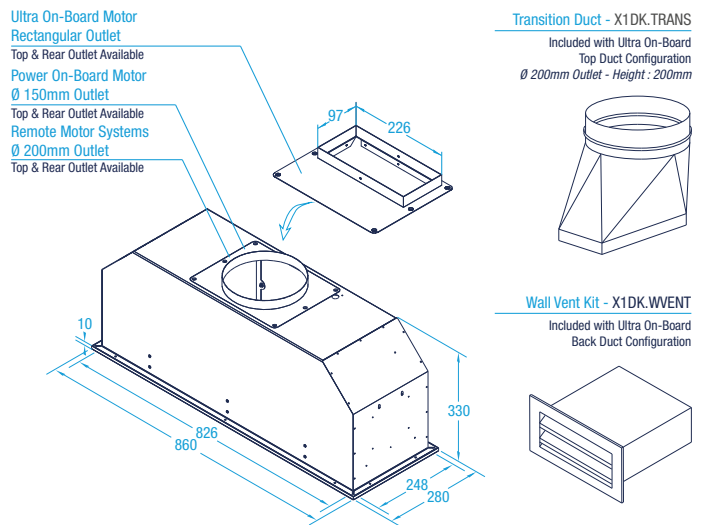

**Whispair Endurance Warranty**



5 YEAR WARRANTY

10 YEAR WARRANTY

LIFETIME WARRANTY

**Filtration Zone**



**Available Models - Select Your Motor Solution & Optional Finish**

**On Board**

X3M09S5.OP (T or /B)	Power 1,020m <sup>3</sup> /hr (Top or Back Ducted)	SPL: 53.9dB(A) In
X3M09S6.OU (T or /B)	Ultra 1,680m <sup>3</sup> /hr (Top or Back Ducted)	SPL: 56.5dB(A) In

**Remote External (Roof or Wall Mounted)**

X3M09S5.EL	Lite 800m <sup>3</sup> /hr	SPL: 39.3dB(A) In / 52.7dB(A) Out
X3M09S5.EP	Pro 1,140m <sup>3</sup> /hr	SPL: 49.6dB(A) In / 58.5dB(A) Out
X3M09S5.EPP	Pro Plus 2,010m <sup>3</sup> /hr	SPL: 56.6dB(A) In / 62.8dB(A) Out

**Remote Inline (Through Wall or Eave)**

X3M09S5.IL	Lite 800m <sup>3</sup> /hr	SPL: 39.3dB(A) In / 52.7dB(A) Out
X3M09S5.IP	Pro 1,140m <sup>3</sup> /hr	SPL: 49.6dB(A) In / 58.5dB(A) Out

**Your Hood. Your Colour. Your Way. (Optional Undermount Finish)\***

X1P3.BL	Paint Finish - Satin Black
X1P3.WH	Paint Finish - Satin White
X1P3.CUS	Paint Finish - Custom Colour

\*Additional charges apply

SPL - Nominal Sound Pressure Level on Boost (Max) Speed