



**SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

*For*  
**Tablet Device**

**FCC ID: BCGA1584  
Model Name: A1584**

**Report Number: 14U19185-S3V3  
Issue Date: 9/15/2015**

*Prepared for*  
**APPLE INC.  
1 INFINITE LOOP, MS 26A  
CUPERTINO, CA 95014-2084**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
V1	9/1/2015	Initial Issue	--
V2	9/11/2015	Report revised based on Reviewer's comments: 1. Sec. 6.1.: Updated	Kenneth Mak
V3	9/15/2015	Report revised based on Reviewer's comments: 1. Sec. 1., 4.3., 8., 9.1., 10.1., 12.1.: Updated 2. Appendix B, F: Updated	Kenneth Mak

**Table of Contents**

**1. Attestation of Test Results ..... 5**

**2. Test Specification, Methods and Procedures..... 6**

**3. Facilities and Accreditation ..... 6**

**4. SAR Measurement System & Test Equipment ..... 7**

    4.1. SAR Measurement System..... 7

    4.2. SAR Scan Procedures ..... 8

    4.3. Test Equipment..... 10

**5. Measurement Uncertainty..... 12**

**6. Device Under Test (DUT) Information ..... 13**

    6.1. DUT Description ..... 13

    6.2. Wireless Technologies..... 13

    6.3. Maximum Output Power from Tune-Up Procedure ..... 14

    6.4. Antenna Dimensions and Separation Distances ..... 23

**7. RF Exposure Conditions (Test Configurations) ..... 24**

    7.1. Standalone SAR Test Exclusion Considerations..... 24

        7.1.1. SAR Test Exclusion Calculations for WLAN SISO ..... 24

        7.1.2. SAR Test Exclusion Calculations for WLAN MIMO ..... 25

    7.2. Required Test Configurations ..... 26

**8. Dielectric Property Measurements & System Check ..... 27**

    8.1. Dielectric Property Measurements ..... 27

    8.2. System Check..... 32

**9. Conducted Output Power Measurements..... 36**

    9.1. Wi-Fi DTS Band..... 36

    9.2. Wi-Fi U-NII Bands..... 36

    9.3. Bluetooth ..... 36

**10. Measured and Reported (Scaled) SAR Results ..... 37**

    10.1. Wi-Fi (DTS Band)..... 38

    10.2. Wi-Fi (U-NII-1 & U-NII-2A Band)..... 38

    10.3. Wi-Fi (U-NII-2C Band) ..... 39

    10.4. Wi-Fi (U-NII-3 Band)..... 39

    10.5. Bluetooth..... 40



**11. SAR Measurement Variability ..... 41**

**12. Simultaneous Transmission SAR Analysis ..... 42**

---

12.1. Sum of the SAR for Wi-Fi & BT .....	44
<b>Appendixes .....</b>	<b>45</b>
14U19185-S3V1 SAR_App A Photos (STC_180days) .....	45
14U19185-S3V2 SAR_App B System Check Plots .....	45
14U19185-S3V1 SAR_App C Highest Test Plots .....	45
14U19185-S3V1 SAR_App D Tissue Ingredients .....	45
14U19185-S3V1 SAR_App E Probe Cal. Certificates.....	45
14U19185-S3V2 SAR_App F Dipole Cal. Certificates .....	45

# 1. Attestation of Test Results

Applicant Name	APPLE INC.			
FCC ID	BCGA1584			
Model Name	A1584			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
<b>SAR Limits (W/Kg)</b>				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
<b>The Highest Reported SAR (W/kg)</b>				
<b>RF Exposure Conditions</b>	<b>Equipment Class</b>			
	<b>Licensed</b>	<b>DTS</b>	<b>U-NII</b>	<b>DSS (BT)</b>
Standalone	N/A	1.150	1.190	0.210
Simultaneous TX	N/A	1.310	1.400	1.400
Date Tested	7/29/2015 to 8/7/2015; 9/14/2015			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:		Prepared By:		
				
Bobby Bayani Senior Engineer UL Verification Services Inc.		Yu Chen Laboratory Technician UL Verification Services Inc.		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r01
- 447498 D01 General RF Exposure Guidance v05r02
- 447498 D03 Supplement C Cross-Reference v01
- 616217 D04 SAR for laptop and tablets v01r01
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r01

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by [NVLAP](#), Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

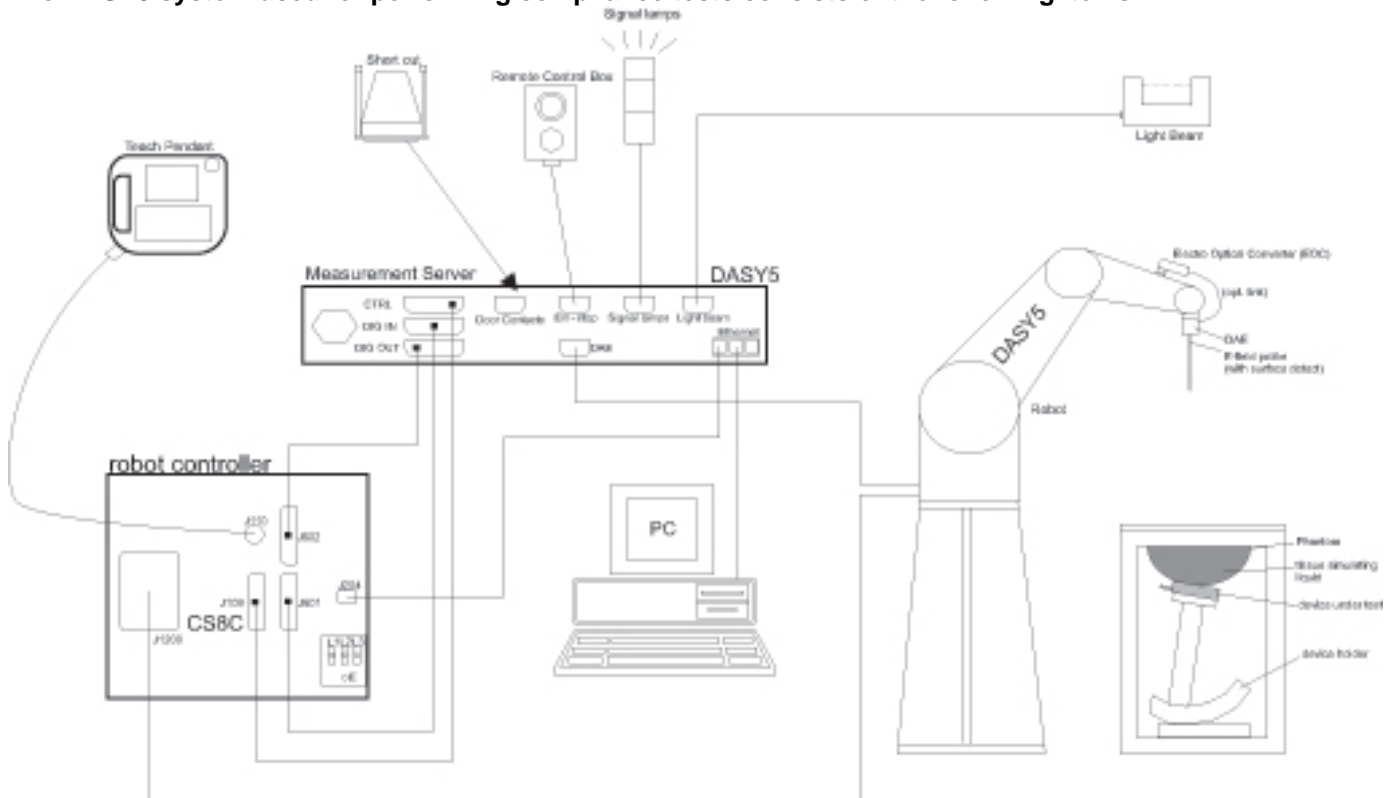

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm *	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{\text{Zoom}}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY4000980	4/17/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	Traceable	122529163	10/8/2015
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/11/2015
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Traceable Calibration Control Co.	4242	122529162	10/8/2015

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	1000622	5/8/2016
Power Meter	Agilent	N1912A	MY50001018	9/3/2015
Power Sensor	Agilent	E9323A	US40411556	8/27/2015
Power Sensor	Agilent	E9323A	MY53070007	3/2/2016
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Directional coupler	Werlatone	C8060-102	2149	N/A
DC Power Supply	AMETEK	XT 15-4	1319A02778	N/A
Synthesized Signal Generator	HP	8665B	3744A01155	3/18/2016
Power Meter	HP	437B	3125U11364	8/27/2015
Power Meter	HP	437B	3125U12345	8/15/2015
Power Sensor	HP	8481A	1926A27048	8/15/2015
Power Sensor	HP	8481A	2702A76223	9/17/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK PRECISION	1611	215-02292	N/A
E-Field Probe (SAR Lab C)	SPEAG	EX3DV4	3885	9/15/2015
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3772	2/23/2016
E-Field Probe (SAR Lab F)	SPEAG	EX3DV4	3929	4/22/2016
E-Field Probe (SAR Lab G)	SPEAG	EX3DV4	3991	5/19/2016
E-Field Probe (SAR Lab H)	SPEAG	EX3DV4	7335	3/13/2016
Data Acquisition Electronics (SAR Lab C)	SPEAG	DAE3	427	1/14/2016
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1257	9/29/2015
Data Acquisition Electronics (SAR Lab F)	SPEAG	DAE4	1359	2/18/2016
Data Acquisition Electronics (SAR Lab G)	SPEAG	DAE4	1433	3/12/2016
Data Acquisition Electronics (SAR Lab H)	SPEAG	DAE4	1472	3/5/2016
System Validation Dipole	SPEAG	D2450V2	899	3/13/2016
System Validation Dipole	SPEAG	D5GHzV2	1003	2/20/2016
System Validation Dipole	SPEAG	D5GHzV2	1168	12/4/2015

**9/14/2015 - Additional Testing****System Check**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3744A01155	3/18/2016
Power Meter	HP	437B	3125U16345	6/15/2016
Power Meter	HP	437B	3125U12345	7/31/2016
Power Sensor	HP	8481A	2702A76223	9/3/2016
Power Sensor	HP	8481A	1926A27048	8/3/2016
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795092	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	BK PRECISION	1611	215-02292	N/A
E-Field Probe (SAR Lab E)	SPEAG	EX3DV4	3772	2/23/2016
Data Acquisition Electronics (SAR Lab E)	SPEAG	DAE4	1439	7/30/2016
System Validation Dipole	SPEAG	D2450V2	748	2/20/2016

**Other**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040016	3/26/2016
Power Sensor	Agilent	N1921A	MY52260001	10/11/2015
Power Sensor	Agilent	N1921A	MY52270022	12/12/2015

## 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

<p>Model A1584 is a tablet with multimedia functions (music, application support, and video)</p> <p>IEEE 802.11a/b/g/n/ac radio (MIMO 2x2) and Bluetooth radio</p> <p>There are two vendors of the Wi-Fi/Bluetooth radio modules to support the production volumes of the device. The two variants are referenced in this report as:</p> <p>Module 1 = Wi-Fi/BT module vendor 1</p> <p>Module 2 = Wi-Fi/BT module vendor 2</p> <p>The Wi-Fi/Bluetooth radio modules have the same mechanical outline (e.g., the same package dimension and pin-out layout), use the same on-board antenna matching circuit, have an identical antenna structure, and are built and tested to conform to the same specifications and to operate within the same tolerances.</p> <p>Complete SAR evaluation is performed on the device with one Wi-Fi/Bluetooth radio module, and then the test is repeated on the device with the other Wi-Fi/Bluetooth module at the highest SAR value.</p>	
Device Dimension	<p>Overall (Length x Width): 305 mm x 220 mm</p> <p>Overall Diagonal: 370 mm</p> <p>Display Diagonal: 330 mm</p>
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.
AirPlay	<p>AirPlay mode enabled devices transfer data directly between each other</p> <p><input checked="" type="checkbox"/> AirPlay (Wi-Fi 2.4 GHz)</p> <p><input checked="" type="checkbox"/> AirPlay (Wi-Fi 5 GHz)</p>

### 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
	Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Bluetooth	2.4 GHz	Version 4.2 LE	77.5% (DH5)

### 6.3. Maximum Output Power from Tune-Up Procedure

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
2.4	1 Tx	802.11b	1	2412	16.0	16.0	Yes
			2	2417	16.0	16.0	
			6	2437	16.0	16.0	
			10	2457	16.0	16.0	
			11	2462	16.0	16.0	
			12	2467	16.0	16.0	
		13	2472	13.0	13.0		
		802.11g	1	2412	16.0	16.0	No
			2	2417	16.0	16.0	
			6	2437	16.0	16.0	
			10	2457	16.0	16.0	
			11	2462	14.5	14.5	
			12	2467	11.5	11.5	
		13	2472	3.5	3.5		
		802.11n HT20	1	2412	16.0	16.0	No
			2	2417	16.0	16.0	
			6	2437	16.0	16.0	
			10	2457	16.0	16.0	
	11		2462	14.5	14.5		
	12		2467	11.5	11.5		
	13	2472	3.5	3.5			
	2 Tx	802.11g CDD	1	2412	14.0	14.0	Yes
			2	2417	16.0	16.0	
			6	2437	16.0	16.0	
			10	2457	16.0	16.0	
			11	2462	14.0	14.0	
			12	2467	10.0	10.0	
		13	2472	2.5	2.5		
		802.11n HT20 CDD	1	2412	14.0	14.0	No
			2	2417	16.0	16.0	
			6	2437	16.0	16.0	
			10	2457	16.0	16.0	
			11	2462	14.0	14.0	
			12	2467	10.0	10.0	
		13	2472	2.5	2.5		
		802.11n HT20 STBC	1	2412	14.0	14.0	No
2			2417	16.0	16.0		
6			2437	16.0	16.0		
10			2457	16.0	16.0		
11	2462		14.0	14.0			
12	2467		10.0	10.0			
13	2472	2.5	2.5				
802.11n HT20 SDM	1	2412	14.0	14.0	No		
	2	2417	16.0	16.0			
	6	2437	16.0	16.0			
	10	2457	16.0	16.0			
	11	2462	14.0	14.0			
	12	2467	10.0	10.0			
13	2472	2.5	2.5				

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.2	1 Tx	802.11a	36	5180	16.5	16.5	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
			48	5240	17.0	17.0	
		802.11n HT20	36	5180	16.5	16.5	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
			48	5240	17.0	17.0	
		802.11n HT40	38	5190	14.5	14.5	Yes (Antenna A)
			46	5230	17.0	17.0	
		802.11ac VHT20	36	5180	16.5	16.5	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
			48	5240	17.0	17.0	
802.11ac VHT40	38	5190	14.5	14.5	No		
	46	5230	17.0	17.0			
802.11ac VHT80	42	5210	13.0	13.0	No		
5.2	2 Tx	802.11a CDD	36	5180	15.0	15.0	No
			40	5200	16.5	16.5	
			44	5220	16.5	16.5	
			48	5240	16.5	16.5	
		802.11n HT20 CDD	36	5180	15.0	15.0	No
			40	5200	16.5	16.5	
			44	5220	16.5	16.5	
		802.11n HT20 STBC	36	5180	15.0	15.0	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
		802.11n HT20 SDM	36	5180	15.0	15.0	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
			48	5240	17.0	17.0	
		802.11n HT40 CDD	38	5190	13.0	13.0	No
			46	5230	16.5	16.5	
		802.11n HT40 STBC	38	5190	13.0	13.0	Yes
			46	5230	17.0	17.0	
		802.11n HT40 SDM	38	5190	13.0	13.0	No
			46	5230	17.0	17.0	
		802.11ac VHT20 CDD	36	5180	15.0	15.0	No
			40	5200	16.5	16.5	
			44	5220	16.5	16.5	
			48	5240	16.5	16.5	
		802.11ac VHT20 STBC	36	5180	15.0	15.0	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
			48	5240	17.0	17.0	
		802.11ac VHT20 SDM	36	5180	15.0	15.0	No
			40	5200	17.0	17.0	
			44	5220	17.0	17.0	
		802.11ac VHT40 CDD	38	5190	13.0	13.0	No
			46	5230	16.5	16.5	
		802.11ac VHT40 STBC	38	5190	13.0	13.0	No
46	5230		17.0	17.0			
802.11ac VHT40 SDM	38	5190	13.0	13.0	No		
	46	5230	17.0	17.0			
802.11ac VHT80 CDD	42	5210	12.5	12.5	No		
802.11ac VHT80 STBC	42	5210	12.5	12.5	No		
802.11ac VHT80 SDM	42	5210	12.5	12.5	No		

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.3	1 Tx	802.11a	52	5260	16.5	17.0	No
			56	5280	16.5	17.0	
			60	5300	16.5	17.0	
			64	5320	16.5	16.5	
		802.11n HT20	52	5260	16.5	17.0	No
			56	5280	16.5	17.0	
			60	5300	16.5	17.0	
		802.11n HT40	54	5270	16.5	17.0	Yes (Antenna B)
			62	5310	14.5	14.5	
		802.11ac VHT20	52	5260	16.5	17.0	No
			56	5280	16.5	17.0	
			60	5300	16.5	17.0	
		802.11ac VHT40	54	5270	16.5	17.0	No
			62	5310	14.5	14.5	
		802.11ac VHT80	58	5290	14.5	14.5	No
		5.3	2 Tx	802.11a CDD	52	5260	16.0
56	5280				16.0	16.0	
60	5300				16.0	16.0	
64	5320				15.0	15.0	
802.11n HT20 CDD	52			5260	16.0	16.0	No
	56			5280	16.0	16.0	
	60			5300	16.0	16.0	
802.11n HT20 STBC	52			5260	16.5	17.0	No
	60			5300	16.5	17.0	
	64			5320	15.0	15.0	
802.11n HT20 SDM	52			5260	16.5	17.0	No
	56			5280	16.5	17.0	
	60			5300	16.5	17.0	
802.11n HT40 CDD	54			5270	16.0	16.0	No
	62			5310	13.5	13.5	
802.11n HT40 STBC	54			5270	16.5	17.0	No
	62			5310	13.5	13.5	
802.11n HT40 SDM	54			5270	16.5	17.0	No
	62			5310	13.5	13.5	
802.11ac VHT20 CDD	52			5260	16.0	16.0	No
	56			5280	16.0	16.0	
	60			5300	16.0	16.0	
802.11ac VHT20 STBC	52			5260	16.5	17.0	No
	56			5280	16.5	17.0	
	60			5300	16.5	17.0	
802.11ac VHT20 SDM	52			5260	16.5	17.0	No
	56			5280	16.5	17.0	
	60			5300	16.5	17.0	
802.11ac VHT40 CDD	54			5270	16.0	16.0	No
	62			5310	13.5	13.5	
	54			5270	16.5	17.0	
802.11ac VHT40 STBC	62			5310	13.5	13.5	No
	54	5270	16.5	17.0			
802.11ac VHT40 SDM	62	5310	13.5	13.5	No		
	54	5270	16.5	17.0			
802.11ac VHT80 CDD	58	5290	13.0	13.0	No		
802.11ac VHT80 STBC	58	5290	13.0	13.0	No		
802.11ac VHT80 SDM	58	5290	13.0	13.0	No		



Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.5	1 Tx	802.11a	100	5500	15.5	15.5	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	15.0	15.0	
			144	5720	15.5	16.0	
		802.11n HT20	100	5500	15.5	15.5	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	15.0	15.0	
			144	5720	15.5	16.0	
		802.11n HT40	102	5510	14.5	14.5	No
			110	5550	15.5	16.0	
			118	5590	15.5	16.0	
			126	5630	15.5	16.0	
			134	5670	15.5	15.5	
		802.11ac VHT20	100	5500	15.5	15.5	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	15.0	15.0	
			144	5720	15.5	16.0	
		802.11ac VHT40	102	5510	14.5	14.5	No
			110	5550	15.5	16.0	
			118	5590	15.5	16.0	
			126	5630	15.5	16.0	
			134	5670	15.5	15.5	
		802.11ac VHT80	106	5530	14.5	14.5	Yes
			122	5610	15.5	16.0	
138	5690		15.5	16.0			

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.5	2 Tx	802.11a CDD	100	5500	15.0	15.0	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	14.5	14.5	
			144	5720	15.5	16.0	
		802.11n HT20 CDD	100	5500	15.0	15.0	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	14.5	14.5	
			144	5720	15.5	16.0	
		802.11n HT20 STBC	100	5500	15.0	15.0	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
			132	5660	15.5	16.0	
			136	5680	15.5	16.0	
			140	5700	14.5	14.5	
			144	5720	15.5	16.0	
		802.11n HT20 SDM	100	5500	15.0	15.0	No
			104	5520	15.5	16.0	
			108	5540	15.5	16.0	
			112	5560	15.5	16.0	
			116	5580	15.5	16.0	
			120	5600	15.5	16.0	
			124	5620	15.5	16.0	
			128	5640	15.5	16.0	
132	5660		15.5	16.0			
136	5680		15.5	16.0			
140	5700		14.5	14.5			
144	5720		15.5	16.0			

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)		
					Antenna A	Antenna B			
5.5	2 Tx	802.11n HT40 CDD	102	5510	13.5	13.5	No		
			110	5550	15.5	16.0			
			118	5590	15.5	16.0			
			126	5630	15.5	16.0			
			134	5670	14.5	14.5			
			142	5710	14.5	14.5			
		802.11n HT40 STBC	102	5510	13.5	13.5	No		
			110	5550	15.5	16.0			
			118	5590	15.5	16.0			
			126	5630	15.5	16.0			
			134	5670	14.5	14.5			
			142	5710	14.5	14.5			
		802.11n HT40 SDM	102	5510	13.5	13.5	No		
			110	5550	15.5	16.0			
			118	5590	15.5	16.0			
			126	5630	15.5	16.0			
			134	5670	14.5	14.5			
			142	5710	14.5	14.5			
		802.11ac VHT20 CDD	100	5500	15.0	15.0	No		
			104	5520	15.5	16.0			
			108	5540	15.5	16.0			
			112	5560	15.5	16.0			
			116	5580	15.5	16.0			
			120	5600	15.5	16.0			
			124	5620	15.5	16.0			
			128	5640	15.5	16.0			
			132	5660	15.5	16.0			
			136	5680	15.5	16.0			
			140	5700	14.5	14.5			
			144	5720	15.5	16.0			
			802.11ac VHT20 STBC	100	5500	15.0		15.0	No
				104	5520	15.5		16.0	
		108		5540	15.5	16.0			
		112		5560	15.5	16.0			
		116		5580	15.5	16.0			
		120		5600	15.5	16.0			
		124		5620	15.5	16.0			
		128		5640	15.5	16.0			
		132		5660	15.5	16.0			
		136		5680	15.5	16.0			
		140		5700	14.5	14.5			
		144		5720	15.5	16.0			
		802.11ac VHT20 SDM		100	5500	15.0	15.0	No	
				104	5520	15.5	16.0		
108	5540		15.5	16.0					
112	5560		15.5	16.0					
116	5580		15.5	16.0					
120	5600		15.5	16.0					
124	5620		15.5	16.0					
128	5640		15.5	16.0					
132	5660		15.5	16.0					
136	5680		15.5	16.0					
140	5700	14.5	14.5						
144	5720	15.5	16.0						

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.5	2 Tx	802.11ac VHT40 CDD	102	5510	13.5	13.5	No
			110	5550	15.5	16.0	
			118	5590	15.5	16.0	
			126	5630	15.5	16.0	
			134	5670	14.5	14.5	
			142	5710	14.5	14.5	
		802.11ac VHT40 STBC	102	5510	13.5	13.5	No
			110	5550	15.5	16.0	
			118	5590	15.5	16.0	
			126	5630	15.5	16.0	
			134	5670	14.5	14.5	
			142	5710	14.5	14.5	
		802.11ac VHT40 SDM	102	5510	13.5	13.5	No
			110	5550	15.5	16.0	
			118	5590	15.5	16.0	
			126	5630	15.5	16.0	
			134	5670	14.5	14.5	
			142	5710	14.5	14.5	
		802.11ac VHT80 CDD	106	5530	13.5	13.5	Yes
			122	5610	15.5	16.0	
			138	5690	15.5	16.0	
		802.11ac VHT80 STBC	106	5530	13.5	13.5	No
			122	5610	15.5	16.0	
			138	5690	15.5	16.0	
802.11ac VHT80 SDM	106	5530	13.5	13.5	No		
	122	5610	15.5	16.0			
	138	5690	15.5	16.0			

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.8	1 Tx	802.11a	149	5745	15.5	15.5	Yes (Antenna B)
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	16.0	16.0	
		802.11n HT20	149	5745	15.5	15.5	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
		802.11n HT40	151	5755	15.0	15.0	Yes (Antenna A)
			159	5795	16.0	16.0	
		802.11ac VHT20	149	5745	15.5	15.5	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	16.0	16.0	
		802.11ac VHT40	151	5755	15.0	15.0	No
			159	5795	16.0	16.0	
		802.11ac VHT80	155	5775	14.5	14.5	No

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Max. RF Output Power (dBm)		SAR Test (Yes/No)
					Antenna A	Antenna B	
5.8	2 Tx	802.11a CDD	149	5745	15.0	15.0	Yes
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	15.5	15.5	
		802.11n HT20 CDD	149	5745	15.0	15.0	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	15.5	15.5	
		802.11n HT20 STBC	149	5745	15.0	15.0	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	15.5	15.5	
		802.11n HT20 SDM	149	5745	15.0	15.0	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	15.5	15.5	
		802.11n HT40 CDD	151	5755	14.5	14.5	No
			159	5795	15.5	15.5	
		802.11n HT40 STBC	151	5755	14.5	14.5	No
			159	5795	15.5	15.5	
		802.11n HT40 SDM	151	5755	14.5	14.5	No
			159	5795	15.5	15.5	
		802.11ac HT20 CDD	149	5745	15.0	15.0	No
			153	5765	16.0	16.5	
			157	5785	16.0	16.5	
			161	5805	16.0	16.5	
			165	5825	15.5	15.5	
		802.11ac HT20 STBC	149	5745	15.0	15.0	No
153	5765		16.0	16.5			
157	5785		16.0	16.5			
161	5805		16.0	16.5			
165	5825		15.5	15.5			
802.11ac HT20 SDM	149	5745	15.0	15.0	No		
	153	5765	16.0	16.5			
	157	5785	16.0	16.5			
	161	5805	16.0	16.5			
	165	5825	15.5	15.5			
802.11ac HT40 CDD	151	5755	14.5	14.5	No		
	159	5795	15.5	15.5			
802.11ac HT40 STBC	151	5755	14.5	14.5	No		
	159	5795	15.5	15.5			
802.11ac HT40 SDM	151	5755	14.5	14.5	No		
	159	5795	15.5	15.5			
802.11ac VHT80 CDD	155	5775	14.0	14.0	No		
802.11ac VHT80 STBC	155	5775	14.0	14.0	No		
802.11ac VHT80 SDM	155	5775	14.0	14.0	No		

RF Air interface	Mode	Max Output Power (dBm)	
		Emission Power	Body Power
Bluetooth	GFSK	10.0	

## **6.4. Antenna Dimensions and Separation Distances**

Refer to separate filing document.

## 7. RF Exposure Conditions (Test Configurations)

### 7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is  $\leq 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is  $> 5$  mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

#### 7.1.1. SAR Test Exclusion Calculations for WLAN SISO

##### Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
<b>Antenna A</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	132.7	3.1	46.4		10.5 -MEASURE-	> 50 mm	> 50 mm	12.6 -MEASURE-	14 -EXEMPT-	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	132.7	3.1	46.4		19.1 -MEASURE-	> 50 mm	> 50 mm	22.9 -MEASURE-	2.5 -EXEMPT-	
Wi-Fi 5.3 GHz	5320	16.50	45	6	291.7	132.7	3.1	46.4		17.3 -MEASURE-	> 50 mm	> 50 mm	20.8 -MEASURE-	2.3 -EXEMPT-	
Wi-Fi 5.5 GHz	5700	15.50	35	6	291.7	132.7	3.1	46.4		13.9 -MEASURE-	> 50 mm	> 50 mm	16.7 -MEASURE-	18 -EXEMPT-	
Wi-Fi 5.8 GHz	5825	16.00	40	6	291.7	132.7	3.1	46.4		16.1 -MEASURE-	> 50 mm	> 50 mm	19.3 -MEASURE-	2.1 -EXEMPT-	
Bluetooth	2480	10.00	10	6	291.7	132.7	3.1	46.4		2.6 -EXEMPT-	> 50 mm	> 50 mm	3.1 -MEASURE-	0.3 -EXEMPT-	
<b>Antenna B</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	46.4	3.1	132.7		10.5 -MEASURE-	> 50 mm	14 -EXEMPT-	12.6 -MEASURE-	> 50 mm	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	46.4	3.1	132.7		19.1 -MEASURE-	> 50 mm	2.5 -EXEMPT-	22.9 -MEASURE-	> 50 mm	
Wi-Fi 5.3 GHz	5320	17.00	50	6	291.7	46.4	3.1	132.7		19.2 -MEASURE-	> 50 mm	2.5 -EXEMPT-	23.1 -MEASURE-	> 50 mm	
Wi-Fi 5.5 GHz	5700	16.00	40	6	291.7	46.4	3.1	132.7		15.9 -MEASURE-	> 50 mm	2.1 -EXEMPT-	19.1 -MEASURE-	> 50 mm	
Wi-Fi 5.8 GHz	5825	16.50	45	6	291.7	46.4	3.1	132.7		18.1 -MEASURE-	> 50 mm	2.4 -EXEMPT-	21.7 -MEASURE-	> 50 mm	

##### Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
<b>Antenna A</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	132.7	3.1	46.4		< 50 mm	2512.6 mW -EXEMPT-	922.6 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	132.7	3.1	46.4		< 50 mm	2482.5 mW -EXEMPT-	892.5 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.3 GHz	5320	16.50	45	6	291.7	132.7	3.1	46.4		< 50 mm	2482 mW -EXEMPT-	892 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.5 GHz	5700	15.50	35	6	291.7	132.7	3.1	46.4		< 50 mm	2479.8 mW -EXEMPT-	889.8 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.8 GHz	5825	16.00	40	6	291.7	132.7	3.1	46.4		< 50 mm	2479.2 mW -EXEMPT-	889.2 mW -EXEMPT-	< 50 mm	< 50 mm	
Bluetooth	2480	10.00	10	6	291.7	132.7	3.1	46.4		< 50 mm	2512.3 mW -EXEMPT-	922.3 mW -EXEMPT-	< 50 mm	< 50 mm	
<b>Antenna B</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	46.4	3.1	132.7		< 50 mm	2512.6 mW -EXEMPT-	< 50 mm	< 50 mm	922.6 mW -EXEMPT-	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	46.4	3.1	132.7		< 50 mm	2482.5 mW -EXEMPT-	< 50 mm	< 50 mm	892.5 mW -EXEMPT-	
Wi-Fi 5.3 GHz	5320	17.00	50	6	291.7	46.4	3.1	132.7		< 50 mm	2482 mW -EXEMPT-	< 50 mm	< 50 mm	892 mW -EXEMPT-	
Wi-Fi 5.5 GHz	5700	16.00	40	6	291.7	46.4	3.1	132.7		< 50 mm	2479.8 mW -EXEMPT-	< 50 mm	< 50 mm	889.8 mW -EXEMPT-	
Wi-Fi 5.8 GHz	5825	16.50	45	6	291.7	46.4	3.1	132.7		< 50 mm	2479.2 mW -EXEMPT-	< 50 mm	< 50 mm	889.2 mW -EXEMPT-	

#### Note(s):

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.



### 7.1.2. SAR Test Exclusion Calculations for WLAN MIMO

#### Antennas < 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
<b>Antenna A</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	132.7	3.1	46.4		10.5 -MEASURE-	> 50 mm	> 50 mm	12.6 -MEASURE-	14 -EXEMPT-	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	132.7	3.1	46.4		19.1 -MEASURE-	> 50 mm	> 50 mm	22.9 -MEASURE-	2.5 -EXEMPT-	
Wi-Fi 5.3 GHz	5320	16.50	45	6	291.7	132.7	3.1	46.4		17.3 -MEASURE-	> 50 mm	> 50 mm	20.8 -MEASURE-	2.3 -EXEMPT-	
Wi-Fi 5.5 GHz	5700	15.50	35	6	291.7	132.7	3.1	46.4		13.9 -MEASURE-	> 50 mm	> 50 mm	16.7 -MEASURE-	18 -EXEMPT-	
Wi-Fi 5.8 GHz	5825	16.00	40	6	291.7	132.7	3.1	46.4		16.1 -MEASURE-	> 50 mm	> 50 mm	19.3 -MEASURE-	2.1 -EXEMPT-	
<b>Antenna B</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	46.4	3.1	132.7		10.5 -MEASURE-	> 50 mm	14 -EXEMPT-	12.6 -MEASURE-	> 50 mm	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	46.4	3.1	132.7		19.1 -MEASURE-	> 50 mm	2.5 -EXEMPT-	22.9 -MEASURE-	> 50 mm	
Wi-Fi 5.3 GHz	5320	17.00	50	6	291.7	46.4	3.1	132.7		19.2 -MEASURE-	> 50 mm	2.5 -EXEMPT-	23.1 -MEASURE-	> 50 mm	
Wi-Fi 5.5 GHz	5700	16.00	40	6	291.7	46.4	3.1	132.7		15.9 -MEASURE-	> 50 mm	2.1 -EXEMPT-	19.1 -MEASURE-	> 50 mm	
Wi-Fi 5.8 GHz	5825	16.50	45	6	291.7	46.4	3.1	132.7		18.1 -MEASURE-	> 50 mm	2.4 -EXEMPT-	21.7 -MEASURE-	> 50 mm	

#### Antennas > 50mm to adjacent edges

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value					
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
<b>Antenna A</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	132.7	3.1	46.4		< 50 mm	2512.6 mW -EXEMPT-	922.6 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	132.7	3.1	46.4		< 50 mm	2482.5 mW -EXEMPT-	892.5 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.3 GHz	5320	16.50	45	6	291.7	132.7	3.1	46.4		< 50 mm	2482 mW -EXEMPT-	892 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.5 GHz	5700	15.50	35	6	291.7	132.7	3.1	46.4		< 50 mm	2479.8 mW -EXEMPT-	889.8 mW -EXEMPT-	< 50 mm	< 50 mm	
Wi-Fi 5.8 GHz	5825	16.00	40	6	291.7	132.7	3.1	46.4		< 50 mm	2479.2 mW -EXEMPT-	889.2 mW -EXEMPT-	< 50 mm	< 50 mm	
<b>Antenna B</b>															
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	46.4	3.1	132.7		< 50 mm	2512.6 mW -EXEMPT-	< 50 mm	< 50 mm	922.6 mW -EXEMPT-	
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	46.4	3.1	132.7		< 50 mm	2482.5 mW -EXEMPT-	< 50 mm	< 50 mm	892.5 mW -EXEMPT-	
Wi-Fi 5.3 GHz	5320	17.00	50	6	291.7	46.4	3.1	132.7		< 50 mm	2482 mW -EXEMPT-	< 50 mm	< 50 mm	892 mW -EXEMPT-	
Wi-Fi 5.5 GHz	5700	16.00	40	6	291.7	46.4	3.1	132.7		< 50 mm	2479.8 mW -EXEMPT-	< 50 mm	< 50 mm	889.8 mW -EXEMPT-	
Wi-Fi 5.8 GHz	5825	16.50	45	6	291.7	46.4	3.1	132.7		< 50 mm	2479.2 mW -EXEMPT-	< 50 mm	< 50 mm	889.2 mW -EXEMPT-	

**Note(s):**

According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

## 7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Rear	Edge 1	Edge 2	Edge 3	Edge 4
		(Top Edge)	(Right Edge )	(Bottom Edge)	(Left Edge)
Wi-Fi 2.4 GHz SISO (Antenna A)	Yes	No	No	Yes	No
Wi-Fi 2.4 GHz SISO (Antenna B)	Yes	No	No	Yes	No
Wi-Fi 2.4 GHz MIMO	Yes	No	No	Yes	No
Wi-Fi 5 GHz SISO (Antenna A)	Yes	No	No	Yes	No
Wi-Fi 5 GHz SISO (Antenna B)	Yes	No	No	Yes	No
Wi-Fi 5 GHz MIMO	Yes	No	No	Yes	No
Bluetooth	No	No	No	Yes	No

### Note(s):

Yes = Testing is required.

No = Testing is not required.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

**SAR Lab C**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8/4/2015	Body 5180	e'	48.0300	Relative Permittivity ( $\epsilon_r$ ):	48.03	49.05	-2.07	5
		e"	18.3700	Conductivity ( $\sigma$ ):	5.29	5.27	0.37	5
	Body 5200	e'	47.9800	Relative Permittivity ( $\epsilon_r$ ):	47.98	49.02	-2.12	5
		e"	18.4300	Conductivity ( $\sigma$ ):	5.33	5.29	0.64	5
	Body 5600	e'	47.3100	Relative Permittivity ( $\epsilon_r$ ):	47.31	48.48	-2.41	5
		e"	18.8200	Conductivity ( $\sigma$ ):	5.86	5.76	1.72	5
	Body 5800	e'	46.9900	Relative Permittivity ( $\epsilon_r$ ):	46.99	48.20	-2.51	5
		e"	19.0200	Conductivity ( $\sigma$ ):	6.13	6.00	2.23	5
Body 5825	e'	46.9300	Relative Permittivity ( $\epsilon_r$ ):	46.93	48.20	-2.63	5	
	e"	19.0100	Conductivity ( $\sigma$ ):	6.16	6.00	2.62	5	

**SAR Lab E**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
7/29/2015	Body 2450	e'	52.1100	Relative Permittivity ( $\epsilon_r$ ):	52.11	52.70	-1.12	5
		e"	14.0700	Conductivity ( $\sigma$ ):	1.92	1.95	-1.71	5
	Body 2410	e'	52.1800	Relative Permittivity ( $\epsilon_r$ ):	52.18	52.76	-1.10	5
		e"	14.1000	Conductivity ( $\sigma$ ):	1.89	1.91	-0.94	5
	Body 2475	e'	52.0800	Relative Permittivity ( $\epsilon_r$ ):	52.08	52.67	-1.12	5
		e"	14.1800	Conductivity ( $\sigma$ ):	1.95	1.99	-1.70	5
8/3/2015	Body 2450	e'	54.2100	Relative Permittivity ( $\epsilon_r$ ):	54.21	52.70	2.87	5
		e"	14.0700	Conductivity ( $\sigma$ ):	1.92	1.95	-1.71	5
	Body 2410	e'	54.3300	Relative Permittivity ( $\epsilon_r$ ):	54.33	52.76	2.98	5
		e"	14.0200	Conductivity ( $\sigma$ ):	1.88	1.91	-1.51	5
	Body 2475	e'	54.1000	Relative Permittivity ( $\epsilon_r$ ):	54.10	52.67	2.72	5
		e"	14.1400	Conductivity ( $\sigma$ ):	1.95	1.99	-1.98	5
8/6/2015	Body 2450	e'	50.9900	Relative Permittivity ( $\epsilon_r$ ):	50.99	52.70	-3.24	5
		e"	14.5000	Conductivity ( $\sigma$ ):	1.98	1.95	1.30	5
	Body 2410	e'	51.0600	Relative Permittivity ( $\epsilon_r$ ):	51.06	52.76	-3.22	5
		e"	14.3900	Conductivity ( $\sigma$ ):	1.93	1.91	1.09	5
	Body 2475	e'	50.9300	Relative Permittivity ( $\epsilon_r$ ):	50.93	52.67	-3.30	5
		e"	14.5700	Conductivity ( $\sigma$ ):	2.01	1.99	1.01	5

**SAR Lab F**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
7/29/2015	Body 5180	e'	48.9300	Relative Permittivity ( $\epsilon_r$ ):	48.93	49.05	-0.24	5	
		e"	18.7000	Conductivity ( $\sigma$ ):	5.39	5.27	2.18	5	
	Body 5200	e'	48.9000	Relative Permittivity ( $\epsilon_r$ ):	48.90	49.02	-0.24	5	
		e"	18.7700	Conductivity ( $\sigma$ ):	5.43	5.29	2.50	5	
	Body 5600	e'	48.3200	Relative Permittivity ( $\epsilon_r$ ):	48.32	48.48	-0.33	5	
		e"	19.0800	Conductivity ( $\sigma$ ):	5.94	5.76	3.13	5	
	Body 5800	e'	48.0600	Relative Permittivity ( $\epsilon_r$ ):	48.06	48.20	-0.29	5	
		e"	19.2200	Conductivity ( $\sigma$ ):	6.20	6.00	3.31	5	
	Body 5825	e'	48.0700	Relative Permittivity ( $\epsilon_r$ ):	48.07	48.20	-0.27	5	
		e"	19.2900	Conductivity ( $\sigma$ ):	6.25	6.00	4.13	5	
	8/3/2015	Body 5180	e'	48.0200	Relative Permittivity ( $\epsilon_r$ ):	48.02	49.05	-2.09	5
			e"	18.4900	Conductivity ( $\sigma$ ):	5.33	5.27	1.03	5
Body 5200		e'	47.9600	Relative Permittivity ( $\epsilon_r$ ):	47.96	49.02	-2.16	5	
		e"	18.5300	Conductivity ( $\sigma$ ):	5.36	5.29	1.19	5	
Body 5600		e'	47.3000	Relative Permittivity ( $\epsilon_r$ ):	47.30	48.48	-2.43	5	
		e"	18.8800	Conductivity ( $\sigma$ ):	5.88	5.76	2.04	5	
Body 5800		e'	46.9800	Relative Permittivity ( $\epsilon_r$ ):	46.98	48.20	-2.53	5	
		e"	19.0800	Conductivity ( $\sigma$ ):	6.15	6.00	2.55	5	
Body 5825		e'	46.9400	Relative Permittivity ( $\epsilon_r$ ):	46.94	48.20	-2.61	5	
		e"	19.1200	Conductivity ( $\sigma$ ):	6.19	6.00	3.21	5	
8/6/2015		Body 5180	e'	49.3200	Relative Permittivity ( $\epsilon_r$ ):	49.32	49.05	0.56	5
			e"	18.3600	Conductivity ( $\sigma$ ):	5.29	5.27	0.32	5
	Body 5200	e'	49.2700	Relative Permittivity ( $\epsilon_r$ ):	49.27	49.02	0.51	5	
		e"	18.3800	Conductivity ( $\sigma$ ):	5.31	5.29	0.37	5	
	Body 5600	e'	48.7200	Relative Permittivity ( $\epsilon_r$ ):	48.72	48.48	0.50	5	
		e"	18.8100	Conductivity ( $\sigma$ ):	5.86	5.76	1.67	5	
	Body 5800	e'	48.4100	Relative Permittivity ( $\epsilon_r$ ):	48.41	48.20	0.44	5	
		e"	19.1100	Conductivity ( $\sigma$ ):	6.16	6.00	2.72	5	
	Body 5825	e'	48.3900	Relative Permittivity ( $\epsilon_r$ ):	48.39	48.20	0.39	5	
		e"	19.0900	Conductivity ( $\sigma$ ):	6.18	6.00	3.05	5	

**SAR Lab G**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
7/29/2015	Body 5180	e'	48.4500	Relative Permittivity ( $\epsilon_r$ ):	48.45	49.05	-1.22	5	
		e"	18.6600	Conductivity ( $\sigma$ ):	5.37	5.27	1.96	5	
	Body 5200	e'	48.2600	Relative Permittivity ( $\epsilon_r$ ):	48.26	49.02	-1.55	5	
		e"	18.7800	Conductivity ( $\sigma$ ):	5.43	5.29	2.55	5	
	Body 5600	e'	47.6900	Relative Permittivity ( $\epsilon_r$ ):	47.69	48.48	-1.62	5	
		e"	19.1800	Conductivity ( $\sigma$ ):	5.97	5.76	3.67	5	
	Body 5800	e'	47.5000	Relative Permittivity ( $\epsilon_r$ ):	47.50	48.20	-1.45	5	
		e"	19.1700	Conductivity ( $\sigma$ ):	6.18	6.00	3.04	5	
	Body 5825	e'	47.3500	Relative Permittivity ( $\epsilon_r$ ):	47.35	48.20	-1.76	5	
		e"	19.1500	Conductivity ( $\sigma$ ):	6.20	6.00	3.37	5	
	8/3/2015	Body 5180	e'	48.7600	Relative Permittivity ( $\epsilon_r$ ):	48.76	49.05	-0.58	5
			e"	18.6200	Conductivity ( $\sigma$ ):	5.36	5.27	1.74	5
Body 5200		e'	48.6900	Relative Permittivity ( $\epsilon_r$ ):	48.69	49.02	-0.67	5	
		e"	18.6400	Conductivity ( $\sigma$ ):	5.39	5.29	1.79	5	
Body 5600		e'	48.1000	Relative Permittivity ( $\epsilon_r$ ):	48.10	48.48	-0.78	5	
		e"	18.9700	Conductivity ( $\sigma$ ):	5.91	5.76	2.53	5	
Body 5800		e'	47.7600	Relative Permittivity ( $\epsilon_r$ ):	47.76	48.20	-0.91	5	
		e"	19.1800	Conductivity ( $\sigma$ ):	6.19	6.00	3.09	5	
Body 5825		e'	47.7200	Relative Permittivity ( $\epsilon_r$ ):	47.72	48.20	-1.00	5	
		e"	19.2000	Conductivity ( $\sigma$ ):	6.22	6.00	3.64	5	
8/5/2015		Body 5180	e'	47.1400	Relative Permittivity ( $\epsilon_r$ ):	47.14	49.05	-3.89	5
			e"	17.8600	Conductivity ( $\sigma$ ):	5.14	5.27	-2.41	5
	Body 5200	e'	47.0900	Relative Permittivity ( $\epsilon_r$ ):	47.09	49.02	-3.94	5	
		e"	17.8600	Conductivity ( $\sigma$ ):	5.16	5.29	-2.47	5	
	Body 5600	e'	46.6000	Relative Permittivity ( $\epsilon_r$ ):	46.60	48.48	-3.87	5	
		e"	18.1800	Conductivity ( $\sigma$ ):	5.66	5.76	-1.74	5	
	Body 5800	e'	46.2500	Relative Permittivity ( $\epsilon_r$ ):	46.25	48.20	-4.05	5	
		e"	18.3700	Conductivity ( $\sigma$ ):	5.92	6.00	-1.26	5	
	Body 5825	e'	46.2200	Relative Permittivity ( $\epsilon_r$ ):	46.22	48.20	-4.11	5	
		e"	18.3000	Conductivity ( $\sigma$ ):	5.93	6.00	-1.21	5	

**SAR Lab H**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
7/29/2015	Body 5180	e'	47.4000	Relative Permittivity ( $\epsilon_r$ ):	47.40	49.05	-3.36	5	
		e"	18.8500	Conductivity ( $\sigma$ ):	5.43	5.27	2.99	5	
	Body 5200	e'	47.4500	Relative Permittivity ( $\epsilon_r$ ):	47.45	49.02	-3.20	5	
		e"	18.9800	Conductivity ( $\sigma$ ):	5.49	5.29	3.65	5	
	Body 5600	e'	46.7700	Relative Permittivity ( $\epsilon_r$ ):	46.77	48.48	-3.52	5	
		e"	19.2800	Conductivity ( $\sigma$ ):	6.00	5.76	4.21	5	
	Body 5800	e'	46.5300	Relative Permittivity ( $\epsilon_r$ ):	46.53	48.20	-3.46	5	
		e"	19.3300	Conductivity ( $\sigma$ ):	6.23	6.00	3.90	5	
	Body 5825	e'	46.4500	Relative Permittivity ( $\epsilon_r$ ):	46.45	48.20	-3.63	5	
		e"	19.3800	Conductivity ( $\sigma$ ):	6.28	6.00	4.62	5	
	7/31/2015	Body 5180	e'	47.4500	Relative Permittivity ( $\epsilon_r$ ):	47.45	49.05	-3.26	5
			e"	17.9700	Conductivity ( $\sigma$ ):	5.18	5.27	-1.81	5
Body 5200		e'	47.3800	Relative Permittivity ( $\epsilon_r$ ):	47.38	49.02	-3.34	5	
		e"	18.0300	Conductivity ( $\sigma$ ):	5.21	5.29	-1.54	5	
Body 5600		e'	46.6800	Relative Permittivity ( $\epsilon_r$ ):	46.68	48.48	-3.71	5	
		e"	18.2700	Conductivity ( $\sigma$ ):	5.69	5.76	-1.25	5	
Body 5800		e'	46.4300	Relative Permittivity ( $\epsilon_r$ ):	46.43	48.20	-3.67	5	
		e"	18.3300	Conductivity ( $\sigma$ ):	5.91	6.00	-1.48	5	
Body 5825		e'	46.3400	Relative Permittivity ( $\epsilon_r$ ):	46.34	48.20	-3.86	5	
		e"	18.4600	Conductivity ( $\sigma$ ):	5.98	6.00	-0.35	5	
8/3/2015		Body 5180	e'	48.5400	Relative Permittivity ( $\epsilon_r$ ):	48.54	49.05	-1.03	5
			e"	18.4400	Conductivity ( $\sigma$ ):	5.31	5.27	0.75	5
	Body 5200	e'	48.4800	Relative Permittivity ( $\epsilon_r$ ):	48.48	49.02	-1.10	5	
		e"	18.4600	Conductivity ( $\sigma$ ):	5.34	5.29	0.81	5	
	Body 5600	e'	47.8600	Relative Permittivity ( $\epsilon_r$ ):	47.86	48.48	-1.27	5	
		e"	18.8000	Conductivity ( $\sigma$ ):	5.85	5.76	1.61	5	
	Body 5800	e'	47.5200	Relative Permittivity ( $\epsilon_r$ ):	47.52	48.20	-1.41	5	
		e"	18.9900	Conductivity ( $\sigma$ ):	6.12	6.00	2.07	5	
	Body 5825	e'	47.4900	Relative Permittivity ( $\epsilon_r$ ):	47.49	48.20	-1.47	5	
		e"	19.0400	Conductivity ( $\sigma$ ):	6.17	6.00	2.78	5	
	8/5/2015	Body 5180	e'	49.1000	Relative Permittivity ( $\epsilon_r$ ):	49.10	49.05	0.11	5
			e"	18.5400	Conductivity ( $\sigma$ ):	5.34	5.27	1.30	5
Body 5200		e'	49.0400	Relative Permittivity ( $\epsilon_r$ ):	49.04	49.02	0.04	5	
		e"	18.5400	Conductivity ( $\sigma$ ):	5.36	5.29	1.24	5	
Body 5600		e'	48.4800	Relative Permittivity ( $\epsilon_r$ ):	48.48	48.48	0.00	5	
		e"	18.9100	Conductivity ( $\sigma$ ):	5.89	5.76	2.21	5	
Body 5800		e'	48.1900	Relative Permittivity ( $\epsilon_r$ ):	48.19	48.20	-0.02	5	
		e"	19.1100	Conductivity ( $\sigma$ ):	6.16	6.00	2.72	5	
Body 5825		e'	48.1600	Relative Permittivity ( $\epsilon_r$ ):	48.16	48.20	-0.08	5	
		e"	19.1000	Conductivity ( $\sigma$ ):	6.19	6.00	3.10	5	

**SAR Lab E (Additional Testing)**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
9/14/2015	Body 2450	e'	51.8600	Relative Permittivity ( $\epsilon_r$ ):	51.86	52.70	-1.59	5
		e"	14.5800	Conductivity ( $\sigma$ ):	1.99	1.95	1.86	5
	Body 2410	e'	51.9700	Relative Permittivity ( $\epsilon_r$ ):	51.97	52.76	-1.50	5
		e"	14.4900	Conductivity ( $\sigma$ ):	1.94	1.91	1.79	5
	Body 2475	e'	51.8100	Relative Permittivity ( $\epsilon_r$ ):	51.81	52.67	-1.63	5
		e"	14.6300	Conductivity ( $\sigma$ ):	2.01	1.99	1.42	5

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2$  mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0$  cm for SAR measurements  $\leq 3$  GHz and  $\geq 10.0$  cm for measurements  $> 3$  GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.



**Reference Target SAR Values**

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D2450V2	899	3/13/2015	2450	1g	51.6	48.8
				10g	23.9	22.7
D2450V2	748	2/20/2015	2450	1g	52.7	50.3
				10g	24.6	23.5
D5GHzV2	1003	2/20/2015	5200	1g	76.4	72.7
				10g	21.9	20.4
			5600	1g	79.6	77.0
				10g	22.8	21.3
5800	1g	76.1	75.0			
	10g	21.7	20.6			
D5GHzV2	1168	12/4/2014	5200	1g	79.3	76.0
				10g	22.5	21.1
			5600	1g	81.7	82.0
				10g	23.2	22.7
			5800	1g	78.0	76.2
				10g	22.1	21.0

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR Lab C**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
8/4/2015	D5GHzV2 (5.2GHz)	1003	Body	1g	7.29	72.90	72.70	0.28	
				10g	2.04	20.40	20.40	0.00	
8/4/2015	D5GHzV2 (5.6GHz)	1003	Body	1g	7.93	79.30	77.00	2.99	
				10g	2.20	22.00	21.30	3.29	
8/4/2015	D5GHzV2 (5.8GHz)	1003	Body	1g	7.74	77.40	75.00	3.20	1,2
				10g	2.15	21.50	20.60	4.37	

**SAR Lab E**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
7/29/2015	D2450V2	899	Body	1g	5.27	52.7	48.8	7.99	
				10g	2.44	24.4	22.7	7.49	
8/3/2015	D2450V2	899	Body	1g	5.29	52.9	48.8	8.40	3,4
				10g	2.46	24.6	22.7	8.37	
8/6/2015	D2450V2	899	Body	1g	5.15	51.5	48.8	5.53	
				10g	2.38	23.8	22.7	4.85	

**SAR Lab F**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
7/30/2015	D5GHzV2 (5.2GHz)	1168	Body	1g	7.67	76.7	76.0	0.92	
				10g	2.17	21.7	21.1	2.84	
8/3/2015	D5GHzV2 (5.2GHz)	1168	Body	1g	7.64	76.4	76.0	0.53	
				10g	2.18	21.8	21.1	3.32	
8/6/2015	D5GHzV2 (5.2GHz)	1168	Body	1g	7.97	79.7	76.0	4.87	5,6
				10g	2.27	22.7	21.1	7.58	

**SAR Lab G**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
7/30/2015	D5GHzV2 (5.6GHz)	1003	Body	1g	7.89	78.9	77.0	2.47	
				10g	2.19	21.9	21.3	2.82	
8/3/2015	D5GHzV2 (5.6GHz)	1003	Body	1g	8.43	84.3	77.0	9.48	7,8
				10g	2.34	23.4	21.3	9.86	
8/5/2015	D5GHzV2 (5.6GHz)	1003	Body	1g	7.66	76.6	77.0	-0.52	
				10g	2.12	21.2	21.3	-0.47	

**SAR Lab H**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
7/30/2015	D5GHzV2 (5.8GHz)	1168	Body	1g	7.63	76.3	76.2	0.13	
				10g	2.13	21.3	21.0	1.43	
7/31/2015	D5GHzV2 (5.8GHz)	1168	Body	1g	7.24	72.4	76.2	-4.99	9,10
				10g	2.06	20.6	21.0	-1.90	
8/3/2015	D5GHzV2 (5.8GHz)	1168	Body	1g	7.34	73.4	76.2	-3.67	
				10g	2.06	20.6	21.0	-1.90	
8/5/2015	D5GHzV2 (5.6GHz)	1168	Body	1g	7.90	79.0	82.0	-3.66	
				10g	2.20	22.0	22.7	-3.08	

**SAR Lab E (Additional Testing)**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
9/14/2015	D2450V2	748	Body	1g	5.04	50.4	50.3	0.20	11,12
				10g	2.34	23.4	23.5	-0.43	

## 9. Conducted Output Power Measurements

### 9.1. Wi-Fi DTS Band

#### Measured Results

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Average Power (dBm)	
					Antenna A	Antenna B
2.4	1 Tx	802.11b	1	2412	16.0	16.0
			6	2437	16.0	16.0
			12	2467	16.0	16.0
	2 Tx	802.11g HT20 CDD	2	2417	16.0	16.0
			6	2437	16.0	16.0
			10	2457	16.0	16.0

### 9.2. Wi-Fi U-NII Bands

#### Measured Results

Band (GHz)	No. of Transmitters	Mode	Ch #	Freq. (MHz)	Average Power (dBm)	
					Antenna A	Antenna B
5.2	1 Tx	802.11n HT40	38	5180	14.5	Not Required
			46	5230	17.0	
	2 Tx	802.11n HT40 STBC	38	5190	13.0	13.0
			46	5230	17.0	17.0
5.3	1 Tx	802.11n HT40	54	5270	Not Required	17.0
			62	5310		14.5
5.5	1 Tx	802.11ac VHT80	106	5530	14.5	14.5
			122	5610	15.5	16.0
			138	5690	15.5	16.0
	2 Tx	802.11ac VHT80 CDD	106	5530	13.5	13.5
			122	5610	15.5	15.5
			138	5690	15.5	15.5
5.8	1 Tx	802.11a	153	5765	Not Required	16.5
			157	5785		16.5
			161	5805		16.5
		802.11n HT40	151	5755	15.0	Not Required
			159	5795	16.0	
			161	5805	16.0	
	2 Tx	802.11a CDD	153	5765	16.0	16.5
			157	5785	16.0	16.5
161			5805	16.0	16.5	

### 9.3. Bluetooth

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
2.4	V3.0 + EDR, GFSK	0	2402	9.9
		39	2441	10.0
		78	2480	9.8

## 10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

### KDB 248227 D01 802.11 Wi-Fi SAR:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

### 10.1. Wi-Fi (DTS Band)

#### Module 1

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								plots
							Ant A		Ant B			Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured		Measured	Scaled	Measured	Scaled	Measured	Scaled	Measured	Scaled	
2.4 GHz	1 Tx	802.11b	0	Rear	6	2437	16.0	16.0			0.118	0.093	0.042	0.093	0.042					
				Edge 3	6	2437	16.0	16.0			1.340	1.070	0.370	1.070	0.370					
					12	2467	16.0	16.0			1.390	1.130	0.387	1.130	0.387					
				Edge 4	6	2437	16.0	16.0			0.283	<0.001	<0.001	<0.001	<0.001					
2.4 GHz	1 Tx	802.11b	0	Rear	6	2437			16.0	16.0	0.142					0.117	0.054	0.117	0.054	
				Edge 2	6	2437			16.0	16.0	0.005					<0.001	<0.001	<0.001	<0.001	
					6	2437			16.0	16.0	1.710					1.010	0.345	1.010	0.345	
				Edge 3	12	2467			16.0	16.0	2.120					1.100	0.381	1.100	0.381	
2.4 GHz	2 Tx	802.11g CDD	0	Rear	6	2437	16.0	16.0	16.0	16.0	0.137	0.088	0.039	0.088	0.039	0.105	0.047	0.105	0.047	
				Edge 2	6	2437	16.0	16.0	16.0	16.0	0.054	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	
					6	2437	16.0	16.0	16.0	16.0	1.330	1.130	0.388	1.130	0.388	1.010	0.347	1.010	0.347	
				Edge 3	10	2457	16.0	16.0	16.0	16.0	1.240	1.150	0.396	1.150	0.396	1.100	0.384	1.100	0.384	
Edge 4	6	2437	16.0	16.0	16.0	16.0	0.049	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001					

#### Module 2

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)								plots
							Ant A		Ant B		Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured	Measured	Scaled	Measured	Scaled	Measured	Scaled	Measured	Scaled	
2.4GHz	2Tx	802.11g CDD	0	Edge 3	10	2457	16.0	16.0	16.0	16.0	1.150	0.395	1.150	0.395	1.140	0.393	1.140	0.393	

### 10.2. Wi-Fi (U-NII-1 & U-NII-2A Band)

#### Module 1

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
							Ant A		Ant B			Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured		Measured	Scaled	Measured	Scaled	Measured	Scaled	Measured	Scaled	
5.2 GHz	1 Tx	802.11n HT40	0	Rear	46	5230	17.0	17.0			0.169	0.064	0.015	0.064	0.015					
				Edge 3	38	5180	14.5	14.5					0.586	0.196	0.586	0.196				
					46	5230	17.0	17.0			2.330	1.190	0.414	1.190	0.414					
				Edge 4	46	5230	17.0	17.0			0.005	<0.001	<0.001	<0.001	<0.001					
5.3 GHz	1 Tx	802.11n HT40	0	Rear	54	5270			17.0	17.0	0.129					0.073	0.028	0.073	0.028	
				Edge 2	54	5270			17.0	17.0	0.013					<0.001	<0.001	<0.001	<0.001	
					54	5270			17.0	17.0	3.010					1.000	0.340	1.000	0.340	
				Edge 3	62	5310			14.5	14.5						0.571	0.188	0.571	0.188	
5.2 GHz	2 Tx	802.11n HT40 STBC	0	Rear	46	5230	17.0	17.0	17.0	17.0	0.146	0.070	0.028	0.070	0.028	0.090	0.030	0.090	0.030	
				Edge 2	46	5230	17.0	17.0	17.0	17.0	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	
					38	5190	13.0	13.0	13.0	13.0		0.422	0.136	0.422	0.136	0.385	0.129	0.385	0.129	
				Edge 3	46	5230	17.0	17.0	17.0	17.0	1.940	1.150	0.400	1.150	0.400	1.120	0.358	1.120	0.358	
Edge 4	46	5230	17.0	17.0	17.0	17.0	0.011	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001					

#### Module 2

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)								Plots
							Ant A		Ant B		Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured	Measured	Scaled	Measured	Scaled	Measured	Scaled	Measured	Scaled	
5.2GHz	1Tx	802.11n HT40	0	Edge 3	46	5230	17.0	17.0			1.070	0.372	1.070	0.372					

### 10.3. Wi-Fi (U-NII-2C Band)

#### Module 1

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
							Ant A		Ant B			Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
							1-g	10-g	1-g	10-g		1-g	10-g	1-g	10-g	1-g	10-g			
5.5 GHz	1 Tx	802.11ac VHT80	0	Rear	122	5610	15.5	15.5			0.094	0.073	0.025	0.073	0.025					
				Edge 3	122	5610	15.5	15.5			2.310	1.090	0.351	1.090	0.351					
					138	5690	15.5	15.5				1.170	0.377	1.170	0.377					
				Edge 4	122	5610	15.5	15.5			0.004	<0.001	<0.001	<0.001	<0.001					
5.5 GHz	1 Tx	802.11ac VHT80	0	Rear	122	5610			16.0	16.0	0.189					0.089	0.034	0.089	0.034	
				Edge 2	122	5610			16.0	16.0	<0.001					<0.001	<0.001	<0.001	<0.001	
					122	5610			16.0	16.0	1.720					1.190	0.390	1.190	0.390	
				Edge 3	138	5690			16.0	16.0						1.150	0.361	1.150	0.361	
5.5 GHz	2 Tx	802.11ac VHT80 CDD	0	Rear	122	5610	15.5	15.5	16.0	15.5	0.191	0.072	0.026	0.072	0.026	0.084	0.030	0.094	0.034	
				Edge 2	122	5610	15.5	15.5	16.0	15.5	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	
					122	5610	15.5	15.5	16.0	15.5	3.330	1.160	0.373	1.160	0.373	1.010	0.330	1.133	0.370	
				Edge 3	138	5690	15.5	15.5	16.0	15.5		1.180	0.376	1.180	0.376	1.010	0.335	1.133	0.376	
Edge 4	122	5610	15.5	15.5	16.0	15.5	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001					

#### Module 2

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)								Plots
							Ant A		Ant B		Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled		
							1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g			
5.5 GHz	1 Tx	802.11ac VHT80	0	Edge 3	122	5610			16.0	15.7					1.010	0.330	1.082	0.354	

### 10.4. Wi-Fi (U-NII-3 Band)

#### Module 1

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				Area Scan Measured Peak	SAR (W/kg)								Plots
							Ant A		Ant B			Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured		Measured		Scaled		Measured		Scaled		
							1-g	10-g	1-g	10-g		1-g	10-g	1-g	10-g	1-g	10-g			
5.8 GHz	1 Tx	802.11n HT40	0	Rear	159	5795	16.0	16.0			0.168	0.103	0.043	0.103	0.043					
				Edge 3	151	5755	15.0	15.0				0.812	0.260	0.812	0.260					
					159	5795	16.0	16.0			2.170	1.020	0.330	1.020	0.330					
				Edge 4	159	5795	16.0	16.0			0.022	<0.001	<0.001	<0.001	<0.001					
5.8 GHz	1 Tx	802.11a	0	Rear	157	5785			16.5	16.5	0.174					0.102	0.040	0.102	0.040	
				Edge 2	157	5785			16.5	16.5	0.026					<0.001	<0.001	<0.001	<0.001	
					157	5785			16.5	16.5	2.020					0.936	0.304	0.936	0.304	
				Edge 3	161	5805			16.5	16.5						0.983	0.321	0.983	0.321	
5.8 GHz	2 Tx	802.11a CDD	0	Rear	157	5785	16.0	16.0	16.5	16.5	0.188	0.112	0.045	0.112	0.045	0.096	0.038	0.096	0.038	
				Edge 2	157	5785	16.0	16.0	16.5	16.5	0.026	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	
					153	5765	16.0	16.0	16.5	16.5	2.400	1.140	0.368	1.140	0.368	1.060	0.345	1.060	0.345	
				Edge 3	157	5785	16.0	16.0	16.5	16.5		1.010	0.321	1.010	0.321	0.932	0.303	0.932	0.303	
Edge 4	157	5785	16.0	16.0	16.5	16.5	0.019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001					

#### Module 2

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)				SAR (W/kg)								Plots
							Ant A		Ant B		Ant A				Ant B				
							Tune-up Limit	Measured	Tune-up Limit	Measured	Measured		Scaled		Measured		Scaled		
							1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g	1-g	10-g			
5.8GHz	2 TX	802.11a CDD	0	Edge 3	153	5765	16.0	16.0	16.5	16.5	1.030	0.326	1.030	0.326	1.110	0.355	1.110	0.355	

## 10.5. Bluetooth

### Module 1

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)		SAR (W/kg)				Plots
							Tune-up Limit	Measured	Measured		Scaled		
									1-g	10-g	1-g	10-g	
Bluetooth	1 Tx	GMFK	0	Rear	39	2441	10.0	10.0	0.014	0.006	0.014	0.006	
				Edge 1	39	2441	10.0	10.0	<0.001	<0.001	<0.001	<0.001	
				Edge 2	39	2441	10.0	10.0	<0.001	<0.001	<0.001	<0.001	
				Edge 3	39	2441	10.0	10.0	0.210	0.073	0.210	0.073	5
				Edge 4	39	2441	10.0	10.0	0.004	0.001	0.004	0.001	

### Module 2

Band	No. of Transmitters	Mode	Dist. (mm)	Position	Ch #.	Freq. (MHz)	Power (dBm)		SAR (W/kg)				Plots
							Tune-up Limit	Measured	Measured		Scaled		
									1-g	10-g	1-g	10-g	
Bluetooth	1 Tx	GMFK	0	Edge 3	39	2441	10.0	10.0	0.203	0.069	0.203	0.069	



## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 1.6$  or  $2$  W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or  $2$  W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is  $> 1.20$  or  $3$  (1-g or 10-g respectively) or when the original or repeated measurement is  $\geq 1.45$  or  $3.6$  W/kg ( $\sim 10\%$  from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or  $3.75$  W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$  or  $3$  (1-g or 10-g respectively).

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated		Third Repeated
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)
2400	Wi-Fi 802.11b/g/n	Standalone	Edge 3	Yes	1.150	1.140	1.01	N/A	N/A	N/A
	BT	Standalone	Edge 3	No	0.210	N/A	N/A	N/A	N/A	N/A
5200	Wi-Fi 802.11a/n/ac	Standalone	Edge 3	Yes	1.190	1.180	1.01	N/A	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Standalone	Edge 3	Yes	1.190	1.130	1.05	N/A	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Standalone	Edge 3	Yes	1.140	1.130	1.01	N/A	N/A	N/A

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$  or  $3$  (1-g or 10-g respectively).

## 12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

**SAR<sub>1</sub>** is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**Ri** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri \leq 0.04$$

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Standalone	1	Antenna B Wi-Fi 2.4 GHz SISO	+ Bluetooth
	2	Antenna A Wi-Fi 5 GHz SISO	+ Bluetooth
	3	Antenna B Wi-Fi 5 GHz SISO	+ Bluetooth
	4	Wi-Fi 5 GHz MIMO	+ Bluetooth
Notes:			
1. Antenna A Wi-Fi 2.4GHz Radio cannot transmit simultaneously with Bluetooth Radio.			

## Estimated SAR for Simultaneous Transmission SAR Analysis

### Considerations for SAR estimation

1. When standalone SAR test exclusion applies, standalone SAR must also be estimated to determine simultaneous transmission SAR test exclusion.
2. Dedicated Host Approach criteria for SAR test exclusion is likewise applied to SAR estimation, with certain distinctions between test exclusion and SAR estimation:
  - o When the separation distance from the antenna to an adjacent edge is  $\leq 5$  mm, a distance of 5 mm is applied for SAR estimation; this is the same between test exclusion and SAR estimation calculations.
  - o When the separation distance from the antenna to an adjacent edge is  $> 5$  mm but  $\leq 50$  mm, the actual antenna-to-edge separation distance is applied for SAR estimation.
  - o When the minimum test separation distance is  $> 50$  mm, the estimated SAR value is 0.4 W/kg
3. Please refer to Estimated SAR Tables to see which test positions are inherently compliant as they consist of only estimated SAR values for all applicable transmitters and consequently will always have sum of SAR values  $< 1.2$  W/kg. Simultaneous transmission SAR analysis was therefore not performed for these test positions.

### Estimated SAR for WLAN

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)					Estimated 1-g SAR Value (W/kg)				
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Rear	Edge 1	Edge 2	Edge 3	Edge 4
<b>Antenna A</b>													
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	132.7	3.1	46.4	-MEASURE	0.400	0.400	-MEASURE	0.182
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	132.7	3.1	46.4	-MEASURE	0.400	0.400	-MEASURE	0.332
Wi-Fi 5.3 GHz	5320	16.50	45	6	291.7	132.7	3.1	46.4	-MEASURE	0.400	0.400	-MEASURE	0.301
Wi-Fi 5.5 GHz	5700	15.50	35	6	291.7	132.7	3.1	46.4	-MEASURE	0.400	0.400	-MEASURE	0.242
Wi-Fi 5.8 GHz	5825	16.00	40	6	291.7	132.7	3.1	46.4	-MEASURE	0.400	0.400	-MEASURE	0.280
Bluetooth	2480	10.00	10	6	291.7	132.7	3.1	46.4	0.350	0.400	0.400	-MEASURE	0.046
<b>Antenna B</b>													
Wi-Fi 2.4 GHz	2462	16.00	40	6	291.7	46.4	3.1	132.7	-MEASURE	0.400	0.182	-MEASURE	0.400
Wi-Fi 5.2 GHz	5240	17.00	50	6	291.7	46.4	3.1	132.7	-MEASURE	0.400	0.332	-MEASURE	0.400
Wi-Fi 5.3 GHz	5320	17.00	50	6	291.7	46.4	3.1	132.7	-MEASURE	0.400	0.334	-MEASURE	0.400
Wi-Fi 5.5 GHz	5700	16.00	40	6	291.7	46.4	3.1	132.7	-MEASURE	0.400	0.277	-MEASURE	0.400
Wi-Fi 5.8 GHz	5825	16.50	45	6	291.7	46.4	3.1	132.7	-MEASURE	0.400	0.315	-MEASURE	0.400

### 12.1. Sum of the SAR for Wi-Fi & BT

RF Exposure Conditions	Test Position	(1)	(2)	(3)	(4)	(5)	(1)+(5)		(2)+(5)		(3)+(5)		(4)+(5)	
		Wi-Fi 2.4GHz (Ant B)	Wi-Fi 5GHz (Ant A)	Wi-Fi 5GHz (Ant B)	Wi-Fi 5GHz (MIMO)	Bluetooth	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Standalone	Rear	0.117	0.103	0.102	0.112	0.014	0.131	No	0.117	No	0.116	No	0.126	No
	Edge 1	1.100	1.190	1.190	1.180	0.001	1.101	No	1.191	No	1.191	No	1.181	No
	Edge 2	0.001	1.190	0.001	0.001	0.001	0.002	No	1.191	No	0.002	No	0.002	No
	Edge 3	1.100	1.190	1.190	1.180	0.210	1.310	No	1.400	No	1.400	No	1.390	No
	Edge 4	1.100	0.001	1.190	0.001	0.004	1.104	No	0.005	No	1.194	No	0.005	No

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**14U19185-S3V1 SAR\_App A Photos (STC\_180days)**

**14U19185-S3V2 SAR\_App B System Check Plots**

**14U19185-S3V1 SAR\_App C Highest Test Plots**

**14U19185-S3V1 SAR\_App D Tissue Ingredients**

**14U19185-S3V1 SAR\_App E Probe Cal. Certificates**

**14U19185-S3V2 SAR\_App F Dipole Cal. Certificates**

**END OF REPORT**