



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-247 ISSUE 1**

**BLUETOOTH LOW ENERGY  
CERTIFICATION TEST REPORT**

**FOR**

**TABLET DEVICE**

**MODEL NUMBER: A1584**

**FCC ID: BCGA1584  
IC: 579C-A1584**

**REPORT NUMBER: 14U19185-E2V3**

**ISSUE DATE: SEPTEMBER 11, 2015**

*Prepared for*  
**APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u>        | <u>Revised By</u> |
|-------------|-------------------|-------------------------|-------------------|
| V1          | 09/03/2015        | Initial Issue           | M. Mekuria        |
| V2          | 09/08/2015        | Addressed TCB Questions | E. Yu             |
| V3          | 09/11/2015        | Updated antenna gain    | C. Pang           |

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>       | <b>5</b>  |
| <b>2. TEST METHODOLOGY .....</b>                  | <b>6</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>      | <b>6</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>       | <b>7</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....       | 7         |
| 4.2. SAMPLE CALCULATION .....                     | 7         |
| 4.3. MEASUREMENT UNCERTAINTY.....                 | 7         |
| <b>5. EQUIPMENT UNDER TEST .....</b>              | <b>8</b>  |
| 5.1. DESCRIPTION OF EUT .....                     | 8         |
| 5.2. MAXIMUM OUTPUT POWER.....                    | 8         |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS .....      | 8         |
| 5.4. SOFTWARE AND FIRMWARE.....                   | 8         |
| 5.5. WORST-CASE CONFIGURATION AND MODE.....       | 9         |
| 5.6. DESCRIPTION OF TEST SETUP.....               | 10        |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>    | <b>17</b> |
| <b>7. ANTENNA PORT TEST RESULTS .....</b>         | <b>18</b> |
| 7.1. MEASUREMENT METHODS .....                    | 18        |
| 7.2. ON TIME, DUTY CYCLE .....                    | 19        |
| 7.3. 6 dB BANDWIDTH.....                          | 21        |
| 7.4. 99% BANDWIDTH.....                           | 24        |
| 7.5. AVERAGE POWER.....                           | 27        |
| 7.6. OUTPUT POWER.....                            | 28        |
| 7.7. POWER SPECTRAL DENSITY .....                 | 29        |
| 7.8. CONDUCTED SPURIOUS EMISSIONS.....            | 32        |
| <b>8. RADIATED TEST RESULTS.....</b>              | <b>36</b> |
| 8.1. LIMITS AND PROCEDURE .....                   | 36        |
| 8.2. TRANSMITTER ABOVE 1 GHz.....                 | 37        |
| 8.2.1. RESTRICTED BANDEDGE .....                  | 37        |
| 8.2.2. HARMONICS AND SPURIOUS EMISSIONS .....     | 41        |
| 8.3. WORST CASE CO-LOCATION .....                 | 47        |
| 8.4. WORST-CASE BELOW 1 GHz.....                  | 49        |
| 8.5. WORST-CASE 18 to 26 GHz.....                 | 51        |
| <b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b> | <b>53</b> |

---

|            |   |           |
|------------|---|-----------|
| 9.1.       | <i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i> ..... | 54        |
| 9.2.       | <i>EUT POWERED BY HOST PC VIA USB CABLE</i> .....       | 56        |
| <b>10.</b> | <b>SETUP PHOTOS</b> .....                               | <b>58</b> |

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** APPLE, INC.  
1 INFINITE LOOP  
CUPERTINO, CA 95014, U.S.A.

**EUT DESCRIPTION:** TABLET DEVICE

**MODEL:** A1584

**SERIAL NUMBER:** DLXQ1005GPCT (Radiated), DLXQ1005GPCP (Conducted)

**DATE TESTED:** JULY 20, 2015 - AUGUST 19, 2015

| APPLICABLE STANDARDS            |              |
|---------------------------------|--------------|
| STANDARD                        | TEST RESULTS |
| CFR 47 Part 15 Subpart C        | Pass         |
| INDUSTRY CANADA RSS-247 Issue 1 | Pass         |
| INDUSTRY CANADA RSS-GEN Issue 4 | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



CHIN PANG  
SENIOR ENGINEER  
UL VERIFICATION SERVICES INC.

Tested By:



ERIC YU  
EMC ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-247 Issue 1, and ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street               | 47266 Benicia Street                          |
|------------------------------------|---|
| <input type="checkbox"/> Chamber A | <input checked="" type="checkbox"/> Chamber D |
| <input type="checkbox"/> Chamber B | <input type="checkbox"/> Chamber E            |
| <input type="checkbox"/> Chamber C | <input type="checkbox"/> Chamber F            |
|                                    | <input checked="" type="checkbox"/> Chamber G |
|                                    | <input type="checkbox"/> Chamber H            |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | ± 3.52 dB   |
| Radiated Disturbance, 30 to 1000 MHz  | ± 4.94 dB   |
| Radiated Disturbance, 1 to 6 GHz      | ± 3.86 dB   |
| Radiated Disturbance, 6 to 18 GHz     | ± 4.23 dB   |
| Radiated Disturbance, 18 to 26 GHz    | ± 5.30 dB   |
| Radiated Disturbance, 26 to 40 GHz    | ± 5.23 dB   |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a tablet with multimedia functions (music, application support, and video), IEEE 802.11a/b/g/n/ac radio, and Bluetooth radio. The rechargeable battery is not user accessible.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-----------------------|------|--------------------|-------------------|
| 2402 - 2480           | BLE  | 9.12               | 8.17              |

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

| Frequency Band (GHz) | Antenna Gain |
|----------------------|--------------|
| 2.4                  | -0.60        |

### 5.4. SOFTWARE AND FIRMWARE

The software installed in the EUT during testing was 13B72.



## 5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The Murata chipset was determined to be the worst case for BLE.

The fundamental of the EUT was investigated in three orthogonal orientations X/Y/Z, it was determined that Y (Landscape) orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Y orientation.

Worst-case data rates as provided by the client were:

Based on the baseline scan, the worst-case data rates were:

BLE: 1 Mbps.

For simultaneous transmission of multiple channels from the same antenna in BT/BLE and WLAN 5 GHz bands. Baseline testing was performed on various configurations to determine the worst case on radiated emissions.

The following configurations were investigated on AC line conducted test.

| Configuration | Descriptions                               |
|---------------|--|
| 1             | EUT powered by AC/DC adapter via USB cable |
| 2             | EUT powered by host PC via USB cable       |

There are two vendors of the WiFi/Bluetooth radio modules: variant 1 and variant 2 and they have the same mechanical outline, same on board antenna, matching circuit, antenna structure and same specification. Baseline testing was performed on all two variants to determine the worst case on all conducted power and radiated emissions.

**5.6. DESCRIPTION OF TEST SETUP**

**SUPPORT EQUIPMENT**

| Support Equipment List |              |         |                        |        |
|------------------------|--------------|---------|------------------------|--------|
| Description            | Manufacturer | Model   | Serial Number          | FCC ID |
| Laptop AC/DC adapter   | Lenovo       | 92P1160 | 11S92P1160Z1ZBGH798B12 | N/A    |
| Laptop                 | Lenovo       | 7659    | L3-AL664 08/03         | N/A    |
| Earphone               | Apple        | N/A     | N/A                    | N/A    |
| EUT AC/CD adapter      | Apple        | A1385   | D293062F3WVDHLHCF      | N/A    |

**I/O CABLES (CONDUCTED TEST)**

| I/O Cable List |         |                      |                |             |                  |                      |
|----------------|---------|----------------------|----------------|-------------|------------------|----------------------|
| Cable No       | Port    | # of identical ports | Connector Type | Cable Type  | Cable Length (m) | Remarks              |
| 1              | Antenna | 1                    | SMA            | Un-Shielded | 0.2              | To spectrum Analyzer |
| 2              | USB     | 1                    | USB            | Shielded    | 1                | N/A                  |
| 3              | AC      | 1                    | AC             | Un-shielded | 3                | N/A                  |

**I/O CABLES (RADIATED ABOVE 1 GHZ)**

| I/O Cable List |      |                      |                |            |                  |         |
|----------------|------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| None Used      |      |                      |                |            |                  |         |

**I/O CABLES (RADAITED BELOW 1 GHZ)**

| I/O Cable List |                 |                |                |             |                  |         |
|----------------|-----------------|----------------|----------------|-------------|------------------|---------|
| Cable No       | Port            | # of identical | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | Headphones Jack | 1              | 3.5mm Audio    | Shielded    | 0.9              | N/A     |
| 2              | AC              | 1              | AC             | Un-shielded | 3                | N/A     |

**I/O CABLES (AC LINE CONDUCTED: AC/DC ADAPTER)**

| I/O Cable List |                 |                |                |             |                  |         |
|----------------|-----------------|----------------|----------------|-------------|------------------|---------|
| Cable No       | Port            | # of identical | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | Headphones Jack | 1              | 3.5mm Audio    | Shielded    | 0.9              | N/A     |
| 2              | AC              | 1              | AC             | Un-shielded | 3                | N/A     |


**I/O CABLES (AC LINE CONDUCTED: LAPTOP CONFIGUARTION)**

| I/O Cable List |                 |                |                |             |                  |         |
|----------------|-----------------|----------------|----------------|-------------|------------------|---------|
| Cable No       | Port            | # of identical | Connector Type | Cable Type  | Cable Length (m) | Remarks |
| 1              | Headphones Jack | 1              | 3.5mm Audio    | Shielded    | 0.9              | N/A     |
| 2              | USB             | 1              | USB            | Shielded    | 1                | N/A     |
| 3              | AC              | 1              | AC             | Un-shielded | 3                | N/A     |

**TEST SETUP - CONDUCTED TESTS**

The EUT was tested connected to a host Laptop via USB cable adapter and spectrum analyzer to antenna port. Test software exercised the EUT.


**SETUP DIAGRAM**

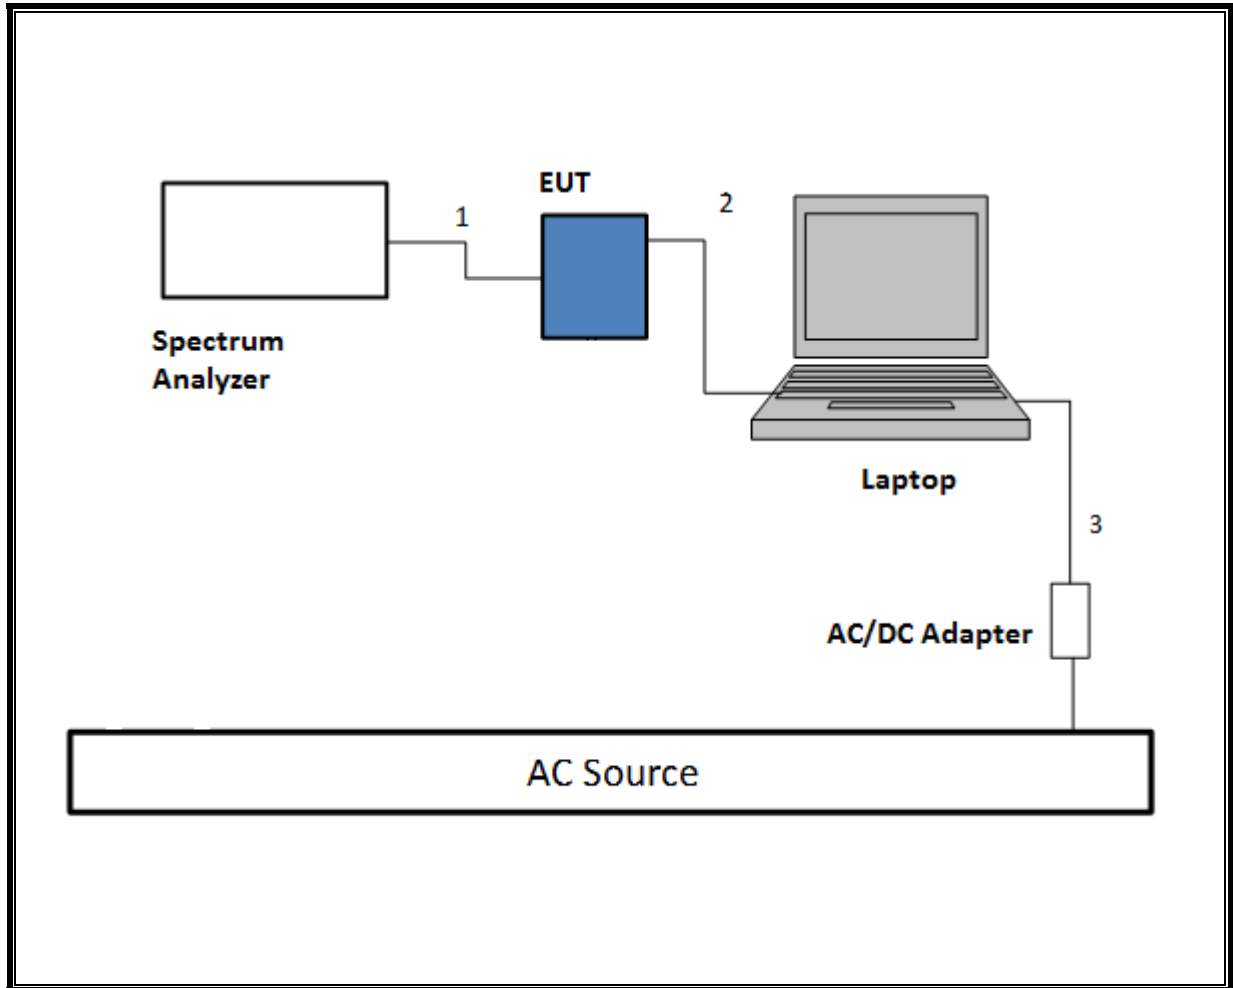

**TEST SETUP- RADIATED-ABOVE 1 GHZ**

The EUT was tested battery powered. Test software exercised the EUT.


**SETUP DIAGRAM**

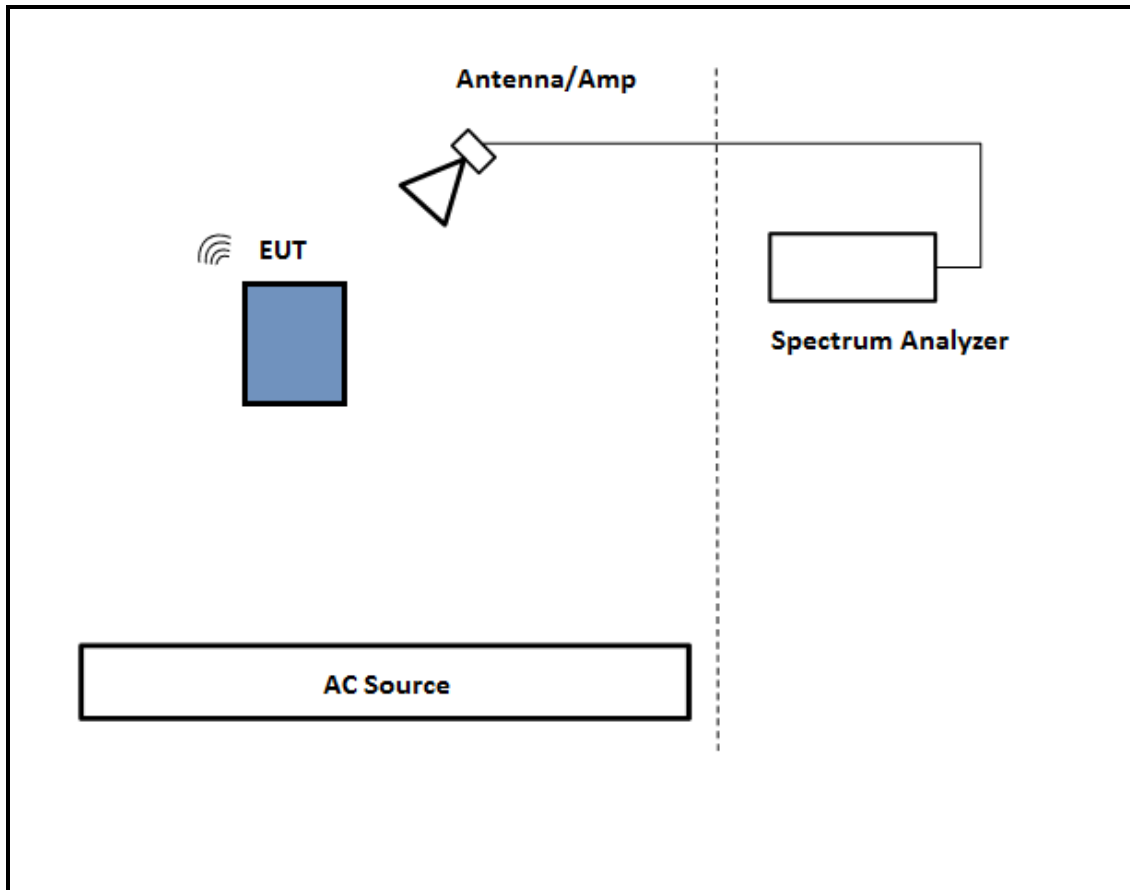

**TEST SETUP- BELOW 1GHz**

The EUT was tested with earphone connected and powered by AC adapter. Test software exercised the EUT.


**SETUP DIAGRAM**

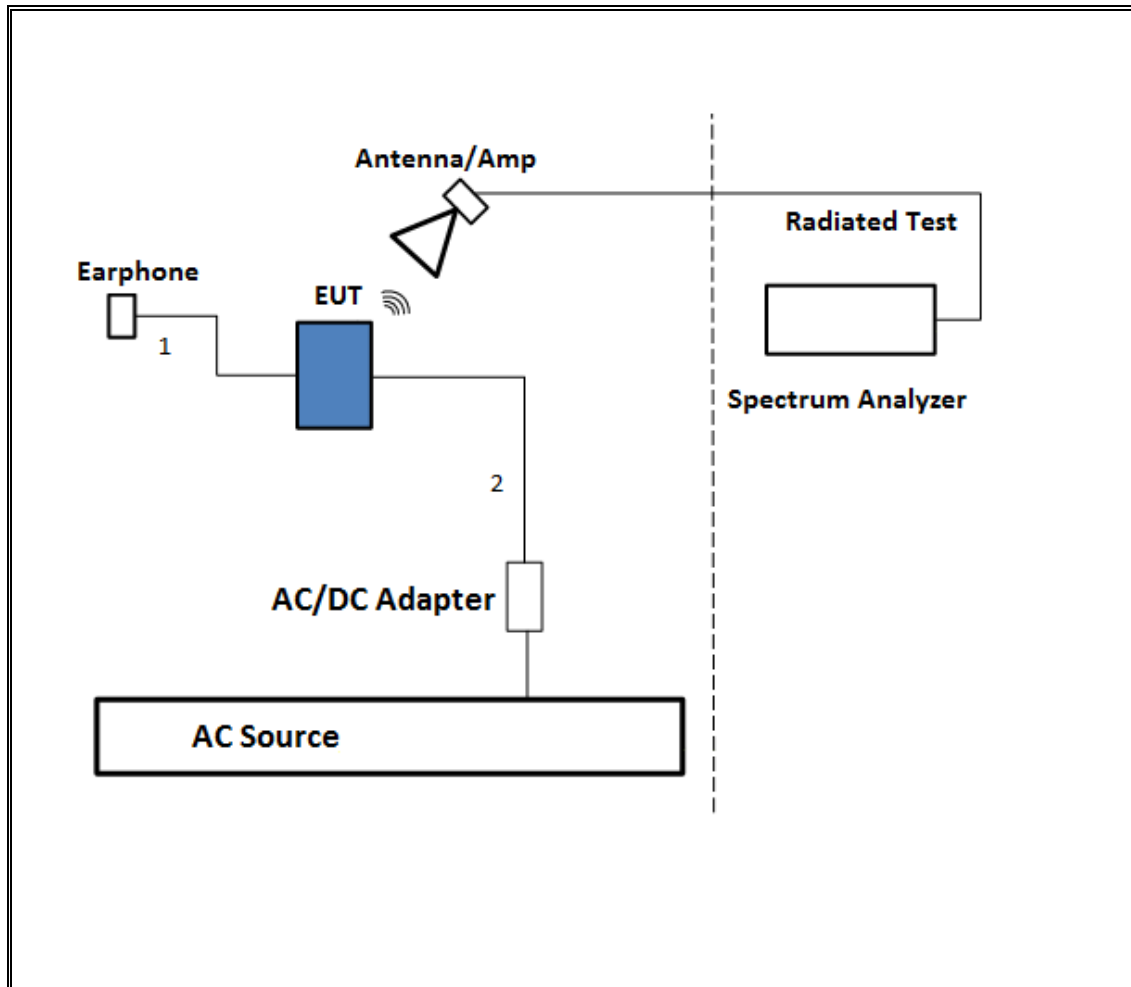

**TEST SETUP- AC LINE CONDUCTED: AC/DC ADAPTER**

The EUT was tested with earphone connected and powered by AC/DC adapter via USB cable. Test software exercised the EUT.


**SETUP DIAGRAM**

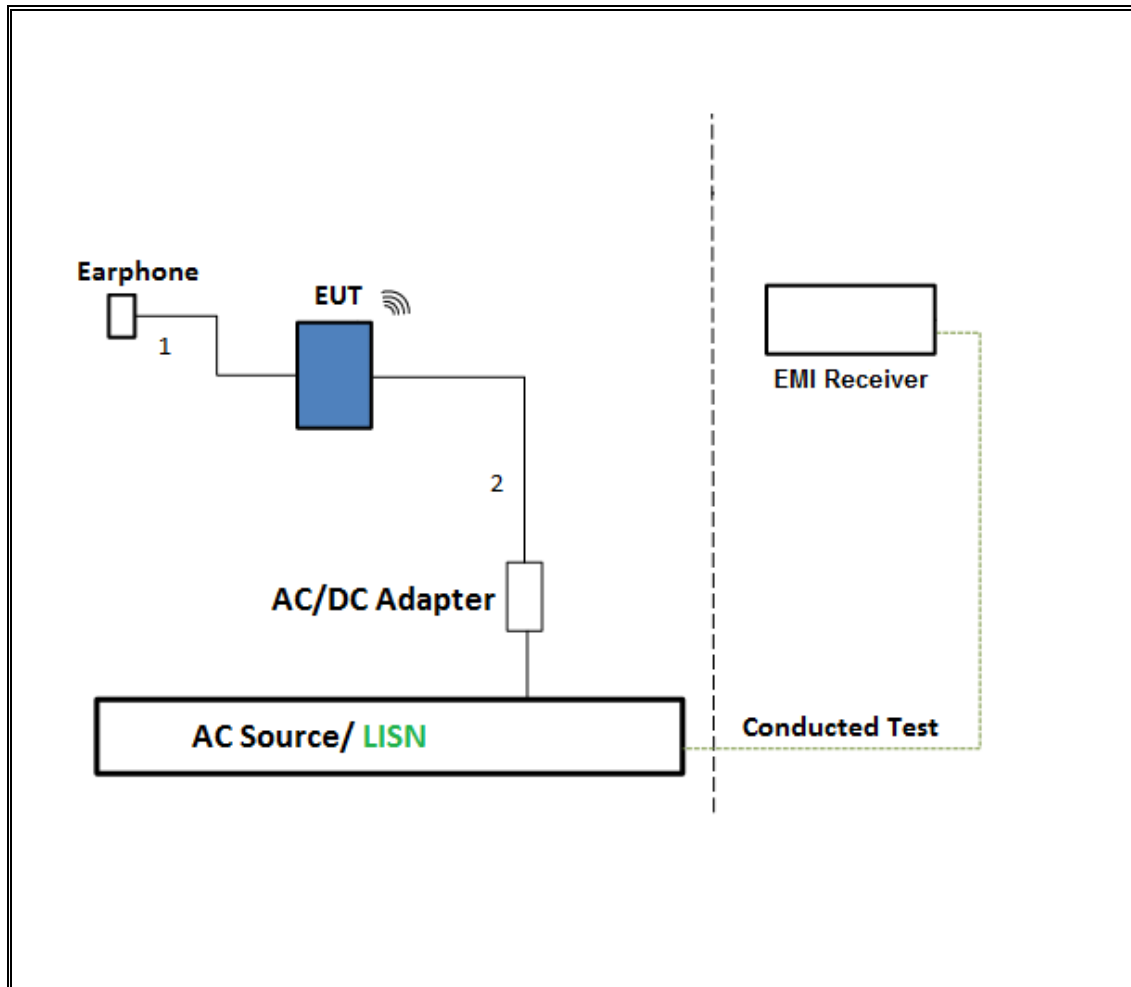

**TEST SETUP- AC LINE CONDUCTED: LAPTOP CONFIGURATION**

The EUT was tested with earphone connected and powered by host PC via USB cable. Test software exercised the EUT.

**SETUP DIAGRAM**

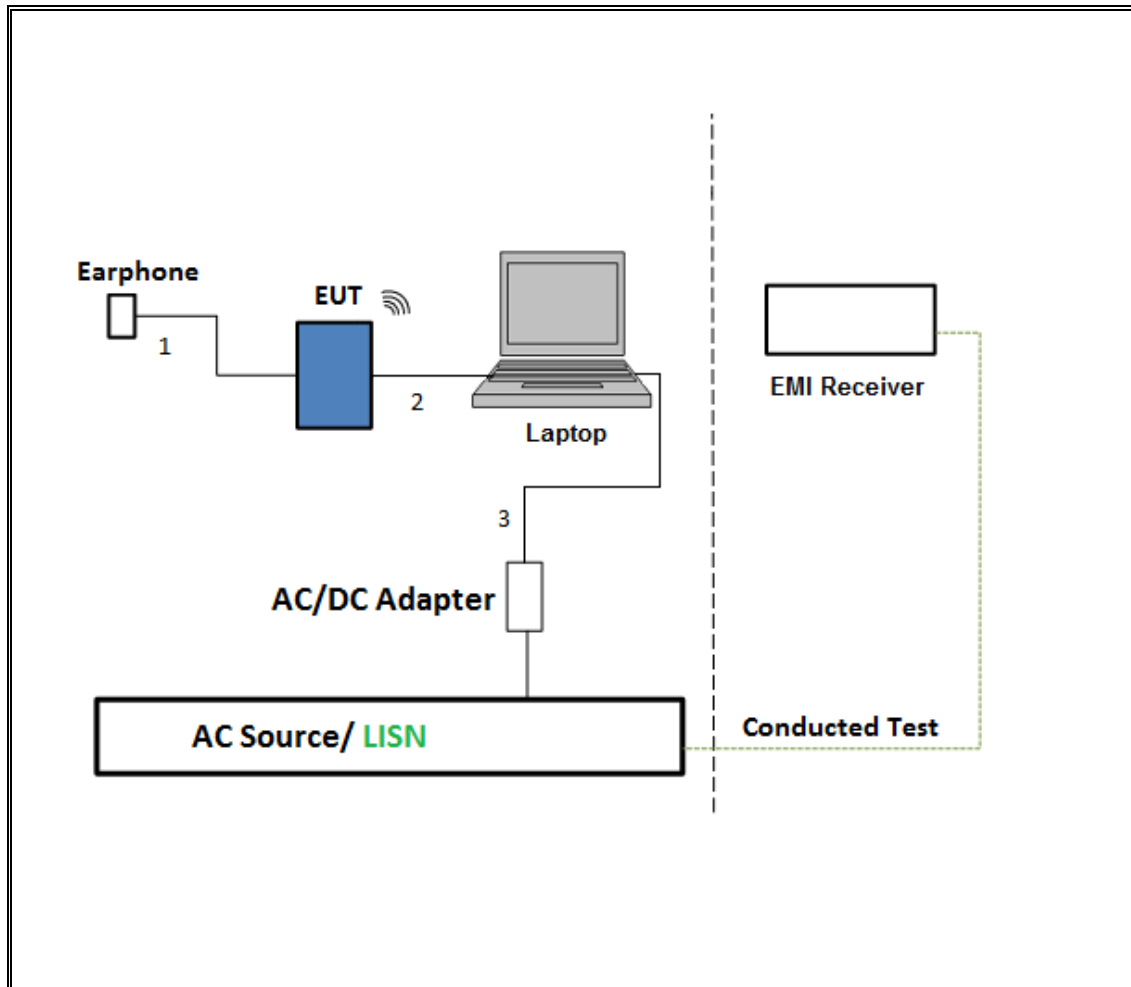



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                                |                 |                        |                         |            |
|--|-----------------|------------------------|-------------------------|------------|
| Description  | Manufacturer    | Model                  | Asset                   | Cal Due    |
| Antenna, Horn 1-18GHz                              | ETS Lindgren    | 3117                   | 00143448                | 2/10/2016  |
| Antenna, Broadband Hybrid, 30MHz to 2000MHz        | Sunol Sciences  | JB3                    | A022813-1               | 1/14/2016  |
| Amplifier, 1 - 18GHz                               | Miteq           | AFS42-00101800-25-S-42 | 1782158                 | 1/26/2016  |
| Amplifier, 10KHz to 1GHz, 32dB                     | Sonoma          | 310N                   | 171202                  | 11/1/2015  |
| Spectrum Analyzer, PXA, 3Hz to 50GHz               | Agilent         | N9030A                 | MY52350427              | 9/13/2015  |
| Amplifier, 10KHz to 1GHz, 32dB                     | Sonoma          | 310N                   | 325118                  | 2/14/2016  |
| Spectrum Analyzer, PXA, 3Hz to 44GHz               | Agilent         | N9030A                 | MY52350675              | 3/16/2016  |
| Power Meter, P-series single channel               | Agilent         | N1911A                 | GB45100212              | 10/9/2015  |
| Power Sensor, P - series, 50MHz to 18GHz, Wideband | Agilent         | N1921A                 | MY53260010              | 4/7/2016   |
| Antenna, Horn 18 to 26.5GHz                        | ARA             | MWH-1826               | 1049                    | 12/17/2015 |
| Amplifier, 1 to 26.5GHz, 23.5dB Gain minimum       | Agilent         | 8449B                  | 3008A01114              | 10/4/2015  |
| AC Line Conducted                                  |                 |                        |                         |            |
| EMI Test Receiver 9KHz-7GHz                        | Rohde & Schwarz | ESCI7                  | 100935                  | 9/16/2015  |
| LISN for Conducted Emissions CISPR-16              | FCC             | 50/250-25-2            | 114                     | 1/16/2016  |
| Power Cable, Line Conducted Emissions ANSI 63.4    | U L             | PG1                    | N/A                     | 7/28/2015  |
| UL SOFTWARE  |                 |                        |                         |            |
| *Radiated Software                                 | UL              | UL EMC                 | Ver 9.5, July 22, 2014  |            |
| *Conducted Software                                | UL              | UL EMC                 | Ver 2.2, March 31, 2015 |            |
| *AC Line Conducted Software                        | UL              | UL EMC                 | Ver 9.5, April 3, 2015  |            |

Note: \* indicates automation software version used in the compliance certification testing

## 7. ANTENNA PORT TEST RESULTS

### 7.1. MEASUREMENT METHODS

#### MEASUREMENT METHODS

6 dB BW: KDB 558074 D01 v03r03, Section 8.1.

Output Power: KDB 558074 D01 v03r03, Section 9.1.2.

Power Spectral Density: KDB 558074 D01 v03r03, Section 10.2.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r03, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r03, Section 12.1.

Band-edge: KDB 558074 D01 v03r03, Section 12.1

## 7.2. ON TIME, DUTY CYCLE

### LIMITS

None; for reporting purposes only.

### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

### ON TIME AND DUTY CYCLE RESULTS

| Mode | ON Time<br>B<br>(msec) | Period<br>(msec) | Duty Cycle<br>x<br>(linear) | Duty<br>Cycle<br>(%) | Duty Cycle<br>Correction Factor<br>(dB) | 1/B<br>Minimum VBW<br>(kHz) |
|------|------------------------|------------------|-----------------------------|----------------------|---|-----------------------------|
| BLE  | 5.000                  | 5.000            | 1.000                       | 100.00%              | 0.00                                    | 0.010                       |



**7.3. 6 dB BANDWIDTH**

**LIMITS**

FCC §15.247 (a) (2)



IC RSS-247 (5.2) (1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

**RESULTS**

| <b>Channel</b> | <b>Frequency (MHz)</b> | <b>6 dB Bandwidth (MHz)</b> | <b>Minimum Limit (MHz)</b> |
|----------------|------------------------|-----------------------------|----------------------------|
| Low            | 2402                   | 0.7196                      | 0.5                        |
| Middle         | 2440                   | 0.7196                      | 0.5                        |
| High           | 2480                   | 0.7182                      | 0.5                        |

**6 dB BANDWIDTH**

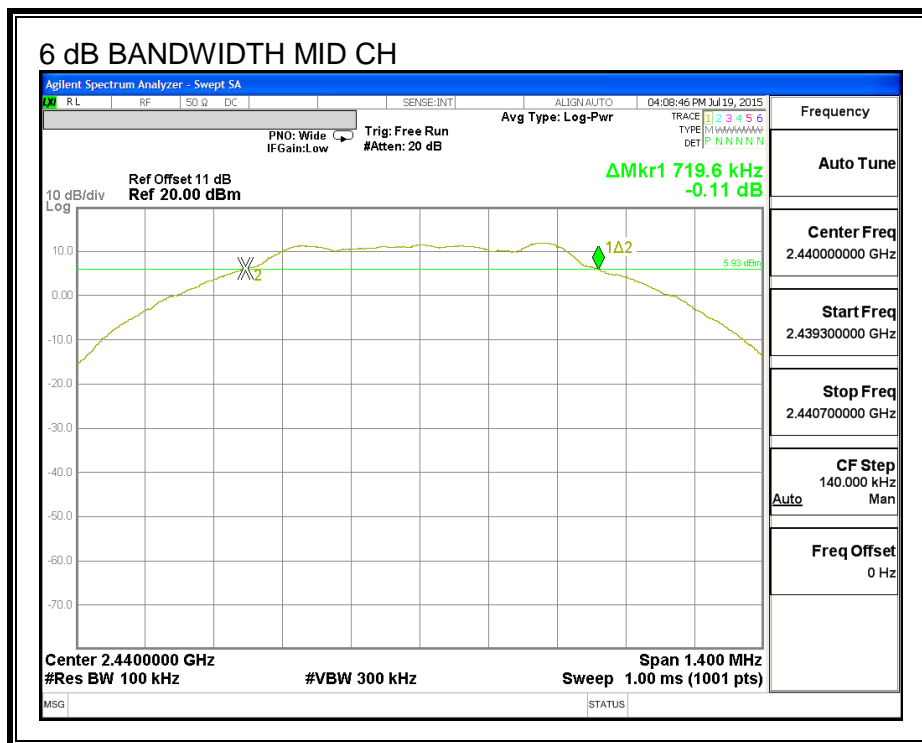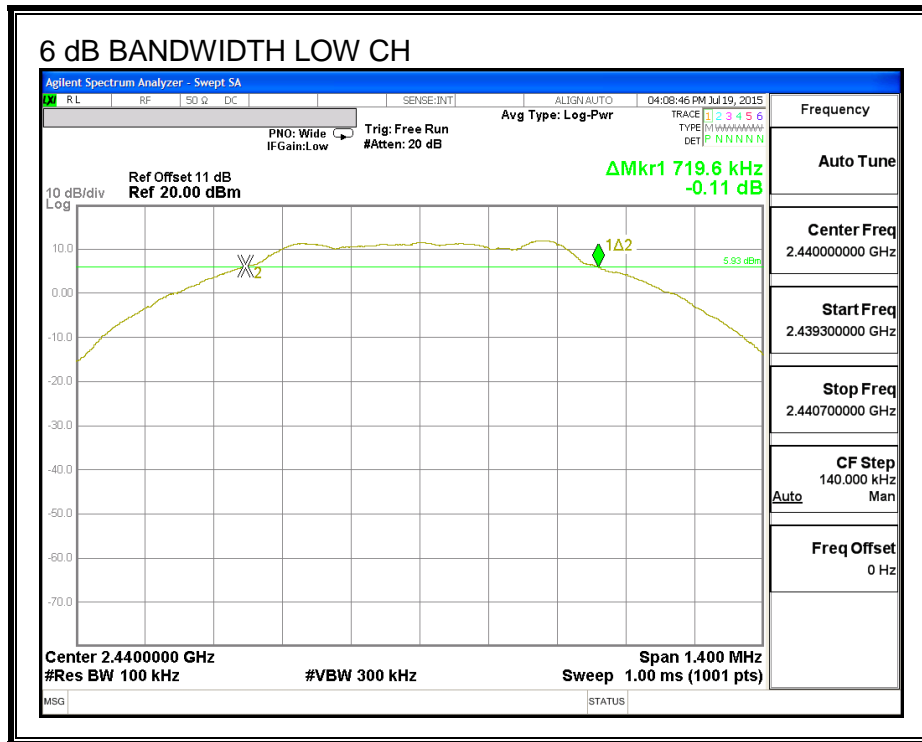



## 7.4. 99% BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE



The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


### RESULTS

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low     | 2402            | 1.0520              |
| Middle  | 2440            | 1.0395              |
| High    | 2480            | 1.0386              |



**99% BANDWIDTH**

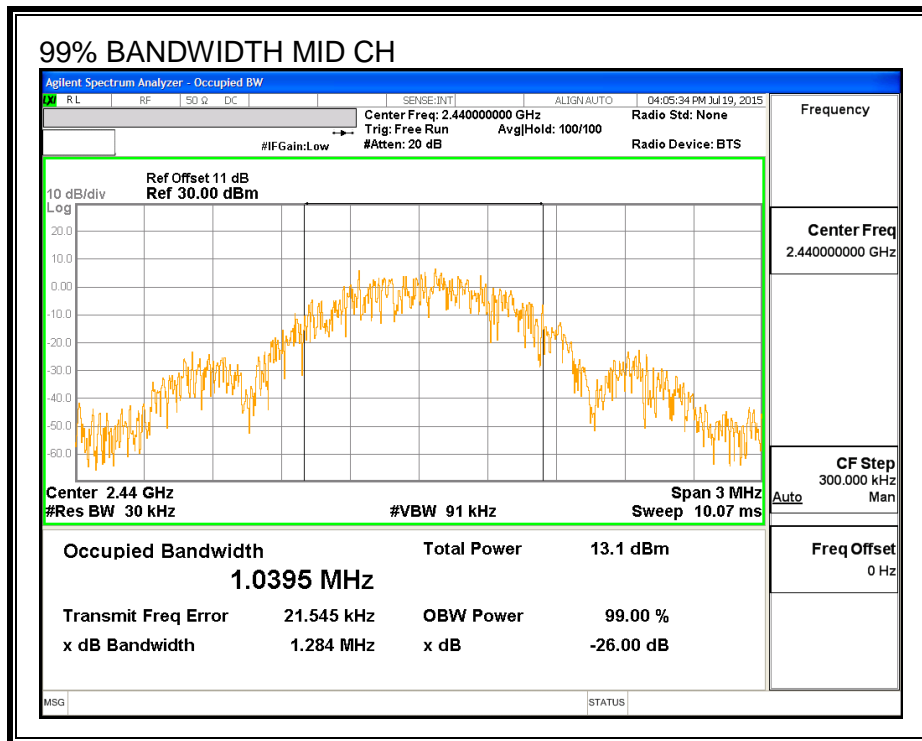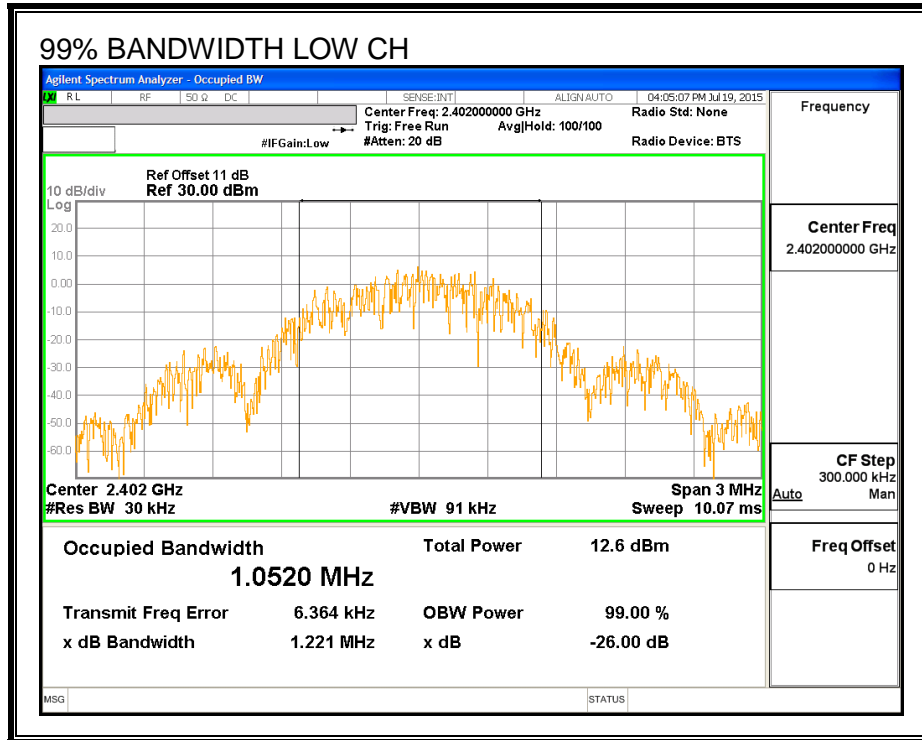

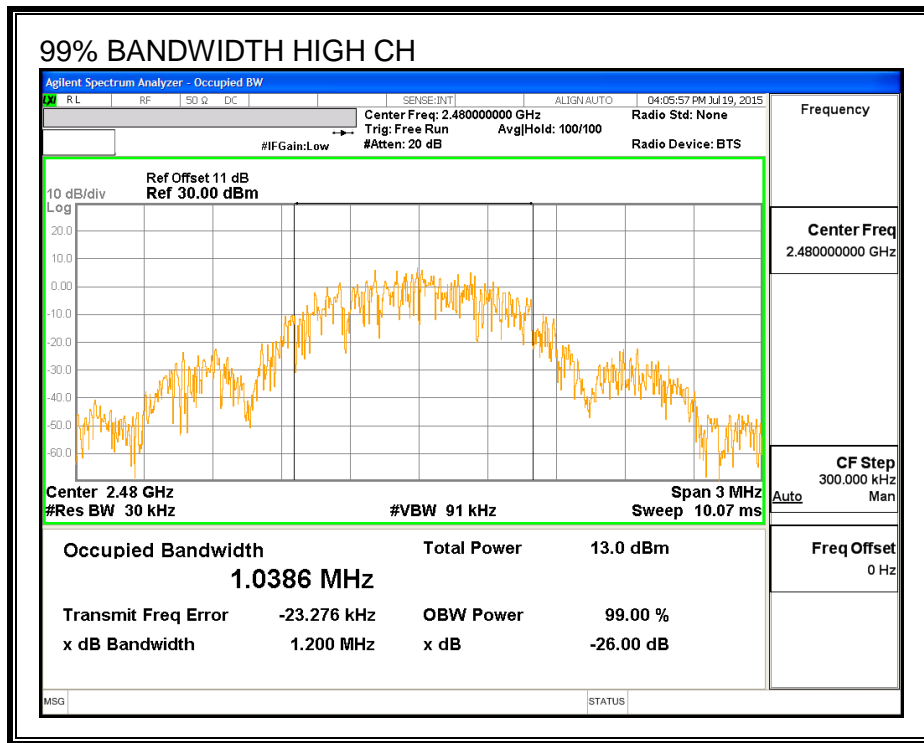

## 7.5. AVERAGE POWER

### LIMITS

None; for reporting purposes only.

### RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

| Channel | Frequency (MHz) | AV power (dBm) |
|---------|-----------------|----------------|
| Low     | 2402            | 8.95           |
| Middle  | 2440            | 8.31           |
| High    | 2480            | 8.44           |

## 7.6. OUTPUT POWER

### LIMITS

FCC §15.247 (b)

IC RSS-247 (5.4) (4)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

### RESULTS

| Channel | Frequency<br>(MHz) | Peak Power<br>Reading<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------|--------------------|--------------------------------|----------------|----------------|
| Low     | 2402               | 9.12                           | 30             | -20.880        |
| Middle  | 2440               | 8.50                           | 30             | -21.500        |
| High    | 2480               | 8.59                           | 30             | -21.410        |

## 7.7. POWER SPECTRAL DENSITY

### LIMITS

FCC §15.247 (e)



IC RSS-247 (5.2) (2)


The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

| Channel | Frequency (MHz) | PSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|-----------|-------------|-------------|
| Low     | 2402            | -7.45     | 8           | -15.45      |
| Middle  | 2440            | -7.42     | 8           | -15.42      |
| High    | 2480            | -7.12     | 8           | -15.12      |

**POWER SPECTRAL DENSITY**

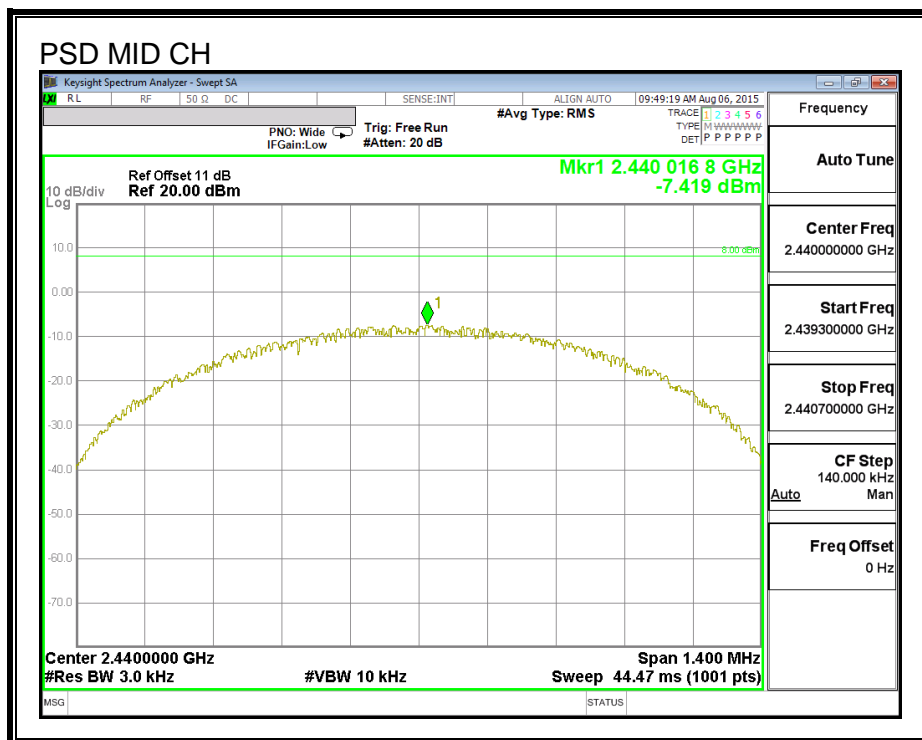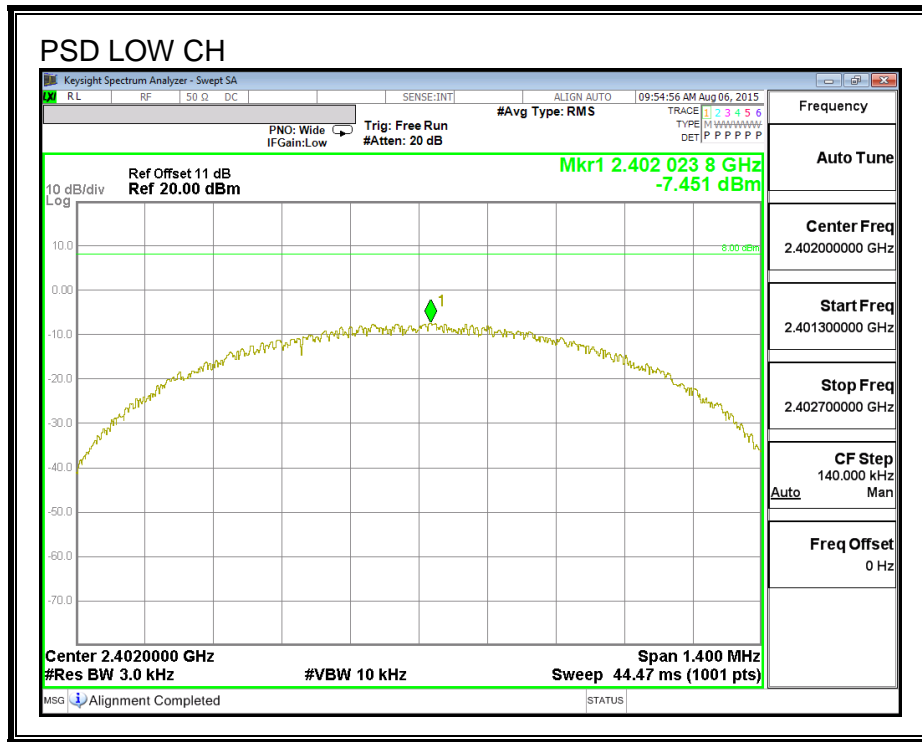

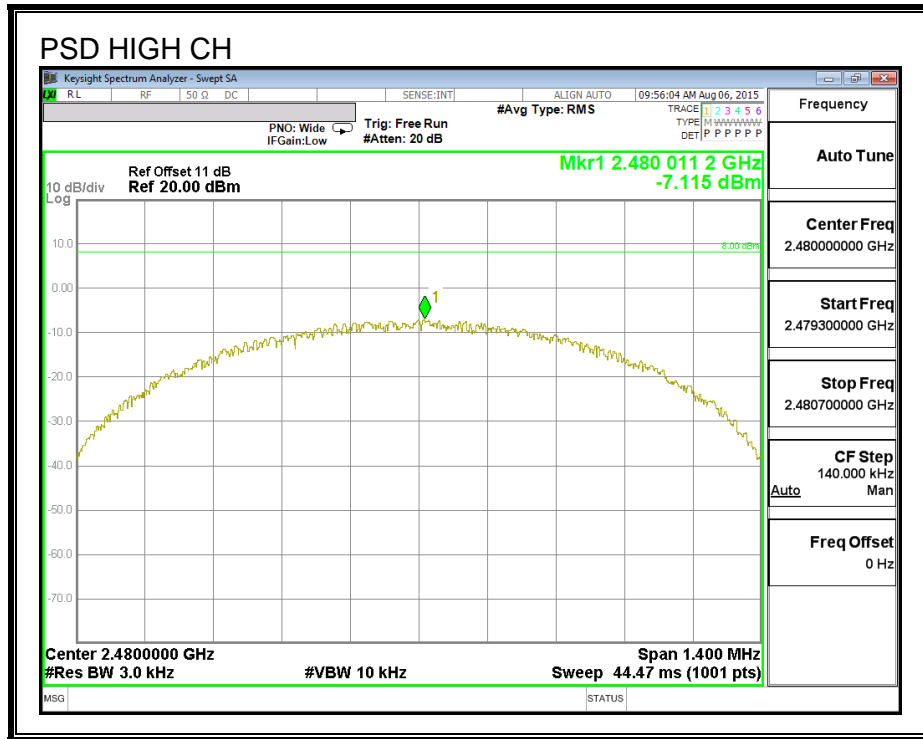

## 7.8. CONDUCTED SPURIOUS EMISSIONS

### LIMITS


FCC §15.247 (d)

IC RSS-247 (5.5)


Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

### RESULTS


#### SPURIOUS EMISSIONS, LOW CHANNEL

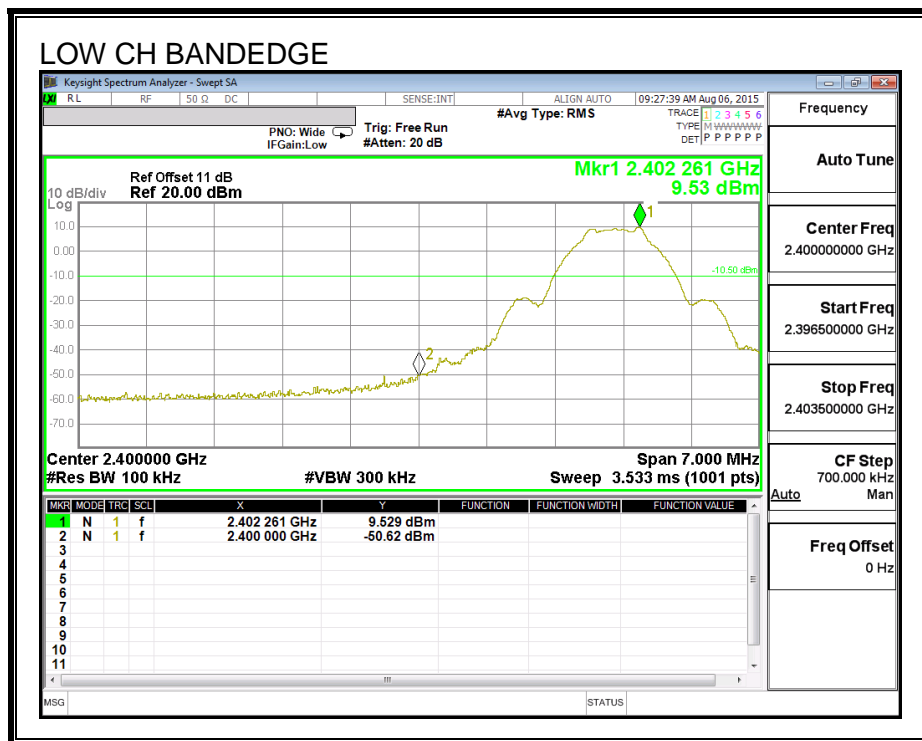




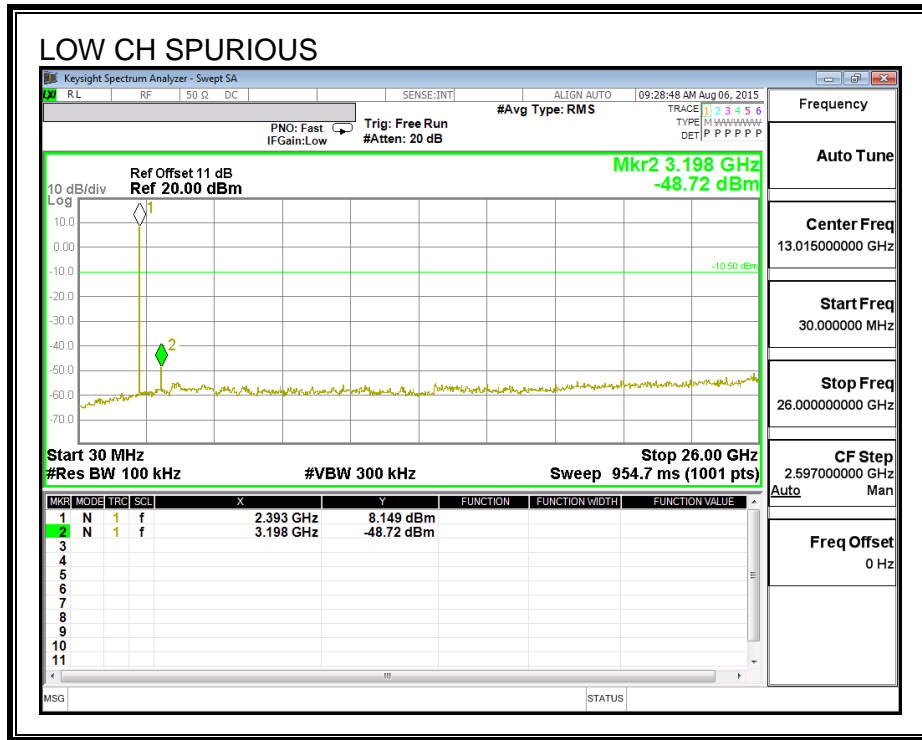


### SPURIOUS EMISSIONS, MID CHANNEL

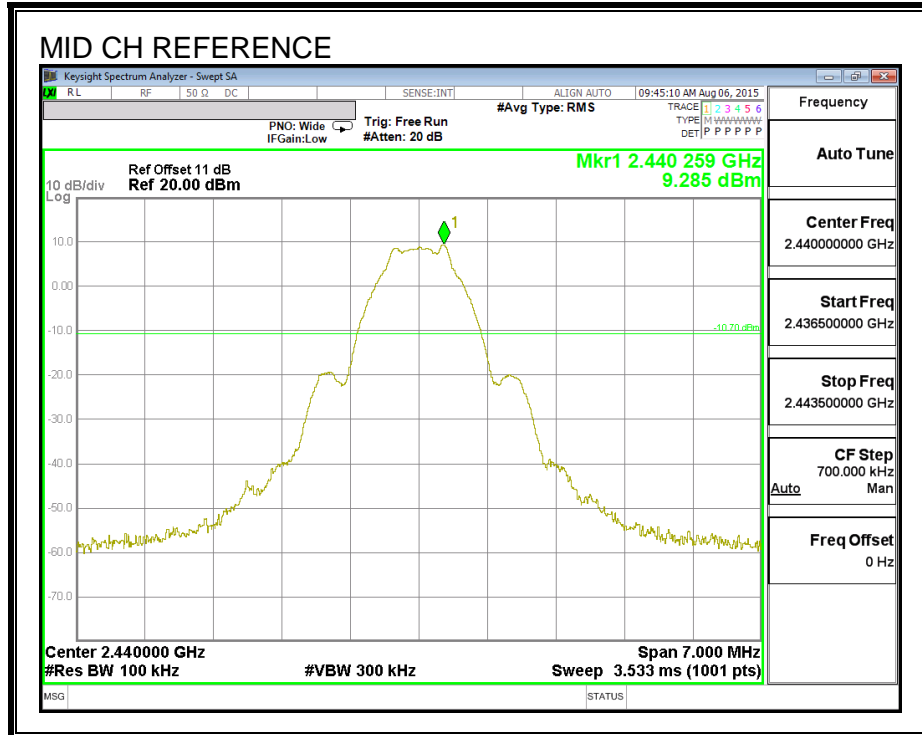

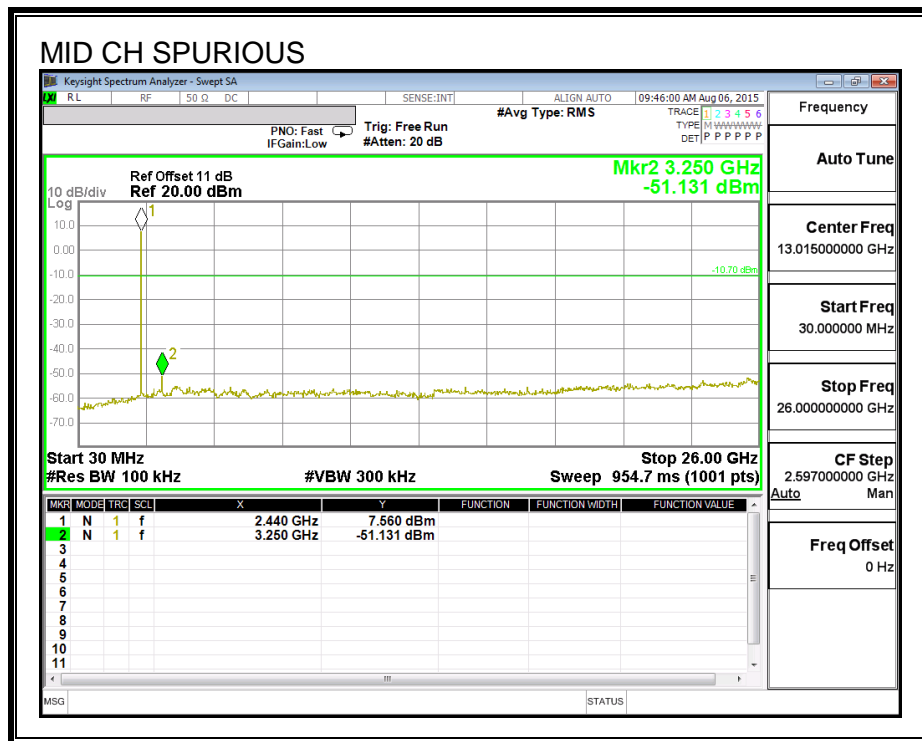

**SPURIOUS EMISSIONS, HIGH CHANNEL**

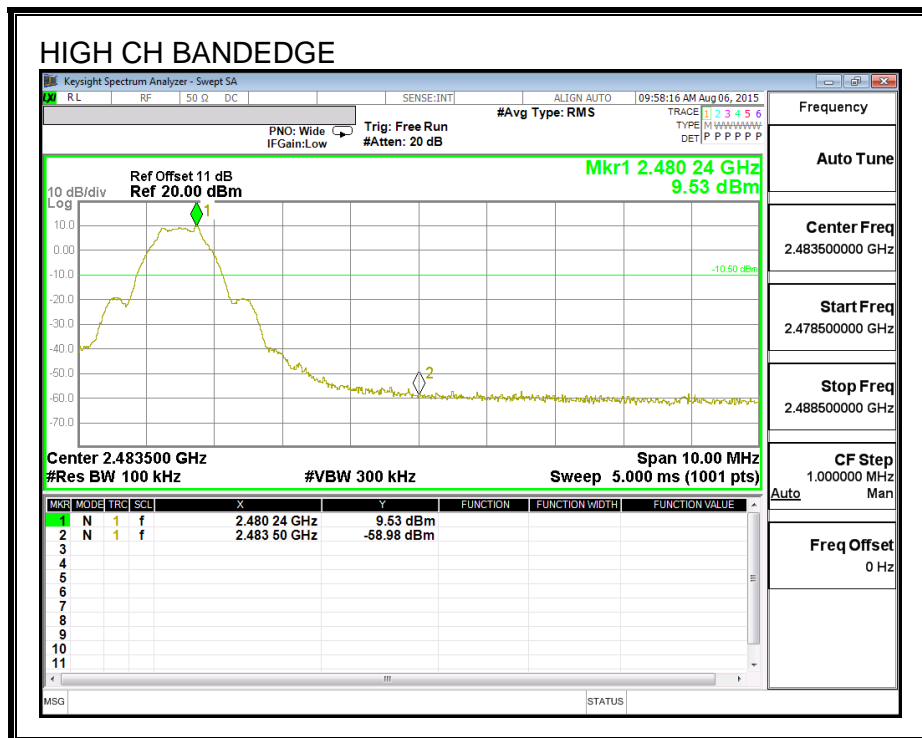



## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-GEN, Section 8.9 and 8.10.

| Frequency Range (MHz) | Field Strength Limit (uV/m) at 3 m | Field Strength Limit (dBuV/m) at 3 m |
|-----------------------|------------------------------------|--------------------------------------|
| 30 - 88               | 100                                | 40                                   |
| 88 - 216              | 150                                | 43.5                                 |
| 216 - 960             | 200                                | 46                                   |
| Above 960             | 500                                | 54                                   |

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 3MHz video bandwidth with average detector for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. RESTRICTED BANDEGE

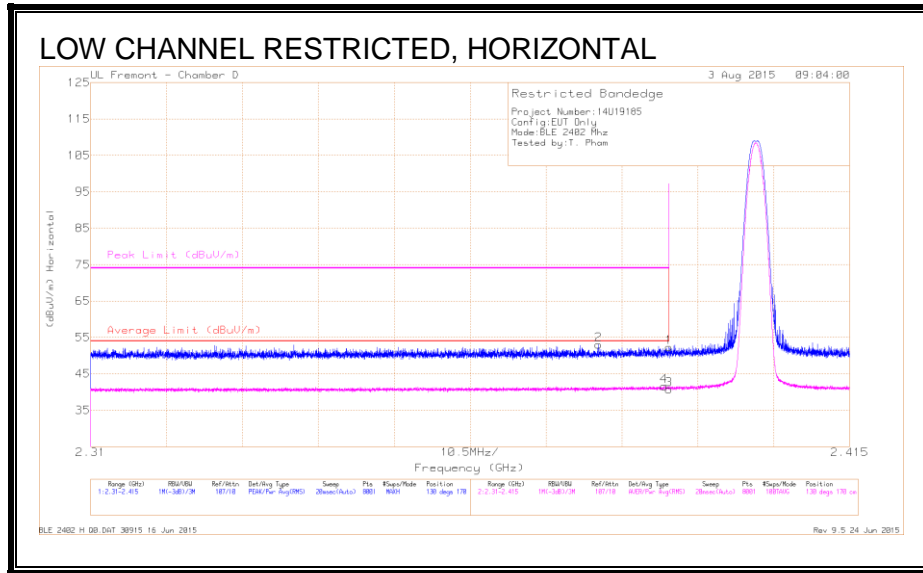


### DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T344 (dB/m) | Amp/Cbl/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 40.88                | Pk  | 32.1           | -20.7                 | 52.28                      | -                      | -           | 74                  | -21.72         | 130            | 170         | H        |
| 2      | * 2.38          | 41.77                | Pk  | 32.1           | -20.8                 | 53.07                      | -                      | -           | 74                  | -20.93         | 130            | 170         | H        |
| 3      | * 2.39          | 29.29                | RMS | 32.1           | -20.7                 | 40.69                      | 54                     | -13.31      | -                   | -              | 130            | 170         | H        |
| 4      | * 2.389         | 30.23                | RMS | 32.1           | -20.7                 | 41.63                      | 54                     | -12.37      | -                   | -              | 130            | 170         | H        |

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

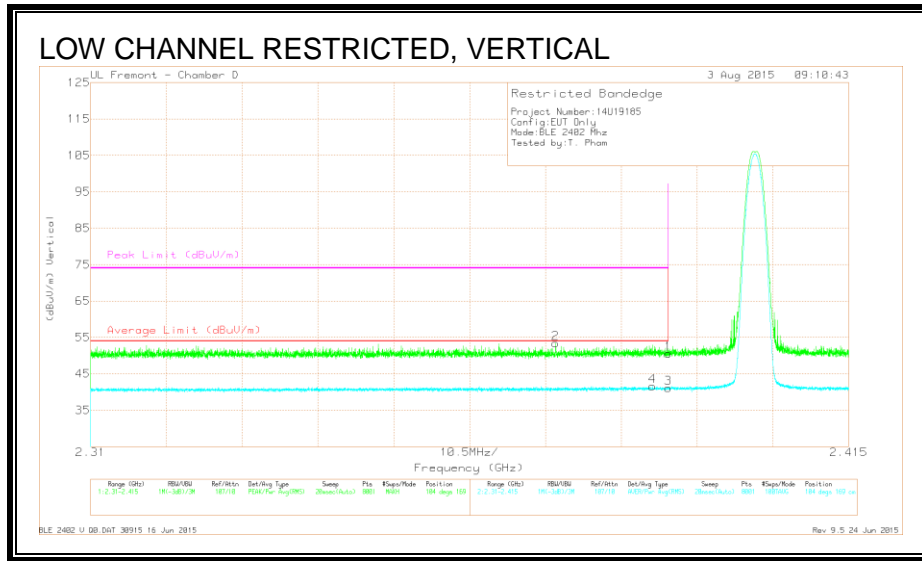


**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T344 (dB/m) | Amp/Cb/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 39.13                | Pk  | 32.1           | -20.7                 | 50.53                      | -                      | -           | 74                  | -23.47         | 104            | 169         | V        |
| 2      | * 2.374         | 42.32                | Pk  | 32             | -20.9                 | 53.42                      | -                      | -           | 74                  | -20.58         | 104            | 169         | V        |
| 3      | * 2.39          | 29.72                | RMS | 32.1           | -20.7                 | 41.12                      | 54                     | -12.88      | -                   | -              | 104            | 169         | V        |
| 4      | * 2.388         | 30.29                | RMS | 32.1           | -20.8                 | 41.59                      | 54                     | -12.41      | -                   | -              | 104            | 169         | V        |

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

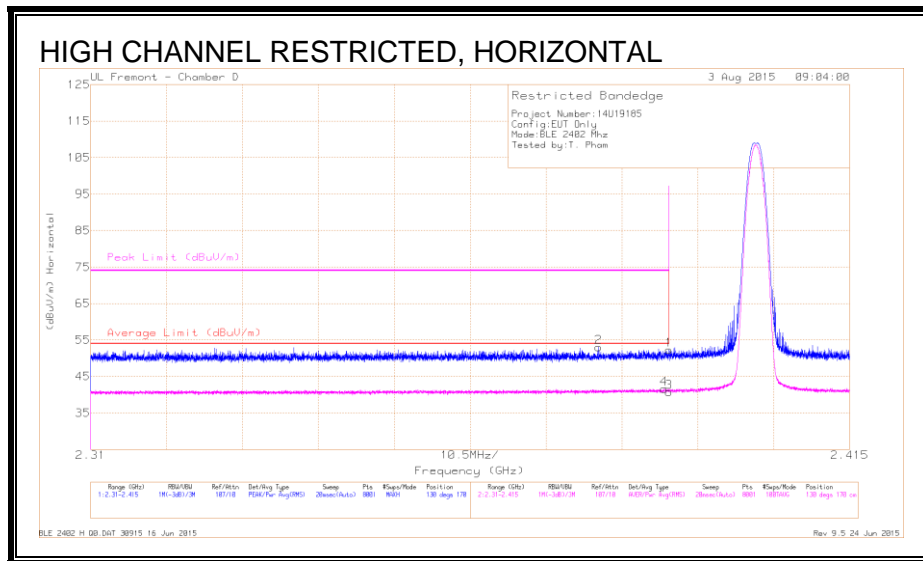


**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AFT344 (dB/m) | Amp/Cb/ Ftr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|---------------|----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.39          | 40.88                | Pk  | 32.1          | -20.7                | 52.28                      | -                      | -           | 74                  | -21.72         | 130            | 170         | H        |
| 2      | * 2.38          | 41.77                | Pk  | 32.1          | -20.8                | 53.07                      | -                      | -           | 74                  | -20.93         | 130            | 170         | H        |
| 3      | * 2.39          | 29.29                | RMS | 32.1          | -20.7                | 40.69                      | 54                     | -13.31      | -                   | -              | 130            | 170         | H        |
| 4      | * 2.389         | 30.23                | RMS | 32.1          | -20.7                | 41.63                      | 54                     | -12.37      | -                   | -              | 130            | 170         | H        |

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection

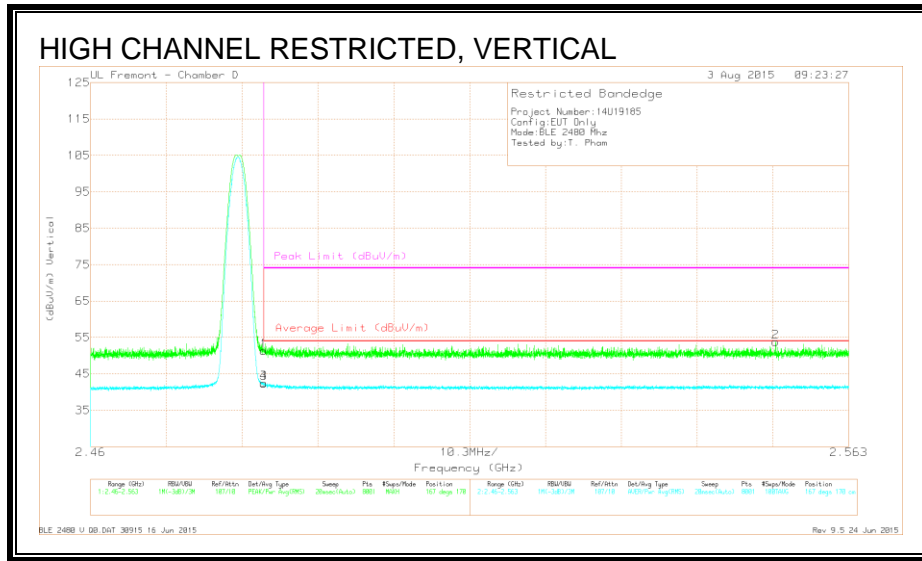

**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T344 (dB/m) | Amp/Cb/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 39.92                | Pk  | 32.2           | -20.8                 | 51.32                      | -                      | -           | 74                  | -22.68         | 167            | 170         | V        |
| 2      | 2.553           | 42.21                | Pk  | 32.3           | -20.7                 | 53.81                      | -                      | -           | 74                  | -20.19         | 167            | 170         | V        |
| 3      | * 2.484         | 31.01                | RMS | 32.2           | -20.8                 | 42.41                      | 54                     | -11.59      | -                   | -              | 167            | 170         | V        |
| 4      | * 2.484         | 31.11                | RMS | 32.2           | -20.8                 | 42.51                      | 54                     | -11.49      | -                   | -              | 167            | 170         | V        |



\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK - Peak detector

RMS - RMS detection



### 8.2.2. HARMONICS AND SPURIOUS EMISSIONS

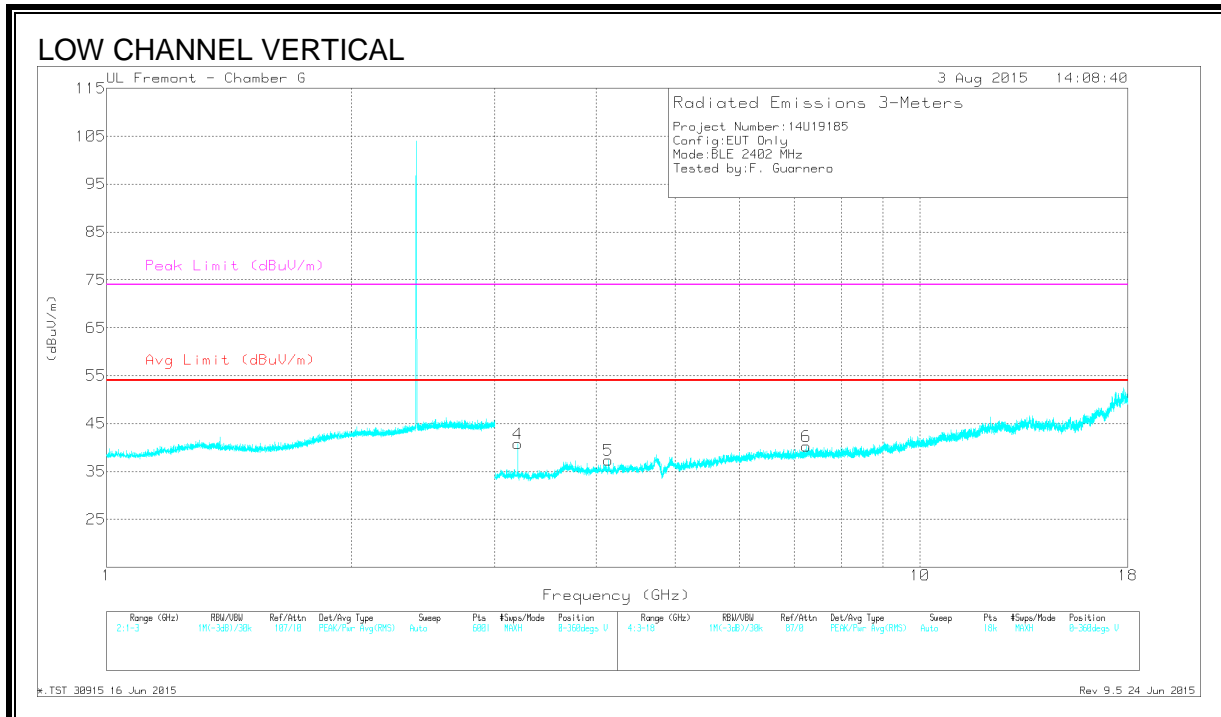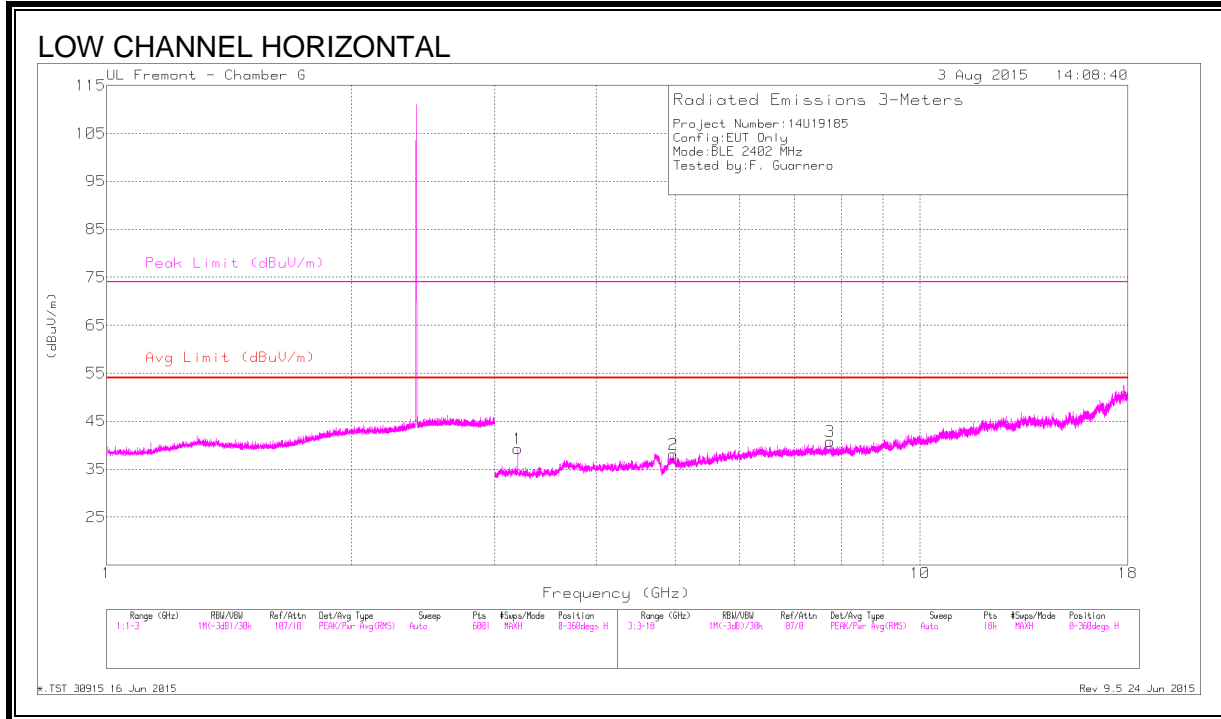



**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/ Fitr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 3.203           | 46.23                | PK2  | 33.1           | -33.3                  | 46.03                      | -                  | -           | -                   | -              | 241            | 239         | H        |
| 2      | * 4.973         | 42.88                | PK2  | 34.2           | -32.4                  | 44.68                      | -                  | -           | 74                  | -29.32         | 109            | 172         | H        |
|        | * 4.973         | 30.39                | VA1T | 34.2           | -32.4                  | 32.19                      | 54                 | -21.81      | -                   | -              | 109            | 172         | H        |
| 3      | 7.753           | 40.9                 | PK2  | 35.6           | -30.2                  | 46.3                       | -                  | -           | -                   | -              | 179            | 341         | H        |
| 4      | 3.203           | 45.97                | PK2  | 33.1           | -33.3                  | 45.77                      | -                  | -           | -                   | -              | 310            | 101         | V        |
| 5      | * 4.137         | 43.85                | PK2  | 33.3           | -33.1                  | 44.05                      | -                  | -           | 74                  | -29.95         | 286            | 111         | V        |
|        | * 4.137         | 29.79                | VA1T | 33.3           | -33                    | 30.09                      | 54                 | -23.91      | -                   | -              | 286            | 111         | V        |
| 6      | 7.249           | 41.08                | PK2  | 35.6           | -30.4                  | 46.28                      | -                  | -           | -                   | -              | 171            | 101         | V        |

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

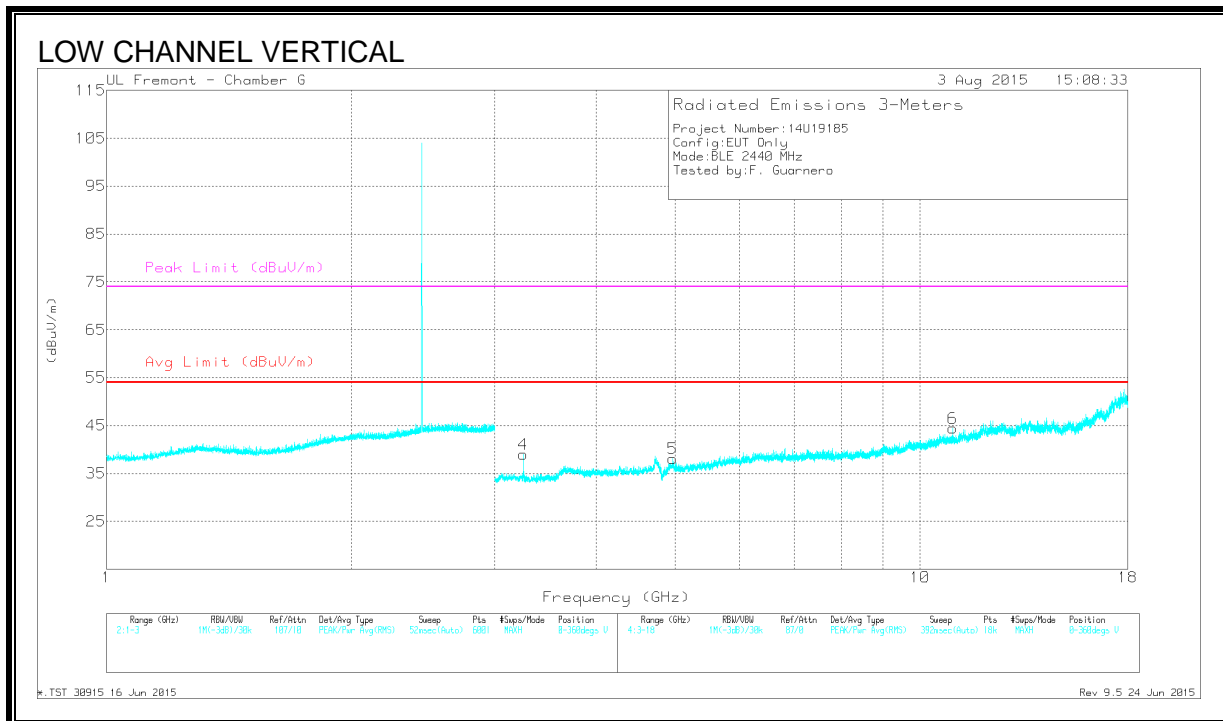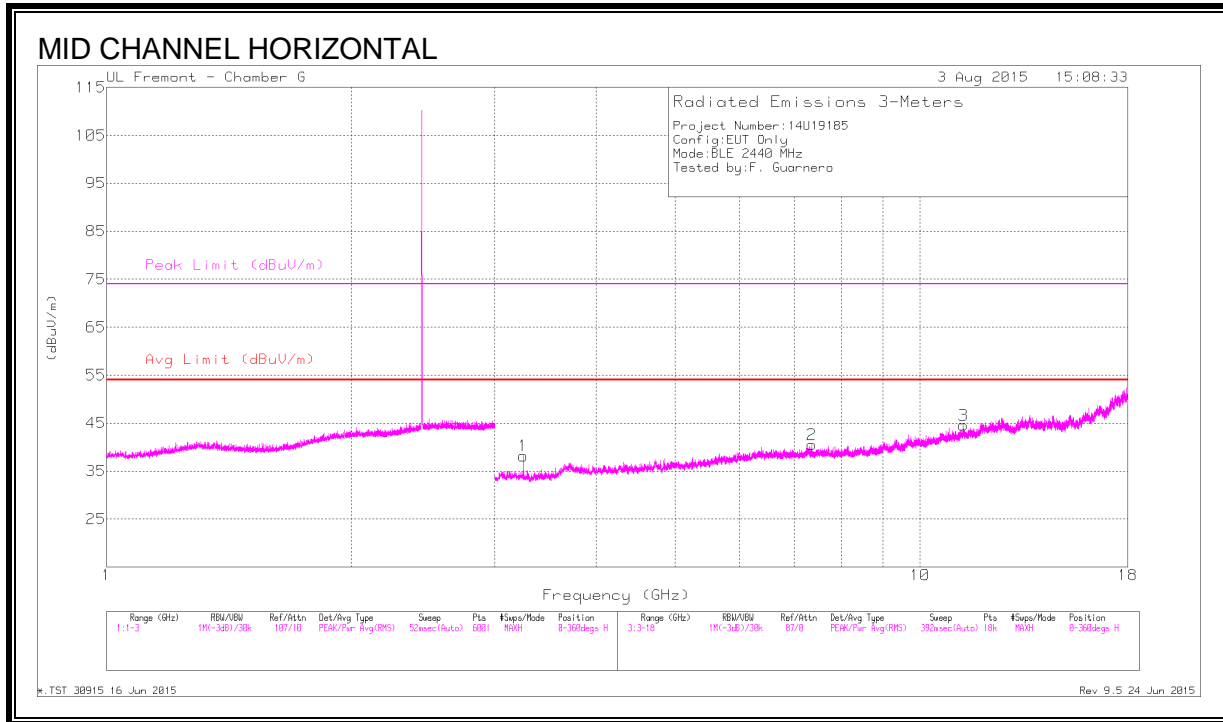



**DATA**

| Markers | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|---------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1       | 3.254           | 44.53                | PK2  | 32.9           | -33.1                  | 44.33                      | -                  | -           | -                   | -              | 65             | 254         | H        |
| 2       | * 7.365         | 41.1                 | PK2  | 35.6           | -30.8                  | 45.9                       | -                  | -           | 74                  | -28.1          | 23             | 234         | H        |
|         | * 7.363         | 28.62                | VA1T | 35.6           | -30.8                  | 33.42                      | 54                 | -20.58      | -                   | -              | 23             | 234         | H        |
| 3       | * 11.304        | 37.77                | PK2  | 38             | -25.1                  | 50.67                      | -                  | -           | 74                  | -23.33         | 165            | 166         | H        |
|         | * 11.302        | 24.9                 | VA1T | 38             | -25                    | 37.9                       | 54                 | -16.1       | -                   | -              | 165            | 166         | H        |
| 4       | 3.254           | 45.29                | PK2  | 32.9           | -33.1                  | 45.09                      | -                  | -           | -                   | -              | 138            | 102         | V        |
| 5       | * 4.964         | 43.06                | PK2  | 34.2           | -32.4                  | 44.86                      | -                  | -           | 74                  | -29.14         | 124            | 114         | V        |
|         | * 4.967         | 30.29                | VA1T | 34.2           | -32.4                  | 32.09                      | 54                 | -21.91      | -                   | -              | 124            | 114         | V        |
| 6       | * 10.963        | 37.55                | PK2  | 37.9           | -26                    | 49.45                      | -                  | -           | 74                  | -24.55         | 64             | 136         | V        |
|         | * 10.963        | 25                   | VA1T | 37.9           | -26                    | 36.9                       | 54                 | -17.1       | -                   | -              | 64             | 136         | V        |

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK3 - FHSS Method: Maximum Peak

VB10Hz - FHSS Method: 10Hz Video Bandwidth

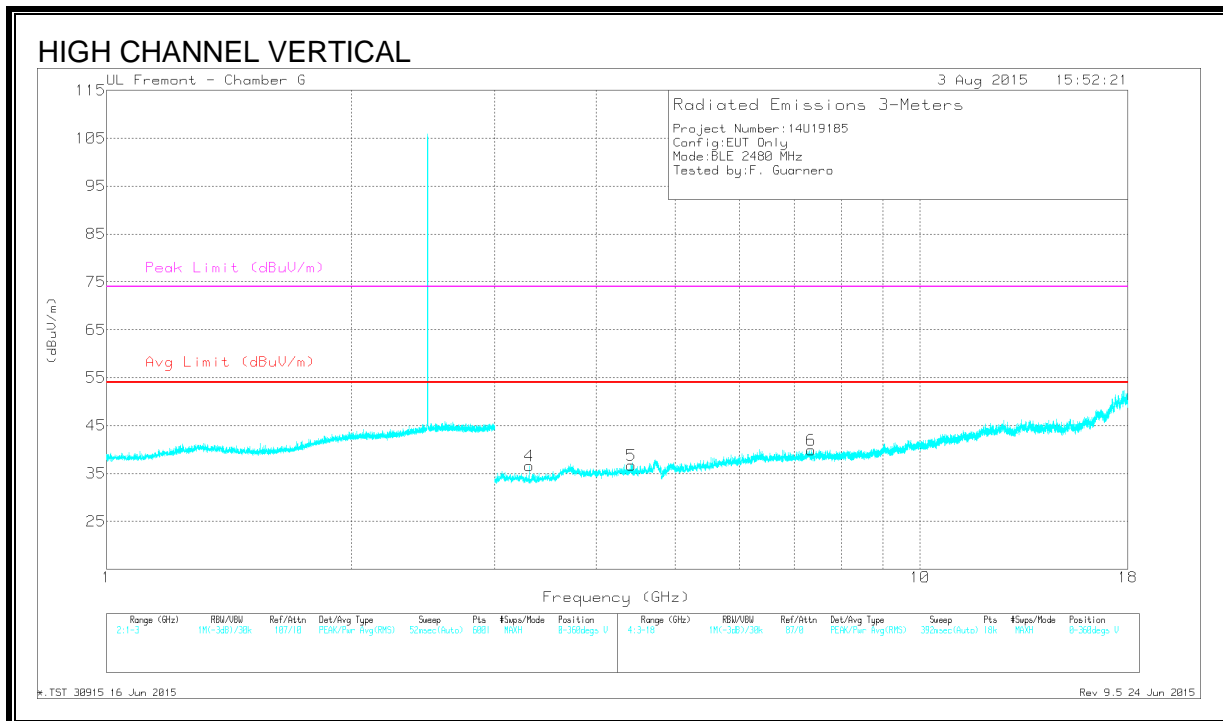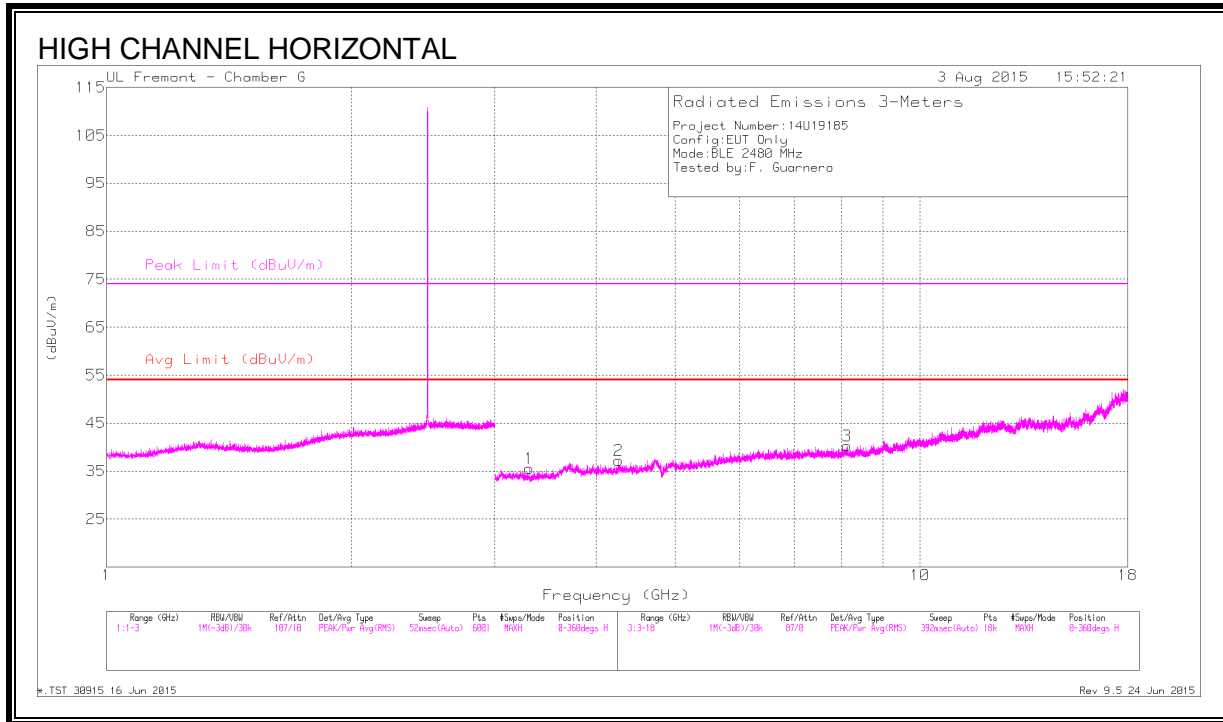

**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T862 (dB/m) | Amp/Cbl/Filtr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | 3.306           | 44.05                | PK2  | 32.7           | -33.1                  | 43.65                      | -                  | -           | -                   | -              | 296            | 101         | V        |
| 2      | * 4.261         | 42.19                | PK2  | 33.4           | -32.2                  | 43.39                      | -                  | -           | 74                  | -30.61         | 40             | 133         | H        |
|        | * 4.262         | 29.17                | VA1T | 33.5           | -32.1                  | 30.57                      | 54                 | -23.43      | -                   | -              | 40             | 133         | H        |
| 3      | * 8.131         | 40.32                | PK2  | 35.7           | -29.4                  | 46.62                      | -                  | -           | 74                  | -27.38         | 198            | 128         | H        |
|        | * 8.129         | 27.63                | VA1T | 35.7           | -29.4                  | 33.93                      | 54                 | -20.07      | -                   | -              | 198            | 128         | H        |
| 4      | 3.307           | 43.9                 | PK2  | 32.7           | -33.1                  | 43.5                       | -                  | -           | -                   | -              | 249            | 100         | H        |
| 5      | 4.421           | 42.89                | PK2  | 33.6           | -32.6                  | 43.89                      | -                  | -           | -                   | -              | 140            | 182         | V        |
| 6      | * 7.348         | 40.82                | PK2  | 35.6           | -30.6                  | 45.82                      | -                  | -           | 74                  | -28.18         | 269            | 278         | V        |
|        | * 7.348         | 28.21                | VA1T | 35.6           | -30.6                  | 33.21                      | 54                 | -20.79      | -                   | -              | 269            | 278         | V        |



\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

### 8.3. WORST CASE CO-LOCATION

#### BLUETOOTH LOW ENERGY AND 802.11 HT20 2Tx CDD MODE IN THE 5.6GHz BAND

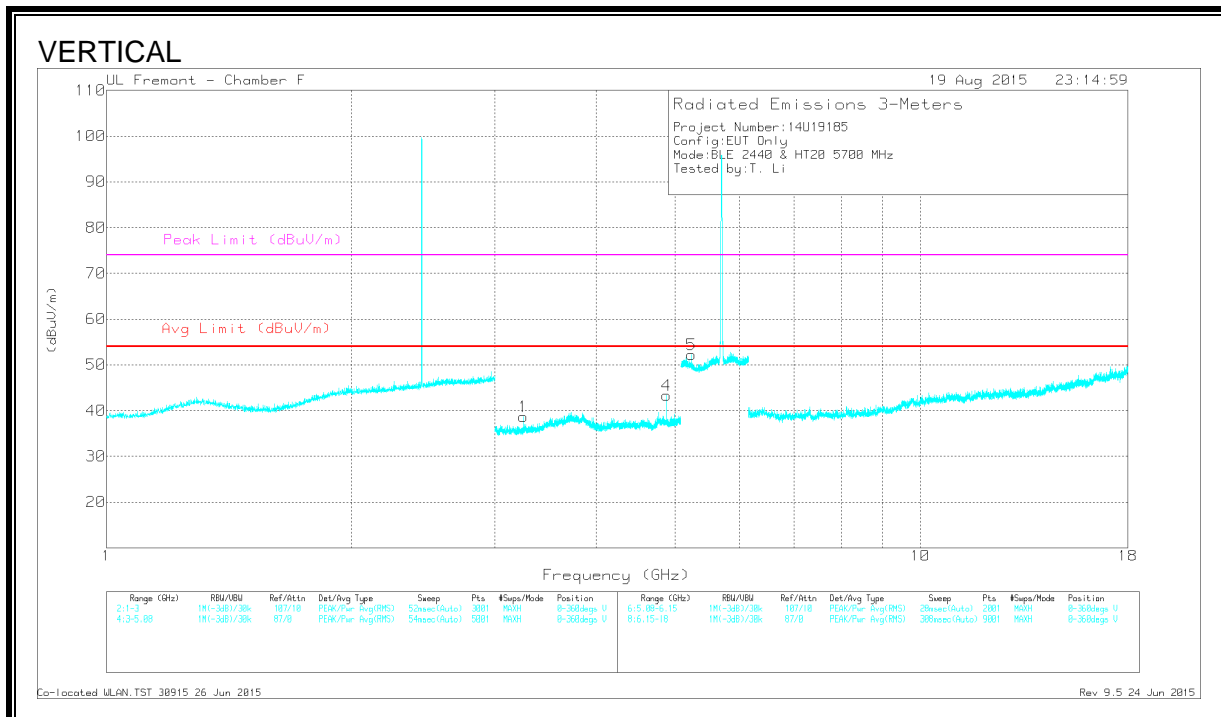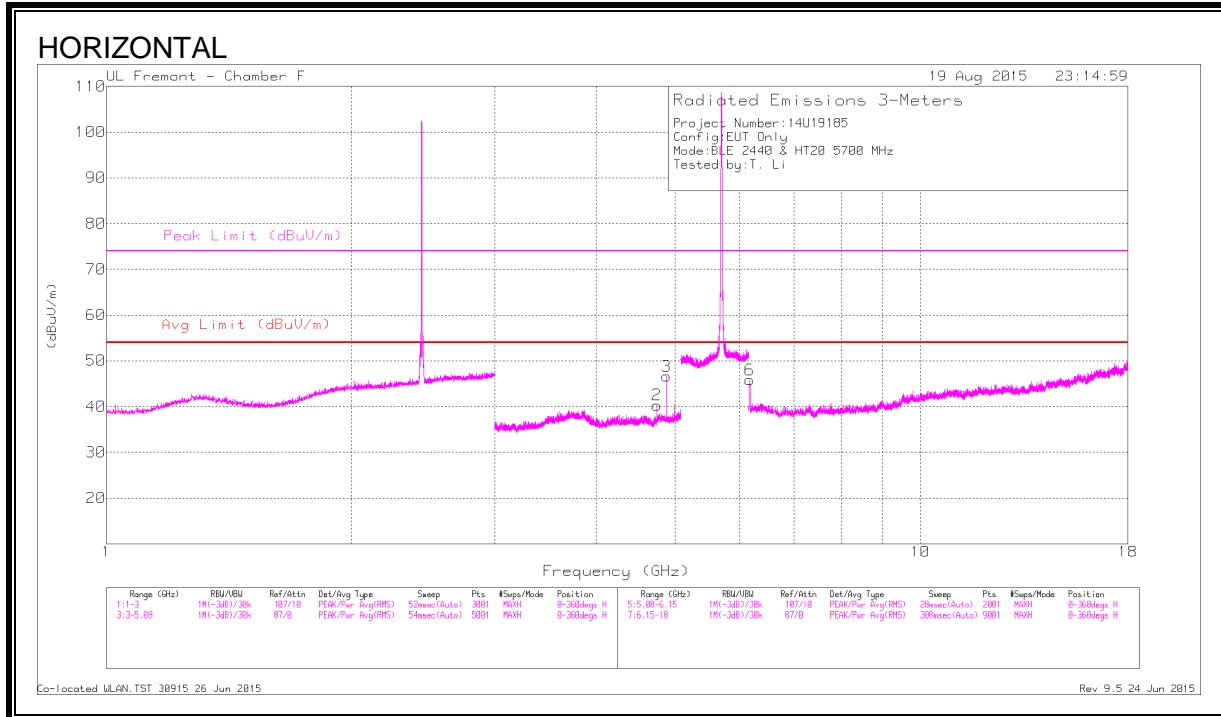

**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T120 (dB/m) | Amp/Cb/F ltr/Pad (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-----------------------|----------------------------|--------------------|-------------|---------------------|-------------|----------------|-------------|----------|
| 2      | * 4.75          | 40.89                | PK2  | 34.1           | -28.4                 | 46.59                      | -                  | -           | 74                  | -27.41      | 0              | 176         | H        |
|        | * 4.75          | 32.42                | MAv1 | 34.1           | -28.4                 | 38.12                      | 53.97              | -15.85      | -                   | -           | 0              | 176         | H        |
| 3      | * 4.881         | 43.96                | PK2  | 34.1           | -27.9                 | 50.16                      | -                  | -           | 74                  | -23.84      | 283            | 248         | H        |
|        | * 4.88          | 37.91                | MAv1 | 34.1           | -27.9                 | 44.11                      | 53.97              | -9.86       | -                   | -           | 283            | 248         | H        |
| 1      | 3.253           | 41.27                | PK2  | 33.2           | -29.1                 | 45.37                      | -                  | -           | 74                  | -28.63      | 8              | 100         | V        |
| 4      | * 4.879         | 41.17                | PK2  | 34.1           | -27.9                 | 47.37                      | -                  | -           | 74                  | -26.63      | 347            | 189         | V        |
|        | * 4.88          | 33.55                | MAv1 | 34.1           | -27.9                 | 39.75                      | 53.97              | -14.22      | -                   | -           | 347            | 189         | V        |
| 5      | 5.237           | 41.68                | PK2  | 34.4           | -18.4                 | 57.68                      | -                  | -           | 74                  | -16.32      | 67             | 119         | V        |
| 6      | 6.172           | 44.03                | PK2  | 35.7           | -26.7                 | 53.03                      | -                  | -           | 74                  | -20.97      | 283            | 100         | H        |

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band



PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average



### 8.4. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

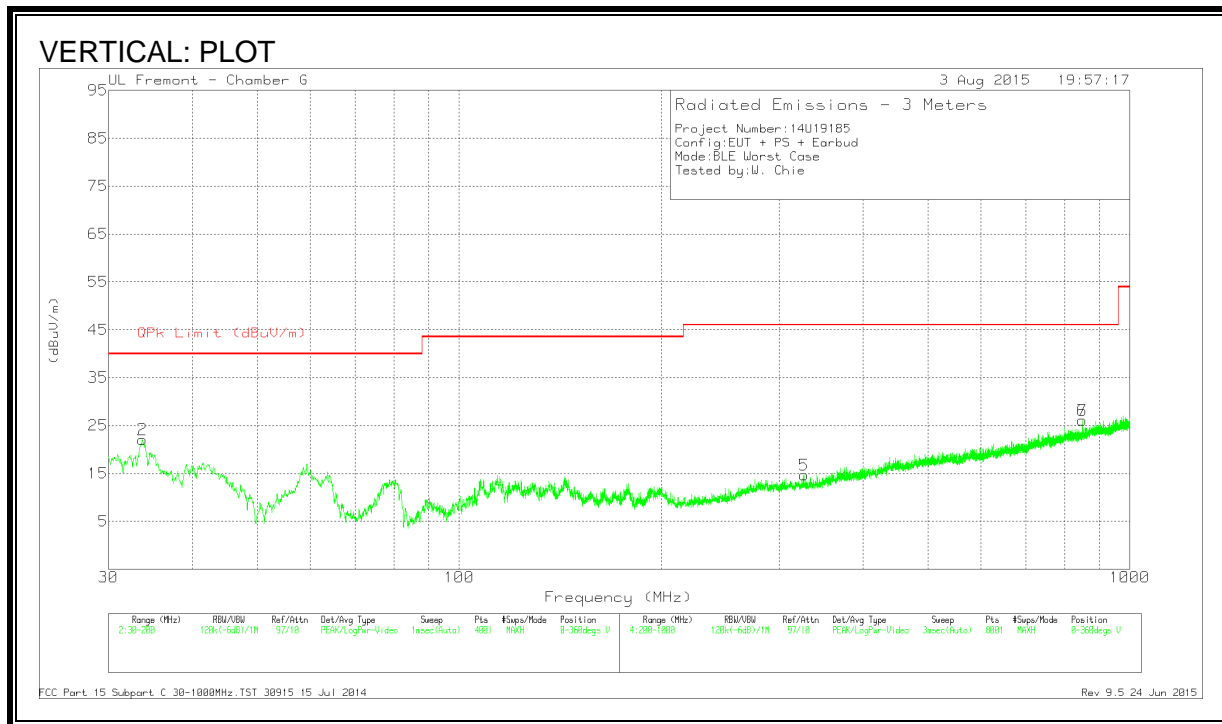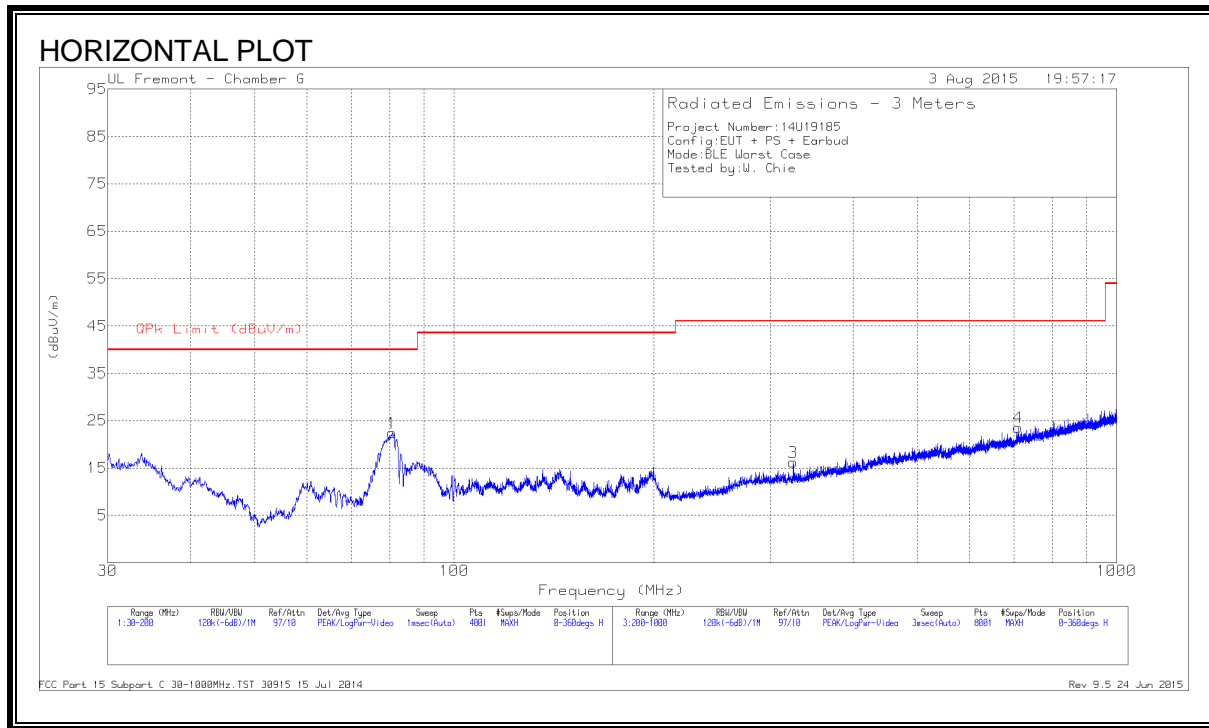

**DATA**

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T899 (dB/m) | Amp Cbl (dB) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|--------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 1      | 80.66           | 45.54                | Pk  | 7.6            | -30.7        | 22.44                      | 40                 | -17.56      | 0-360          | 201         | H        |
| 2      | 33.6975         | 34.31                | Pk  | 19.1           | -31.3        | 22.11                      | 40                 | -17.89      | 0-360          | 100         | V        |
| 3      | * 325           | 31.16                | Pk  | 13.8           | -28.7        | 16.26                      | 46.02              | -29.76      | 0-360          | 100         | H        |
| 4      | 709.7           | 30.47                | Pk  | 20.2           | -27.1        | 23.57                      | 46.02              | -22.45      | 0-360          | 201         | H        |
| 5      | * 326.5         | 29.73                | Pk  | 13.8           | -28.8        | 14.73                      | 46.02              | -31.29      | 0-360          | 100         | V        |
| 6      | 849.85          | 31                   | Pk  | 21.5           | -26.4        | 26.1                       | 46.02              | -19.92      | 0-360          | 100         | V        |
| 7      | 849.85          | 31                   | Pk  | 21.5           | -26.4        | 26.1                       | 46.02              | -19.92      | 0-360          | 100         | V        |

\* - indicates frequency in CFR15.205/IC8.10 Restricted Band


Pk - Peak detector

\* - indicates frequency in CFR 47, Part 15 and Industry Canada RSS-Restricted Band.


PK - Peak detector

### 8.5. WORST-CASE 18 to 26 GHz

#### SPURIOUS EMISSIONS 18 to 26 GHz (WORST-CASE CONFIGURATION, HORIZONTAL)

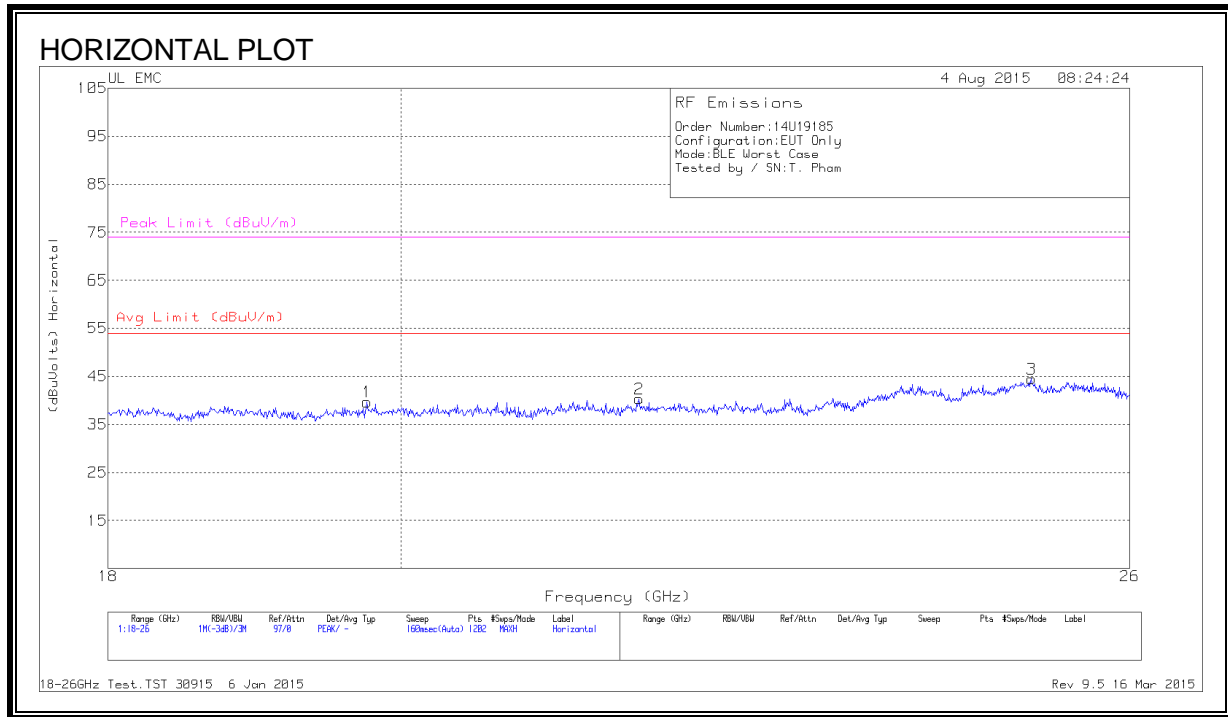

#### SPURIOUS EMISSIONS 18 to 26 GHz (WORST-CASE CONFIGURATION, VERTICAL)

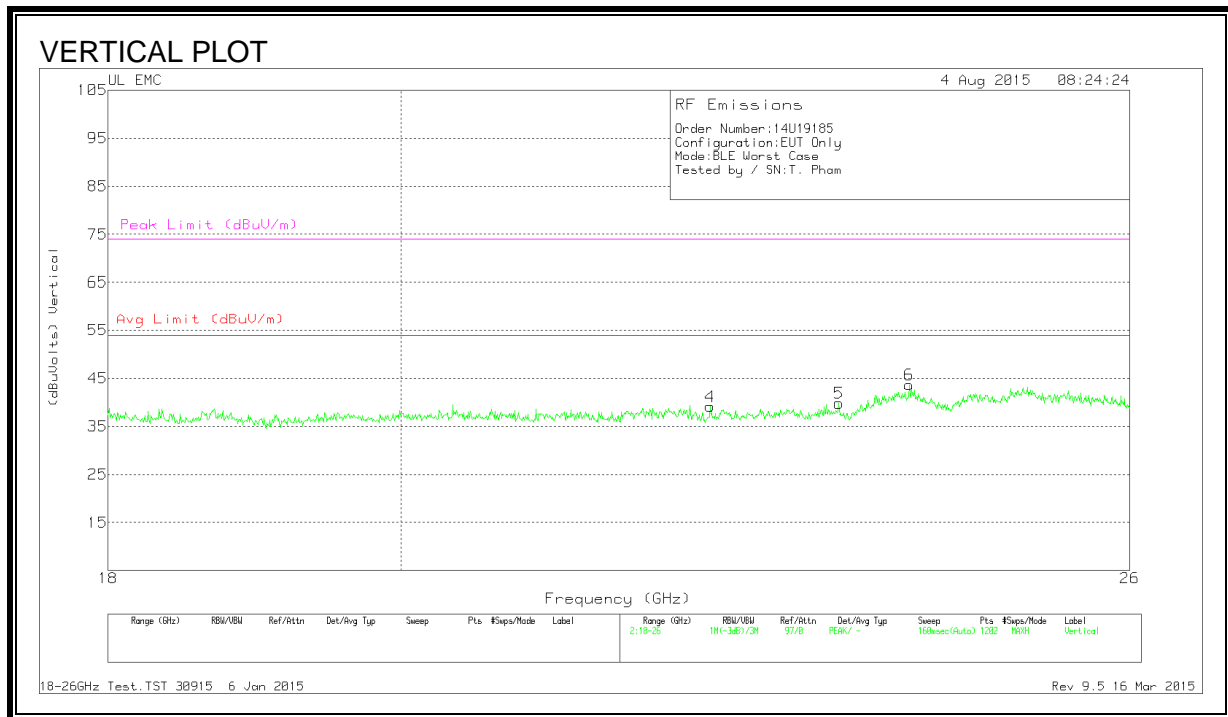

**DATA**

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | T89 AF (dB/m) | Amp/Cbl (dB) | Dist Corr (dB) | Corrected Reading (dBuVolts) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) |
|--------|-----------------|----------------------|-----|---------------|--------------|----------------|------------------------------|--------------------|-------------|---------------------|----------------|
| 1      | 19.759          | 41.57                | Pk  | 32.5          | -24.9        | -9.5           | 39.67                        | 54                 | -14.33      | 74                  | -34.33         |
| 2      | 21.79           | 41.33                | Pk  | 33.3          | -24.8        | -9.5           | 40.33                        | 54                 | -13.67      | 74                  | -33.67         |
| 3      | 25.094          | 44.6                 | Pk  | 33.9          | -24.5        | -9.5           | 44.5                         | 54                 | -9.5        | 74                  | -29.5          |
| 4      | 22.356          | 40.37                | Pk  | 33            | -24.7        | -9.5           | 39.17                        | 54                 | -14.83      | 74                  | -34.83         |
| 5      | 23.415          | 40.43                | Pk  | 33.3          | -24.4        | -9.5           | 39.83                        | 54                 | -14.17      | 74                  | -34.17         |
| 6      | 24.015          | 44.17                | Pk  | 33.3          | -24.3        | -9.5           | 43.67                        | 54                 | -10.33      | 74                  | -30.33         |

Pk - Peak detector

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

| Frequency of Emission (MHz) | Conducted Limit (dB $\mu$ V) |            |
|-----------------------------|------------------------------|------------|
|                             | Quasi-peak                   | Average    |
| 0.15-0.5                    | 66 to 56 *                   | 56 to 46 * |
| 0.5-5                       | 56                           | 46         |
| 5-30                        | 60                           | 50         |

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

## 9.1. EUT POWERED BY AC/DC ADAPTER VIA USB CABLE

### 6 WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 1      | .1815           | 37.53                | Pk  | 1.1       | 0             | 38.63                  | 64.42               | -25.79      | -                    | -           |
| 2      | .1815           | 27.53                | Av  | 1.1       | 0             | 28.63                  | -                   | -           | 54.42                | -25.79      |
| 3      | .2265           | 36.29                | Pk  | .8        | 0             | 37.09                  | 62.58               | -25.49      | -                    | -           |
| 4      | .2265           | 26.8                 | Av  | .8        | 0             | 27.6                   | -                   | -           | 52.58                | -24.98      |
| 5      | .2715           | 35.3                 | Pk  | .6        | 0             | 35.9                   | 61.07               | -25.17      | -                    | -           |
| 6      | .2715           | 26.22                | Av  | .6        | 0             | 26.82                  | -                   | -           | 51.07                | -24.25      |
| 7      | .609            | 37.74                | Pk  | .3        | 0             | 38.04                  | 56                  | -17.96      | -                    | -           |
| 8      | .6045           | 27.57                | Av  | .3        | 0             | 27.87                  | -                   | -           | 46                   | -18.13      |
| 9      | 18.987          | 41.06                | Pk  | .3        | .2            | 41.56                  | 60                  | -18.44      | -                    | -           |
| 10     | 18.9465         | 25.01                | Av  | .3        | .2            | 25.51                  | -                   | -           | 50                   | -24.49      |

Range 2: Line-L2 .15 - 30MHz


| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 11     | .1815           | 38.36                | Pk  | 1.2       | 0             | 39.56                  | 64.42               | -24.86      | -                    | -           |
| 12     | .1815           | 25.17                | Av  | 1.2       | 0             | 26.37                  | -                   | -           | 54.42                | -28.05      |
| 13     | .2265           | 37.97                | Pk  | .9        | 0             | 38.87                  | 62.58               | -23.71      | -                    | -           |
| 14     | .2265           | 23.58                | Av  | .9        | 0             | 24.48                  | -                   | -           | 52.58                | -28.1       |
| 15     | .26925          | 37.01                | Pk  | .7        | 0             | 37.71                  | 61.14               | -23.43      | -                    | -           |
| 16     | .2715           | 22.24                | Av  | .7        | 0             | 22.94                  | -                   | -           | 51.07                | -28.13      |
| 17     | .3165           | 36.21                | Pk  | .6        | 0             | 36.81                  | 59.8                | -22.99      | -                    | -           |
| 18     | .3165           | 20.44                | Av  | .6        | 0             | 21.04                  | -                   | -           | 49.8                 | -28.76      |
| 19     | .609            | 32.71                | Pk  | .3        | 0             | 33.01                  | 56                  | -22.99      | -                    | -           |
| 20     | .609            | 19.26                | Av  | .3        | 0             | 19.56                  | -                   | -           | 46                   | -26.44      |
| 21     | 8.25            | 30.51                | Pk  | .2        | .1            | 30.81                  | 60                  | -29.19      | -                    | -           |
| 22     | 8.259           | 20.77                | Av  | .2        | .1            | 21.07                  | -                   | -           | 50                   | -28.93      |

Pk - Peak detector  
 Av - Average detection

**LINE 1 RESULTS**

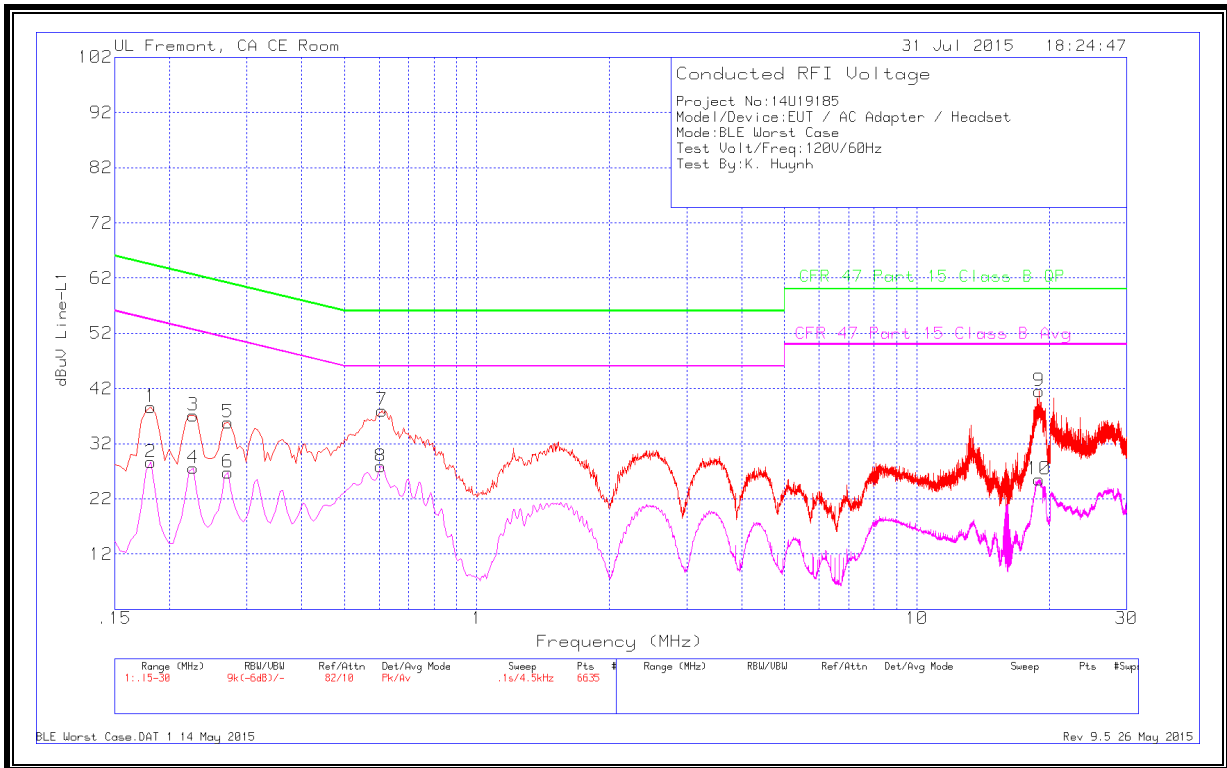

**LINE 2 RESULTS**

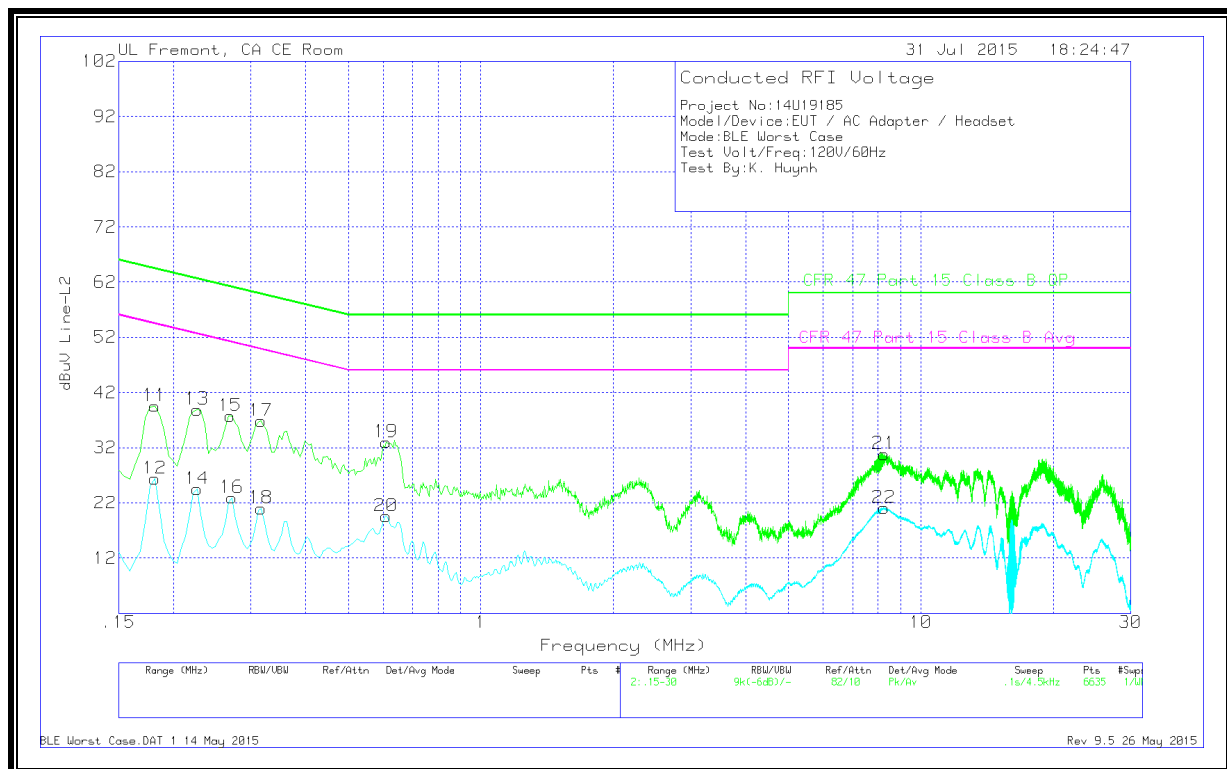

## 9.2. EUT POWERED BY HOST PC VIA USB CABLE

### 6 WORST EMISSIONS

Range 1: Line-L1 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L1 | LC Cables 1&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 1      | .1545           | 51.7                 | Pk  | 1.3       | 0             | 53                     | 65.75               | -12.75      | -                    | -           |
| 2      | .1545           | 44.58                | Av  | 1.3       | 0             | 45.88                  | -                   | -           | 55.75                | -9.87       |
| 3      | .4785           | 36.94                | Pk  | .4        | 0             | 37.34                  | 56.37               | -19.03      | -                    | -           |
| 4      | .4695           | 26.67                | Av  | .4        | 0             | 27.07                  | -                   | -           | 46.52                | -19.45      |
| 5      | .78             | 37.63                | Pk  | .3        | 0             | 37.93                  | 56                  | -18.07      | -                    | -           |
| 6      | .78             | 25.17                | Av  | .3        | 0             | 25.47                  | -                   | -           | 46                   | -20.53      |
| 7      | 1.392           | 38.44                | Pk  | .2        | .1            | 38.74                  | 56                  | -17.26      | -                    | -           |
| 8      | 1.392           | 23.84                | Av  | .2        | .1            | 24.14                  | -                   | -           | 46                   | -21.86      |
| 9      | 13.3665         | 45.83                | Pk  | .2        | .2            | 46.23                  | 60                  | -13.77      | -                    | -           |
| 10     | 13.3305         | 26.62                | Av  | .2        | .2            | 27.02                  | -                   | -           | 50                   | -22.98      |
| 11     | 18.7395         | 45.35                | Pk  | .3        | .2            | 45.85                  | 60                  | -14.15      | -                    | -           |
| 12     | 18.717          | 28.5                 | Av  | .3        | .2            | 29                     | -                   | -           | 50                   | -21         |


Range 2: Line-L2 .15 - 30MHz

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | T24 IL L2 | LC Cables 2&3 | Corrected Reading dBuV | CISPR 22 Class B QP | Margin (dB) | CISPR 22 Class B Avg | Margin (dB) |
|--------|-----------------|----------------------|-----|-----------|---------------|------------------------|---------------------|-------------|----------------------|-------------|
| 13     | .15             | 51.81                | Pk  | 1.5       | 0             | 53.31                  | 66                  | -12.69      | -                    | -           |
| 14     | .15             | 44.68                | Av  | 1.5       | 0             | 46.18                  | -                   | -           | 56                   | -9.82       |
| 15     | .4245           | 33.39                | Pk  | .4        | 0             | 33.79                  | 57.36               | -23.57      | -                    | -           |
| 16     | .4335           | 17.01                | Av  | .4        | 0             | 17.41                  | -                   | -           | 47.19                | -29.78      |
| 17     | .7935           | 34.81                | Pk  | .3        | 0             | 35.11                  | 56                  | -20.89      | -                    | -           |
| 18     | .7305           | 22.14                | Av  | .3        | 0             | 22.44                  | -                   | -           | 46                   | -23.56      |
| 19     | 13.3215         | 51.48                | Pk  | .2        | .2            | 51.88                  | 60                  | -8.12       | -                    | -           |
| 20     | 13.317          | 36.29                | Av  | .2        | .2            | 36.69                  | -                   | -           | 50                   | -13.31      |
| 21     | 18.825          | 46.27                | Pk  | .3        | .2            | 46.77                  | 60                  | -13.23      | -                    | -           |
| 22     | 18.7575         | 31.89                | Av  | .3        | .2            | 32.39                  | -                   | -           | 50                   | -17.61      |

Pk - Peak detector  
 Av - Average detection



**LINE 1 RESULTS**

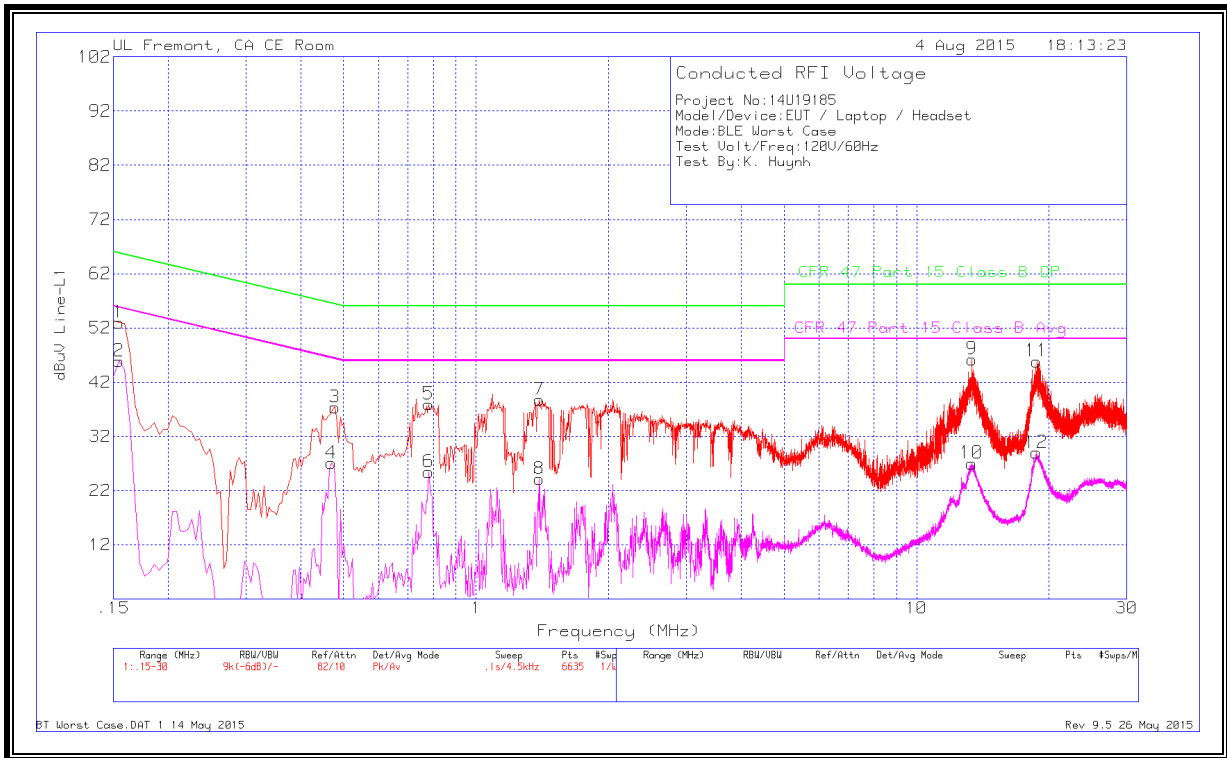

**LINE 2 RESULTS**

